SIDWELL FRIENDS LOWER SCHOOL DC CAMPUS

VOL. 2A - STRUCTURAL

3825 WISCONSIN AVE NW WASHINGTON, DC 20016

Owner:	Construction Manager:	Civil / Site:	Landscape:	Structural:	MEP / FP / Lighting	AV / IT / Telecom	Accessibility	Food Service:	Specifications	Envelope Consultant:	Code Consultant:	Acoustical Consultant:
Sidwell Friends School	**Advanced Project Management, Inc (APM)**	**Bowman Consulting Group, Ltd**	**Natural Resources Design, Inc (NRD)**	**Yun Associates LLC**	**CMTA Inc**	**Educational Systems Planning (ESP)**	**Galbo Wolf LLC**	**Nyikos-Garcia Foodservice Design, Inc**	**Heller & Metzger Inc.**	**Sustainable Building Partners LLC**	**Campbell Code Consulting LLC**	**ACENTECH**
3825 Wisconsin Ave NW, Washington DC 20016	4530 Walney Rd, Ste 202, Chantilly, VA 20151	888 17th St NW, Suite 510, Washington, DC 20006	1009 Shepherd Street NE, Washington, DC 20017	1050 Connecticut Ave NW, Suite 500, Washington, DC 20036	220 Lexington Green Circle, Suite 600, Lexington, KY 40503	2448 Holly Avenue, Suite 302, Annapolis, MD 21401	4410 Massachusetts Ave NW, Suite 240, Washington DC 20016	7146 Starmount Way, New Market, MD 21774	1600 K St NW, Washington, DC 20006	2701 Prosperity Ave, Suite 105, Fairfax, VA 22031	7834 Taggart Ct, Elkridge, MD 21075	33 Moulton Street Combridge, MA 02138

DRAWING SCHEDULE

---VOLUME 1---

GENERAL	
G-001	CODE ANALYSIS
G-002	ZONING COMPLIANCE
G-003	CODE SITE ANALYSIS
G-004	3D VIEWS
G-101	LIFE SAFETY PLAN - FIRST FLOOR
G-102	LIFE SAFETY PLAN - SECOND FLOOR
G-103	LIFE SAFETY PLAN - THIRD FLOOR
CIVIL	
CIV0001	COVER AND GENERAL NOTES
CIV0110	EXISTING CONDITIONS
CIV0111	STORM, SANITARY & TREE TABLES
CIV0120	DEMOLITION PLAN
CIV0131	EROSION AND SEDIMENT CONTROL PLAN - RAZE AND DEMO
CIV0132	EROSION AND SEDIMENT CONTROL PLAN - INTERMEDIATE
CIV0133	EROSION AND SEDIMENT CONTROL PLANS - FINAL
CIV0140	SITE PLAN
CIV0141	FIRE TRUCK TURN AROUND
CIV0142	BUS TURN AROUND
CIV0150	UTILITY PLAN
CIV0151	DC WATER PUBLIC UTILITY CONNECTION PLAN
CIV0160	GRADING PLAN
CIV0161	GRADING DETAIL
CIV0162	GRADING DETAIL
CIV0310	UTILITY PROFILES
CIV0311	UTILITY PROFILES
CIV0312	UTILITY PROFILES
CIV0313	UTILITY PROFILES
CIV0314	UTILITY PROFILES
CIV0510	EROSION AND SEDIMENT CONTROL NOTES
CIV0520	EROSION AND SEDIMENT CONTROL DETAILS
CIV0530	SITE DETAILS
CIV0531	SITE DETAILS II
CIV0540	UTILITY DETAILS – WATER
CIV0550	UTILITY DETAILS – SEWER
CIV0551	UTILITY DETAILS - SEWER
CIV0710	STORMWATER MANAGEMENT PLAN
CIV0720	STORMWATER CDA PLAN
CIV0730	STORMWATER MANAGEMENT BIO DETAILS
CIV0731	STORMWATER MANAGEMENT BIO DETAILS
CIV0732	UNDERGROUND INFILTRATION DETAIL
CIV0733	UNDERGROUND INFILTRATION DETAIL
CIV0734	GREEN ROOF DETAILS
CIV0740	STORMWATER MANAGEMENT NOTES
LANDSCAPE	
L-100	LANDSCAPE SITE PLAN
L-100 BW	LANDSCAPE SITE PLAN
L-101	ENLARGED LANDSCAPE SITE PLAN
L-110	SECTION PLAN
L-120	SECTION 1 COURTYARD PLAYGROUND
L-130	SECTION 2 THE GREEN
L-140	SECTION 3 MAIN STREET & AMPHITHEATER
L-150	SECTION 4 5-12 YO PLAYGROUND
L-160	SECTION 5 ENTRY DECK
L-170	SECTION 6 MIDDLE SCHOOL PLAYGROUND
L-200	ADVANCED TREE PROTECTION PLAN
L-201	TREE PROTECTION NOTES
L-202	TREE PROTECTION DETAILS & EXISTING TREE INVENTORY
L-400	PLANTING PLAN - SITE
L-400-a	PLANT SCHEDULE - FULL SITE
L-401	PLANTING PLAN & PLANT SCHEDULE - BIORETENTION
L-402	ENLARGED PLANTING PLAN - ECE COURTYARD
L-403	ENLARGED PLANTING PLAN - LAWN
L-404	ENLARGED PLANTING PLAN - PLAY AREA & ENTRY
L-405	ENLARGED PLANTING PLAN - HILL AND PATHWAYS
L-410	PLANTING NOTE
L-411	PLANTING DETAILS
L-500	MATERIALS & DETAILS COURTYARD PLAYGROUND
L-501	MATERIALS & DETAILS COURTYARD PLAYGROUND
L-510	MATERIALS & DETAILS 5-12 PLAYGROUND
L-511	MATERIALS & DETAILS 5-12 PLAYGROUND
L-520	MATERIALS & DETAILS DECKING AREA
L-540	MATERIALS & DETAILS SURFACE
L-541	MATERIALS & DETAILS SURFACE
L-542	MATERIALS & DETAILS SURFACE
L-550	MATERIALS & DETAILS SITE FURNISHING & SPORTS EQUIPMENT
L-551	MATERIALS & DETAILS SITE FURNISHING & SPORTS EQUIPMENT
L-560	SECTIONS & DETAILS
L-561	SECTIONS & DETAILS
L-562	SECTIONS & DETAILS
L-563	SECTIONS & DETAILS

L-564	SECTIONS & DETAILS
L-570	SECTIONS & DETAILS COURTYARD WATER FEATURE
L-571	SECTIONS & DETAILS SAND PLAY AREA
L-572	SECTIONS & DETAILS BIO-RETENTION BOULDER WALL
L-573	SECTIONS & DETAILS CLIMBER SLOPE AREA
L-574	SECTIONS & DETAILS AMPHITHEATER
L-575	SECTIONS & DETAILS LOWER SCHOOL STAIRWAY
L-576	SECTIONS & DETAILS ADA RAMP HANDRAIL
L-580	MATERIALS SCHEDULE
L-581	MATERIALS SCHEDULE

---VOLUME 2---

STRUCTURAL DEMO	
SD-111	FOUNDATION AND 1ST FLOOR DEMO PLAN
SD-121	SECOND FLOOR DEMO PLAN
SD-131	THIRD FLOOR DEMO PLAN
SD-141	ROOF DEMO PLAN
SD-601	FEB DEMO PLANS AND SECTIONS
STRUCTURAL	
S-001	GENERAL NOTES
S-002	GENERAL NOTES
S-003	STATEMENT OF SPECIAL INSPECTIONS FORM
S-004	LOAD PLANS
S-005	LOAD PLANS
S-111	FOUNDATION AND 1ST FLOOR FRAMING PLAN - PART A
S-112	FOUNDATION AND 1ST FLOOR FRAMING PLAN - PART B
S-113	FOUNDATION AND 1ST FLOOR FRAMING PLAN - PART C
S-121	SECOND FLOOR FRAMING PLAN - PART A
S-122	SECOND FLOOR FRAMING PLAN - PART B
S-123	SECOND FLOOR FRAMING PLAN - PART C
S-124	TENNIS DECK FRAMING PLAN
S-131	THIRD FLOOR FRAMING PLAN - PART A
S-132	THIRD FLOOR FRAMING PLAN - PART B
S-141	ROOF FRAMING PLAN - PART A
S-142	ROOF FRAMING PLAN - PART B
S-201	TYPICAL DETAILS
S-202	TYPICAL DETAILS
S-203	TYPICAL DETAILS
S-204	TYPICAL DETAILS
S-205	TYPICAL DETAILS
S-206	TYPICAL DETAILS
S-207	TYPICAL DETAILS
S-208	TYPICAL DETAILS
S-209	TYPICAL DETAILS
S-301	SECTIONS
S-302	SECTIONS
S-311	SECTIONS
S-312	SECTIONS
S-313	SECTIONS
S-321	SECTIONS
S-322	SECTIONS
S-401	ELEVATIONS
S-402	ELEVATIONS
S-403	ELEVATIONS
S-404	ELEVATIONS
S-501	STEEL COLUMN SCHEDULE
S-502	CONCRETE COLUMN SCHEDULE
S-601	FES FOUNDATION AND ROOF FRAMING PLANS, SECTIONS AND DETAILS
ARCHITECTURAL SITE	
AS-001	ARCHITECTURAL SITE PLAN
AS-002	CAMPUS SITE PLAN
AS-200	FACILITIES & EQPT. BUILDING
ARCHITECTURAL GENERAL	
A-001	NOTES, ABBREVIATIONS, LEGENDS
A-002	EXTERIOR ASSEMBLY TYPES
A-003	PARTITION TYPES
A-004	SIGNAGE
A-021	EOS PLAN - FIRST FLOOR
A-022	EOS PLAN - SECOND FLOOR PLAN
A-023	EOS PLAN - THIRD FLOOR
A-024	EOS PLAN - ROOF
ARCH DEMO	
AD-100	ARCHITECTURAL DEMOLITION SITE PLAN
AD-101	FIRST FLOOR DEMO PLAN
AD-102	SECOND FLOOR DEMO PLAN
AD-103	THIRD FLOOR DEMO PLAN
AD-104	ROOF DEMO PLAN
AD-200	DEMOLITION ELEVATIONS

ARCHITECTURAL	
A-101	FIRST FLOOR PLAN
A-102	SECOND FLOOR PLAN
A-103	THIRD FLOOR PLAN
A-104	ROOF PLAN
A-111A	FIRST FLOOR PLAN - PART A
A-111B	FIRST FLOOR PLAN - PART B
A-111C	FIRST FLOOR PLAN - PART C
A-112A	SECOND FLOOR PLAN - PART A
A-112B	SECOND FLOOR PLAN - PART B
A-112C	SECOND FLOOR PLAN - PART C
A-113A	THIRD FLOOR PLAN - PART A
A-113B	THIRD FLOOR PLAN - PART B
A-114A	ROOF PLAN - PART A
A-114B	ROOF PLAN - PART B
A-131A	FIRST FLOOR RCP - PART A
A-131B	FIRST FLOOR RCP - PART B
A-131C	FIRST FLOOR RCP - PART C
A-132A	SECOND FLOOR RCP - PART A
A-132B	SECOND FLOOR RCP - PART B
A-133A	THIRD FLOOR RCP - PART A
A-133B	THIRD FLOOR RCP - PART B
A-140	MATERIALS & EQUIPMENT LEGENDS
A-141A	FIRST FLOOR FINISH PLAN - PART A
A-141B	FIRST FLOOR FINISH PLAN - PART B
A-142A	SECOND FLOOR FINISH PLAN - PART A
A-142B	SECOND FLOOR FINISH PLAN - PART B
A-142C	SECOND FLOOR FINISH PLAN - PART C
A-143A	THIRD FLOOR FINISH PLAN - PART A
A-143B	THIRD FLOOR FINISH PLAN - PART B
A-200	OVERALL ELEVATIONS
A-201	BUILDING ELEVATIONS - PART A
A-202	BUILDING ELEVATIONS - PART B
A-203	BUILDING ELEVATIONS - PART C
A-300	BUILDING SECTIONS
A-311	WALL SECTIONS - PART A
A-312	WALL SECTIONS - PART A
A-313	WALL SECTIONS - PART A
A-321	WALL SECTIONS - PART B
A-322	WALL SECTIONS - PART B
A-323	WALL SECTIONS - PART B
A-324	WALL SECTIONS - PART B
A-331	WALL SECTIONS - PART C/DECK
A-411	INTERIOR ELEVATIONS - MUSIC & MPR
A-421	ENLARGED PLANS - GYMNASIUM
A-422	INTERIOR ELEVATIONS - GYMNASIUM
A-424	ENLARGED PLANS & INTERIOR ELEVATIONS - EXPLORATORIUM
A-431	ENLARGED PLANS & INTERIOR ELEVATIONS - LIBRARY
A-461	CORRIDOR ELEVATIONS - FIRST FLOOR
A-462	CORRIDOR ELEVATIONS - SECOND FLOOR
A-463	CORRIDOR ELEVATIONS - THIRD FLOOR
A-510	FOUNDATION DETAILS
A-521	ROOF DETAILS
A-570	INTERIOR DETAILS
A-600	CASEWORK DETAILS
A-601	CASEWORK DETAILS
A-602	CASEWORK ELEVATIONS
A-701	ENLARGED PLAN & SECTIONS - STAIR 1
A-702	ENLARGED PLAN & SECTIONS - STAIR 2
A-703	ENLARGED PLAN & SECTIONS - STAIR 3
A-704	ENLARGED PLAN & SECTIONS - STAIR 4
A-705	ENLARGED PLAN AND SECTION - MISC. STAIRS
A-710	STAIR & RAILING DETAILS
A-711	ELEVATOR PLANS AND SECTION
A-800	DOOR SCHEDULE & DOOR/FRAME TYPES
A-801	DOOR DETAILS
A-811	STOREFRONT & WINDOW TYPES
A-812	CURTAIN WALL TYPES
A-821	EXTERIOR STOREFRONT DETAILS
A-822	EXTERIOR CURTAIN WALL DETAILS
xA-204	TENNIS FENCE ELEVATIONS
FOOD SERVICE	
K-001	COVER SHEET
K-101	KITCHEN EQUIPMENT PLAN
K-200	BUILDING CONDITIONS & VENTILATION PLAN
K-201	VENTILATION SCHEDULE & DETAILS
K-300	PLUMBING ROUGH-IN PLAN
K-301	PLUMBING SCHEDULE & DETAILS
K-400	ELECTRICAL ROUGH-IN PLAN
K-401	ELECTRICAL SCHEDULE & DETAILS

K-500	FABRICATION DETAILS
K-510	UTILITY DISTRIBUTION SYSTEM DETAILS
K-511	UTILITY DISTRIBUTION SYSTEM SCHEDULE
K-512	VENTILATOR DETAILS
K-513	VENTILATOR DETAILS
K-514	VENTILATOR WIRING DIAGRAM
K-515	VENTILATOR WIRING DIAGRAM
K-516	FIRE SYSTEM DETAILS
K-520	SERVING COUNTER DETAILS
K-521	SERVING COUNTER DETAILS
K-522	SERVING COUNTER DETAILS
K-523	SERVING COUNTER DETAILS
K-524	SERVING COUNTER DETAILS
K-525	SERVING COUNTER DETAILS

---VOLUME 3---

MECHANICAL	
M-001	MECHANICAL LEGEND
M-101	FIRST FLOOR MECHANICAL DEMOLITION PLAN
M-102	SECOND FLOOR MECHANICAL DEMOLITION PLAN
M-103	THIRD FLOOR MECHANICAL DEMOLITION PLAN
M-104	ROOF MECHANICAL DEMOLITION PLAN
M-311A	FIRST FLOOR AIR DISTRIBUTION PLAN AREA A
M-311B	FIRST FLOOR AIR DISTRIBUTION PLAN AREA B
M-311C	FIRST FLOOR AIR DISTRIBUTION PLAN AREA C
M-311D	FIRST FLOOR AIR DISTRIBUTION NEW WORK FES
M-312A	SECOND FLOOR AIR DISTRIBUTION PLAN AREA A
M-312B	SECOND FLOOR AIR DISTRIBUTION PLAN AREA B
M-313A	THIRD FLOOR AIR DISTRIBUTION PLAN AREA A
M-313B	THIRD FLOOR AIR DISTRIBUTION PLAN AREA B
M-314A	ROOF AIR DISTRIBUTION NEW WORK PLAN AREA A
M-314B	ROOF AIR DISTRIBUTION NEW WORK PLAN AREA B
M-411A	FIRST FLOOR HYDRONIC NEW WORK PLAN AREA A
M-411B	FIRST FLOOR HYDRONIC NEW WORK PLAN AREA B
M-412A	SECOND FLOOR HYDRONIC NEW WORK PLAN AREA A
M-412B	SECOND FLOOR HYDRONIC NEW WORK PLAN AREA B
M-413A	THIRD FLOOR HYDRONIC NEW WORK PLAN AREA A
M-413B	THIRD FLOOR HYDRONIC NEW WORK PLAN AREA B
M-414A	ROOF HYDRONIC NEW WORK PLAN AREA A
M-414B	ROOF HYDRONIC NEW WORK PLAN AREA B
M-500	ENLARGED MECHANICAL PLANS
M-501	MECHANICAL ZONING PLAN - FIRST FLOOR
M-502	MECHANICAL ZONING PLAN - SECOND FLOOR
M-503	MECHANICAL ZONING PLAN - THIRD FLOOR
M-504	ENLARGED MECHANICAL PLANS
M-505	MECHANICAL DETAILS
M-506	MECHANICAL DETAILS
M-600	MECHANICAL DETAILS
M-601	MECHANICAL DETAILS
M-700	MECHANICAL PIPING SCHEMATICS
M-701	MECHANICAL CONTROLS
M-702	MECHANICAL CONTROLS
M-703	MECHANICAL CONTROLS
M-704	MECHANICAL CONTROLS
M-705	MECHANICAL CONTROLS
M-800	MECHANICAL SCHEDULES
M-801	MECHANICAL SCHEDULES
M-802	MECHANICAL SCHEDULES
M-803	MECHANICAL SCHEDULES
MU-100	GEOTHERMAL WELL FIELD LAYOUT
ELECTRICAL GENERAL	
E-001	ELECTRICAL LEGEND
ELECTRICAL SITE UTILITY	
EU-100	ELECTRICAL SITE UTILITY DEMOLITION PLAN
EU-101	ELECTRICAL SITE UTILITY PLAN
EU-501	ELECTRICAL SITE DETAILS
ELECTRICAL	
ED-101	FIRST FLOOR PLAN - EXISTING ELECTRICAL
ED-102	SECOND FLOOR PLAN - EXISTING ELECTRICAL
ED-103	THIRD FLOOR PLAN - EXISTING ELECTRICAL
ED-104	ROOF PLAN - EXISTING ELECTRICAL
ED-105	FIRST FLOOR PLAN - EXISTING LIGHTING
ED-106	SECOND FLOOR PLAN - EXISTING LIGHTING
ED-107	THIRD FLOOR PLAN - EXISTING LIGHTING
EL-111A	PARTIAL FIRST FLOOR PLAN - LIGHTING - AREA A
EL-111B	PARTIAL FIRST FLOOR PLAN - LIGHTING - AREA B
EL-111C	PARTIAL FIRST FLOOR PLAN - LIGHTING - AREA C
EL-111D	FACILITY EQUIPMENT STORAGE PLAN - LIGHTING
EL-112A	PARTIAL SECOND FLOOR PLAN - LIGHTING - AREA A
EL-112B	PARTIAL SECOND FLOOR PLAN - LIGHTING - AREA B

EL-112C	PARTIAL SECOND FLOOR PLAN - LIGHTING - AREA C
EL-113A	PARTIAL THIRD FLOOR PLAN - LIGHTING - AREA A
EL-113B	PARTIAL THIRD FLOOR PLAN - LIGHTING - AREA B
EL-501	LIGHTING DETAILS
EL-502	ELECTRICAL LIGHTING DETAILS
EM-111A	PARTIAL FIRST FLOOR PLAN - HVAC POWER- AREA A
EM-111B	PARTIAL FIRST FLOOR PLAN - HVAC POWER- AREA B
EM-111C	PARTIAL FIRST FLOOR PLAN - HVAC POWER- AREA C
EM-112A	PARTIAL SECOND FLOOR PLAN - HVAC POWER- AREA A
EM-112B	PARTIAL SECOND FLOOR PLAN - HVAC POWER- AREA B
EM-113A	PARTIAL THIRD FLOOR PLAN - HVAC POWER- AREA A
EM-113B	PARTIAL THIRD FLOOR PLAN - HVAC POWER- AREA B
EP-111A	PARTIAL FIRST FLOOR PLAN - POWER - AREA A
EP-111B	PARTIAL FIRST FLOOR PLAN - POWER - AREA B
EP-111C	PARTIAL FIRST FLOOR PLAN - POWER - AREA C
EP-111D	FACILITY EQUIPMENT STORAGE PLAN - POWER
EP-112A	PARTIAL SECOND FLOOR PLAN - POWER - AREA A
EP-112B	PARTIAL SECOND FLOOR PLAN - POWER - AREA B
EP-112C	PARTIAL SECOND FLOOR PLAN - POWER - AREA C
EP-113A	PARTIAL THIRD FLOOR PLAN - POWER - AREA A
EP-113B	PARTIAL THIRD FLOOR PLAN - POWER - AREA B
EP-114	ROOF PLAN - POWER
EP-400	ENLARGED KITCHEN PLAN - POWER
EP-501	ELECTRICAL DETAILS
EP-601	ELECTRICAL ONE-LINE DIAGRAM
EP-602	FIRE ALARM RISER
EP-603	GROUNDING RISER DIAGRAM
EP-701	ELECTRICAL PANEL SCHEDULES
EP-702	ELECTRICAL PANEL SCHEDULES
EP-703	ELECTRICAL PANEL SCHEDULES
EP-704	ELECTRICAL PANEL SCHEDULES
FIRE ALARM	
FA-111A	PARTIAL FIRST FLOOR PLAN - FIRE ALARM - AREA A
FA-111B	PARTIAL FIRST FLOOR PLAN - FIRE ALARM - AREA B
FA-112A	PARTIAL SECOND FLOOR PLAN - FIRE ALARM - AREA A
FA-112B	PARTIAL SECOND FLOOR PLAN - FIRE ALARM - AREA B
FA-113A	PARTIAL THIRD FLOOR PLAN - FIRE ALARM - AREA A
FA-113B	PARTIAL THIRD FLOOR PLAN - FIRE ALARM - AREA B
PLUMBING	
P-001	PLUMBING LEGEND
P-100A	UNDERSLAB PLUMBING DEMOLITION PLAN AREA A
P-100B	UNDERSLAB PLUMBING DEMOLITION PLAN AREA B
P-101A	FIRST FLOOR PLUMBING DEMOLITION PLAN AREA A
P-101B	FIRST FLOOR PLUMBING DEMOLITION PLAN AREA B

P-102A	SECOND FLOOR PLUMBING DEMOLITION PLAN AREA A
P-102B	SECOND FLOOR PLUMBING DEMOLITION PLAN AREA B
P-103A	THIRD FLOOR PLUMBING DEMOLITION PLAN AREA A
P-103B	THIRD FLOOR PLUMBING DEMOLITION PLAN AREA B
P-104	ROOF PLUMBING DEMOLITION PLAN
P-110A	UNDERSLAB PLUMBING PLAN AREA A
P-110B	UNDERSLAB PLUMBING PLAN AREA B
P-110C	UNDERSLAB PLUMBING PLAN AREA C
P-111A	FIRST FLOOR PLUMBING PLAN AREA A
P-111B	FIRST FLOOR PLUMBING PLAN AREA B
P-111C	FIRST FLOOR PLUMBING PLAN AREA C
P-111D	FACILITY EQUIPMENT STORAGE PLUMBING PLAN
P-112A	SECOND FLOOR PLUMBING PLAN AREA A
P-112B	SECOND FLOOR PLUMBING PLAN AREA B
P-112C	SECOND FLOOR PLUMBING PLAN AREA C
P-113A	THIRD FLOOR PLUMBING PLAN AREA A
P-113B	THIRD FLOOR PLUMBING PLAN AREA B
P-114	ROOF PLUMBING PLAN
P-200	ENLARGED PLUMBING PLANS
P-201	ENLARGED PLUMBING PLANS
P-300	PLUMBING SCHEDULES
P-400	PLUMBING DETAILS
P-500	DOMESTIC WATER RISER
P-501	DOMESTIC WATER RISER
P-502	DOMESTIC WATER RISER
P-503	DOMESTIC WATER RISER
P-504	DOMESTIC WATER RISER
P-505	DOMESTIC WATER RISER
P-506	DOMESTIC WATER RISER
P-507	DOMESTIC WATER RISER
P-508	DOMESTIC WATER RISER
P-509	DOMESTIC WATER RISER
P-510	SANITARY WASTE AND VENT RISER
P-511	SANITARY WASTE AND VENT RISER
P-512	SANITARY WASTE AND VENT RISER
P-513	SANITARY WASTE AND VENT RISER
P-514	SANITARY WASTE AND VENT RISER
P-515	SANITARY WASTE AND VENT RISER
P-516	NATURAL GAS RISER
P-517	STORM RISER
P-518	STORM RISER
P-519	STORM RISER
P-520	STORM RISER

FIRE PROTECTION	
F-001	FIRE SUPPRESSION LEGEND
F-101A	FIRST FLOOR FIRE PROTECTION DEMOLITION PLAN AREA A
F-101B	FIRST FLOOR FIRE PROTECTION DEMOLITION PLAN AREA B
F-102A	SECOND FLOOR FIRE PROTECTION DEMOLITION PLAN AREA A
F-102B	SECOND FLOOR FIRE PROTECTION DEMOLITION PLAN AREA B
F-103A	THIRD FLOOR FIRE PROTECTION DEMOLITION PLAN AREA A
F-103B	THIRD FLOOR FIRE PROTECTION DEMOLITION PLAN AREA B
F-111A	FIRST FLOOR FIRE PROTECTION PLAN AREA A
F-111B	FIRST FLOOR FIRE PROTECTION PLAN AREA B
F-111C	FIRST FLOOR FIRE PROTECTION PLAN AREA C
F-111D	FACILITY EQUIPMENT STORAGE FIRE PROTECTION PLAN
F-112A	SECOND FLOOR FIRE PROTECTION PLAN AREA A
F-112B	SECOND FLOOR FIRE PROTECTION PLAN AREA B
F-113A	THIRD FLOOR FIRE PROTECTION PLAN AREA A
F-113B	THIRD FLOOR FIRE PROTECTION PLAN AREA B
F-114	ROOF FIRE PROTECTION PLAN
F-200	ENLARGED FIRE PROTECTION PLANS, DETAILS, AND SCHEDULES
TECHNOLOGY	
T-001	TECHNOLOGY GENERAL NOTES
T-100	SITE PLAN - SECURITY
T-101	TECHNOLOGY OVERALL FIRST FLOOR PLAN
T-102	TECHNOLOGY OVERALL SECOND FLOOR PLAN
T-103	TECHNOLOGY OVERALL THIRD FLOOR PLAN
T-111A	TECHNOLOGY FIRST FLOOR PLAN PART A
T-111B	TECHNOLOGY FIRST FLOOR PLAN PART B
T-111C	TECHNOLOGY FIRST FLOOR PLAN PART C
T-112A	TECHNOLOGY SECOND FLOOR PLAN PART A
T-112B	TECHNOLOGY SECOND FLOOR PLAN PART B
T-112C	TECHNOLOGY SECOND FLOOR PLAN PART C
T-113A	TECHNOLOGY THIRD FLOOR PLAN PART A
T-113B	TECHNOLOGY THIRD FLOOR PLAN PART B
T-900	TECHNOLOGY FACEPLATE DETAILS
T-901	TECHNOLOGY PATHWAY DETAILS
T-902	TELECOME ROOM AND RACK DETAILS
T-903	PUBLIC ADDRESS AND MASTER CLOCK
T-904	ACCESS CONTROL AND INTRUSION DETECTION
T-905	CCTV SYSTEM
T-906	MULTI-PURPOSE AND GYMNASIUM AV SYSTEMS
T-907	MUSIC MOVEMENT AND MOVEMENT STUDIO SOUND SYSTEMS
T-908	MUSIC MOVEMENT AND MOVEMENT STUDIO SOUND SYSTEMS
ELEVATOR	
VT01	GENERAL ELEVATOR INFORMATION
VT02	PLANS AND HOISTWAY SECTION - ELEVATOR 1

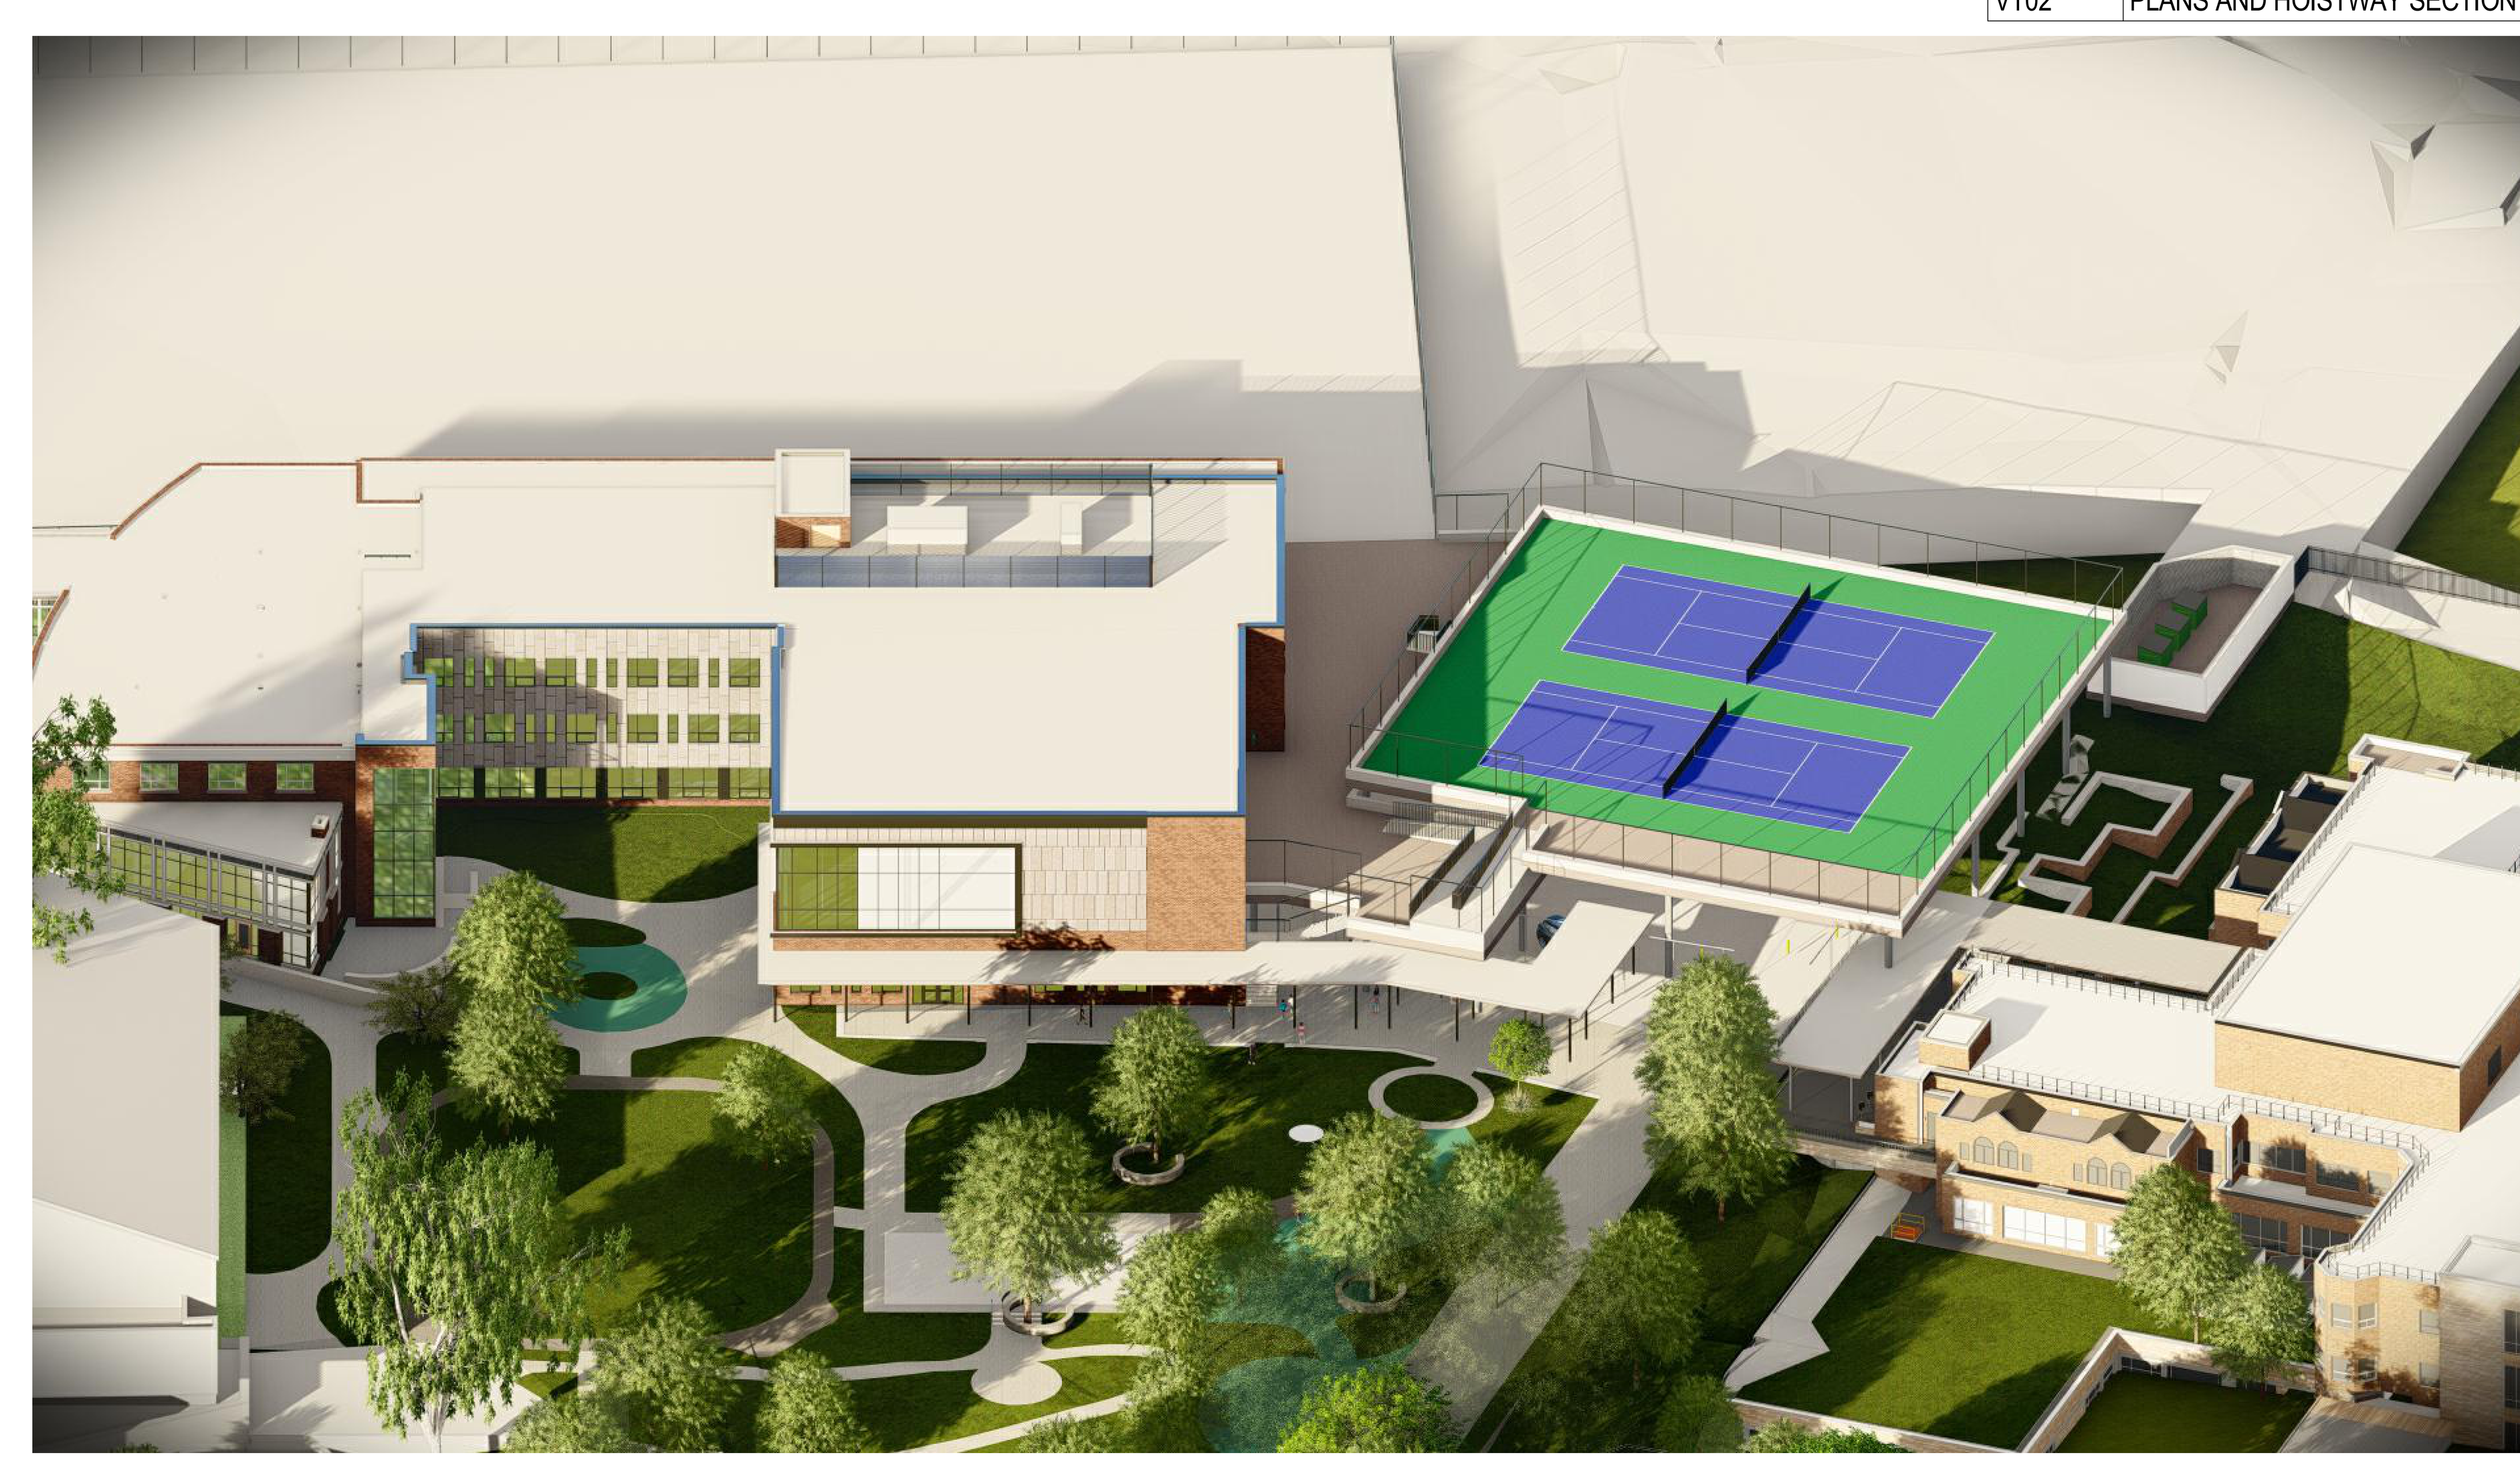

PERKINS EASTMAN

One Thomas Circle NW, Suite 200
Washington, DC 20005
T. +1 202 861 1325
F. +1 202 861 1326

ISSUED FOR BID

PROJECT No.0081312.01

10/29/2025

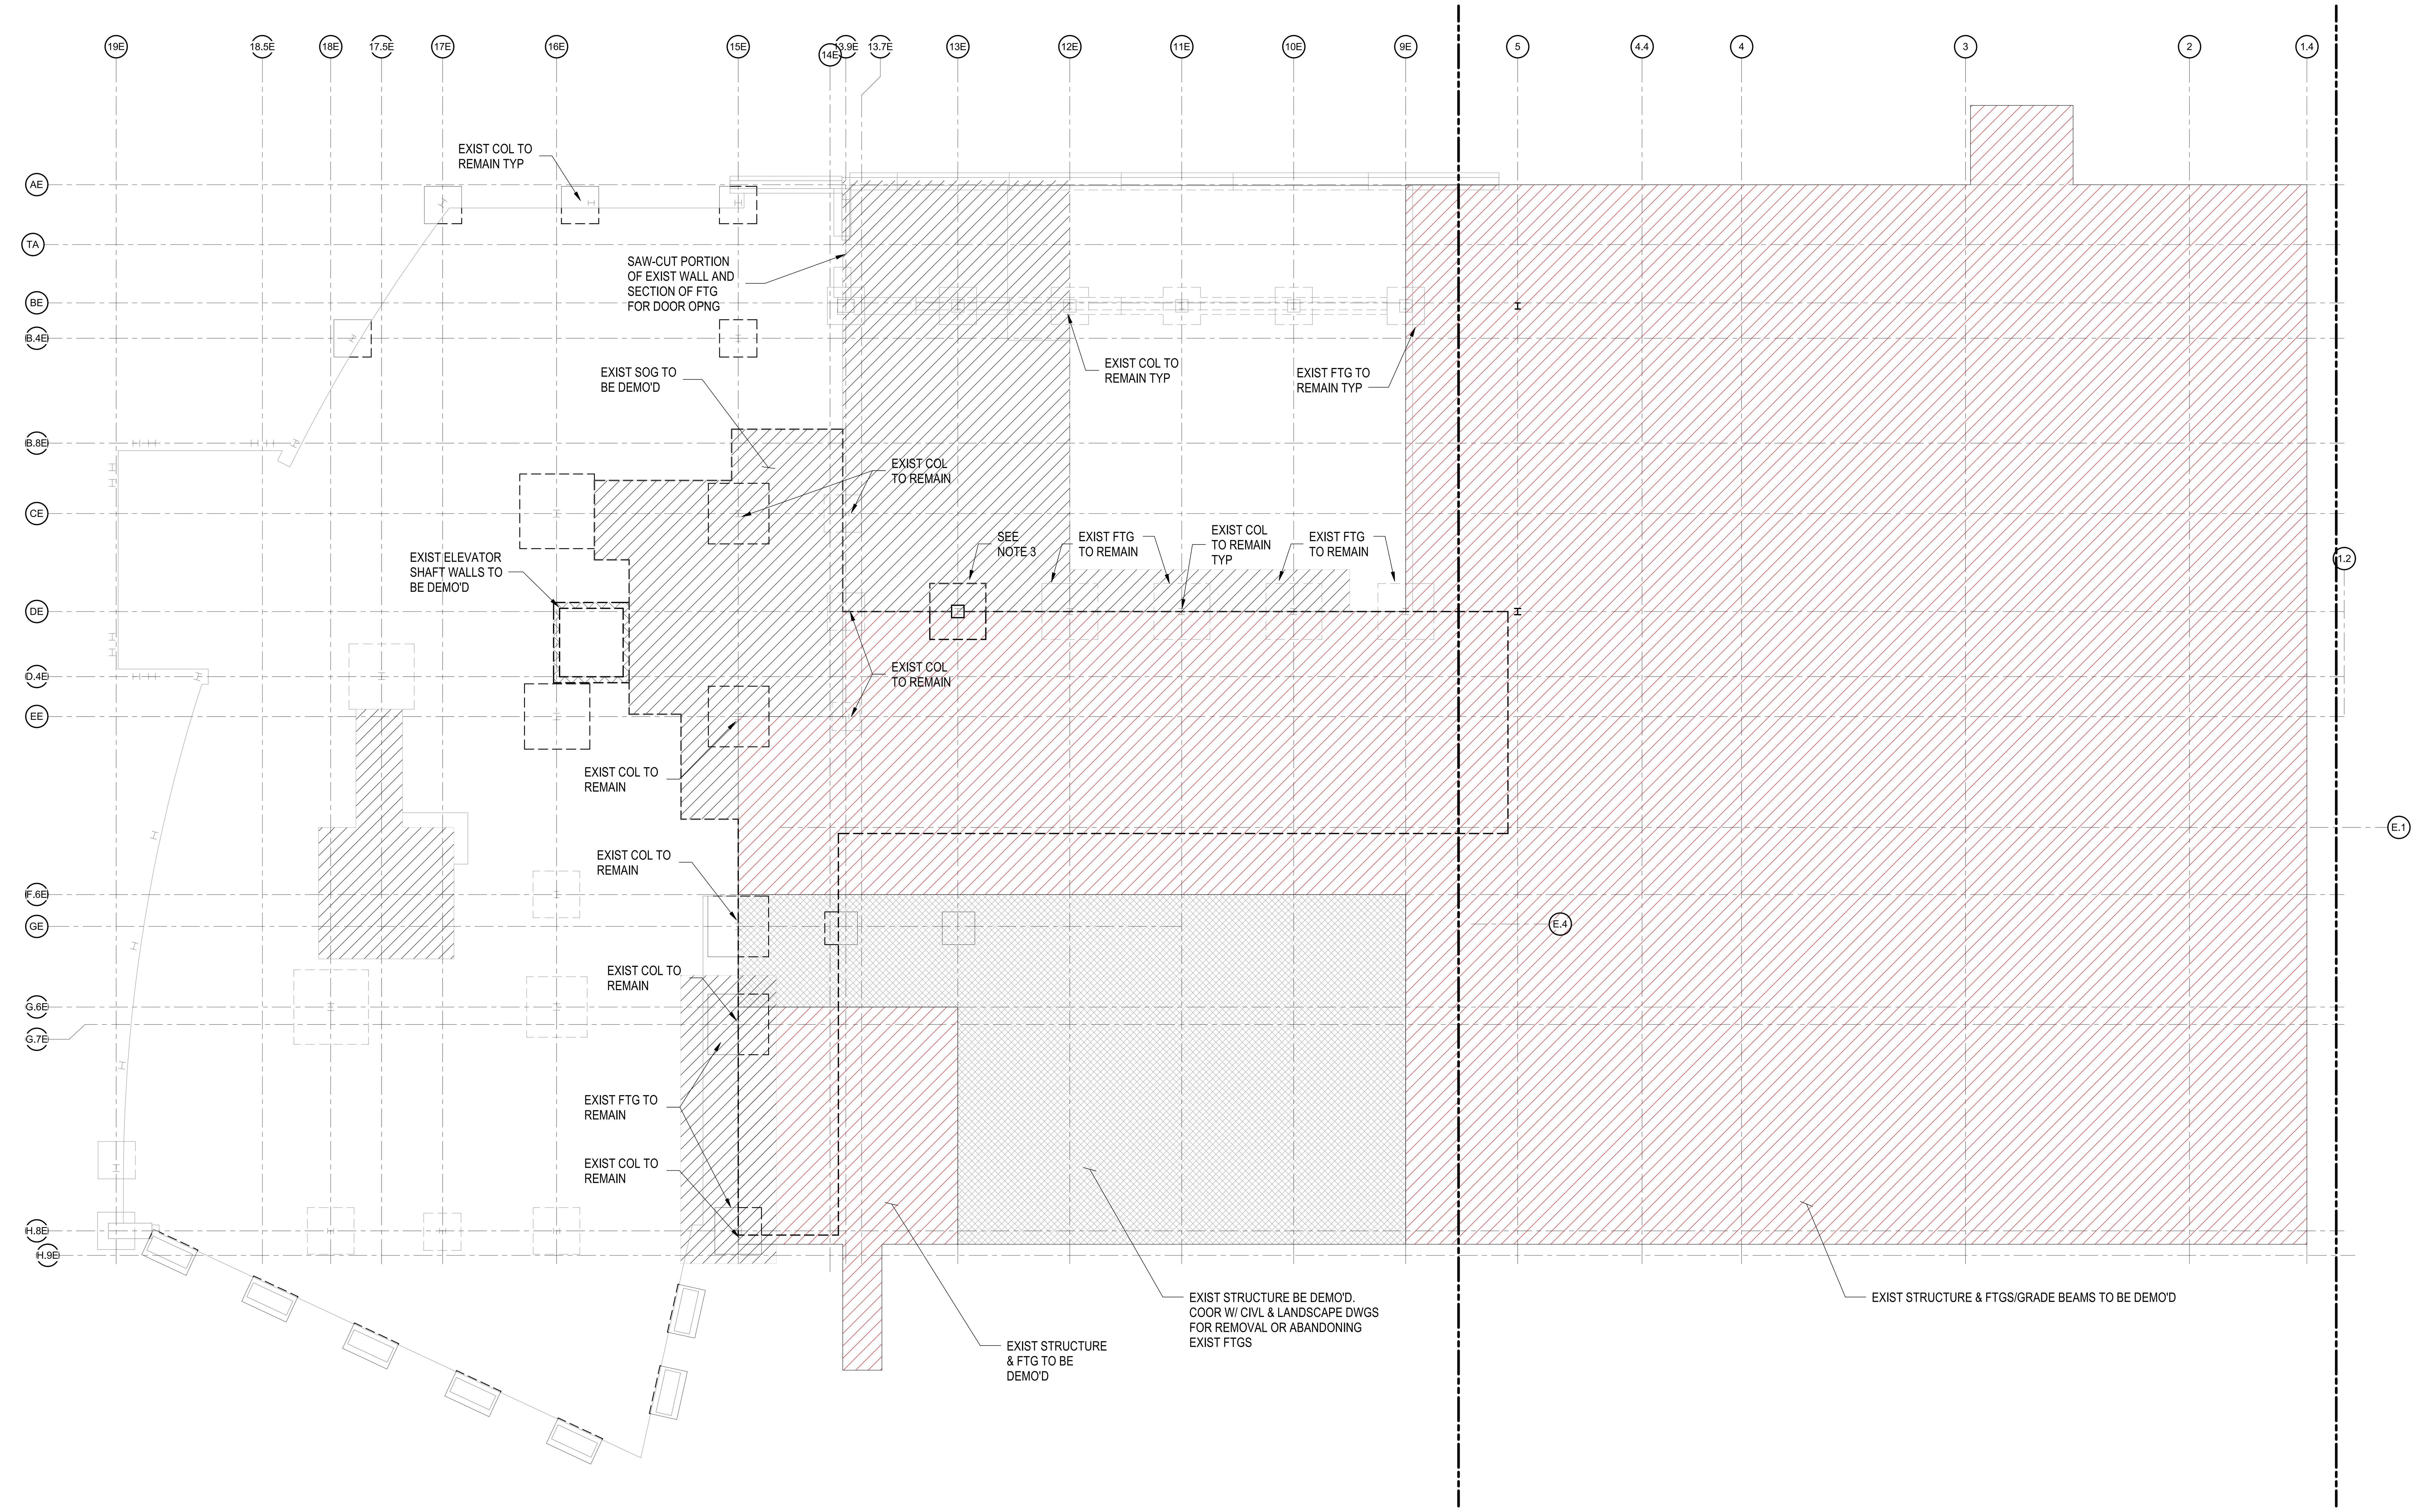

1 **FOUNDATION AND FIRST FLOOR DEMO PLAN**

1/8" = 1'-0"

DEMOLITION NOTES

1. COORDINATE WITH ARCHITECTURAL DRAWINGS AND STRUCTURAL FOUNDATION/FRAMING PLAN FOR EXTENT OF DEMOLITION. DO NOT DAMAGE EXISTING STRUCTURAL ELEMENTS TO REMAIN.
2. SEE STRUCTURAL FRAMING SECTIONS FOR INFORMATION ABOUT DEMOLITION AT THE EXISTING SLAB EDGE REQUIRED FOR CONNECTING TO NEW STRUCTURAL SLABS.
3. DEMOLISH THE EXISTING FOOTING AND PLACE TOP OF NEW FOOTING ONE FOOT BELOW FINISH FLOOR. CONTRACTOR SHALL SUBMIT SIGNED AND SEALED TEMPORARY SHORING DESIGN FOR REVIEW AND APPROVAL BEFORE COMMENCING FOOTING DEMOLITION WORK

NO.	DATE	ISSUE
A	09/30/2025	Permit
	10/29/2025	BID SET

0' 4' 8' 16' 24'

SCALE : 1/8" = 1'-0"

SEAL

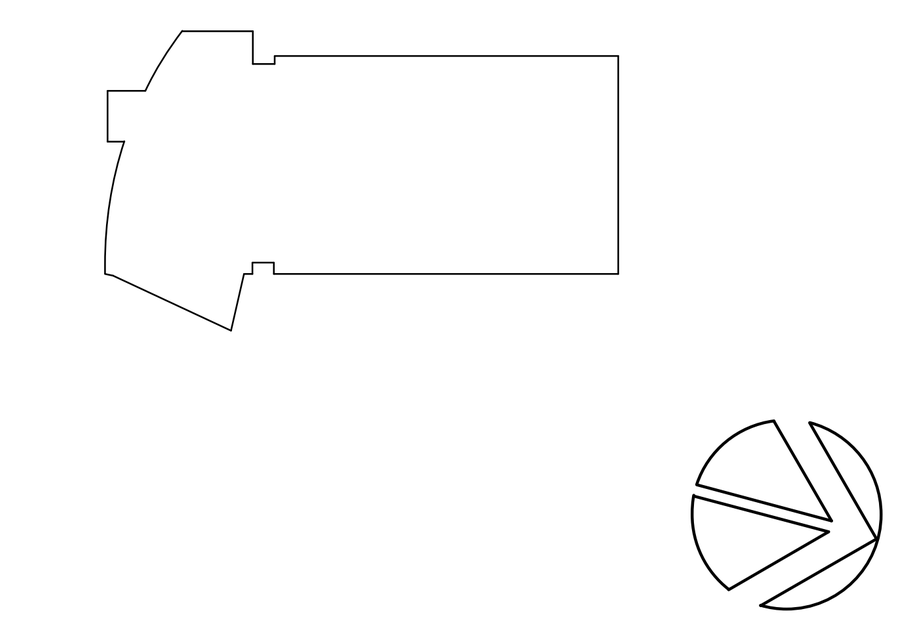

KEY PLAN

PERKINS EASTMAN
One Thomas Circle NW, Suite 200
Washington, DC 20005
T. +1 202 861 1325
F. +1 202 861 1326

Owner:
Sidwell Friends School
3825 Wisconsin Ave NW, Washington DC 20016

Construction Manager:
Advanced Project Management, Inc (APM)
4530 Walney Rd, Ste 202, Chantilly, VA 20151

Civil / Site:
Bowman Consulting Group, Ltd
888 17th St NW, Suite 510, Washington, DC 20006

Landscape:
Natural Resources Design, Inc (NRD)
1009 Shepherd Street NE, Washington, DC 20017

Structural:
Yun Associates LLC
1050 Connecticut Ave NW, Suite 500, Washington, DC 20036

MEP / FP / Lighting:
CMTA Inc
220 Lexington Green Circle, Suite 600, Lexington, KY 40503

AV / IT / Telecom / Security:
Educational Systems Planning (ESP)
2448 Holly Avenue, Suite 302, Annapolis, MD 21401

Food Service
Nyikos-Garcia Foodservice Design, Inc
7146 Starmount Way, New Market, MD 21774

Accessibility Consultant:
Galbo Wolf LLC
4410 Massachusetts Ave NW, #240, Washington, DC 20016

Acoustics:
Polysonics Corp
555 Hospital Drive, Warrenton, VA 20186

Building Envelope Consultant:
Sustainable Building Partners LLC
2701 Prosperity Ave, Suite 105, Fairfax, VA 22031

Code Consultant:
Campbell Code Consulting LLC
7834 Taggart Ct, Elkridge, MD 21075

Specifications:

PROJECT TITLE:

SIDWELL FRIENDS NEW LOWER SCHOOL AT DC CAMPUS

3825 WISCONSIN AVE NW
WASHINGTON, DC 20016

PROJECT No: 2025008

DRAWING TITLE:

FOUNDATION AND 1ST FLOOR DEMO PLAN

SCALE: 1/8" = 1'-0"

SD-111

BID SET
10/29/2025

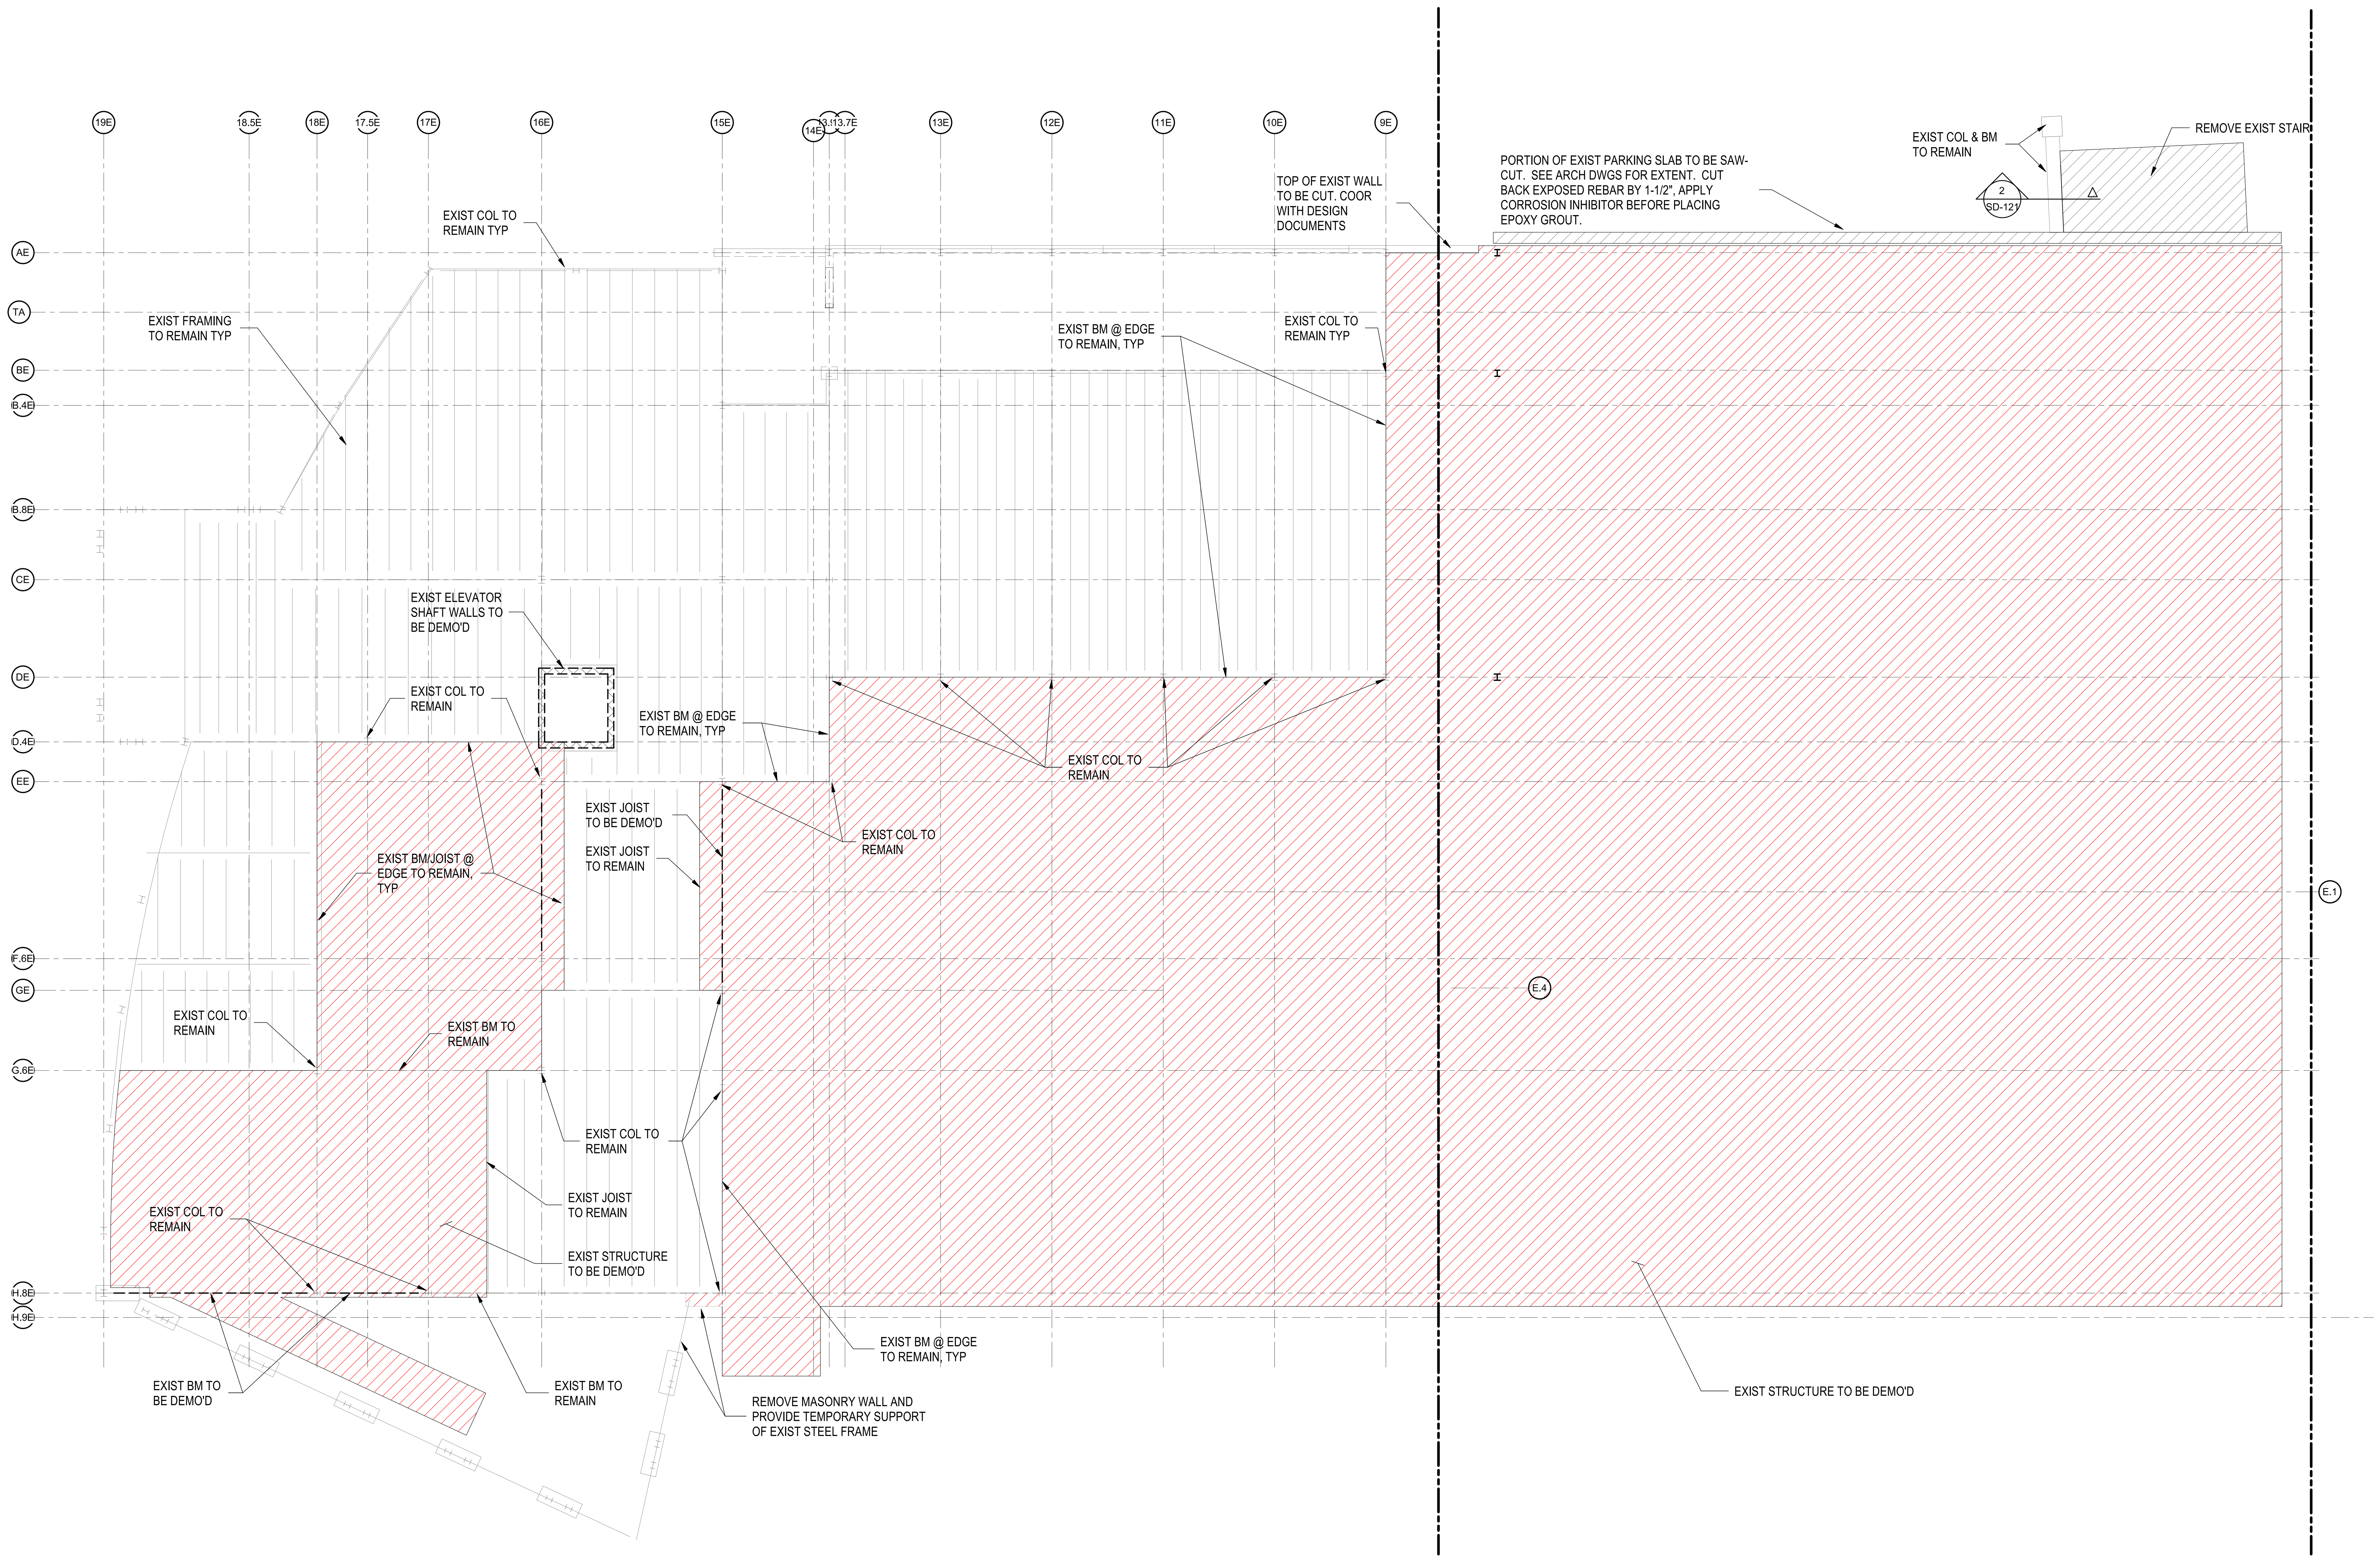

1 **SECOND FLOOR DEMO PLAN**

1/8" = 1'-0"

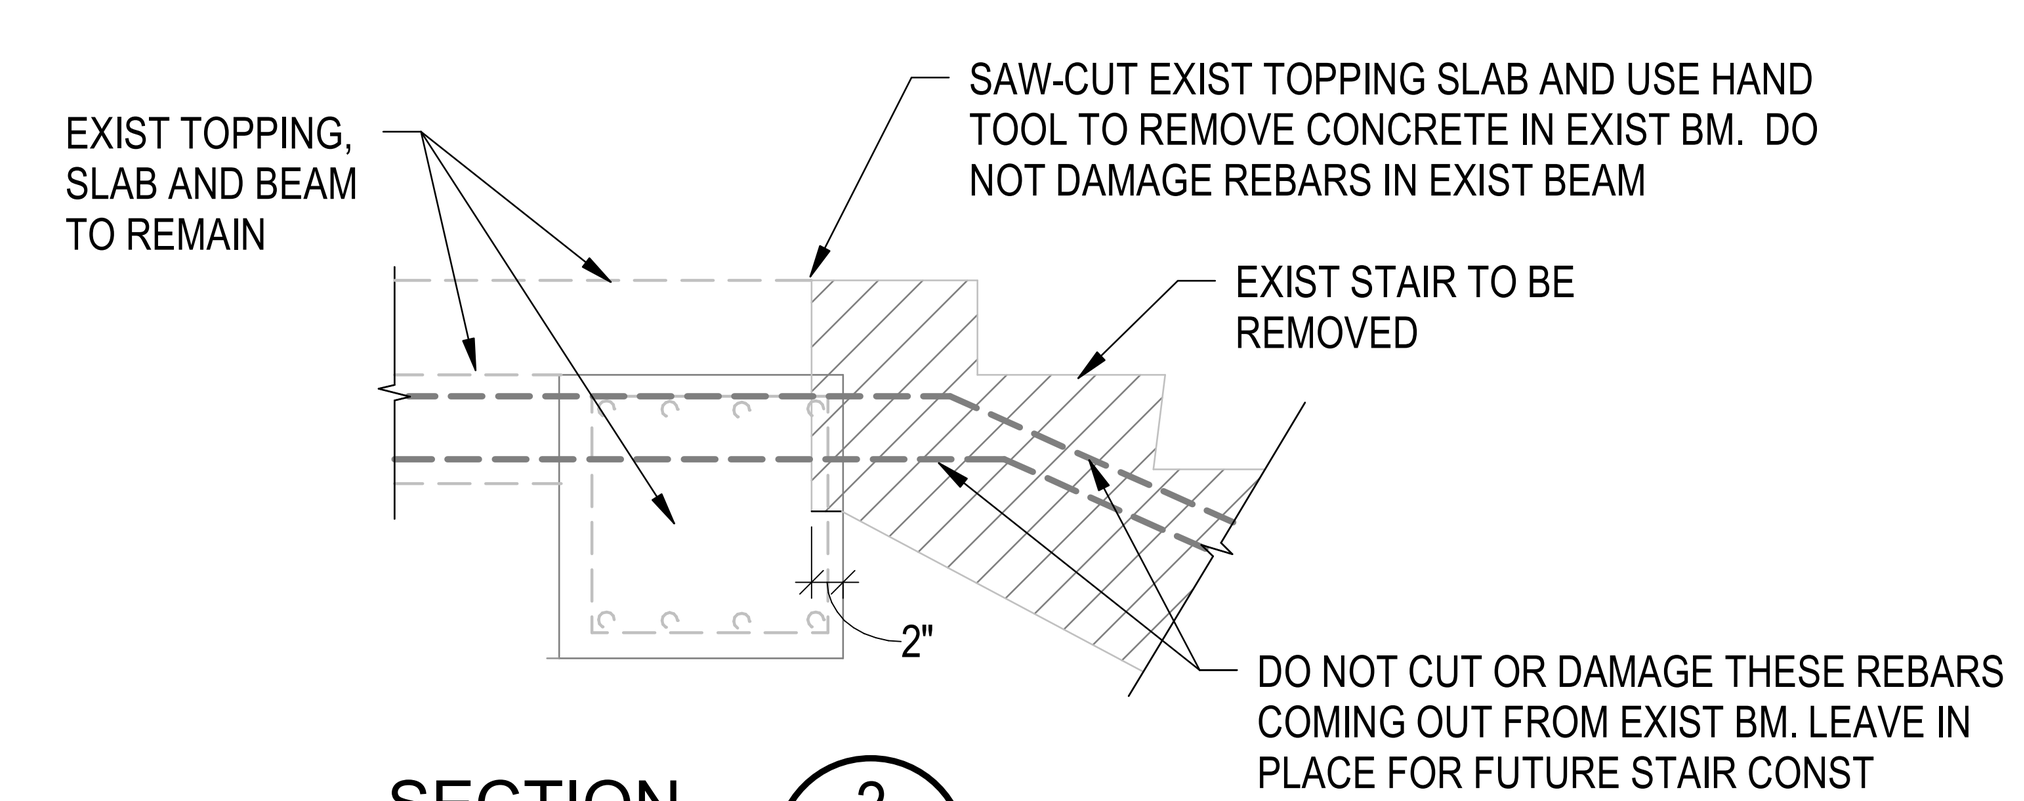

SECTION 2 SD-121

SCALE: 3/4" = 1'-0"

Autodesk Docs://Sidwell Lower School/Sidwell Lower School_ST_R24.rvt
10/28/2025 10:16:06 AM

NO.	DATE	ISSUE
A	09/30/2025	Permit
	10/29/2025	BID SET

0' 4' 8' 16' 24'

SCALE : 1/8" = 1'-0"

SEAL

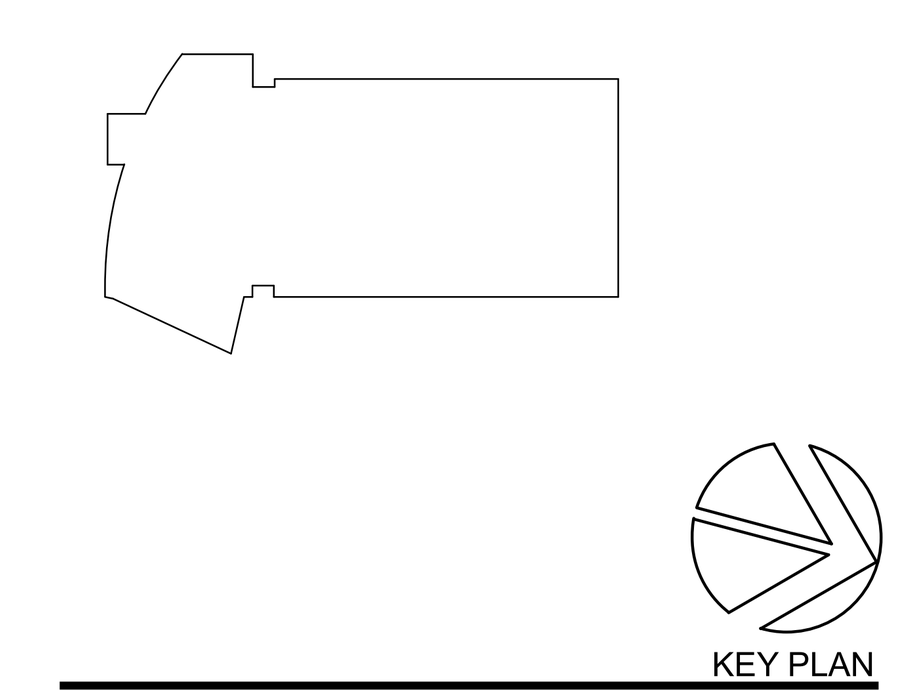

KEY PLAN

PERKINS EASTMAN
One Thomas Circle NW, Suite 200
Washington, DC 20005
T: +1 202 861 1325
F: +1 202 861 1326

Owner:
Sidwell Friends School
3825 Wisconsin Ave NW, Washington DC 20016

Construction Manager:
Advanced Project Management, Inc (APM)
4530 Walney Rd, Ste 202, Chantilly, VA 20151

Civil / Site:
Bowman Consulting Group, Ltd
888 17th St NW, Suite 510, Washington, DC 20006

Landscape:
Natural Resources Design, Inc (NRD)
1009 Shepherd Street NE, Washington, DC 20017

Structural:
Yun Associates LLC
1050 Connecticut Ave NW, Suite 500, Washington, DC 20036

MEP / FP / Lighting:
CMTA Inc
220 Lexington Green Circle, Suite 600, Lexington, KY 40503

AV / IT / Telecom / Security:
Educational Systems Planning (ESP)
2448 Holly Avenue, Suite 302, Annapolis, MD 21401

Food Service
Nyikos-Garcia Foodservice Design, Inc
7146 Starmount Way, New Market, MD 21774

Accessibility Consultant:
Galbo Wolf LLC
4410 Massachusetts Ave NW, #240, Washington, DC 20016

Acoustics:
Polysonics Corp
555 Hospital Drive, Warrenton, VA 20186

Building Envelope Consultant:
Sustainable Building Partners LLC
2701 Prosperity Ave, Suite 105, Fairfax, VA 22031

Code Consultant:
Campbell Code Consulting LLC
7834 Taggart Ct, Elkridge, MD 21075

Specifications:

PROJECT TITLE:

SIDWELL FRIENDS NEW LOWER SCHOOL AT DC CAMPUS

3825 WISCONSIN AVE NW
WASHINGTON, DC 20016

PROJECT No: 2025008

DRAWING TITLE:

SECOND FLOOR DEMO PLAN

SCALE: As indicated

SD-121

BID SET
10/29/2025

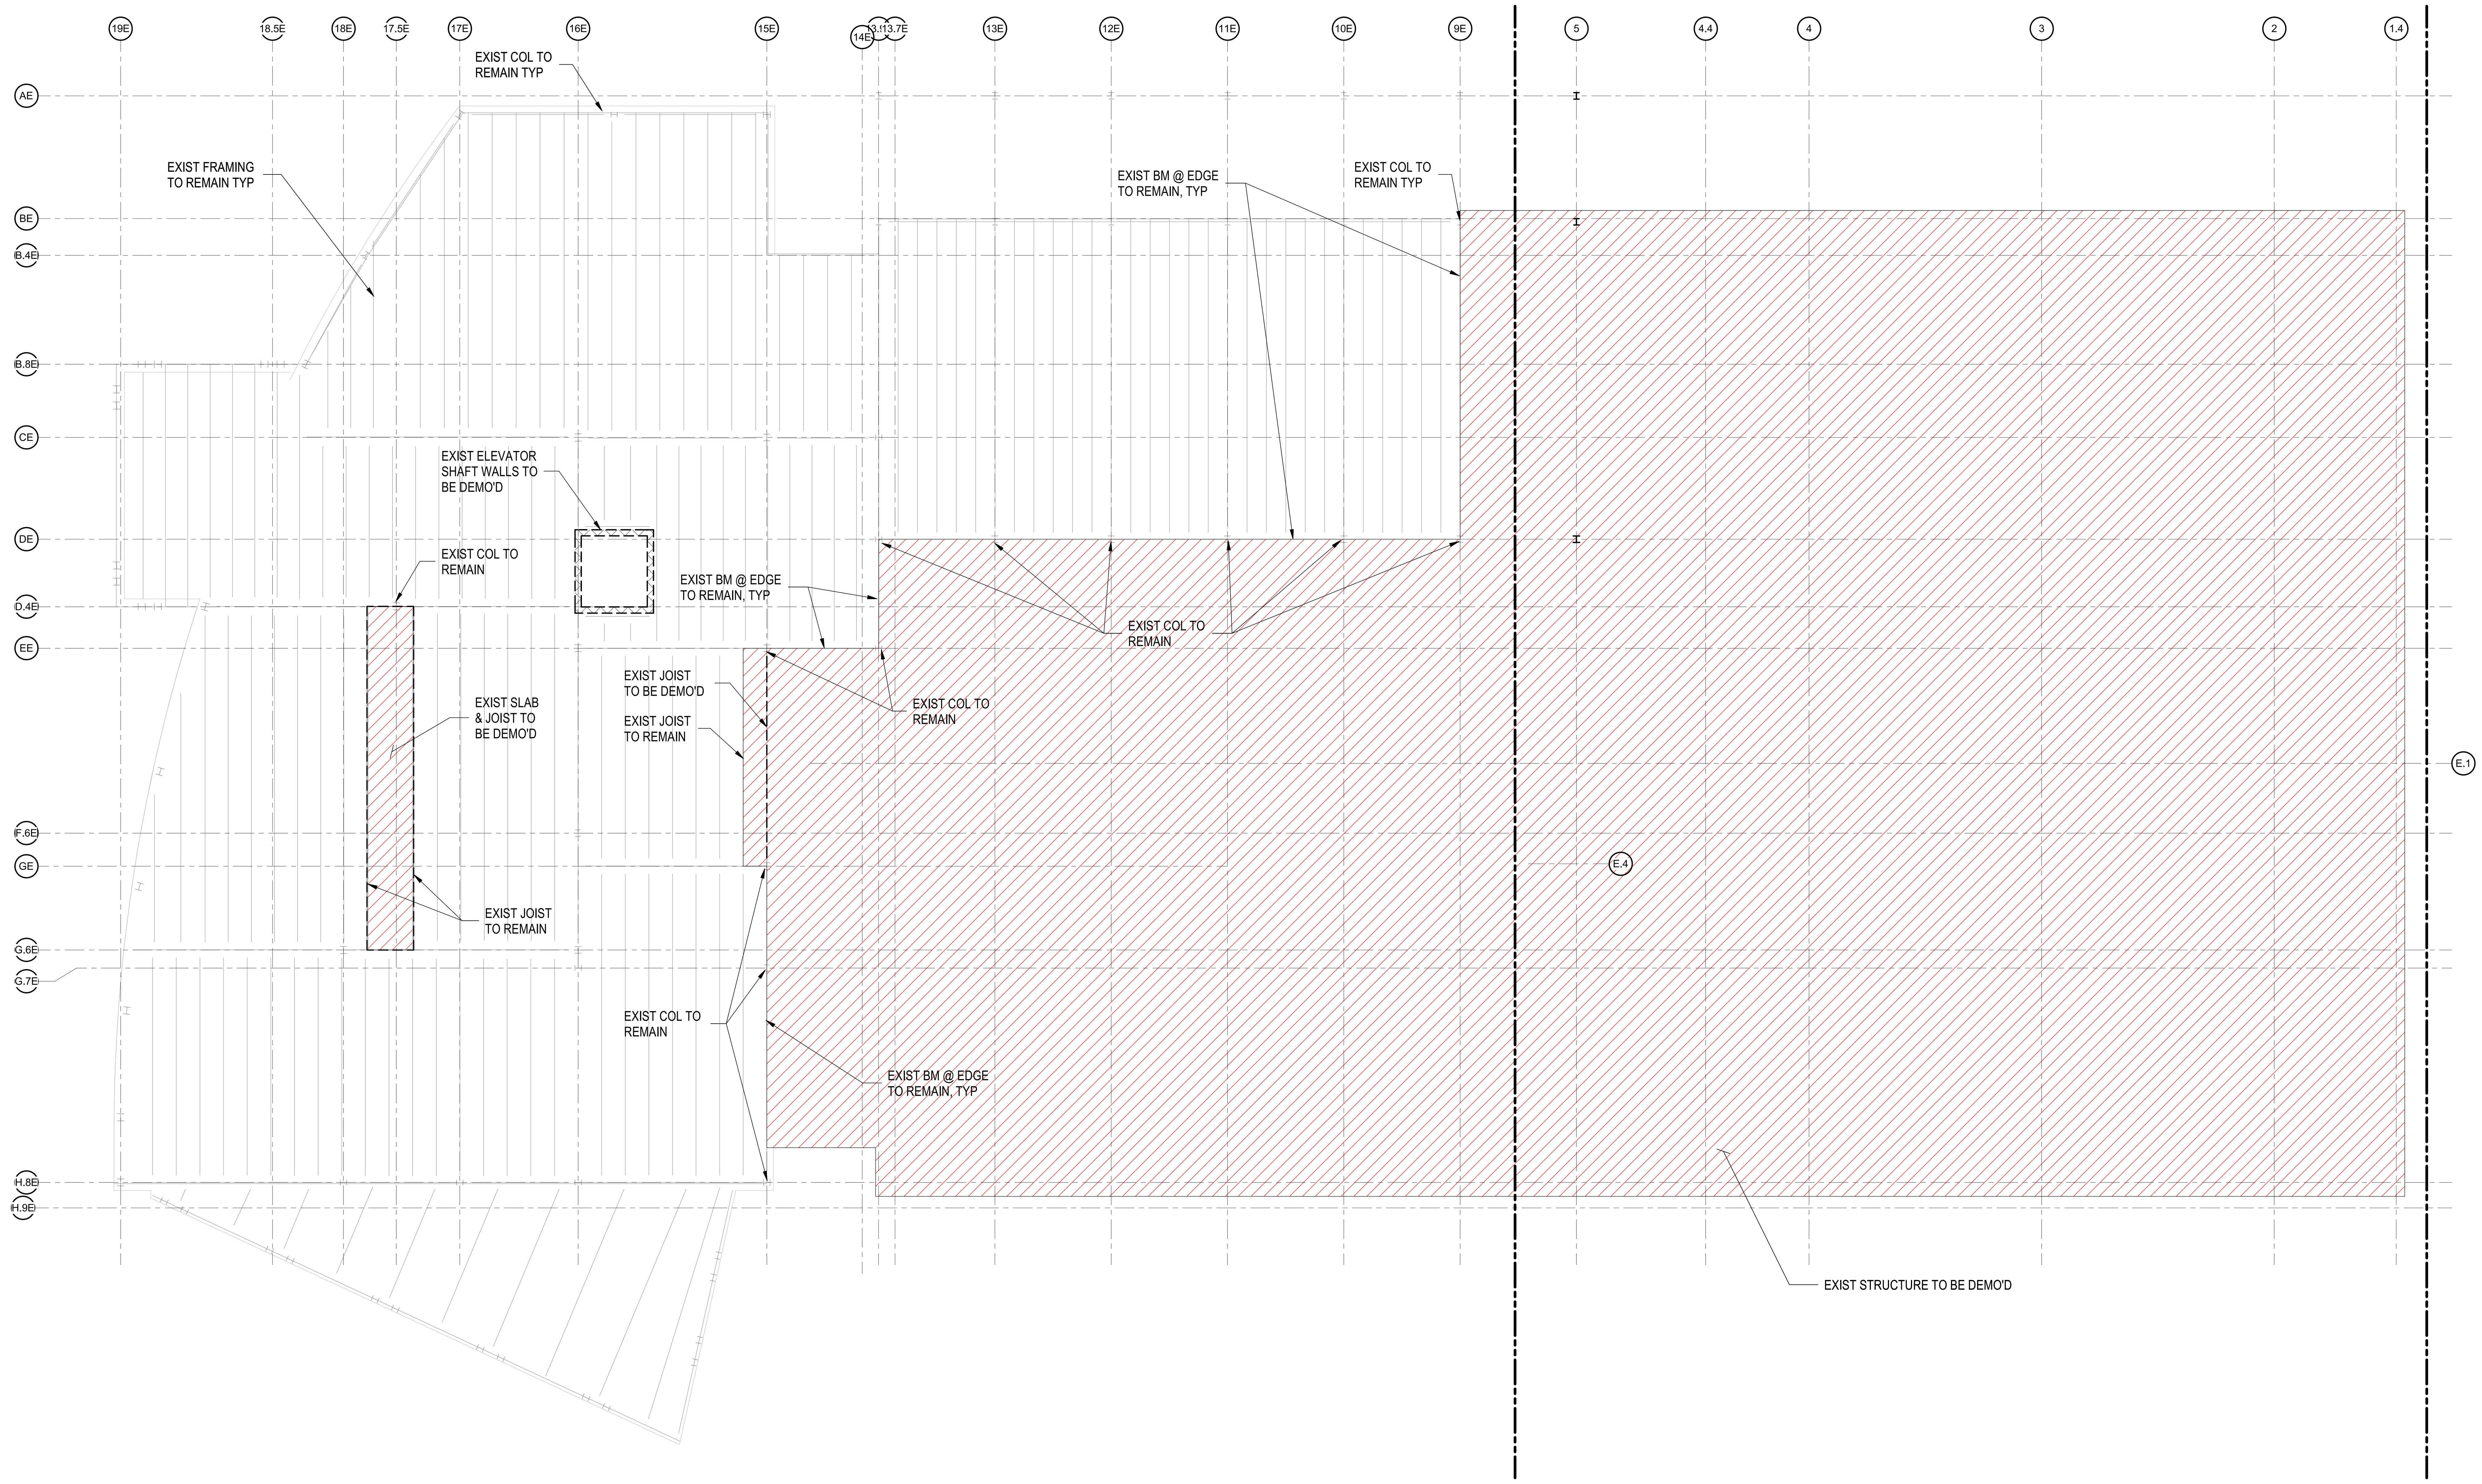

1 **THIRD FLOOR DEMO PLAN**
1/8" = 1'-0"

Autodesk Docs://Sidwell Lower School/Sidwell Lower School_ST_R24.rvt
10/28/2025 10:16:07 AM

NO.	DATE	ISSUE
A	09/30/2025	Permit
	10/29/2025	BID SET

0' 4' 8' 16' 24'
SCALE : 1/8" = 1'-0"

SEAL

KEY PLAN

PERKINS EASTMAN
One Thomas Circle NW, Suite 200
Washington, DC 20005
T: +1 202 861 1325
F: +1 202 861 1326

Owner:
Sidwell Friends School
3825 Wisconsin Ave NW, Washington DC 20016

Construction Manager:
Advanced Project Management, Inc (APM)
4530 Walney Rd, Ste 202, Chantilly, VA 20151

Civil / Site:
Bowman Consulting Group, Ltd
888 17th St NW, Suite 510, Washington, DC 20006

Landscape:
Natural Resources Design, Inc (NRD)
1009 Shepherd Street NE, Washington, DC 20017

Structural:
Yun Associates LLC
1050 Connecticut Ave NW, Suite 500, Washington, DC 20036

MEP / FP / Lighting:
CMTA Inc
220 Lexington Green Circle, Suite 600, Lexington, KY 40503

AV / IT / Telecom / Security:
Educational Systems Planning (ESP)
2448 Holly Avenue, Suite 302, Annapolis, MD 21401

Food Service
Nyikos-Garcia Foodservice Design, Inc
7146 Starmount Way, New Market, MD 21774

Accessibility Consultant:
Galbo Wolf LLC
4410 Massachusetts Ave NW, #240, Washington, DC 20016

Acoustics:
Polysonics Corp
555 Hospital Drive, Warrenton, VA 20186

Building Envelope Consultant:
Sustainable Building Partners LLC
2701 Prosperity Ave, Suite 105, Fairfax, VA 22031

Code Consultant:
Campbell Code Consulting LLC
7834 Taggart Ct, Elkridge, MD 21075

Specifications:

PROJECT TITLE:
SIDWELL FRIENDS NEW LOWER SCHOOL AT DC CAMPUS

3825 WISCONSIN AVE NW
WASHINGTON, DC 20016

PROJECT No: 2025008

DRAWING TITLE:
THIRD FLOOR DEMO PLAN

SCALE: 1/8" = 1'-0"

SD-131

BID SET
10/29/2025

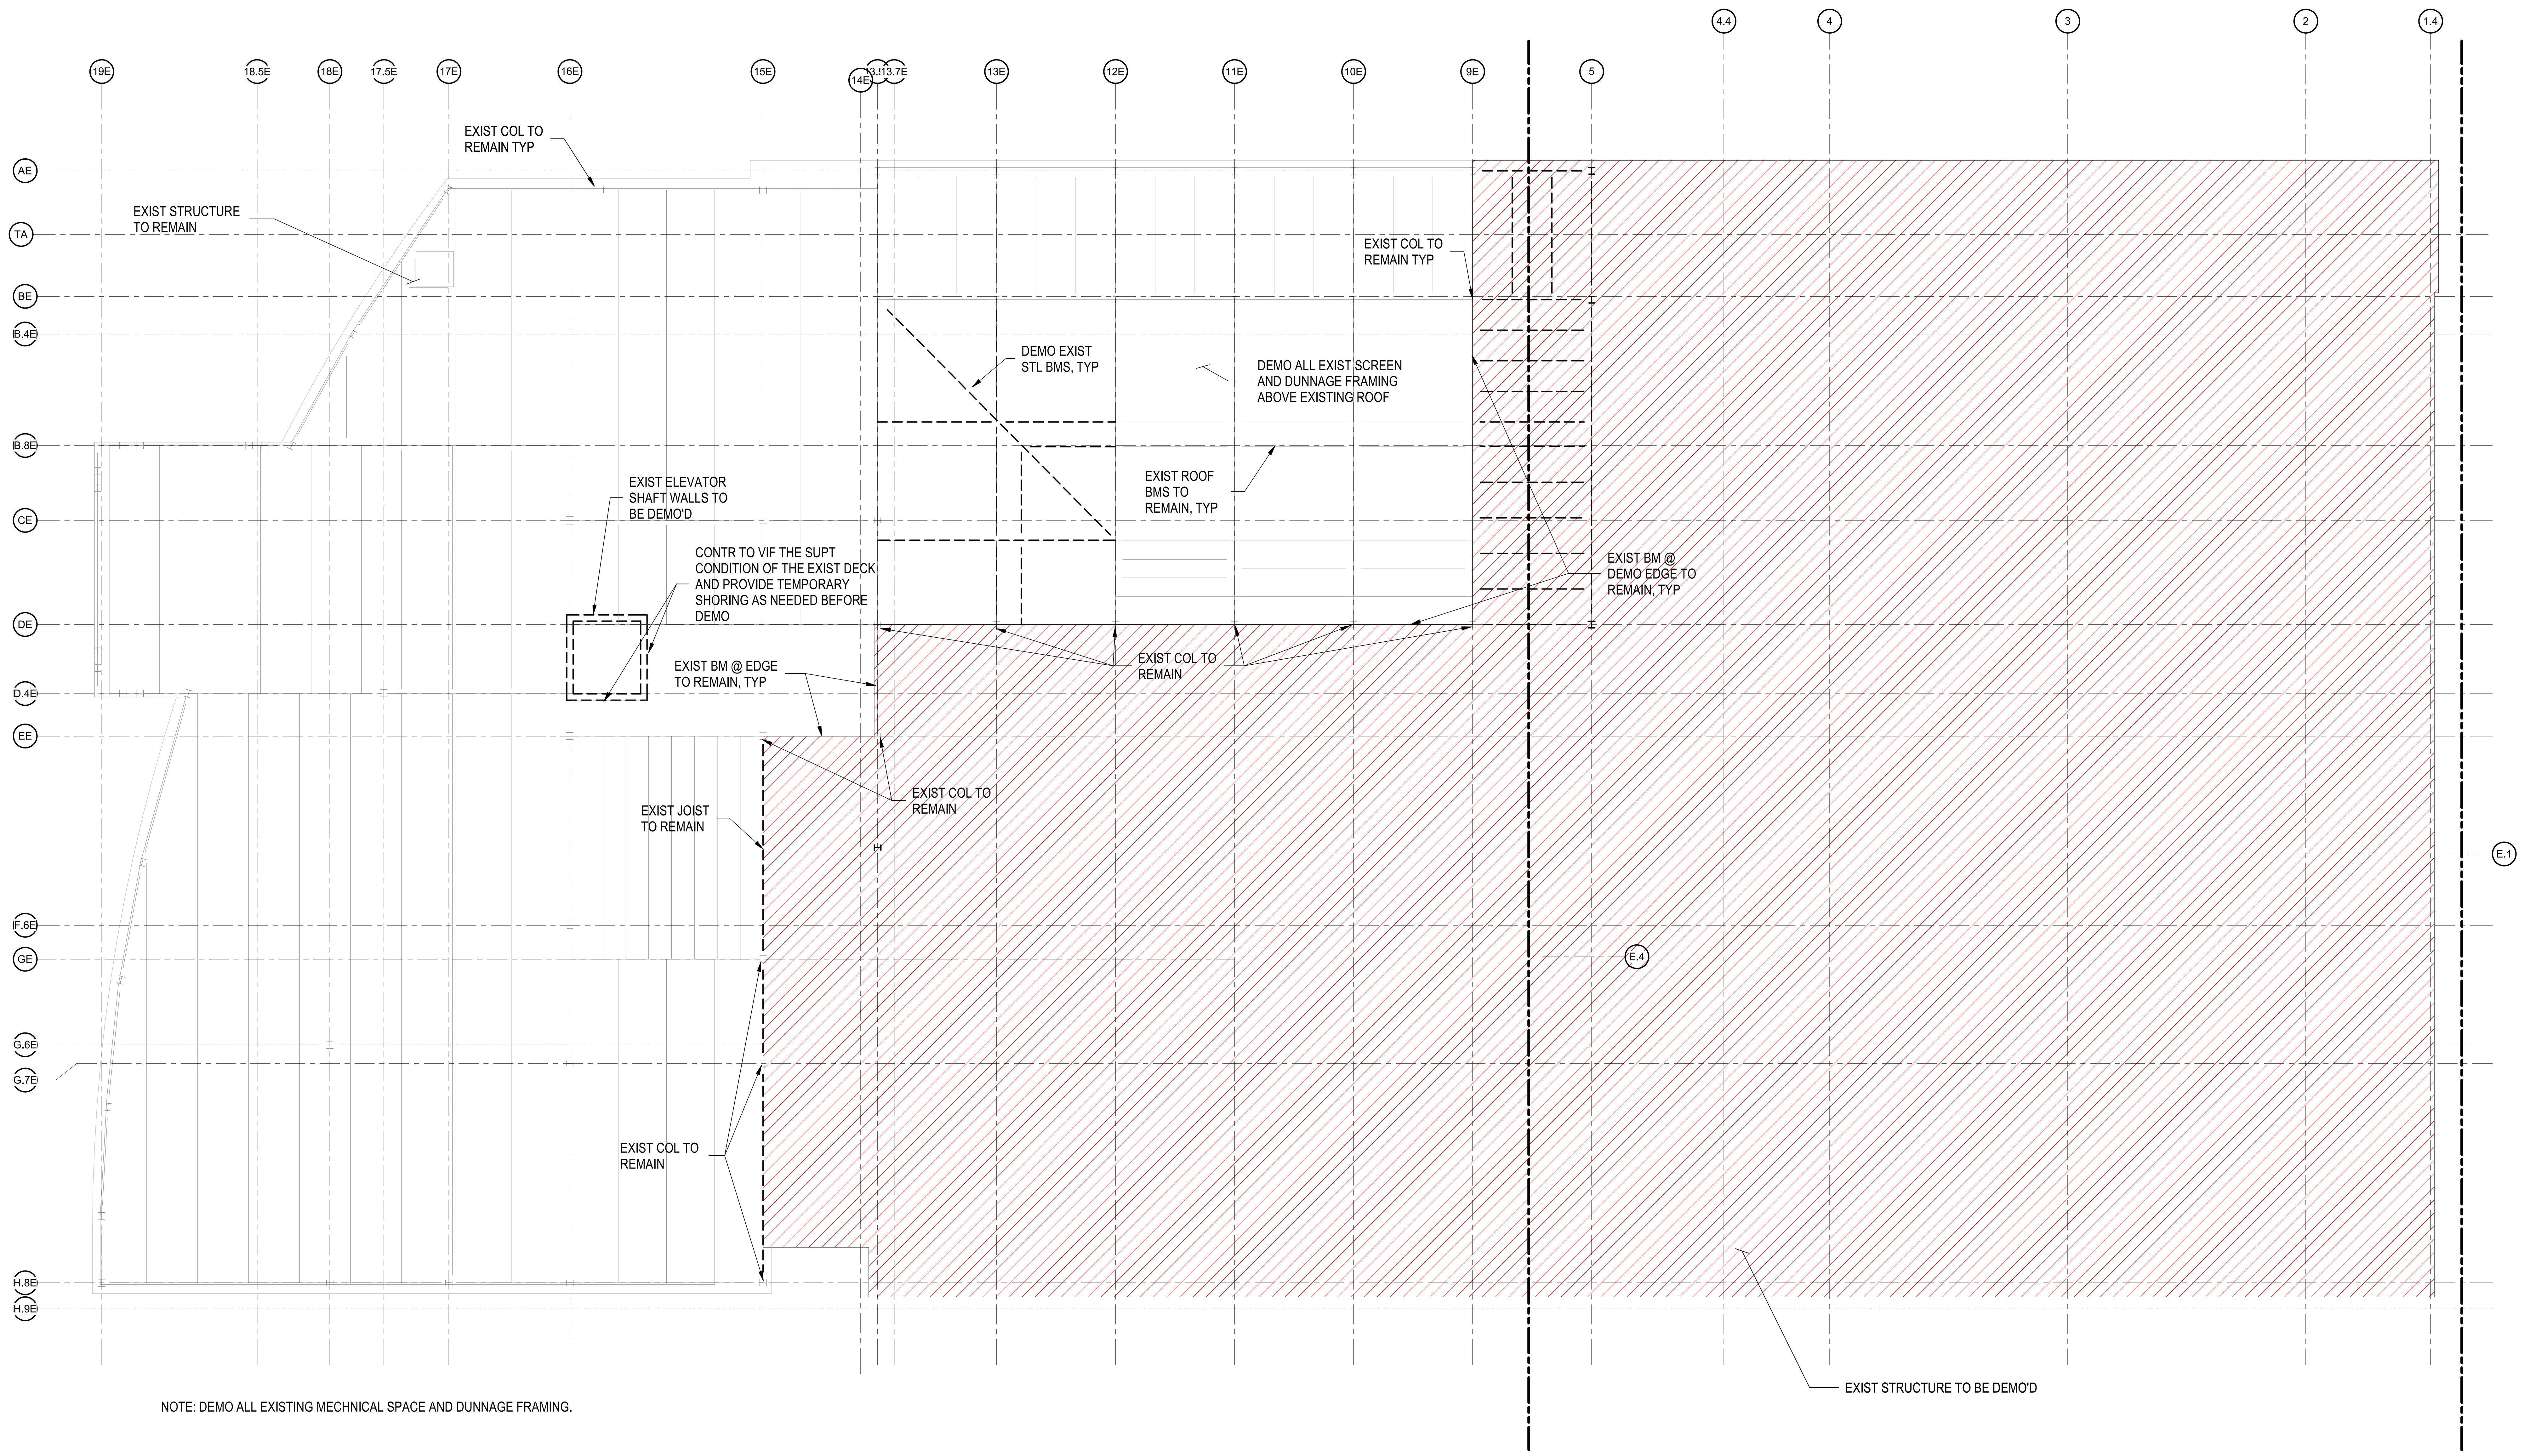

1 **ROOF DEMO PLAN**
1/8" = 1'-0"

Autodesk Docs://Sidwell Lower School/Sidwell Lower School_ST_R24.rvt
10/28/2025 10:16:08 AM

NO.	DATE	ISSUE
A	09/30/2025	Permit
	10/29/2025	BID SET

0' 4' 8' 16' 24'
SCALE : 1/8" = 1'-0"

SEAL

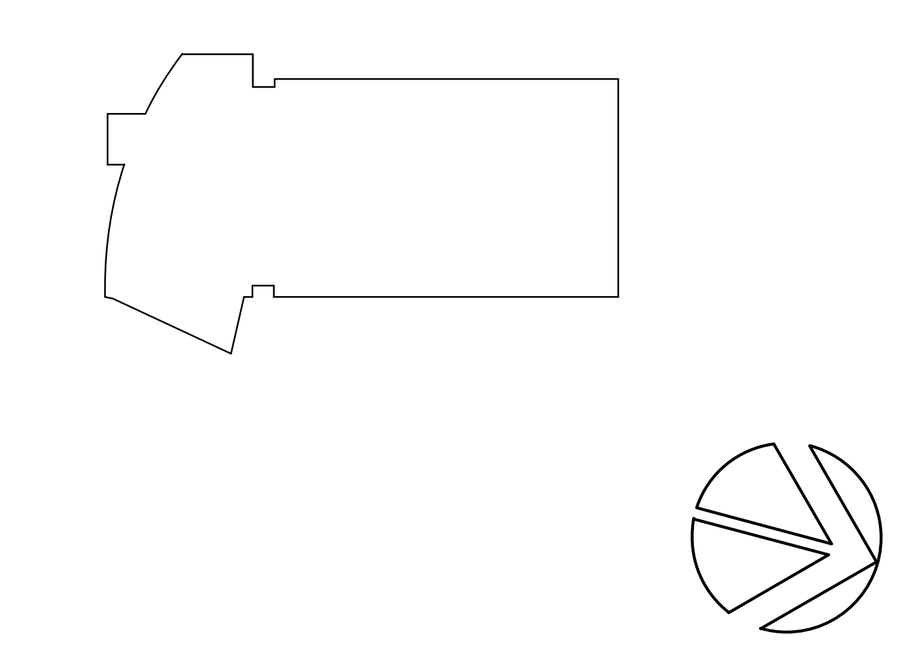

PERKINS — EASTMAN
One Thomas Circle NW, Suite 200
Washington, DC 20005
T. +1 202 861 1325
F. +1 202 861 1326

Owner:
Sidwell Friends School
3825 Wisconsin Ave NW, Washington DC 20016

Construction Manager:
Advanced Project Management, Inc (APM)
4530 Walney Rd, Ste 202, Chantilly, VA 20151

Civil / Site:
Bowman Consulting Group, Ltd
888 17th St NW, Suite 510, Washington, DC 20006

Landscape:
Natural Resources Design, Inc (NRD)
1009 Shepherd Street NE, Washington, DC 20017

Structural:
Yun Associates LLC
1050 Connecticut Ave NW, Suite 500, Washington, DC 20036

MEP / FP / Lighting:
CMTA Inc
220 Lexington Green Circle, Suite 600, Lexington, KY 40503

AV / IT / Telecom / Security:
Educational Systems Planning (ESP)
2448 Holly Avenue, Suite 302, Annapolis, MD 21401

Food Service
Nyikos-Garcia Foodservice Design, Inc
7146 Starmount Way, New Market, MD 21774

Accessibility Consultant:
Galbo Wolf LLC
4410 Massachusetts Ave NW, #240, Washington, DC 20016

Acoustics:
Polysonics Corp
555 Hospital Drive, Warrenton, VA 20186

Building Envelope Consultant:
Sustainable Building Partners LLC
2701 Prosperity Ave, Suite 105, Fairfax, VA 22031

Code Consultant:
Campbell Code Consulting LLC
7834 Taggart Ct, Elkridge, MD 21075

Specifications:

PROJECT TITLE:

SIDWELL FRIENDS NEW LOWER SCHOOL AT DC CAMPUS

3825 WISCONSIN AVE NW
WASHINGTON, DC 20016

PROJECT No: 2025008

DRAWING TITLE:

ROOF DEMO PLAN

SCALE: 1/8" = 1'-0"

SD-141

BID SET
10/29/2025

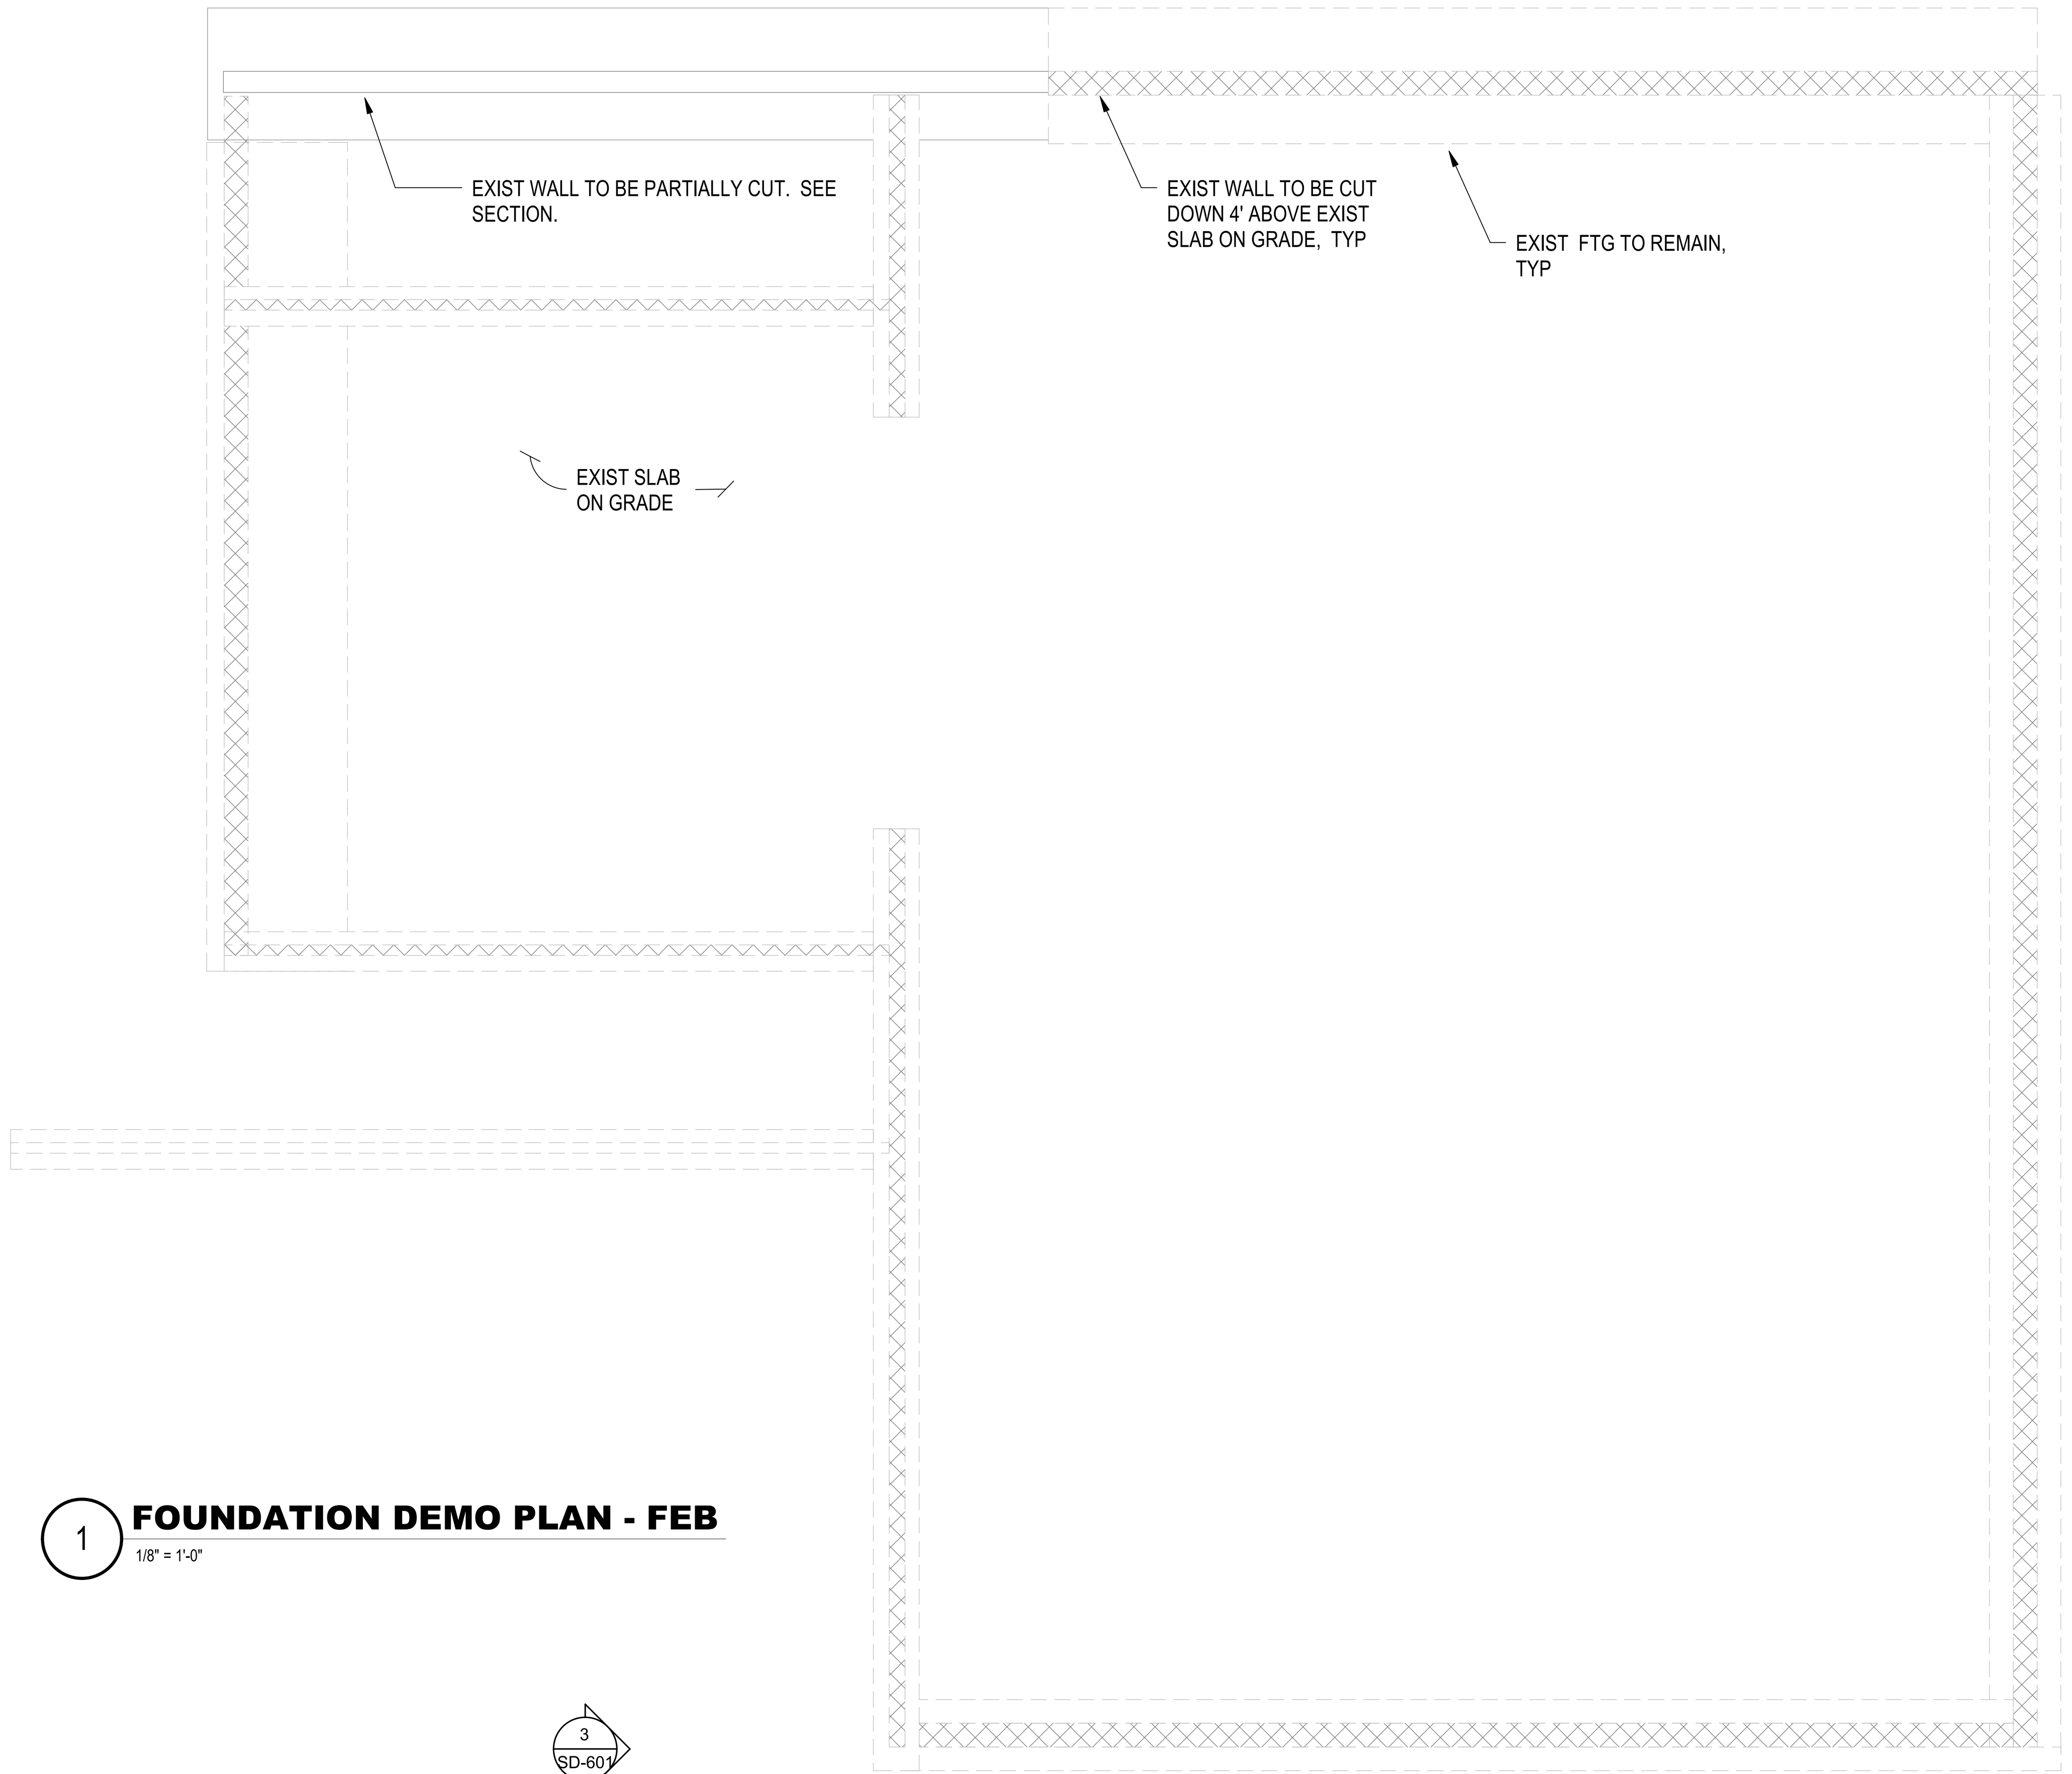

1 **FOUNDATION DEMO PLAN - FEB**
1/8" = 1'-0"

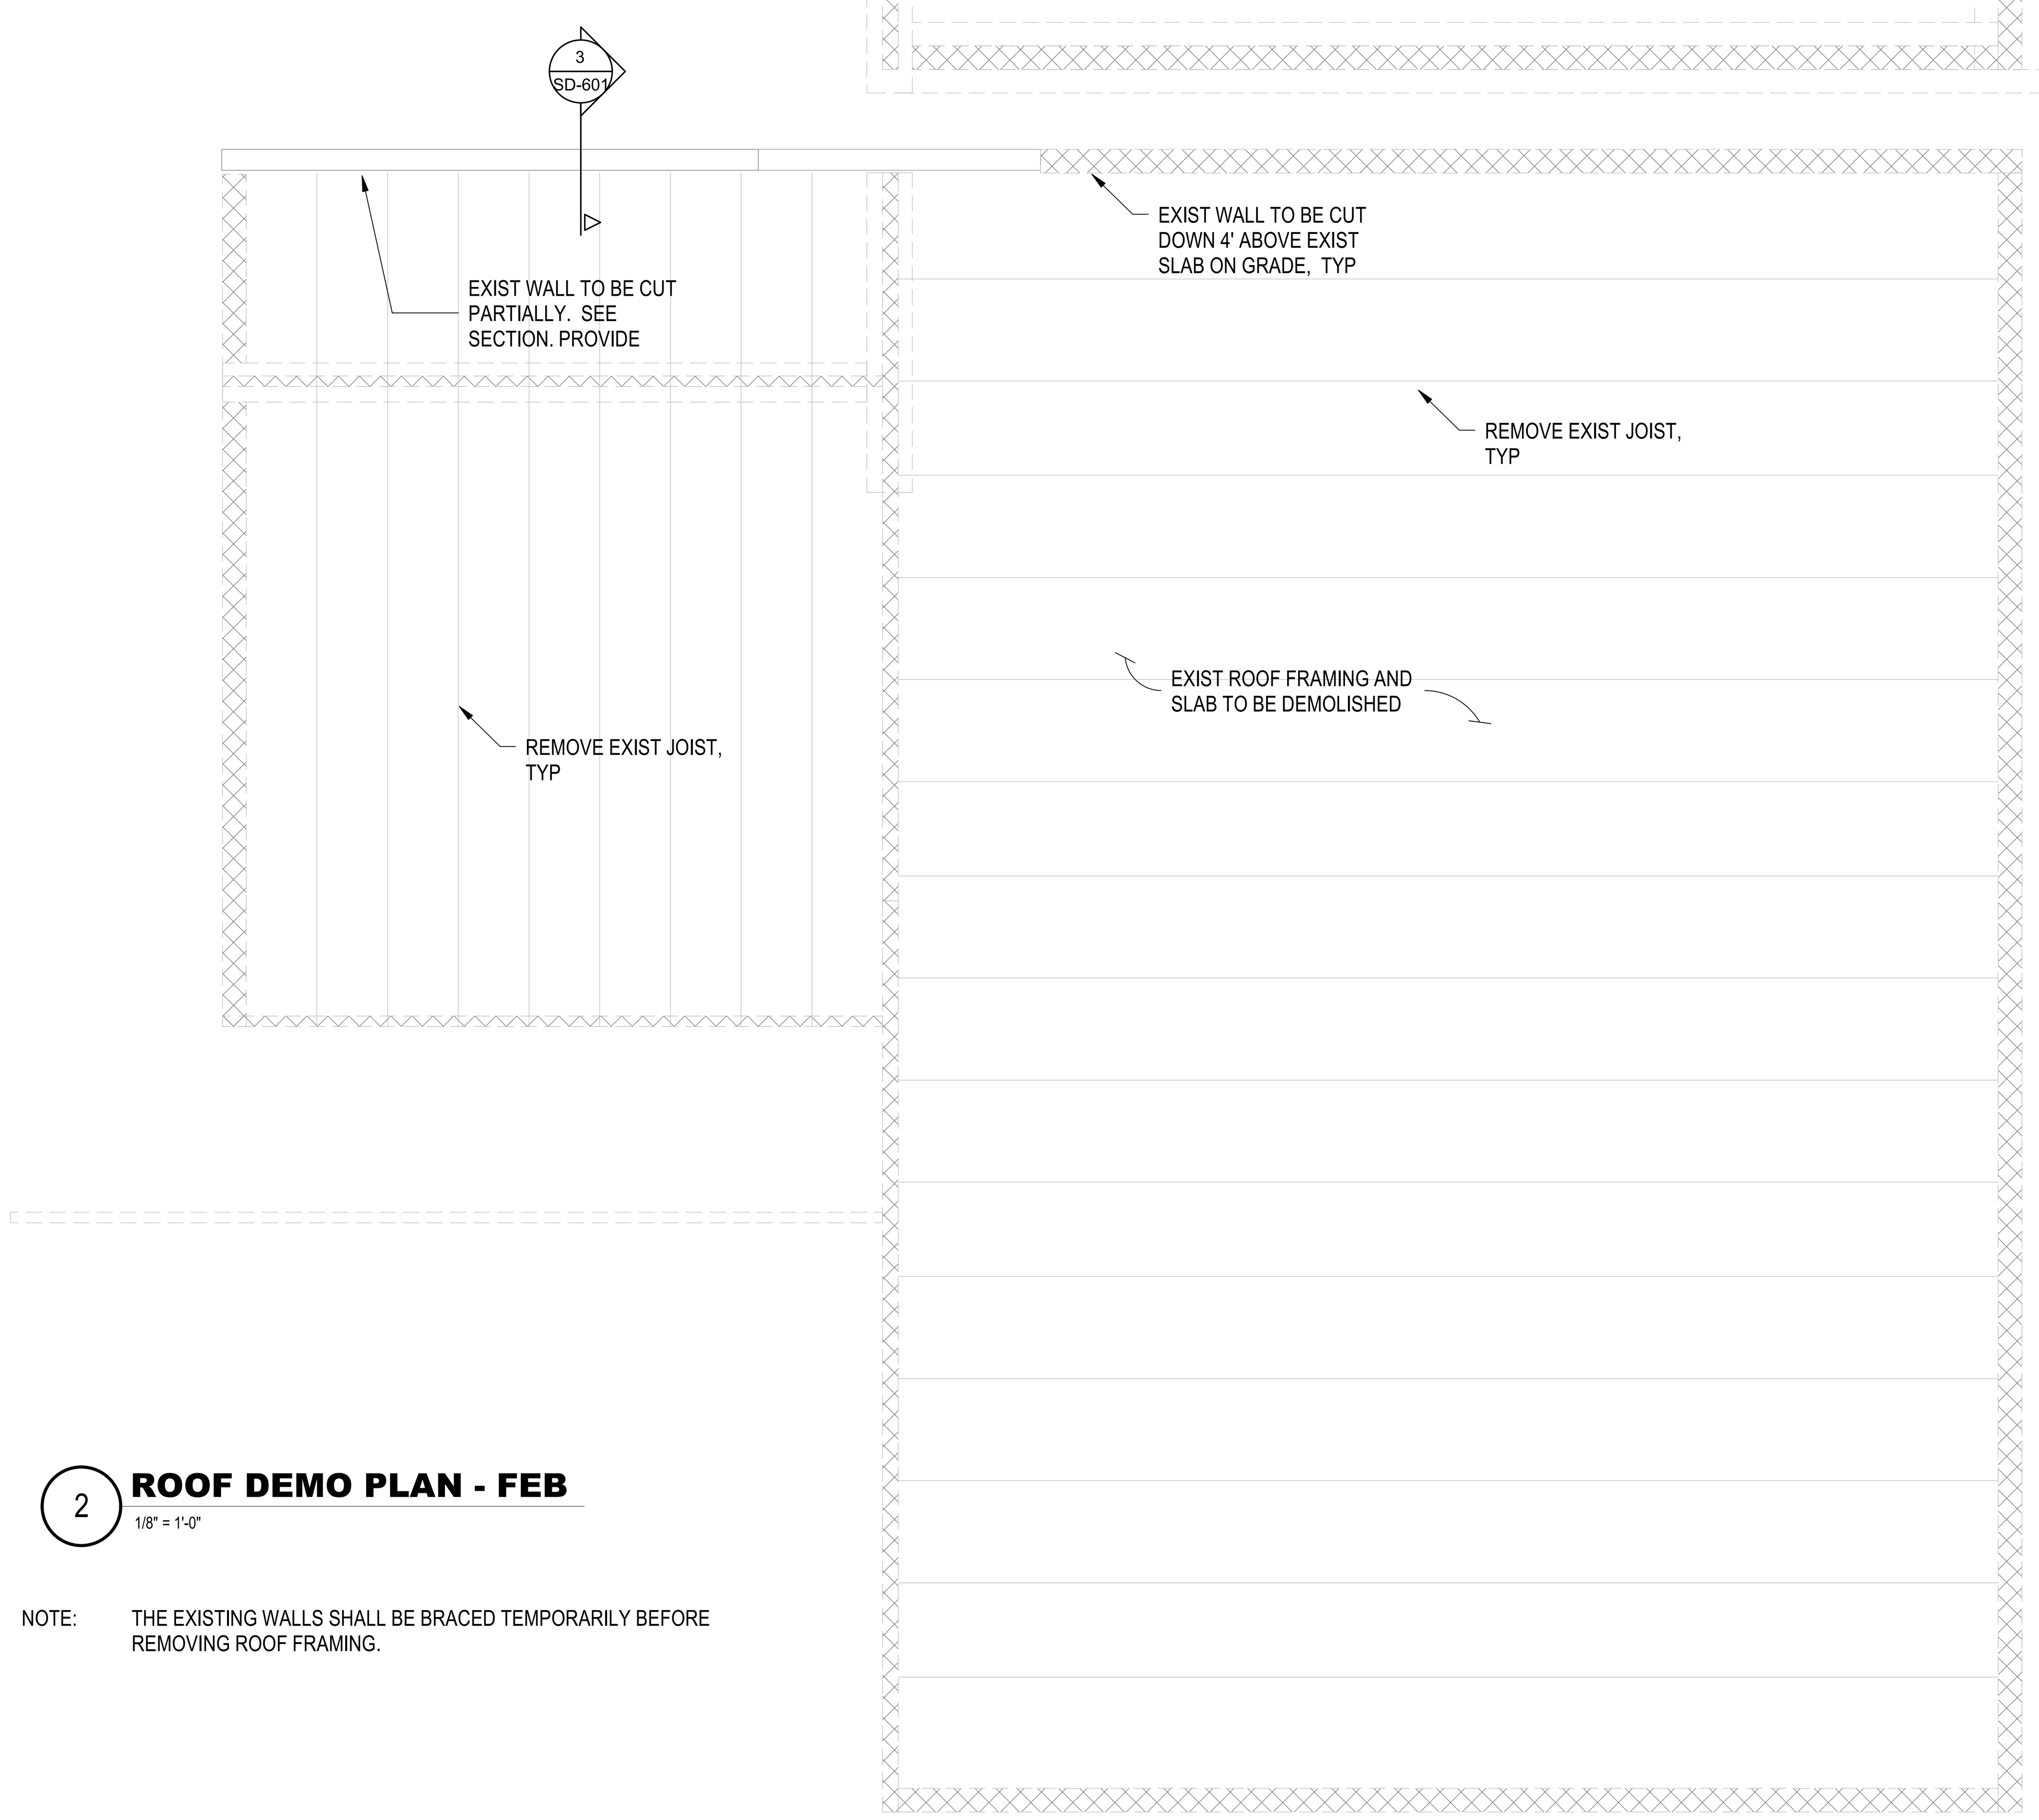

2 **ROOF DEMO PLAN - FEB**
1/8" = 1'-0"

NOTE: THE EXISTING WALLS SHALL BE BRACED TEMPORARILY BEFORE REMOVING ROOF FRAMING.

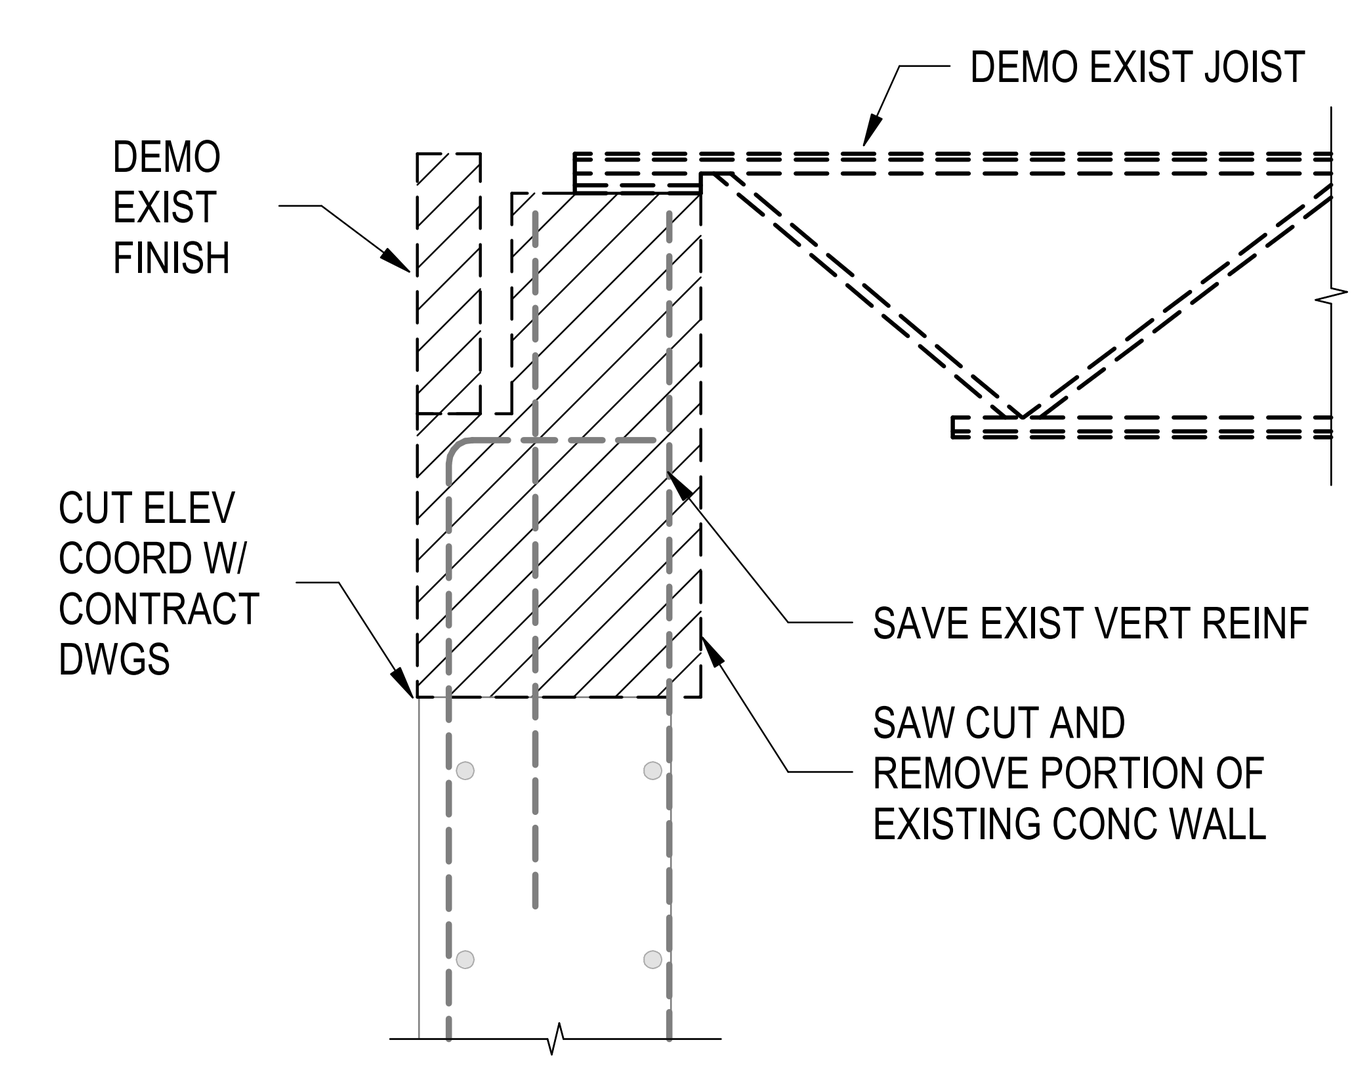

SECTION 3 SD-601
SCALE: 3/4" = 1'-0"

NO.	DATE	ISSUE
A	09/30/2025	Permit
	10/29/2025	BID SET

0' 4' 8' 16' 24'
SCALE : 1/8" = 1'-0"

SEAL

KEY PLAN

PERKINS EASTMAN
One Thomas Circle NW, Suite 200
Washington, DC 20005
T. +1 202 861 1325
F. +1 202 861 1326

Owner:
Sidwell Friends School
3825 Wisconsin Ave NW, Washington DC 20016

Construction Manager:
Advanced Project Management, Inc (APM)
4530 Walney Rd, Ste 202, Chantilly, VA 20151

Civil / Site:
Bowman Consulting Group, Ltd
888 17th St NW, Suite 510, Washington, DC 20006

Landscape:
Natural Resources Design, Inc (NRD)
1009 Shepherd Street NE, Washington, DC 20017

Structural:
Yun Associates LLC
1050 Connecticut Ave NW, Suite 500, Washington, DC 20036

MEP / FP / Lighting:
CMTA Inc
220 Lexington Green Circle, Suite 600, Lexington, KY 40503

AV / IT / Telecom / Security:
Educational Systems Planning (ESP)
2448 Holly Avenue, Suite 302, Annapolis, MD 21401

Food Service
Nyikos-Garcia Foodservice Design, Inc
7146 Starmount Way, New Market, MD 21774

Accessibility Consultant:
Galbo Wolf LLC
4410 Massachusetts Ave NW, #240, Washington, DC 20016

Acoustics:
Polysonics Corp
555 Hospital Drive, Warrenton, VA 20186

Building Envelope Consultant:
Sustainable Building Partners LLC
2701 Prosperity Ave, Suite 105, Fairfax, VA 22031

Code Consultant:
Campbell Code Consulting LLC
7834 Taggart Ct, Elkridge, MD 21075

Specifications:

PROJECT TITLE:

SIDWELL FRIENDS NEW LOWER SCHOOL AT DC CAMPUS

3825 WISCONSIN AVE NW
WASHINGTON, DC 20016

PROJECT No: 2025008

DRAWING TITLE:

FEB DEMO PLANS AND SECTIONS

SCALE: As indicated

SD-601

BID SET
10/29/2025

Autodesk Docs://Sidwell Lower School/Sidwell Lower School_ST_R24.rvt
10/28/2025 10:16:10 AM

GENERAL

THE CONTRACTOR SHALL COMPLY WITH ALL APPLICABLE FEDERAL AND STATE CODES, STANDARDS, REGULATIONS AND LAWS.

IN THE CASE OF CONFLICTS BETWEEN THE NOTES, DETAILS AND SPECIFICATIONS, THE MOST STRINGENT REQUIREMENTS SHALL GOVERN.

THE CONTRACTOR SHALL NOT MAKE ANY DEVIATIONS FROM THE DESIGN DOCUMENTS WITHOUT THE WRITTEN APPROVAL OF THE ENGINEER OF RECORD.

THE CONTRACTOR SHALL VERIFY IN FIELD ALL EXISTING CONDITIONS AND REPORT ANY CONFLICTS WITH THE DESIGN DOCUMENTS FOR CLARIFICATIONS PRIOR TO WORK.

STRUCTURAL DRAWINGS SHALL BE USED IN CONJUNCTION WITH CONTRACT DOCUMENTS RELATED TO OTHER TRADES. THE CONTRACTOR IS RESPONSIBLE TO CHECK AND COORDINATE AND REPORT CONFLICTS IF THERE ARE ANY PRIOR TO WORK.

TYPICAL DETAILS MAY NOT NECESSARILY BE INDICATED ON THE PLANS BUT STILL APPLY. WORK NOT INDICATED ON A PART OF THE DRAWINGS BUT IS REASONABLY IMPLIED TO BE SIMILAR TO THAT SHOWN AT SIMILAR PLACES SHALL BE REPEATED AND INCLUDED IN THE PROJECT. THE CONTRACTOR HAS THE OPTION TO SUBMIT ALTERNATE DETAILS WITH SIGNED AND SEALED CALCULATIONS TO THE ENGINEER OF RECORD FOR APPROVAL PRIOR TO PROCEEDING WITH WORK.

THE STRUCTURE WAS ANALYZED AND DESIGNED BY THE ENGINEER OF RECORD CONSIDERING ITS COMPLETED STATE ONLY. THE CONTRACTOR SHALL MAINTAIN THE STABILITY OF THE BUILDING DURING CONSTRUCTION AND ANY TEMPORARY ERECTION BRACING SHALL REMAIN IN PLACE UNTIL ALL PERMANENT SYSTEM HAS BEEN COMPLETELY INSTALLED AND REACH ITS DESIGN STRENGTH.

THE CONTRACTOR SHALL CONSIDER ALL ASPECTS OF CONSTRUCTION SEQUENCING. CONSIDERATIONS SHALL INCLUDE BUT NOT BE LIMITED TO STEEL ERECTION AND CONCRETE PLACEMENT, CRANE REQUIREMENTS, TEMPORARY SHORING, BRACING/STRENGTHENING, TEMPORARY CONSTRUCTION LOADS, SAFETY PROCEDURES, TEMPERATURE CHANGE, AND MOISTURE EFFECTS.

THE CONTRACTOR SHALL VERIFY ALL DIMENSIONS AND ELEAVATIONS RELATED TO EXISTING CONSTRUCTION PRIOR TO CONSTRUCTION. NOTIFY THE ARCHITECT AND EOR FOR ANY DISCREPANCIES PRIOR TO PROCEED WITH WORK IN THE AREA OF QUESTION.

THE WEIGHT OF CONSTRUCTION MATERIALS AND EQUIPMENT ON FLOORS SHALL NOT EXCEED THE DESIGN LIVE LOAD AS SHOWN ON THE LOADING PLAN.

DO NOT SCALE DRAWINGS. REFER TO ARCHITECTURAL, MECHANICAL, ELECTRICAL, CIVIL, ELEVATOR, OR OTHER SPECIALTY ENGINEERING DRAWINGS FOR DIMENSIONS NOT SHOWN, INCLUDING BUT NOT LIMITED TO: GRID LINES, FINISH ELEVATIONS, EDGE OF SLAB AND DECK, SIZE AND LOCATION OF CURBS, EQUIPMENT HOUSEKEEPING PADS, WALL AND FLOOR OPENINGS, BLOCKOUTS, FLOOR DEPRESSIONS, SUMPS, DRAINS, ANCHOR BOLTS, EMBEDDED ITEMS, ARCHITECTURAL TREATMENT, ETC. THE CONTRACTOR SHALL VERIFY DIMENSIONS AND RESOLVE DISCREPANCIES OR CONFLICTS PRIOR TO CONSTRUCTION.

MAJOR OPENINGS ARE SHOWN ON THE STRUCTURAL DRAWINGS. SMALLER OPENINGS, BLOCKOUTS AND SLEEVES MAY BE REQUIRED BY OTHER TRADES AND SHALL BE CONSTRUCTED IN ACCORDANCE WITH THE TYPICAL DETAILS ON THE STRUCTURAL DRAWINGS. IF NO DETAILS ARE APPLICABLE, SUBMIT PROPOSED DETAIL FOR APPROVAL. SUBMIT FLOOR PENETRATION DRAWINGS THAT SHOW OPENINGS REQUIRED BY ALL TRADES FOR REVIEW. NO HOLES OR CUT THROUGH ANY BEAM OR COLUMN IS ALLOWED UNLESS IT IS DETAILED ON THE STRUCTURAL DRAWNGS.

APPLICABLE CODES AND STANDARDS

BUILDING CODE	2017 DISTRICT OF COLUMBIA BUILDING CODE
IBC 2015	INTERNATIONAL CODE COUNCIL, "INTERNATIONAL BUILDING CODE", 2015 EDITION
ASCE 7-10	AMERICAN SOCIETY OF CIVIL ENGINEERS, "MINIMUM DESIGN LOADS FOR BUILDINGS AND OTHER STRUCTURES", 2010 EDITION
ACI 318-14	AMERICAN CONCRETE INSTITUTE, "BUILDING CODE REQUIREMENTS FOR STRUCTURAL CONCRETE," 2014 EDITION
ACI 530-11	AMERICAN CONCRETE INSTITUTE, "BUILDING CODE REQUIREMENTS FOR MASONRY STRUCTURES"
TMS 402/602-16	THE MASONRY SOCIETY, "BUILDING CODE REQUIREMENTS AND SPECIFICATION FOR MASONRY STRUCTURES."
AISC 360-10	AMERICAN INSTITUTE OF STEEL CONSTRUCTION, "SPECIFICATION FOR STRUCTURAL STEEL BUILDINGS," 2010 EDITION
RCSC	RESEARCH COUNCIL ON STRUCTURAL CONNECTIONS, "SPECIFICATION FOR STRUCTURAL JOINTS USING HIGH STRENGTH BOLTS,' 2009 EDITION
AISI S100-10	AMERICAN IRON AND STEEL INSTITUTE, "NORTH AMERICAN SPECIFICATION FOR THE DESIGN OF COLD FORMED STEEL STRUCTURAL MEMBERS," 2007 EDITION, INCLUDING SUPPLEMENT NO. 1, DATED 2010
ANSI/SDI C-2011	STEEL DECK INSTITUTE, " STANDARD FOR COMPOSITE STEEL FLOOR DECK - SLABS"
ANSI/SDI RD-2010	STEEL DECK INSTITUTE, " STANDARD FOR STEEL ROOF DECK"
SJI 100-15	STANDARD SPECIFICATION FOR OPEN WEB JOISTS
ASTM	AMERICAN SOCIETY FOR TESTING AND MATERIALS
AWS A2.4	AMERICAN WELDING SOCIETY, "STANDARD SYMBOLS FOR WELDING, BRAZING, AND NONDESTRUCTIVE EVALUATION," 2007 EDITION
AWS D1.1	AMERICAN WELDING SOCIETY, "STRUCTURAL WELDING CODE STEEL," 2010 EDITION
AWS D1.3	AMERICAN WELDING SOCIETY, "STRUCTURAL WELDING CODE - SHEET STEEL," 2008 EDITION
AWS D1.4	AMERICAN WELDING SOCIETY, "STRUCTURAL WELDING CODE - REINFORCING STEEL," 2007 EDITION
AWS D1.8	AMERICAN WELDING SOCIETY, "STRUCTURAL WELDING CODE - SEISMIC SUPPLEMENT," 2009 EDITION

ALL CONSTRUCTION SHALL BE IN ACCORDANCE WITH THE BUILDING CODE

STRUCTURAL DESIGN DATA

LIVE LOADS: REFER TO LOADING PLAN ON SHEET S-004.

SNOW LOADS: SNOW LOADING AND SNOW DRIFT LOADING SHALL BE IN ACCORDANCE WITH THE BUILDING CODE (SECTION 1608).

GROUND SNOW LOAD:	Pg = 30 PSF
IMPORTANCE FACTOR:	Is = 1.1
SNOW EXPOSURE FACTOR:	Ce = 0.9
THERMAL FACTOR:	Ct = 1.0
FLAT-ROOF SNOW LOAD:	Pf = 30 PSF (25 PSF + DRIFT)

WIND LOADS: WIND PRESSURE SHALL BE IN ACCORDANCE WITH THE BUILDING CODE (SECTION 1609).

BASIC WIND SPEED (3-SECOND GUST):	Vult = 120 MPH
RISK CATEGORY:	III
EXPOSURE CATEGORY:	B
INTERNAL PRESSURE COEFFICIENT:	GCpi = 0.18
MWFRS MINIMUM DESIGN WIND PRESSURE	30 PSF

DESIGN WIND PRESSURE FOR COMPONENTS AND CLADDING (ULTIMATE DESIGN PSF)

ROOF ZONE	≤ 10		20		50		100		≥ 500	
1	+16	-39	+14	-37	+13	-36	+12	-35	+12	-35
2	+16	-65	+14	-58	+13	-48	+12	-42	+12	-42
3	+16	-97	+14	81	+13	-58	+12	-42	+12	-42
WALL ZONE	≤ 10		20		50		100		≥ 500	
4	+38	-42	+37	-40	+34	-38	+32	-35	+29	-32
5	+38	-52	+37	-48	+34	-43	+32	-40	29	-32

NOTES:
1. POSITIVE AND NEGATIVE SIGNS SIGNIFY PRESSURE ACTING TOWARD AND AWAY FROM SURFACE, RESPECTIVELY.
2. BUILDING ZONES ARE DEFINED IN ASCE 7-10.
3. THE DESIGN ULTIMATE WIND PRESSURE OF COMPONENTS AND CLADDING SHALL NOT BE LESS THAN 30 PSF.

SEISMIC LOADS: SEISMIC LOADING SHALL BE IN ACCORDANCE WITH THE BUILDING CODE

RISK CATEGORY:		III
IMPORTANCE FACTOR:		Ie = 1.25
SITE CLASS:		D
SEISMIC DESIGN CATEGORY:		B
MAPPED SPECTRAL ACCELERATION PARAMETERS:		Ss = 0.119
		S1= 0.051
SITE COEFFICIENTS:		Fa = 1.6
		Fv = 2.4
DESIGN SPECTRAL ACCELERATION PARAMETERS:		Sds = 0.127
		Sd1 = 0.082
LATERAL SYSTEM:		
BUILDING:	STEEL BRACED FRAMES IN BOTH DIRECTIONS	
RESPONSE MODIFICATION COEFFICIENT:		R = 3
SEISMIC RESPONSE COEFFICIENT:		
EAST-WEST:		Cs = 0.058
NORTH-SOUTH:		Cs = 0.044
DESIGN BASE SHEAR:		
EAST-WEST:		V = 361 KIPS
NORTH-SOUTH:		V = 275 KIPS
PLAY AND TENNIS DECK:	CONCRETE SHEAR WALLS IN BOTH DIRECTIONS	
RESPONSE MODIFICATION COEFFICIENT:		R = 4
SEISMIC RESPONSE COEFFICIENT:		
EAST-WEST:		Cs = 0.040
NORTH-SOUTH:		Cs = 0.040
DESIGN BASE SHEAR:		
EAST-WEST:		V = 176 KIPS
NORTH-SOUTH:		V = 174 KIPS
ANALYSIS PROCEDURE USED:	EQUIVALENT LATERAL FORCE	

STORY DRIFT

SEISMIC DRIFT: H/50
WIND DRIFT: H/400

FOUNDATIONS AND SLAB ON GRADE

REFER TO THE GEOTECHNICAL REPORT PREPARED BY STEVENSON CONSULTING, INC, DATED OCTOBER 1, 2025, FOR ALL GEOTECHNICAL REQUIREMENTS AND ANTICIPATED CONDITIONS AT AND BELOW GRADE. REFER TO THE GEOTECHNICAL REPORT, THE CONTRACT DRAWINGS AND SPECIFICATIONS FOR EXCAVATION, BACKFILL, STRUCTURAL FILL, BASE MATERIAL, AND COMPACTION REQUIREMENTS.

FOUNDATIONS SHALL CONSIST OF SPREAD FOOTING WITH A 4000 PSF NET ALLOWABLE BEARING CAPACITY. PLACE FOOTINGS ON SUITABLE UNDISTURBED SOILS OR STRUCTURAL FILL APPROVED BY THE GEOTECHNICAL ENGINEER. WHERE SUITABLE UNDISTURBED SOILS ARE NOT FOUND AT THE SPECIFIED FOOTING ELEVATION, OVER- EXCAVATE TO THE DEPTHS REQUIRED BY THE GEOTECHNICAL ENGINEER AND REPLACE MATERIALS WITH STRUCTURAL FILL, LEAN CONCRETE, OR PROVIDE OTHER PREPARATION AS DIRECTED BY THE GEOTECHNICAL ENGINEER TO ACHIEVE THE REQUIRED ALLOWABLE BEARING CAPACITY.

CONCRETE SLAB ON GRADE SHALL BE PLACED ON PREPARED BASE COURSE PER THE GEOTECHNICAL ENGINEER. BASE COURSE SHALL CONSIST OF CRUSHED AGGREGATE COMPACTED TO THE RECOMMENDATIONS OF THE GEOTECHNICAL ENGINEER. REFER TO THE PLANS AND DETAILS FOR OTHER REQUIREMENTS. REFER TO THE ARCHITECT AND GEOTECHNICAL ENGINEER FOR VAPOR BARRIER AND UNDER-SLAB DRAINAGE REQUIREMENTS.

ALL FILL PLACED TO SUPPORT SLABS ON GRADE, BEHIND PERMANENT WALLS, AND AROUND ALL DRAINS SHALL CONSIST OF WELL GRADED, GRANULAR MATERIAL PER THE SPECIFICATIONS. SOILS USED FOR STRUCTURAL FILL SHALL BE APPROVED BY THE GEOTECHNICAL ENGINEER. STRUCTURAL FILL SHALL BE PLACED ON SOUND NATIVE MATERIAL. PROOF-ROLL CUT AREAS THAT PROVIDE SUPPORT FOR PERMANENT STRUCTURES. AREAS THAT ARE EXCESSIVELY YIELDING, AS DETERMINED BY THE CONTINUOUS OBSERVATION OF THE GEOTECHNICAL ENGINEER, SHALL BE OVEREXCAVATED AND REPLACED WITH STRUCTURAL FILL.

THE DESIGN PRESSURES FOR SUBGRADE WALLS ARE BASED ON A "DRAINED" CONDITION. SEE CIVIL AND MECHANICAL DRAWINGS FOR SUBGRADE DRAINAGE SYSTEM. SEE GEOTECHNICAL REPORT FOR COMPACTION REQUIREMENTS AT SUBGRADE WALLS. SUBGRADE WALLS AND SUPPORTING SLABS SHALL HAVE ATTAINED THEIR FULL CONCRETE STRENGTH BEFORE PLACING ANY BACKFILL. THE CONTRACTOR SHALL PROVIDE TEMPORARY BRACES FOR WALLS IF BACKFILL IS PLACED BEFORE WALLS AND SLABS ACHIEVE FULL CONCRETE STRENGTH.

CONCRETE

MIXING, BATCHING, TRANSPORTING, PLACING, AND CURING OF ALL CONCRETE, AND SELECTION OF CONCRETE MATERIALS, SHALL CONFORM TO ACI 301, "SPECIFICATIONS FOR STRUCTURAL CONCRETE". PROPORTIONS OF AGGREGATE TO CEMENTITIOUS PASTE SHALL BE SUCH AS TO PRODUCE A DENSE, WORKABLE MIX THAT CAN BE PLACED WITHOUT SEGREGATION OR EXCESS FREE SURFACE WATER.

MIX DESIGNS LISTED BELOW SHALL BE SUBMITTED TO THE ARCHITECT AND APPROVED PRIOR TO USE. SELECTION OF CONCRETE MIX PROPORTIONS SHALL BE IN ACCORDANCE WITH ACI 301. MIX PROPORTIONS SHALL MEET OR EXCEED THE REQUIREMENTS WHERE THE CONCRETE IS USED.

THE CEMENTITIOUS MATERIAL CONTENT SHALL BE ADEQUATE FOR THE SPECIFIED REQUIREMENTS FOR STRENGTH, WATER-CEMENT RATIO, DURABILITY, AND FINISHABILITY.

ALL CONCRETE USED IN HORIZONTAL SURFACES EXPOSED TO THE WEATHER SHALL CONTAIN AN ACCEPTABLE ADMIXTURE TO PRODUCE AIR-ENTRAINED CONCRETE WITH TOTAL AIR CONTENT AS NOTED IN THE CONCRETE MIX SPECIFICATION.

CONCRETE MIX SPECIFICATION TABLE

LOCATION	f'c (PSI)	TEST DAYS	W/C RATIO	MAX AGGREGATE SIZE	AIR CONTENT PERCENTAGE
MISC INTERIOR CONCRETE CURBS, SIDEWALKS	3,000	28	0.50	1"	-
EXTERIOR EXPOSED CONCRETE RETAINING WALLS AND CURBS	4,500	28	0.45	1"	6.0
INTERIOR SLAB-ON-GRADCE	3,500	28	0.50	1"	-
GRADE BEAMS, PIERS AND FOOTINGS	4,000	28	0.45	1"	-
CONCRETE ON STEEL DECK	3,500	28	0.45	3/4"	-
COLUMNS, BEAMS, SLABS AND WALLS SUPPORTING CONCRETE DECK, AND STAIRS	5,000	28	0.40	1"	6.0
TOPPING ON DECK STRUCTURE	5,000	28	0.40	3/4"	6.0

ALL CONCRETE SHALL BE NORMAL WEIGHT EXCEPT SLAB ON STEEL DECK AND TOPPING SLAB OTHER THAN ON TENNIS DECK. MAXIMUM CURED UNIT WEIGHT OF LIGHTWEIGHT CONCRETE SHALL BE 115 PCF.

FLOOR SLABS SHALL BE CONSTRUCTED TO THE THICKNESS SHOWN ON THE STRUCTURAL DRAWINGS. REFER TO THE SPECIFICATIONS FOR FLOOR TOLERANCES. THE CONTRACTOR SHALL INCLUDE THE QUANTITIES OF THE ADDED CONCRETE DUE TO THE STEEL DECK AND FRAMING DEFLECTION.

UNLESS OTHERWISE NOTED IN SPECIFICATIONS, APPLY FINAL SLAB FINISH AS INDICATED BELOW:

FLOOR SLABS	TROWEL FINISH
RAMPS AND STAIRS	BROOM FINISH
ROOF SLABS, SURFACES TO RECEIVE TOPPING SLAB OR WATERPROOFING	FLOAT FINISH

ALL CONSTRUCTION JOINTS IN SLABS, BEAMS, AND WALLS SHALL BE IN ACCORDANCE WITH THE TYPICAL DETAILS. INTENTIONAL ROUGHENING WHERE NOTED AS AN ALTERNATE SHALL OCCUR BY SAND BLASTING OR CHIPPING HAMMER TO EXPOSE THE AGGREGATE EMBEDDED IN THE PREVIOUS POUR SO THAT IT PROTRUDES AND HAS A MINIMUM AMPLITUDE OF 1/4 INCH. ALL CONSTRUCTION JOINT SURFACES SHALL BE CLEANED AND LAITANCE REMOVED. IMMEDIATELY BEFORE NEW CONCRETE IS PLACED, THE JOINTS SHALL BE WETTED AND STANDING WATER REMOVED.

ALL CONSTRUCTION JOINTS FOR SLABS ON DECK SHALL BE IN ACCORDANCE WITH THE TYPICAL DETAILS.

ALL CONSTRUCTION, CONTROL, AND ISOLATION JOINTS FOR SLABS ON GRADE SHALL BE IN ACCORDANCE WITH THE TYPICAL DETAILS.

THE CONTRACTOR SHALL SUBMIT THE PROPOSED LOCATIONS OF JOINTS TO THE ENGINEER FOR ACCEPTANCE BEFORE STARTING CONSTRUCTION. PROVIDE JOINTS AT LOCATIONS SPECIFICALLY NOTED ON THE ARCHITECTURAL OR STRUCTURAL DRAWINGS. EXPOSED COLD JOINTS SHALL BE IDENTIFIED CLEARLY FOR ARCHITECT TO REVIEW.

SLEEVES FOR PLUMBING AND ELECTRICAL OPENINGS IN CONCRETE SLABS AND WALLS SHALL BE PLACED FIRST AND ADDITIONAL REINFORCING BARS AS NOTED IN TYPICAL DETAILS AROUND THE OPENINGS SHALL BE INSTALLED FIRST BEFORE PLACING CONCRETE. THE CONTRACTOR MUST PROVIDE A COMPOSITE SLAB PENETRATION DRAWINGS FOR APPROVAL BEFORE PLACING CONCRETE. CORING AFTER CONCRETE PLACEMENT IS NOT PERMITTED.

WHERE REQUIRED BY THE ARCHITECT, CONCRETE TOPPING SLABS WITH A MINIMUM THICKNESS OF 3 INCHES AND MAXIMUM THICKNESS OF 5 INCHES SHALL BE CONSTRUCTED IN ACCORDANCE WITH THE ARCHITECTURAL DETAILS. TYPICAL TOPPING SLABS SHALL BE REINFORCED WITH WELDED WIRE FABRIC, WWF 4x4 – W4.0 x W4.0 UNLESS NOTED OTHERWISE. TOPPINGS SHALL HAVE CONTROL JOINTS AT 10'-0" ON CENTER MAXIMUM EACH WAY UNLESS NOTED OTHERWISE.

REFER TO THE ARCHITECTURAL DRAWINGS FOR ALL CONCRETE DIMENSIONS NOT SHOWN ON THE STRUCTURAL DRAWINGS. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO DEVELOP DETAILED SLAB EDGE AND CONCRETE OUTLINE DRAWINGS BASED ON THE ARCHITECTURAL, STRUCTURAL, AND MEP DRAWINGS. THE DETAILED EDGE AND OUTLINE DRAWINGS SHALL BE SUBMITTED FOR REVIEW. SUBMITTED DRAWINGS SHALL CONTAIN ALL CONCRETE CURBS, FORM OUTLINES, AND EMBEDDED ITEMS. DIMENSIONS AND OUTLINES DEVELOPED BY THE CONTRACTOR MAY VARY FROM THOSE SHOWN BY THE ARCHITECT AND ENGINEER AS NECESSARY BASED ON THE DEPENDENCY ON ADJACENT MATERIALS THAT ARE DETERMINED BY THE CONTRACTOR AND/OR SUPPLIER (EXTERIOR CLADDING, ELEVATOR EQUIPMENT, FINAL MEP SHAFT SIZES, ETC.). CONCRETE OUTLINES SHALL BE ADJUSTED AS NECESSARY TO ACCOUNT FOR CONSTRUCTION METHODS AND FOR SLAB SHRINKAGE. THE CONCRETE OUTLINE DEVELOPED BY THE CONTRACTOR SHALL NOT MATERIALLY ALTER THE DESIGN INTENT SHOWN IN THE STRUCTURAL DRAWINGS.

EXCEPT AS DETAILED ON STRUCTURAL DRAWINGS, NO CONCRETE FOOTINGS, BEAMS, OR GIRDERS SHALL BE SLEEVED FOR PIPING OR DUCTS, UNLESS APPROVED BY THE ENGINEER.

REVEAL DEPTH IN CONCRETE WALLS SHALL NOT BE GREATER THAN 3/8". REBARS SHALL BE POSITIONED SO THAT THEY MAINTAIN THE MINIMUM CLEAR CONCRETE COVER AT THE REVEALS.

ANCHORAGE TO HARDENED CONCRETE SHALL INCLUDE MECHANICAL AND ADHESIVE ANCHORS OF SIZE, NUMBER, AND SPACING AS SHOWN ON THE DRAWINGS. HOLES SHALL BE DRILLED AND CLEANED AND ANCHORS SHALL BE INSTALLED IN STRICT ACCORDANCE WITH THE MANUFACTURER'S PUBLISHED INSTRUCTIONS AND AN APPROVED ICC-ES REPORT. INSPECTION AND TESTING SHALL BE PROVIDED IN ACCORDANCE WITH THE GENERAL NOTES AND SPECIAL INSPECTION REQUIREMENTS AND THE APPROVED ICC-ES REPORT.

WHERE THE ANCHOR TYPE IS SPECIFIED ON THE DRAWINGS, SUBSTITUTION FOR A DIFFERENT TYPE OF ANCHORAGE (INCLUDING SUBSTITUTING FOR CAST-IN-PLACE ANCHORAGE) SHALL NOT BE PERMITTED WITHOUT PRIOR CONSENT OF THE ENGINEER.

UNLESS NOTED OTHERWISE, ANCHORS SHALL BE ASTM A36 THREADED RODS OR ASTM A615, GRADE 60 REINFORCING STEEL DOWELS. CONCRETE SHALL BE ASSUMED CRACKED UNLESS NOTED OTHERWISE.

ELECTRICAL CONDUIT SHALL BE RIGID STEEL CONDUIT OR FLEXIBLE PLASTIC CONDUIT. ALUMINUM CONDUIT IS PROHIBITED.

FOR CONDUIT PLACED IN CONCRETE FLAT SLABS OR SLABS THAT ARE PART OF A CONCRETE SLAB AND BEAM SYSTEM, CONDUIT SHALL HAVE A MAXIMUM OUTSIDE DIAMETER OF 1/6 TIMES THE SLAB THICKNESS AND SHALL BE EMBEDDED WITHIN THE MIDDLE THIRD OF THE SLAB DEPTH. MINIMUM CLEAR DISTANCE BETWEEN CONDUITS SHALL BE THREE TIMES THE CONDUIT DIAMETER.

FOR CONDUIT PLACED IN SLABS ON STEEL DECKING, CONDUIT SHALL ONLY RUN IN THE STEEL DECK FLUTES. CONDUIT SHALL NOT BE PLACED ABOVE DECK FLUTES IN EITHER DIRECTION.

CONDUIT SHALL BE FIRMLY CHAIRED AND TIED TO PREVENT DISPLACEMENT DURING POURING. PLACE #4 AT 12 INCHES ADDITIONAL REINFORCING ABOVE AND BELOW CONDUIT IN CONCRETE SLABS, PERPENDICULAR TO THE CONDUIT. THE ADDED REINFORCING SHALL EXTEND 1'-0" PAST THE CONDUIT ON BOTH SIDES.

WHEN EMBEDMENT IS NOTED ON THE DRAWINGS, THE ANCHOR EFFECTIVE EMBEDMENT DEPTH SHALL EQUAL OR EXCEED THE NOTED EMBEDMENT DEPTH. WHERE NO EMBEDMENT IS NOTED ON THE DRAWINGS, THE MINIMUM EFFECTIVE ANCHOR EMBEDMENT DEPTH SHALL BE 6.5 x ANCHOR DIAMETERS, MINIMUM DISTANCE TO THE NEAREST CONCRETE EDGE SHALL BE 12 x ANCHOR DIAMETERS, AND MINIMUM ANCHOR SPACING SHALL BE 8 x ANCHOR DIAMETERS.

STAINLESS STEEL ANCHORS SHALL BE USED AT ALL EXTERIOR LOCATIONS AND WHERE SPECIFICALLY INDICATED ON THE DRAWINGS. NO STEEL REINFORCEMENT SHALL BE CUT TO INSTALL ANCHORS.

HOLES SHALL BE DRILLED WITH ROTARY IMPACT HAMMER OR EQUIVALENT METHOD TO PRODUCE A HOLE WITH A ROUGH INSIDE SURFACE. CORE DRILLING HOLES IS NOT PERMITTED. THE ADHESIVE SHALL BE MIXED, APPLIED, AND CURED IN STRICT ACCORDANCE WITH THE MANUFACTURER'S PUBLISHED INSTALLATION INSTRUCTIONS IN THE ICC - ES REPORT. ALL PLACEMENT AND CURING SHALL BE CONDUCTED WITH CONCRETE AND AIR TEMPERATURES ABOVE 50 DEGREES FAHRENHEIT. ADHESIVE SHALL BE APPLIED ONLY TO CLEAN, DRY CONCRETE. POSITIVE PROTECTION SHALL BE PROVIDED SO THAT ANCHORS ARE NOT DISTURBED DURING THE CURING PERIOD. DEFECTIVE OR ABANDONED HOLES SHALL BE FILLED WITH NON-SHRINK GROUT OR AN INJECTABLE ADHESIVE MATCHING THE ADJACENT CONCRETE COMPRESSIVE STRENGTH. NOTIFY THE STRUCTURAL ENGINEER OF DEFECTIVE OR ABANDONED HOLES IN WALLS A ND COLUMNS. THESE ELEMENTS MAY REQUIRE NON-SHRINK GROUT WITH A COMPRESSIVE MODULUS OF ELASTICITY MATCHING THAT OF THE ADJACENT CONCRETE.

POLYSTYRENE OR RIGID INSULATION PLACED BELOW CONCRETE SLABS SHALL CONSIST OF RIGID CELLULAR POLYSTYRENE CONFORMING TO ASTM D6817. POLYSTYRENE SHALL HAVE A MINIMUM COMPRESSIVE RESISTANCE OF 3.6 PSI AT 1 PERCENT DEFORMATION UNLESS NOTED OTHERWISE. SECURE POLYSTYRENE IN PLACE PER THE MANUFACTURER'S RECOMMENDATIONS. THE BLOCKS OF POLYSTYRENE SHALL BE PLACED TO OFFSET JOINTS 24 INCHES BETWEEN THE ADJACENT LAYERS.

AT THE CONTRACTOR'S OPTION, IN LIEU OF POLYSTYRENE CONFORMING TO ASTM D6817, PROVIDE POLYSTYRENE CONFORMING TO ASTM C578 TYPE XIV RATED FOR 40 PSI COMPRESSIVE RESISTANCE AT 10 PERCENT DEFORMATION WITH A MINIMUM THICKNESS OF 2 INCHES PER LAYER.

GROUT SHALL BE AN APPROVED NON-SHRINK CEMENTITIOUS GROUT CONTAINING NATURAL AGGREGATES DELIVERED TO THE JOB SITE IN FACTORY PREPACKAGED CONTAINERS REQUIRING ONLY THE ADDITION OF WATER. THE MINIMUM 28-DAY COMPRESSIVE STRENGTH SHALL BE AT LEAST 1,000 PSI HIGHER THAN THE SUPPORTING CONCRETE STRENGTH, UNLESS NOTED OTHERWISE. GROUT SHALL BE MIXED, APPLIED, AND CURED STRICTLY IN ACCORDANCE WITH THE MANUFACTURER'S INSTRUCTIONS. FOR GROUTING UNDER BASE PLATES, GROUT SHALL BE PROPORTIONED AS A FLOWABLE MIX. WHEN A FLOWABLE MIX DOES NOT PROVIDE THE REQUIRED STRENGTH OR WHEN A MINIMUM STRENGTH OF 10,000 PSI IS REQUIRED, AN EPOXY GROUT SHALL BE USED.

REINFORCING STEEL

REINFORCING STEEL SHALL BE DETAILED IN ACCORDANCE WITH ACI 315, "DETAILS AND DETAILING OF CONCRETE REINFORCEMENT." BARS SHALL BE SUPPORTED ON CHAIRS IN ACCORDANCE WITH THE CRSI MANUAL OF STANDARD PRACTICE. ALL REINFORCING BARS SHALL BE SECURELY TIED IN PLACE WITH #16 GAGE MIN ANNEALED BLACK WIRE. EPOXY- COATED REINFORCING BARS SHALL BE TIED WITH NYLON, EPOXY - OR PLASTIC - COATED TIE WIRE OR OTHER ACCEPTABLE MATERIALS. SHOP DRAWINGS, INCLUDING PLACING PLANS AND ELEVATIONS SHALL BE SUBMITTED TO, AND REVIEWED BY, THE ARCHITECT/ENGINEER BEFORE STARTING FABRICATION.

REINFORCING BARS SHALL BE LAP SPLICED FOR TENSION (Lst) UNLESS NOTED OTHERWISE ON THE DRAWINGS. #14 AND #18 BARS SHALL BE SPLICED USING MECHANICAL COUPLINGS AND SHALL NOT BE LAP SPLICED. AT THE CONTRACTOR'S OPTION, MECHANICAL COUPLINGS MAY BE USED FOR ANY BAR SIZE, PROVIDED A CURRENT ICC — ES REPORT DEMONSTRATES THAT THE PRODUCT CAN ACHIEVE A MINIMUM TENSILE STRENGTH OF 125 PERCENT OF THE SPECIFIED YIELD STRENGTH OF THE BAR. NO REINFORCING BARS SHALL BE SPLICED BY WELDING. SPLICE DEVICES SHALL HAVE A CURRENT ICC - ES REPORT THAT SHALL BE SUBMITTED TO THE ENGINEER FOR APPROVAL. HEADED BARS OR TERMINATORS SHALL BE PROVIDED WHERE INDICATED ON THE DRAWINGS OR AT THE CONTRACTOR'S OPTION FOR CONGESTED AREAS OF REINFORCEMENT ANCHORAGE SUBJECT TO THE ENGINEER'S APPROVAL. HEADED BARS OR TERMINATORS SHALL MEET THE REQUIREMENTS OF ACI 318 AND ASTM A970, AND HAVE A CURRENT ICC - ES REPORT.

WELDED WIRE FABRIC (WWF) SHALL BE ELECTRICALLY WELDED AND CONFORM TO ASTM A1064. LAP EDGES AND ENDS OF FABRIC A MINIMUM OF ONE MESH SPACING PLUS 2 INCHES, BUT NOT LESS THAN 6 INCHES. WELDED WIRE FABRIC SHALL BE SUPPORTED ON CHAIRS IN ACCORDANCE WITH THE CRSI MANUAL OF STANDARD PRACTICE. MINIMUM WWF IS 6x6-W2.9xW2.9, UNLESS NOTED OTHERWISE

WELDING OR TACK WELDING OF REINFORCING BARS TO OTHER BARS OR TO PLATES, ANGLES, ETC, IS PROHIBITED, EXCEPT WHERE SPECIFICALLY APPROVED BY THE ENGINEER. WHERE WELDING IS APPROVED, IT SHALL BE DONE BY AWS CERTIFIED WELDERS USING E9018 OR APPROVED ELECTRODES. WELDING PROCEDURES SHALL CONFORM TO THE REQUIREMENTS OF AWS D1.4.

EPOXY COATED REINFORCING BARS SUPPORTED FROM FORMWORK SHALL REST ON COATED WIRE BAR SUPPORTS, OR ON BAR SUPPORTS MADE OF DIELECTRIC MATERIAL OR OTHER ACCEPTABLE MATERIALS. WIRE BAR SUPPORTS SHALL BE COATED WITH DIELECTRIC MATERIAL FOR A MINIMUM DISTANCE OF 2 INCHES FROM THE POINT OF CONTACT WITH THE EPOXY COATED REINFORCING BARS. REINFORCING BARS USED AS SUPPORT BARS SHALL BE EPOXY COATED.

MINIMUM CAST-IN-PLACE CONCRETE COVER OVER REINFORCING STEEL, UNLESS NOTED OTHERWISE, SHALL BE AS FOLLOWS:

CONCRETE CAST AGAINST EARTH:		
ALL BAR SIZES:	3	INCHES
CONCRETE EXPOSED TO EARTH OR WEATHER:		
#6 BAR OR LARGER:	2	INCHES
#5 BAR OR SMALLER:	1 1/2	INCHES
OTHER CONCRETE:		
SLABS:		
#14 AND #18 BARS:	1 1/2	INCHES
#11 BARS AND SMALLER:		
TOP BARS:	3/4	INCHES
BOTTOM BARS:	1	INCH
WALLS:		
#14 AND #18 BARS:	1 1/2	INCHES
#11 BARS AND SMALLER:	1	INCH
BEAMS AND COLUMNS, TIES, STIRRUPS, SPIRALS:		
ALL BAR SIZES:	1 1/2	INCHES

SPECIFIED CONCRETE COVER SHALL BE MAINTAINED TO ALL REINFORCEMENT AT CONCRETE REVEALS AND INSETS.

SHOP DRAWINGS SHOWING CONCRETE REVEALS AND OTHER INSETS SHALL BE SUBMITTED FOR REVIEW.

STRUCTURAL STEEL

ALL STEEL SHALL CONFORM TO THE FOLLOWING:

W-SHAPES	ASTM A992, ASTM A913,	Fy=50 KSI Fy=50 KSI
ALL ANGLES AND CHANNELS UNLESS NOTED OTHERWISE	ASTM A36,	Fy=36 KSI
SQUARE OR RECTANGULAR STRUCTURAL TUBE (HSS)	ASTM A500, GRADE C	Fy=50 KSI
ROUND STRUCTURAL TUBE (HSS)	ASTM A500, GRADE C	Fy=46 KSI
STEEL PIPE DIAMETER LESS THAN OR EQUAL TO 12 INCHES	ASTM A53, TYPE E OR S GRADE B,	Fy=35 KSI
MATERIAL CALLED OUT ON PLANS AS (A36)	ASTM A36,	Fy=36 KSI
MATERIAL CALLED OUT ON PLANS AS (Fy=65 KSI)	ASTM A913,	Fy=65 KSI
ALL OTHER STEEL UNLESS NOTED OTHERWISE	ASTM A572, ASTM A588,	Fy=50 KSI Fy=50 KSI

ALL WORK SHALL BE IN ACCORDANCE WITH THE AISC SPECIFICATION. SHOP DRAWINGS SHALL BE SUBMITTED AND REVIEWED BY THE ARCHITECT/ENGINEER BEFORE COMMENCING FABRICATION.

CONNECTION DESIGN SHALL MEET THE REQUIREMENTS OF THE AISC SPECIFICATIONS AND THE BUILDING CODE. CONNECTIONS SHALL BE CAPABLE OF RESISTING ALL LOADS LISTED ON THE DRAWINGS.

UNLESS SPECIFICALLY DETAILED COMPLETELY ON THE STRUCTURAL DRAWINGS, CONNECTION DETAILS SHOWN ILLUSTRATES THE GENERAL DESIGN AND DETAILING CRITERIA. THE CONTRACTOR SHALL RETAIN A STRUCTURAL ENGINEER LICENSED TO PERFORM THE WORK IN THE JURISDICTION WHERE THE PROJECT IS LOCATED, WHO SHALL DESIGN AND COMPLETE THE CONNECTIONS. SUBMIT STAMPED CALCULATIONS TO THE ARCHITECT FOR REVIEW AND APPROVAL PRIOR TO FABRICATION.

THE CONTRACTOR SHALL BE RESPONSIBLE FOR ALL ERECTION AIDS THAT INCLUDE, BUT ARE NOT LIMITED TO, ERECTION ANGLES, LIFT HOLES, AND OTHER AIDS.

ALL HIGH-STRENGTH BOLTS SHALL BE INSTALLED, TIGHTENED, AND INSPECTED IN ACCORDANCE WITH THE RCSC. BOLTS IN ALL CONNECTIONS MAY BE SNUG TIGHT UNLESS SPECIFICALLY CALLED OUT AS SLIP CRITICAL (SC).

ALL BOLT HOLES SHALL BE STANDARD SIZE HOLES (1/16" LARGER IN DIAMETER THAN THE BOLT DIAMETER) UNLESS OTHERWISE NOTED.

WHERE CONNECTIONS ARE NOTED AS SNUG-TIGHT, THE CONTRACTOR MAY INSTALL PER THE CRITERIA FOR SNUG-TIGHT BOLTS. SLIP-CRITICAL CONNECTIONS SHALL USE LOAD INDICATOR WASHERS OR TENSION CONTROL BOLTS. ALL ASTM A307 BOLTS SHALL BE PROVIDED WITH LOCK WASHERS UNDER NUTS OR SELF-LOCKING NUTS. ALL BOLT HOLES SHALL BE STANDARD SIZE UNLESS NOTED OTHERWISE.

PROVIDE MINIMUM A TWO-BOLT CONNECTION USING 7/8—INCH-DIAMETER A325 BOLTS IN SINGLE SHEAR.

PROVIDE MINIMUM 3/8" THICK PLATE UNLESS OTHERWISE NOTED.

SIMPLE SPAN BEAMS WITHOUT INDICATED CAMBERS SHALL BE LEVEL OR MINOR NATURAL CAMBER UP. TIP OF CANTILEVERED BEAMS SHALL HAVE NATURAL CAMBER UP.

ALL ENDS OF BEARING CONNECTIONS SHALL BE MILLED TO COMPLETE TRUE BEARING.

ALL CANTILEVERED MOMENT CONNECTION SHALL DEVELOP THE FULL TENSILE CAPACITY OF THE BEAM UNO.

STEEL BEAMS SHALL BE EVENLY SPACED WITHIN A COLUMN BAY UNO.

FIELD CUTTNG OR DRILLING OF STRUCTURAL STEEL MEMBERS IS NOT PERMITTED. OPENINGS IN STEEL MEMBERS ARE ALLOWED ONLY WHEN SPECIFICALLY DETAILED ON DESIGN DRAWINGS.

STEEL BASE PLATES MUST BE FULLY GROUTED FIRST BEFORE PLACING CONCRETE ON METAL DECK.

ALL STRUCTURAL STEEL NOT RECEIVING SPRAY-ON FIREPROOFING SHALL BE PRIMED. PARTS OF STRUCTURAL STEEL LEFT UNPAINTED BECAUSE OF FIELD WELDING OR BOLTING SHALL RECEIVE A FIELD APPLICATION OF METAL PROTECTION AS THAT OF THE MEMBER. ALL STEEL ELEMENTS IN CONCRETE OR MASONRY SHALL BE LEFT UNPAINTED.

ALL EXTERIOR STEEL, INCLUDING CONNECTIONS AND ANCHORS, SHALL BE HOT-DIP GALVANIZED UNLESS OTHERWISE CALLED OUT ON PLANS AND SECTIONS OR BY ARCHITECT.

UNLESS SPECIFICALLY SHOWN, WELD SYMBOL SHOWN IN DETAILS DOES NOT STIPULATE SHOP OR FIELD WELDS. CONTRACTOR HAS THE OPTION OF CHOOSING TO FACILICATE THE WORK AND BE IN COMPLIANCE WITH THE CODES.

THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE CONTROL OF ALL ERECTION PROCEDURES AND SEQUENCES. ALL PARTIAL JOINT PENETRATION GROOVE WELD SIZES SHOWN ON THE DRAWINGS REFER TO EFFECTIVE THROAT THICKNESS. ALL WELDS SHALL BE MADE USING LOW HYDROGEN ELECTRODES WITH MINIMUM TENSILE STRENGTH PER AWS D1.1 (MINIMUM 70 KSI). LOW HYDROGEN SMAW ELECTRODES SHALL BE USED WITHIN 4 HOURS OF OPENING THEIR HERMETICALLY SEALED CONTAINERS, OR SHALL BE REBAKED PER AWS D1.1, SECTION 4.5. ELECTRODES SHALL BE REBAKED NO MORE THAN ONE TIME, AND ELECTRODES THAT HAVE BEEN WET SHALL NOT BE USED.

WHERE NO FILLET WELD SIZE IS GIVEN, THE MINIMUM SIZE BASED ON THE PLATE THICKNESSES OF THE CONNECTING ELEMENTS SHALL BE USED BUT SHALL NOT BE LESS THAN 3/16". WELD LENGTH CALLED FOR ON STRUCTURAL DRAWINGS ARE THE NET EFFECTIVE LENGTH. IF NO LENGTH IS SHOWN, IT SHALL BE THE FULL LENGTH OF THE JOINT.

ALL WELDING SHALL BE PERFORMED IN STRICT ADHERENCE TO A WRITTEN WELDING PROCEDURE SPECIFICATION (WPS) PER AWS D1.1. ALL WELDING PARAMETERS SHALL BE WITHIN THE ELECTRODE MANUFACTURER'S RECOMMENDATIONS. WELDING PROCEDURES SHALL BE SUBMITTED TO THE OWNER'S TESTING AGENCY FOR REVIEW BEFORE STARTING FABRICATION OR ERECTION. COPIES OF THE WPS SHALL BE ON SITE AND AVAILABLE TO ALL WELDERS AND THE SPECIAL INSPECTOR.

ALL COMPLETE JOINT PENETRATION WELDS SHALL BE ULTRASONICALLY TESTED UPON COMPLETION OF THE CONNECTION, EXCEPT PLATE LESS THAN OR EQUAL TO 1/4 INCH THICK SHALL BE MAGNETIC PARTICLE TESTED. REDUCTION IN TESTING MAY BE MADE IN ACCORDANCE WITH THE BUILDING CODE WITH APPROVAL OF THE ENGINEER.

THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE JOINT PREPARATIONS AND WELDING PROCEDURES THAT INCLUDE, BUT ARE NOT LIMITED TO: REQUIRED ROOT OPENINGS, ROOT FACE DIMENSIONS, GROOVE ANGLES, BACKING BARS, COPES, SURFACE ROUGHNESS VALUES, AND TAPERS AND TRANSITIONS OF UNEQUAL PARTS.

REFER TO ARCHITECTURAL PLANS FOR MINIMUM HOURLY VALUES OF STEEL FIRE PROTECTION FOR DETERMINING THE THICKNESS OF SPRAY APPLIED FIREPROOFING. THE STRUCTURAL FRAME CONSISTS OF COLUMNS AND GIRDERS, BEAMS, TRUSSES, AND SPANDRELS HAVING DIRECT CONNECTIONS TO THE COLUMNS AND BRACING MEMBERS DESIGNED TO CARRY GRAVITY LOADS. FLOOR OR ROOF MEMBERS THAT HAVE NO CONNECTION TO COLUMNS SHALL BE CONSIDERED SECONDARY MEMBERS.

ANCHOR RODS SHALL BE ASTM F1554 GRADE 36 WITH CLASS 2A THREADS, UNLESS NOTED OTHERWISE. FURNISH ANCHOR RODS PREFABRICATED WITH MATCHING DOUBLE HEAVY HEX NUTS JAMMED AT THE END EMBEDDED IN CONCRETE. FURNISH HARDENED PLATE WASHERS, LOCK WASHERS, AND MATCHING HEAVY HEX NUTS FOR SECURING THE BASE PLATE TO THE ANCHOR RODS. HOOKED ANCHOR RODS SHALL NOT BE USED EXCEPT WHERE NOTED. ANCHOR ROD NUTS SHALL BE INSTALLED TO A SNUG-TIGHT CONDITION. NO HEATING OR BENDING OF THE ANCHOR RODS IS PERMITTED. HOLES IN THE BASE MATERIAL SHALL NOT BE ENLARGED BY BURNING.

NO.	DATE	ISSUE
A	09/30/2025	Permit
	10/29/2025	BID SET

SEAL



KEY PLAN

PERKINS — EASTMAN
One Thomas Circle NW, Suite 200
Washington, DC 20005
T. +1 202 861 1325
F. +1 202 861 1326

Owner:
Sidwell Friends School
3825 Wisconsin Ave NW, Washington DC 20016

Construction Manager:
Advanced Project Management, Inc (APM)
4530 Walney Rd, Ste 202, Chantilly, VA 20151

Civil / Site:
Bowman Consulting Group, Ltd
888 17th St NW, Suite 510, Washington, DC 20006

Landscape:
Natural Resources Design, Inc (NRD)
1009 Shepherd Street NE, Washington, DC 20017

Structural:
Yun Associates LLC
1050 Connecticut Ave NW, Suite 500, Washington, DC 20036

MEP / FP / Lighting:
CMTA Inc
220 Lexington Green Circle, Suite 600, Lexington, KY 40503

AV / IT / Telecom / Security:
Educational Systems Planning (ESP)
2448 Holly Avenue, Suite 302, Annapolis, MD 21401

Food Service
Nyikos-Garcia Foodservice Design, Inc
7146 Starmount Way, New Market, MD 21774

Accessibility Consultant:
Galbo Wolf LLC
4410 Massachusetts Ave NW, #240, Washington, DC 20016

Acoustics:
Polysonics Corp
555 Hospital Drive, Warrenton, VA 20186

Building Envelope Consultant:
Sustainable Building Partners LLC
2701 Prosperity Ave, Suite 105, Fairfax, VA 22031

Code Consultant:
Campbell Code Consulting LLC
7834 Taggart Ct, Elkridge, MD 21075

Specifications:

PROJECT TITLE:

SIDWELL FRIENDS NEW LOWER SCHOOL AT DC CAMPUS

3825 WISCONSIN AVE NW
WASHINGTON, DC 20016

PROJECT No: 2025008

DRAWING TITLE:

GENERAL NOTES

SCALE: As indicated

S-001

BID SET
10/29/2025

STEEL DECK

FLOOR DECK SHALL BE COMPOSITE STEEL DECK (GALVANIZED) AS CALLED OUT ON PLANS WITH THE MINIMUM PROPERTIES AS FOLLOWS:

2" DECK, 20 Ga., Ip = 0.403 in4, In = 0.402 in4, Sp = 0.326 in3, Sn = 0.337 in3.

9/16" FORM DECK, 22 Ga., Ip = 0.024 in4, In = 0.024 in4, Sp = 0.070 in3, Sn = 0.070 in3.

ROOF DECK SHALL BE STEEL DECK (GALVANIZED) AS CALLED OUT ON PLANS WITH THE MINIMUM PROPERTIES AS FOLLOWS:

3" DECK, 19 Ga., TYPE N, Ip = 1.045 in4, In = 1.260 in4, Sp = 0.597 in3, Sn = 0.659 in3.
3" DECK, 16 Ga., TYPE N, Ip = 1.683 in4, In = 1.807 in4, Sp = 0.893 in3, Sn = 0.944 in3.

ACOUSTIC DECK SHALL BE GALVANIZED WIDE RIB CELLULAR ACOUSTIC DECK AS CALLED OUT ON PLANS WITH THE MINIMUM PROPERTIES AS FOLLOWS:

2" DECK, 20 Ga., Fy = 50 KSI, Id+ = 0.472 in^4, Id- = 0.447 in^4, Se+ = 0.343 in^3, Se- = 0.334 in^3.

STEEL DECK SHALL BE CONTINUOUS OVER THREE SPANS OR MORE WHERE POSSIBLE. FOR ONE SPAN COMPOSITE DECK, A TEMPORARY SHORING MAY BE REQUIRED UNTIL CONCRETE SLAB ATTAINS DESIGN STRENGTHS. STEEL DECK DETAILER SHALL CHECK AND COORDINATE.

DECK SHALL HAVE MINIMUM 2" BEARING ON SUPPORTING MEMBERS.

COMPOSITE STEEL DECK SHALL BE CONNECTED TO STEEL BEAMS AND OTHER SUPPORTS WITH 3/4" DIAMETER PUDDLE WELDS AT 36/4 PATTERN. SIDE-LAP CONNECTIONS TO BE #10 SIDE-LAP SCREWS AT 12" O.C.

ROOF STEEL DECK SHALL BE CONNECTED TO STEEL BEAMS AND OTHER SUPPORTS WITH 5/8" DIAMETER PUDDLE WELDS AT 36/7 PATTERN. SIDE-LAP CONNECTIONS TO BE #10 SIDE-LAP SCREWS AT 8" O.C. PER SPAN.

DECK SHALL BE SUPPORTED AT ALL SIDES. WHERE THERE IS NO BEAM FOR DECK TO BEAR, PROVIDE L3x3x1/4 DECK SUPPORT ANGLES SUPPORTED BY THE NEAREST BEAMS.

THE CONTRACTOR SHALL PROVIDE CLOSURE PLATES AND EDGE FORMS WHERE NEEDED FOR CONCRETE CLOSURE.

MASONRY

HOLLOW MASONRY UNITS USED IN NON-LOAD BEARING WALLS SHALL CONFORM TO ASTM C129, LOAD-BEARING MASONRY UNITS SHALL CONFORM TO C90.

ALL MASONRY UNITS SHALL BE HOLLOW MEDIUM WEIGHT, WITH MINIMUM NET COMPRESSIVE STRENGTH OF 1,900 PSI UNLESS OTHERWISE NOTED. STANDARD WEIGHT OF UNITS SHALL BE 30 PSF FOR 6" UNITS; 38 PSF FOR 8" UNITS, 47 PSF FOR 10" UNITS AND 55 PSF FOR 12" UNITS. WEIGHT TOLERANCE FOR ALL TYPES OF MASONRY UNITS SHALL BE LESS THAN 3 PSF HIGHER OR LOWER THAN THE STANDARD WEIGHT.

MASONRY UNITS CONTAINING REINFORCEMENT SHALL BE FILLED SOLID WITH CONCRETE GROUT. GROUT MIX SHALL CONTAIN PORTLAND CEMENT, AGGREGATE, AND A GROUT-ENHANCING SHRINKAGE-COMPENSATING ADDITIVE. FOR EXTERIOR OR BEARING WALLS, MINIMUM GROUT COMPRESSIVE STRENGTH BASED ON 28-DAY TESTS SHALL BE 2,500 PSI. FOR INTERIOR PARTITION WALLS, MINIMUM GROUT COMPRESSIVE STRENGTH BASED ON 28-DAY TESTS SHALL BE 2,000 PSI. GROUT SHALL BE VIBRATED WHILE PLACING TO ENSURE THAT CELLS ARE COMPLETELY FILLED. SUBMIT GROUT MIXES TO ARCHITECT FOR REVIEW BEFORE COMMENCING MASONRY CONSTRUCTION. ALL UNITS SHALL BE LAID IN RUNNING BOND WITH HEAD JOINTS. MINIMUM MORTAR COMPRESSIVE STRENGTH SHALL BE 2,000 PSI.

FOR EXTERIOR OR BEARING WALLS, MASONRY MINIMUM DESIGN STRENGTH f'm SHALL BE 2,500 PSI. FOR INTERIOR PARTITION WALLS, MASONRY MINIMUM DESIGN STRENGTH f'm SHALL BE 2,000 PSI.

PROVIDE GALVANIZED HORIZONTAL JOINT REINFORCEMENT AT 16" ON CENTER OVER FULL HEIGHT OF ALL WALLS. JOINT REINFORCEMENT SHALL BE CONTINUOUS AROUND BUILDING WITH PREFORMED CORNER AND TEE UNITS. PROVIDE HORIZONTAL JOINT REINFORCEMENT IN FIRST UN-REINFORCED COURSE ABOVE AND BELOW EACH OPENING, WITH LENGTH EQUAL TO 36" GREATER THAN THE OPENING WIDTH UNLESS OTHER NOTED.

AT SPANDREL COLUMN AND BEAM LOCATIONS, ANCHOR MASONRY WALLS TO STEEL MEMBERS WITH 3/16"Ø ADJUSTABLE TIES AT A SPACING OF 16" MAXIMUM ALONG THE MEMBER UNLESS OTHERWISE NOTED. GROUT CELLS OF MASONRY SOLID AROUND ALL MASONRY ANCHORS.

BRACE TOP OF ALL PARTITION MASONRY WALLS TO STRUCTURE PER TYPICAL DETAILS. MAINTAIN MINIMUM 1" SOFT JOINT FOR INDEPENDENT VERTICAL MOVEMENT OF THE STRUCTURE UNLESS OTHERWISE NOTED.

FILL ALL HOLLOW MASONRY UNITS BELOW GRADE WITH GROUT OR MORTAR.

PLACE GROUT IN LIFTS OF NO MORE THAN 4' IN HEIGHT.

REINFORCE ALL EXTERIOR OR BEARING WALLS WITH #5@16" ON CENTER UNLESS OTHERWISE NOTED. IF BAR SPACING WOULD FALL WITHIN AN OPENING, RELOCATE BARS TO NEAREST JAMB. IN ADDITION TO STANDARD WALL REINFORCING, PROVIDE 1-#6 VERTICAL AT EACH SIDE OF ANY OPENING. IF 2 BARS ARE TO BE PLACED IN A JAMB CELL, PLACE AT INSIDE AND OUTSIDE FACES OF WALL. PROVIDE HORIZONTAL JOINT REINFORCING AT 8" ON CENTER EXTENDING OUT 4' FROM FACE OF JAMB. DO NOT INTERRUPT JAMB BARS AT LINTELS.

ALL REINFORCING SHALL BE HELD IN PLACE BY REBAR POSITIONING ACCESSORIES PER SPECIFICATION.

MINIMUM CLEARANCE FOR REINFORCING SHALL BE 3/4" FROM MASONRY SURFACE AND 1" BETWEEN BARS.

SEE CONSTRUCTION DOCUMENTS, INCLUDING SPECIFICATION, FOR CONTROL JOINT REQUIREMENTS.

ALL REINFORCING SPLICES SHALL BE A MINIMUM OF 48 BAR DIAMETERS.

SEE ARCHIECTURAL DRAWINGS FOR ADDITIONAL MASONRY WALL INFORMATION, SUCH AS OPENING LOCATION AND SIZES, MISC EMBEDMENTS, ETC.

LINTELS

COORDINATE WITH ARCHITECTURAL DRAWINGS FOR TYPES OF LINTEL REQUIRED.

PROVIDE MASONRY BOND BEAM UNIT WITH THICKNESS EQUAL TO MIN. WIDTH OF WALL.

PROVIDE THE FOLLOWING BOND BEAM LINTELS UNLESS OTHERWISE NOTED OR SHOWN ON CONTRACT DOCUMENTS:

OPENING LENGTH	BOND BEAM DEPTH	REINFORCING		
		BOT	TOP	STIRRUPS
3'-1" TO 4'-0"	8"	1 #4	-	-
4'-1" TO 6'-0"	16"	1 #4	1 #4	-
6'-1" TO 8'-0"	16"	1 #4	1 #4	3 #3 @ 8" OC EE
8'-1" TO 10'-0"	16"	1 #6	1 #5	4 #3 @ 8" OC EE
10'-1" TO 12'-0"	16"	2 #7	2 #5	6 #3 @ 8" OC EE

PROVIDE ONE STEEL ANGLE FOR EACH 4" OF WALL THICKNESS FOR THE FOLLOWING OPENINGS UNLESS OTHERWISE NOTED OR SHOWN ON CONTRACT DOCUMENTS:

OPENINGS UP TO 3'-4"	L3-1/2X3-1/2X5/16	(LLV)
OPENINGS 3'-5" TO 5'-0"	L4X3-1/2X5/16	(LLV)
OPENINGS 5'-1" TO 6'-0"	L5X3-1/2X5/16	(LLV)

MINIMUM BEARING AT EACH END SHALL BE 6" FOR STEEL LINTELS.

PROVIDE SHOP PRIMER FOR ALL INTERIOR STEEL LINTELS AND PROVIDE HOT-DIPPED GALVANIZING FOR ALL STEEL EXTERIOR LINTELS.

COLD FORMED METAL FRAMING

MINIMUM YIELD STRENGTH OF COLD FORMED METAL FRAMING COMPONENTS SHALL BE 33KSI FOR 18 GA OR LIGHTER AND 50KSI FOR 16 GA AND HEAVIER.

MAXIMUM DEFLECTION OF WALL STUDS BACKUP FOR SOLID BRICK WALL SHALL BE L/600, ALL OTHERS SHALL BE L/360. L IS THE STUD LENGTH BETWEEN ITS SUPPORTS.

COLD FORMED METAL FRAMING SHALL ACCOMMODATE 3/4" VERTICAL DEFLECTION OF BASE BUILDING STRUCTURAL ELEMENTS AFTER ATTACHMENT.

COLD FORMED METAL FRAMING AND ITS CONNECTIONS TO THE BASE BUILDING STRUCTURE SHALL BE DESIGNED BY A PROFESSIONAL ENGINEER LICENSED IN THE JURISDICTION OF WHERE THE PROJECT IS LOCATED TO CONFORM WITH THE APPLICABLE BUILDING CODES AND PROJECT REQUIREMENTS. THE CONTRACTOR SHALL PROVIDE COLD FORMED METAL FRAMING SHOP DRAWINGS AND SIGNED AND SEALED CALCULATIONS TO THE ARCHITECT FOR APPROVAL BEFORE COMMENCING WORK.

STEEL JOIST

THE MANUFACTURER OF THE JOISTS SHALL BE A MEMBER OF THE STEEL JOIST INSTITUTE.

JOISTS, BRIDGING AND CONNECTIONS SHALL BE DESIGNED AND DETAILED BY A LICENSED PROFESSIONAL ENGINEER IN THE JURISDICATION OF THE PROJECT LOCATION TO MEET THE LOADING REQUIREMENTS AS NOTED ON THE DRAWINGS AND SPECTIFICATIONS.

REFER TO TYPICAL DETAILS FOR SUPPORTING CONCENTRATED LOADS.

JOISTS SHALL BE DESIGNED TO RESIST A NET UPLIFT OF 15 PSF MIN IN ADDITION TO OTHER LOAD CASES SHOWN ON DRAWINGS.

SUBMIT FOR REVIEW SHOP DRAWINGS OF JOIST DETAILS FOR FABRICATION AND ERECTION PRIOR TO FABRICATING JOISTS. SHOP DRAWINGS SHALL INCLUDE FRAMING FOR ROOF OPENING AND MECHANICAL UNIT SUPPORT.

PROVIDE HORIZONTAL OR DIAGONAL TYPE BRIDGING FOR ALL JOISTS AS REQUIRED BY SJ SPECIFICATION AND AS INDICATED ON THE DRAWINGS. THE ENDS OF ALL BRIDGING LINES TERMINATING AT BEAMS SHALL BE ANCHORED THERETO AT TOP AND BOTTOM CHORDS. PROVIDE ALL REQUIRED BRIDGING ANCHORS.

ALL JOISTS SHALL BE DESIGNED FOR A SINGLE CONCENTRATED TRAVELING PROVISIONAL LOAD OF 300 POUNDS ALONG THE TOP CHORD AND 100 POUNDS ALONG THE BOTTOM CHORD APPLIED BETWEEN PANEL POINTS.

JOIST DIAGONAL MEMBERS LOCATED IN THE MIDDLE QUARTER OF THE SPAN SHALL BE DESIGNED FOR A MINIMUM SHEAR, IN COMPRESSION, OF 15 PERCENT OF THE END REACTION. THIS MINIMUM DESIGN LOAD SHALL BE TO ACCOUNT FOR THE POSSIBILITY OF SHEAR REVERSAL DUE TO UNBALANCED LOADING. BRIDGING AND DIAGONAL MEMBERS SHALL BE COORDINATED WITH THE MEP SYSTEM BEFORE FABRICATION.

JOIST SEATS SHALL HAVE THE CAPACITY TO RESIST A LATERAL LOAD APPLIED TO THE TOP CHORD, PERPENDICULAR TO THE SPAN (ROLLOVER). PROVIDE A MINIMUM ROLLOVER FORCE OF 2,000 POUNDS FOR SEATS UP TO 3 1/2 INCHES DEEP AND 1,200 POUNDS FOR SEAT OVER 3 1/2 INCHES DEEP.

SEE ADDITIONAL REQUIREMENTS IN STEEL JOISTS LOADING DIAGRAM.

JOISTS SHALL NOT DEFLECT UNDER TOTAL LOADS MORE THAN SPAN DIVIDED BY 240 UNO.

CAMBER JOISTS PER STANDARDS OF SJI, UNO.

BEFORE PLACING METAL DECK, ALL BRIDGING SHALL BE FULLY INSTALLED AND ANCHOHORED PROPERTLY.

BUILDING MOVEMENTS

VERTICAL DEFLECTION OF STRUCTURE MEMEBERS IS LIMITED AS FOLLOWS:

STRUCTURAL MEMBERS	LOADING	MAX ALLOWED
SPANDREL BEAMS	LL	TYPICAL: L/360 BUT NO MORE THAN 1/2" SUPPORTING BRICKS: L/600 BUT NO MORE THAN 3/8"
INTERIOR BEAMS AND SLABS	LL	L/360
CANTILEVER BEAMS	LL	L/180 BUT NO MORE THAN 1"
CANTILEVER SLABS	LL	L/180 BUT NO MORE THAN 1/2"
ALL BEAMS	DL+LL - CAMBER	L/240

SIZE OF EXPANSION JOINT SHOWN ON PLAN CONSIDERS THE JOINT MATERIAL TO COMPRESS UP TO 50% OF THE JOINT SIZE WITHOUT IMPARTING LOADS TO ADJACENT STRUCTURE.

BUILDING ELEMENTS INCLUDING EXTERIOR CLADDING; STAIRS, ELEVATORS, AND MISCELLANEOUS METALS; MECHANICAL/ELECTRICAL/PLUMBING SYSTEM SUPPORTS; INTERIOR METAL STUD FRAMING; AND ANY OTHER ELEMENTS AS REQUIRED BY THE BUILDING CODE SHALL BE DESIGNED TO ACCOMMODATE THE ABOVE DEFLECTION AS WELL AS THE PRIMARY STRUCTURE STORY DRIFTS WITH ANY APPLICABLE ELEMENT-SPECIFIC MODIFICATIONS PER CHAPTER 13 OF ASCE 7.

DELEGATED DESIGNS

THE FOLLOWING ITEMS SHALL BE DESIGNED BY DELEGATED ENGINEERS LICENSED IN THE JURISDICATION THAT THE PROJECT RESIDES:
FRAMING CONNECTIONS, STAIRS, RAILINGS, ELEVATORS, MISCELLANEOUS METALS AND MEP SUPPORTS

UNLESS SHOWN AND DETAILED IN THE STRUCTURAL DRAWINGS, ALL STAIRS ARE TO CONSIST OF A PRE-FABRICATED AND PRE-ENGINEERED STAIR, LANDING, AND RAILING SYSTEM DESIGNED BY THE CONTRACTOR OR STAIR SUPPLIER. SEE THE ARCHITECT FOR STAIR SYSTEM LAYOUT, DIMENSIONS, AND CONFIGURATION OF RISE AND RUN. THE CONTRACTOR SHALL BE RESPONSIBLE TO DESIGN AND PROVIDE THE STAIR SYSTEM INCLUDING ALL CONNECTIONS AND SECONDARY SUPPORT FRAMING. THE STAIRS SHALL ACCOMMODATE LATERAL MOVEMENTS BETWEEN ADJACENT FLOORS AS DEFINED IN THE STORY DRIFT SECTION OF THE GENERAL NOTES. UNDER THE SERVICE LEVEL STORY DRIFTS, ALL STAIRS MUST REMAIN FUNCTIONAL.

ALL ELEVATOR MACHINE BEAMS, SILLS, DOOR SUPPORTS, AND RAILS AND THEIR CONNECTIONS TO THE STRUCTURE ARE TO BE DESIGNED BY THE ELEVATOR MANUFACTURER. THE ELEVATORS SHALL ACCOMMODATE LATERAL MOVEMENTS BETWEEN ADJACENT FLOORS AS DEFINED IN THE STORY DRIFT SECTION OF THESE NOTES.

ALL FRAMING AND CONNECTIONS DESIGNED BY THE CONTRACTOR SHALL NOT CAUSE TORSIONAL LOADS OR WEAK AXIS BENDING TO THE STRUCTURAL MEMBERS. THE CONTRACTOR'S DESIGN SHALL VERIFY THAT THE CONNECTIONS DO NOT RESULT IN ADVERSE LOCAL CONNECTION STRESSES OCCURRING WITHIN THE PRIMARY STRUCTURE. SUBMIT CALCULATIONS STAMPED BY A STRUCTURAL ENGINEER LICENSED TO PERFORM THE WORK IN THE JURISDICTION WHERE THE PROJECT IS LOCATED AND SHOP DRAWINGS INDICATING IMPOSED LOADS ON THE PRIMARY STRUCTURE.

THE CONTRACTOR SHALL DESIGN AND SUPPLY ALL ADDITIONAL MISCELLANEOUS METALS AND SYSTEM SUPPORT COMPONENTS THAT ARE NECESSARY TO SUPPORT ALL MECHANICAL, ELECTRICAL (TELECOM, AUDIO VISUAL, ETC), AND PLUMBING/FIRE- PROTECTION SYSTEMS. SUCH METALS AND SUPPORT COMPONENTS AND THEIR CONNECTIONS SHALL BE PROVIDED AS NECESSARY TO DIRECTLY AND CONCENTRICALLY IMPOSE LOADS ON THE PRIMARY STRUCTURE. THE CONNECTIONS TO THE PRIMARY STRUCTURE ARE SUBJECT TO THE REQUIREMENTS OF THE MISCELLANEOUS METALS SECTION ABOVE. THESE SYSTEMS MAY BE SUPPORTED DIRECTLY FROM STEEL ROOF AND COMPOSITE FLOOR/ROOF SLABS SUBJECT TO THE FOLLOWING LIMITATIONS: 250 POUNDS MAY HANG FROM COMPOSITE SLAB ON DECK, 50 POUNDS MAY HANG FROM STEEL ROOF DECK. LOADS SHALL BE LOCATED NO CLOSER THAN 5 FEET FROM ANY ADJACENT HANGING LOAD, AND THE CONTRACTOR SHALL COORDINATE THE SUPPORT AND HANGING LOADS FROM ALL BUILDING SYSTEMS. THE MECHANICAL/ELECTRICAL/PLUMBING SYSTEM SUPPORTS SHALL ACCOMMODATE LATERAL MOVEMENTS BETWEEN ADJACENT FLOORS AS DEFINED IN THE STORY DRIFT SECTION OF THESE NOTES.

SHOP DRAWINGS

REFER TO PROJECT SPECIFICATIONS FOR GENERAL SHOP DRAWINGS REQUIREMENTS.

THE CONTRACTOR SHALL REVIEW AND STAMP SUBMITTALS PRIOR TO FORWARDING TO A/E TEAM. THE CONTRACTOR SHALL ENSURE THAT THE SHOP DRAWINGS ARE BASED ON THE LATEST DESIGN AND HAVE BEEN COORDINATED AMONG ALL TRADES, ALL PREVIOUS COMMENTS BY A/E HAVE BEEN COMPLETELY ADDRESSED AND ANY CHANGES HAVE BEEN CLEARLY IDENTIFIED. THE STRUCTURAL ENGINEER SHALL RETURN SUBMITTALS WITHOUT REVIEW IF THE PRECEEDING REQUIREMENTS ARE NOT MET.

THE CONTRACTOR SHALL SUBMIT CONCRETE WALL ELEVATION DRAWINGS OF AT LEAST 1/8" = 1'—0" SCALE INDICATING LOCATIONS OF CONNECTION EMBEDMENTS AND WALL OPENINGS FOR REVIEW PRIOR TO CONSTRUCTION. THE CONTRACTOR SHALL COORDINATE WITH REINFORCEMENT DRAWINGS.

DIMENSIONS AND QUANTITIES ARE NOT REVIEWED BY THE ENGINEER OF RECORD AND SHALL BE VERIFIED BY THE CONTRACTOR.

SUBMIT FLOOR PENETRATION DRAWINGS THAT SHOW OPENINGS REQUIRED BY ALL TRADES FOR REVIEW.

THE PURPOSE OF SHOP DRAWING SUBMITTALS BY THE CONTRACTOR IS TO DEMONSTRATE TO THE ENGINEER THAT THE CONTRACTOR UNDERSTANDS THE DESIGN CONCEPT, BY INDICATING WHICH MATERIAL IS INTENDED TO BE FURNISHED AND INSTALLED, AND BY DETAILING THE INTENDED FABRICATION AND INSTALLATION METHODS. IF DEVIATIONS, DISCREPANCIES, OR CONFLICTS BETWEEN SHOP DRAWINGS SUBMITTALS AND THE CONTRACT DOCUMENTS ARE DISCOVERED EITHER PRIOR TO OR AFTER SHOP DRAWING SUBMITTALS ARE PROCESSED BY THE ENGINEER, THE DESIGN DRAWINGS AND SPECIFICATIONS SHALL CONTROL AND SHALL BE FOLLOWED.

SHOP DRAWINGS FOR DEFERRED SUBMITTALS THAT ARE DEFINED AS DESIGN-BUILD COMPONENTS IN THE CONSTRUCTION DOCUMENTS SHALL INCLUDE THE DESIGNING PROFESSIONAL ENGINEER'S STAMP FOR THE JURISDICTION WHERE THE PROJECT IS LOCATED AND SHALL BE APPROVED BY THE COMPONENT DESIGNER PRIOR TO CURSORY REVIEW BY THE ENGINEER OF RECORD FOR LOADS IMPOSED ON THE BASIC STRUCTURE. THE COMPONENT DESIGNER IS RESPONSIBLE FOR CODE CONFORMANCE AND ALL NECESSARY CONNECTIONS NOT SPECIFICALLY CALLED OUT ON ARCHITECTURAL OR STRUCTURAL DRAWINGS. SHOP DRAWINGS SHALL INDICATE MAGNITUDE AND DIRECTION OF ALL LOADS IMPOSED ON BASIC STRUCTURE. DESIGN CALCULATIONS SHALL BE INCLUDED IN THE SUBMITTAL.

EXISTING CONDITIIONS

INFORMATION SHOWN ON THE DESIGN DOCUMENTS RELATED TO THE EXISTING CONDITIONS IS BASED ON THE EXISTING DOCUMENTS. THE CONTRACTOR SHALL VERIFY IN FIELD ALL EXISTING CONDITIONS PRIOR TO FABRICATION OF STRUCTURAL ELEMENTS. ANY DEVIATION OF AS-BUILT CONDITION FROM THE INFORMATION SHOWN SHALL BE BROUGHT TO THE ATTENTION OF THE STRUCTURAL ENGINEER OF RECORD.

EXISTING REINFORCING IN CONCRETE ELEMENTS SHALL BE LOCATED BY GPR BEFORE CORE DRILLING OR INSTALLING NEW ANCHORS. CORE DRILL AND NEW ANCHORS SHALL AVOID CUTTING EXISTING REINFORCING. STEEL CONNECTIONS TO THE EXISTING ELEMENTS SHALL BE MADE WITH SLOTTED HOLES PERPENDICULAR TO THE DIRECTION OF THE LOADS TO ALLOW FILED ADJUSTMENT TO AVOID EXISTING REINFORCING.

TEMPORARY SHORING AND/OR BRACING OF EXISTING STRUCTURE AND UNDERPINNING OF EXISTING FOUNDATIONS SHALL BE DESIGNED BY THE CONTRACTOR AND SUBMITTED WITH CALCUALTIONS FOR REVIEW FOR CONFORMANCE TO THE PROJECT REQUIREMENTS.

LEGEND

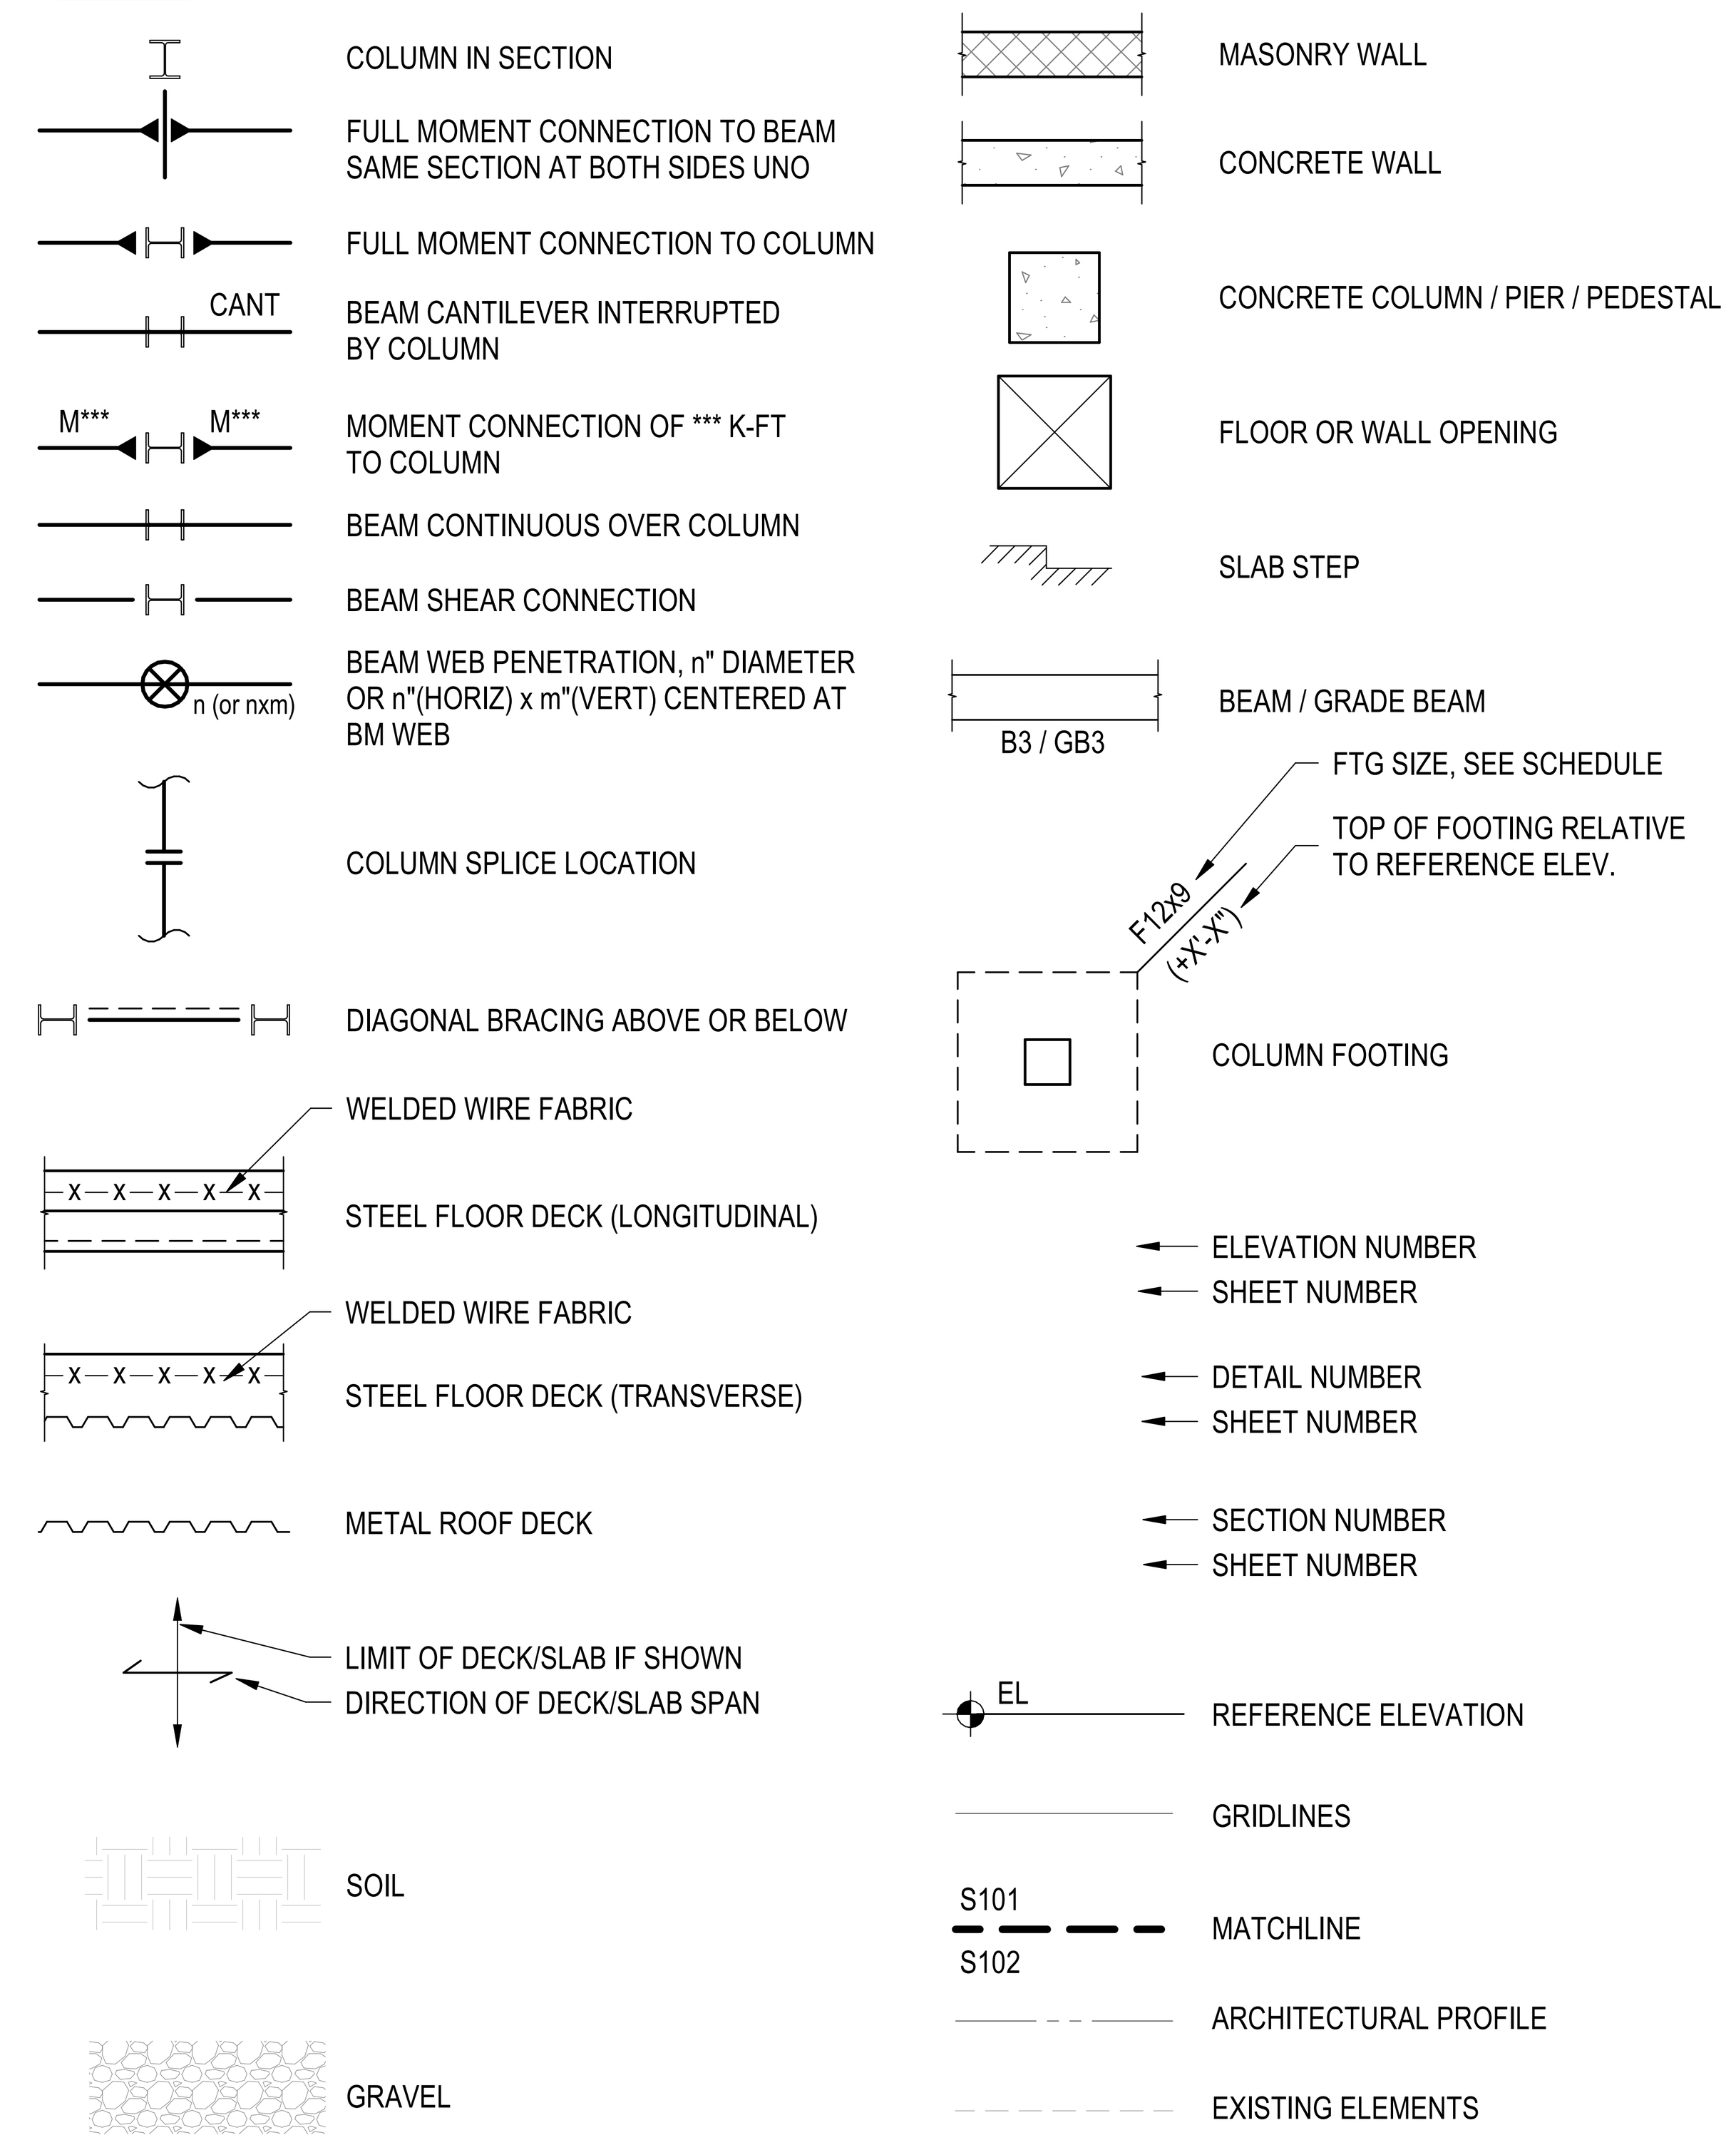

STEEL BEAM LEGEND

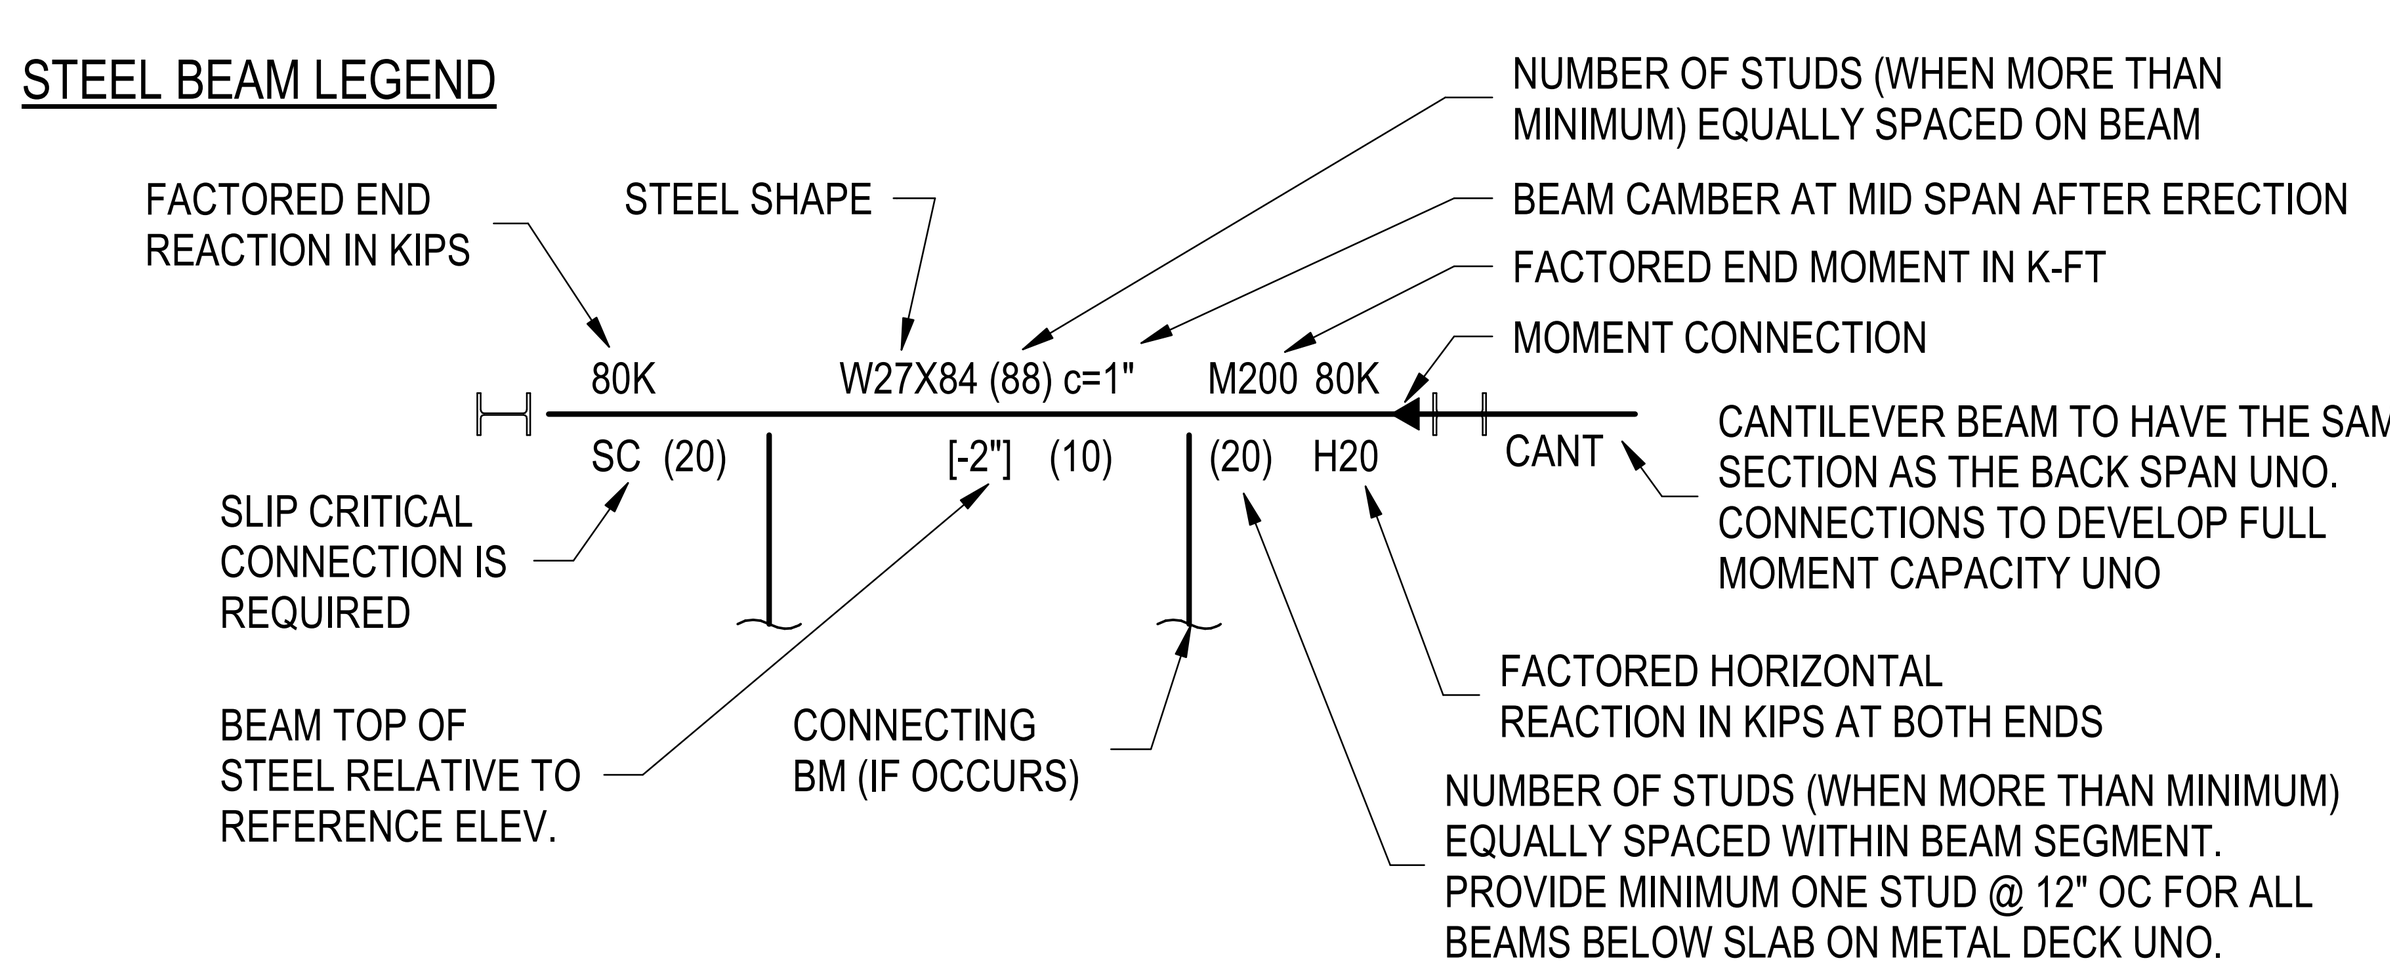

ABBREVIATIONS

&	AND
@	AT
#	NUMBER, POUND
AB	ANCHOR BOLT
ADDL	ADDITIONAL
ADJ	ADJACENT
AESS	ARCHITECTURAL EXPOSED STRUCTURAL STEEL
AGGR	AGGREGATE
ALT	ALTERNATE
ALUM	ALUMINUM
APA	AMERICAN PLYWOOD ASSOCIATION
APPD	APPROVED
APPROX	APPROXIMATE
AR	ANCHOR RODS
ARCH	ARCHITECTURAL; ARCHITECT
ASSY	ASSEMBLY
B/L	BUILDING LINE
BAL	BALANCE
BD	BOARD
BF	BRACED FRAME
BLDG	BUILDING
BLK	BLOCK; BLOCKING
BM	BEAM
BMU	BRICK MASONRY UNIT
BOS	BOTTOM OF STEEL; BOSOM (WELD)
BOT	BOTTOM
BRCG	BRACING
BRG	BEARING
BRKT	BRACKET
BSMT	BASEMENT
BU	BUILT-UP
C	CAMBER
CA	COLUMN ABOVE
CANT	CANTILEVER
CB	COLUMN BELOW
CC	CENTER TO CENTER
CFMF	COLD FORMED METAL FRAMING
CG	CENTER OF GRAVITY
CIP	CAST-IN-PLACE
CJ	CONTROL JOINT
CJP	COMPLETE JOINT PENETRATION WELD
CH	CHANNEL
CL	CENTER LINE
CLR	CLEARANCE; CLEAR
CMU	CONCRETE MASONRY UNIT
COL	COLUMN
COMP	COMPRESSION
CONC	CONCRETE
CONFIG	CONFIGURATION
CONN	CONNECTION; CONNECT
CONST	CONSTRUCTION
CONT	CONTINUE; CONTINUOUS
CONTR	CONTRACTOR
COORD	COORDINATE; COORDINATION
CORR	CORRUGATED
CTR	CENTER
CTSK	COUNTERSINK; COUNTERSUNK
CU	CUBIC
d	PENNY (NAIL)
db	NOMINAL BAR DIAMETER (INCHES)
DBA	DEFORMED BAR ANCHOR
DBL	DOUBLE
DEG, °	DEGREE
DIA, Ø	DIAMETER
DIAG	DIAGONAL
DIAPH	DIAPHRAGM
DICA	DRILLED-IN CONCRETE ANCHOR
DIM	DIMENSION
DISC	DISCONTINUED; DISCONTINUOUS
DL	DEAD LOAD
DN	DOWN
DO	DITTO
DSA	DECK SUPPORT ANGLE
DWG	DRAWING
DWL	DOWEL
E-W	EAST-WEST
EA	EACH
EE	EACH END
EF	EACH FACE
EJ	EXPANSION JOINT
EL	ELEVATION
ELEC	ELECTRICAL
ELEV	ELEVATION
ELVR	ELEVATOR
EMBED	EMBEDDED
ENGR	ENGINEER
EOD	EDGE OF DECK
EQ	EQUAL; EARTHQUAKE
EQUIP	EQUIPMENT
ES	EACH SIDE
EQUIV	EQUIVALENT
ETC	ET CETERA
EW	EACH WAY
EX	EXISTING
EXIST	EXISTING
EXT	EXTERIOR
EXTD	EXTEND, EXTENDED
FD	FLOOR DRAIN
FDN	FOUNDATION
FF	FAR FACE; FINISH FLOOR
FIN	FINISH
FL	FLOOR
FLG	FLANGE
FP	FIREPROOF; FULL PENETRATION
FRMG	FRAMING
FS	FAR SIDE
FT	FOOT; FEET
FTG	FOOTING
GA	GAGE, GAUGE
GALV	GALVANIZED
GB	GRADE BEAM
GL	GLUED LAMINATED
GRND	GROUND
H	HORIZONTAL
HA	HANGER ABOVE
HB	HANGER BELOW
HDG	HOT DIP GALVANIZE
HEF	HORIZONTAL EACH FACE
HGR	HANGER
HORIZ	HORIZONTAL
HP	HIGH POINT
HS	HIGH STRENGTH
HT	HEIGHT
ID	INSIDE DIAMETER
IN	INCH
INCL	INCLUDE
INFO	INFORMATION
INSUL	INSULATION
INT	INTERIOR
JST	JOIST
JT	JOINT
K	KIPS (1,000 POUNDS)
KO	KNOCK-OUT
KSI	KIPS PER SQUARE INCH
L	ANGLE
LB, #	POUND
LF	LINEAR FOOT
LIN	LINEAR, LINTEL
LL	LIVE LOAD
LLBB	LONG LEGS BACK-TO-BACK
LLH	LONG LEG HORIZONTAL
LLV	LONG LEG VERTICAL
LOC	LOCATION; LOCATE
LONGIT	LONGITUDINAL
LP	LOW POINT
LSL	LONG SLOTTED (HOLE)
LTWT	LIGHT WEIGHT
LVL	LEVEL
LW	LONG WAY
LWC	LIGHT WEIGHT CONCRETE
MAS	MASONRY
MATL	MATERIAL
MAX	MAXIMUM
MECH	MECHANICAL
MEMEB	MEMBRANE
MEP	MECHANICAL/ELECTRICAL/PLUMBING
MEZZ	MEZZANINE
MF	MOMENT FRAME
MFR	MANUFACTURE;MANUFACTURER
MFRG	MANUFACTURING
MIN	MINIMUM
MISC	MISCELLANEOUS
ML	MATCH LINE
MO	MASONRY OPENING
MS	MECHANICAL SPLICE
N-S	NORTH-SOUTH
NF	NEAR FACE
NIC	NOT IN CONTRACT
NO	NUMBER
NTS	NOT TO SCALE
NWC	NORMAL WEIGHT CONCRETE
OC	ON CENTER
OD	OUTSIDE DIAMETER
OPNG	OPENING
OPP	OPPOSITE (HAND)
OPT	OPTION; OPTIONAL
OVS	OVERSIZED (HOLES)
OWJ	OPEN WEB JOIST
P	PIPE
PAF	POWER ACTUATED FASTENER
PC	PRECAST
PCF	PONDS PER CUBIC FOOT
PCP	PRECAST CONCRETE PANEL
PEN	PENETRATION
PERP	PERPENDICULAR
PJP	PARTIAL JOINT PENETRATION WELD
PL	PLATE
P/L	PROPERTY LINE
PLC	PLACE
PLF	POUNDS PER LINEAR FOOT
PLYWD	PLYWOOD
PP	PRECAST PANEL
PREFAB	PRE-FABRICATED
PSF	POUNDS PER SQUARE FOOT
PSI	POUNDS PER SQUARE INCH
R	RADIUS
REF	REFERENCE
REINF	REINFORCING; REINFORCEMENT
REQD	REQUIRED
REQT	REQUIREMENT
SC	SLIP CRITICAL
SCHED	SCHEDULE, SCHEDULED
SECT	SECTION
SEOR	STRUCTURAL ENGINEER OF RECORD
SHT	SHEET
SIM	SIMILAR
SLBB	SHORT LEGS BACK-TO-BACK
SOG	SLAB ON GRADE
SP	SPIRAL
SPC	SPACING
SPEC	SPECIFICATION
SQ	SQUARE
SS	STAINLESS STEEL
SSL	SHORT SLOTTED HOLES
STD	STANDARD
STIFF	STIFFENER
STIRR	STIRRUP
STL	STEEL
STR	STRAIGHT
STRUC	STRUCTURAL
SUPT	SUPPORT
SW	SHORT WAY
SYM	SYMMETRICAL
T&B	TOP AND BOTTOM
T&G	TONGUE AND GROOVE
T&R	TREAD AND RISER
TEMP	TEMPERATURE; TEMPORARY
THK	THICK; THICKNESS
TOC	TOP OF CURB, TOP OF CONCRETE
TOF	TOP OF FOOTING
TOS	TOP OF STEEL
TOSL	TOP OF SLAB
TOW	TOP OF WALL
TRANS	TRANSVERSE
TYP	TYPICAL
UL	UNDERWRITER'S LABORATORY
UNO,UON	UNLESS NOTED OTHERWISE
V, VERT	VERTICAL
VG	VERTICAL GRAIN
W/	WITH
W/O	WITHOUT
WD	WOOD
WF	WIDE FLANGE
WH	WEEP HOLE
WP	WORK POINT, WATERPROOFING
WT	WEIGHT
WWF	WELDED WIRE FABRIC
YD	YARD

NO.	DATE	ISSUE
A	09/30/2025	Permit
	10/29/2025	BID SET

SEAL



PERKINS EASTMAN
One Thomas Circle NW, Suite 200
Washington, DC 20005
T. +1 202 861 1325
F. +1 202 861 1326

Owner:
Sidwell Friends School
3825 Wisconsin Ave NW, Washington DC 20016

Construction Manager:
Advanced Project Management, Inc (APM)
4530 Walney Rd, Ste 202, Chantilly, VA 20151

Civil / Site:
Bowman Consulting Group, Ltd
888 17th St NW, Suite 510, Washington, DC 20006

Landscape:
Natural Resources Design, Inc (NRD)
1009 Shepherd Street NE, Washington, DC 20017

Structural:
Yun Associates LLC
1050 Connecticut Ave NW, Suite 500, Washington, DC 20036

MEP / FP / Lighting:
CMTA Inc
220 Lexington Green Circle, Suite 600, Lexington, KY 40503

AV / IT / Telecom / Security:
Educational Systems Planning (ESP)
2448 Holly Avenue, Suite 302, Annapolis, MD 21401

Food Service
Nyikos-Garcia Foodservice Design, Inc
7146 Starmount Way, New Market, MD 21774

Accessibility Consultant:
Galbo Wolf LLC
4410 Massachusetts Ave NW, #240, Washington, DC 20016

Acoustics:
Polysonics Corp
555 Hospital Drive, Warrenton, VA 20186

Building Envelope Consultant:
Sustainable Building Partners LLC
2701 Prosperity Ave, Suite 105, Fairfax, VA 22031

Code Consultant:
Campbell Code Consulting LLC
7834 Taggart Ct, Elkridge, MD 21075

Specifications:

PROJECT TITLE:

SIDWELL FRIENDS NEW LOWER SCHOOL AT DC CAMPUS

3825 WISCONSIN AVE NW
WASHINGTON, DC 20016

PROJECT No: 2025008

DRAWING TITLE:

GENERAL NOTES

SCALE: As indicated

S-002

BID SET
10/29/2025

SCHEDULE OF SPECIAL INSPECTIONS

MATERIAL/ACTIVITY	TYPE OF INSPECTION	APPLICABLE TO THIS PROJECT: Y/N	C/P	ENTENT/REFERENCE	AGENT	COMPLETED
GENERAL						
Pre-construction conference	Meeting with parties listed in Section 6 of DOB SIPM to discuss Special Inspection procedures	Y		Scheduled by DOB with Contractor prior ro commencement of work	SIER	
EARTHWORK						
Site preparation (building)	Field testing and inspection	Y	P	Field Review; IBC 1705.6	SIER	
Fill Material (building)	Review submittals, field testing and inspection	Y	P	Field Review; IBC 1705.6	SIER	
Fill compaction (building)	In place density tests, lift thickness	Y	C	Field Review; IBC 1705.6	SIER	
Excavation	Field inspection and verification of proper depth	Y	P	Field Review; IBC 1705.6	SIER	
Foundation sub-grade	Field inspection of foundation subgrade prior to placement of concrete	Y	P	Field Review; IBC 1705.6	SIER	
Sheeting and shoring	H piles and lagging, tie bakcs	Y	C	IBC 1705.2, 1705.7, 1705.8 T1705,7	SIER	
DEEP FOUNDATION ELEMENTS						
Materials	Review product, sizes, and lengths	Y	C	Submittal and Field Review; IBC1705.7, 1705.8, 1705.9	SIER	
Test piles	Monitor driving of test piles	Y	C	Field Review; IBC 1705.8, .9 or .10	SIER	
Installation	Monitor drilling, placement, plumb, driving of piles, including recording blows per foot, cut off, and tip elevation	Y	C	Field Review; IBC 1705.2, 1705.3, 1705.7	SIER	
Load test	Monitor pile load test	Y	C	Field Review; IBC 1705.8, .9 or .10	SIER	
Helical Piles	Continuous special inspections shall be performed during installation of helical pile foundation	N	C	IBC 1705.9, 1810.3, 1840.4.11	SIER	
CONCRETE						
Materials	Review product supplied versus certificates of compliance and mix design	Y	P	Submittal & Field Review; IBC 1705.3; ACI 318: Ch. 4 and 5; IBC 1904.2, 1910.2, 1903.3	SIER	
Installation of reinforcing steel, including Pre-stressed tendons and anchor bolts as well as welding	Field inspection of placement	Y	P	Submittal and Field Review; ACI 318:3.5, 3.5.2, 3.8.6 & Ch. 7 8.1.3 and 21.2.8; AWS D1.4; IBC 1705.3, 1908.5, 1909.1, 1910.4	SIER	
Formwork installation	Field inspection	Y	P	Field Review; ACI 318: 6.1.1; IBC 1705.3	SIER	
Concreting operations and placement	Field inspection of placement/sampling	Y	C	Field Review; ACI 318: 5.6, 5.8, 5.9-10; ASTM C 172, C 31; IBC 1705.3, 1910.6, 1910.7, 1910.8, 1910.10	SIER	
Concrete curing	Field inspection of curing process	Y	P	Field Review; ACI 318: 5.11-13; IBC 1705.3, 1910.9	SIER	
Concrete strength	Evaluation of concrete strength	Y	P	Laboratory Testing; ACI 318: 6.2; IBC 1705.3	SIER	
Inspect anchors post-installed in hardened concrete members	IBC Table 1705.3	Y	C	ACI 318:17.8.2.4	SIER	
PRECAST CONCRETE						
Verify fabrication/quality control procedures	In-plant inspection of fabrication/quality control procedures**	N	P	Submittal or Field Review; IBC 1705.3		
Erection and installation	Review submittals and as-built assemblies; Field inspection of in-place precast	N	P	Submittal and Field Review; ACI 318; Ch. 16; IBC Table 1705.3		
MASONRY (Level B; Building Risk Category III)	TYPICAL FOR LEVEL B AND RISK CATEGORY I,II,III					
Materials	Review of products supplied versus certificate of compliance and material submitted	Y	P	Submittal & Field Review; ACI 530/ASCE 5; ACI 530.1/ASCE 6; IBC 1705.4, 1708	SIER	
Strength	Testing/review of strength	Y	C	Submittal & Field Review; ACI 530/ASCE 5; ACI 530.1/ASCE 6; IBC 1705.4, 2105.2.2, 2105.3	SIER	
Mortar and Grout	Inspection of proportioning and mixing. Placement of mortar only.	Y	P	Field Review; IBC 1705.4; ACI 530/ASCE 5; ACI 530.1/ASCE 6	SIER	
Grout placement, including pre-stressing grout	Verification to ensure compliance	Y	C	Field Review; IBC 1705.4; ACI 530/ASCE 5; ACI 530.1/ASCE 6	SIER	
Grout space	Verification to ensure compliance	Y	P	Field Review; IBC 1705.4; ACI 530/ASCE 5; ACI 530.1/ASCE 6; TMS 602	SIER	
Mortar, grout, and prism specimens	Observe Preparation	Y	C	Field Review; IBC 1704.5, ACI 530.1; ASCE 6	SIER	
Reinforcement, pre-stressing tendons, and connections	Inspect condition, size, location, and spacing	Y	P	Field Review; IBC 1704.5; ACI 530/ASCE 5; ACI 530.1/ASCE 6	SIER	
Welding of reinforcing bars	Inspection and testing of welds	N	C	Field Review; IBC 1705.4; ACI 530/ASCE 5; ACI 530.1/ASCE 6		
Pre-stressing force	Verify application and measurement	N	C	Field Review; IBC 1705.4; ACI 530/ASCE 5; ACI 530.1/ASCE 6		
Protection	Inspect procedures for protection during cold and hot weather	Y	P	Field Review; IBC 1705.4; ACI 530/ASCE 5; ACI 530.1/ASCE 6	SIER	
Anchorage	Inspection of anchorages	Y	P	Field Review; ACI 530.1/ASCE 6, ASCE 6; IBC 1705.4; ACI 530/ASCE 5	SIER	
Masonry installation	Inspection of placement of masonry and joints (Periodic after the first 5000 sq.ft)	Y	C	Field Review; ACI 530/ASCE 5;ACI 530.1/ASCE 6; IBC 1705.4	SIER	
Grouting of pre-stressed tendons	Field inspection	N	C	Field Review; ACI 318: 18.18.4; IBC 1705.3		
Application of forces for pre-stressed concrete	Field inspection	N	C	Field Review; ACI 318: 18.20; IBC 1705.3		
STRUCTURAL STEEL						
Verify fabrication/quality control procedures	In-plant inspection of fabrication/quality control procedures or submit Certificate of Compliance	Y	P	IBC 1704.2.5, IBC 1704.2.5.1, 1704.2.5.2, 1705.2	SIER	
Bolts, nuts, and washers – materials	Material identification markings. Review of Certificate of Compliance	Y	P	Submittal & Field Review; IBC 1705.2.1; IBC 1705.2.2; IBC 1706; ASTM; AISC 360, Section A3.3	SIER	
Bolts, nuts, washers – installation	Inspection of in-place high-strength bolts, snug-tight joints, pre-tensioned and bearing type, and slip critical connections	Y	C	Submittal & Field Review; IBC 1705.2.1, 1705.2.2;, AISC 360 Section M2.5	SIER	
Structural steel – materials	Material identification markings and review of Certificate of Compliance	Y	P	Submittal & Field Review; IBC 1705.2.1, 1705.2.2, 1706; ASTM A6, A568	SIER	
Structural steel details – installation	Inspection of member locations, structural details for bracing, connections, stiffening	Y	P	Submittal & Field Review; IBC 1705.2.1, 1705.2.2, AISC 360	SIER	
Weld filler materials and welder certification	Review of identification markings, certificate of compliance, and welder certifications	Y	P	Submittal & Field Review; ASTM AISC 360 A3.5	SIER	
Welds	Inspection and testing of welds	Y	C	Field Review; IBC 1705.2.2.1; AWS D1.1, D1.3		
Cold-formed metal deck – materials	Review of identification marking manufacturer's certified test results	Y	P	Submittal and Field Review; IBC 1705.2.2; ASTM		
Cold-formed metal deck – installation	Review laps and welds	Y	P	Submittal and Field Review; IBC 1705.2.2, AWS D1.3		
Cold-formed light frame construction – welds	Review welding operation	Y	P	IBC 1705.10, 1705.10.2, 1705.10.3		
Cold form light frame construction wind resistance – screws	Review screw attachment bolting, anchoring hold downs, bracing, diaphragms, struts	Y	P	Field Review; IBC 1705.10, 1705.10.2, 1705.10.3		
Cold-formed steel trusses spanning 60' or greater	Inspection of temporary and permanent restraints/bracing	N	C	Field review IBC 1705.2.2.2		
WOOD						
Verify fabrication/quality control procedures	In-plant inspection of fabrication/quality control procedures** or submit Certificate of Compliance	N	P	Submittal or Field Review; IBC 1704.2.5, 1705.5, 1705.5.2		
Metal plate connected wood/metal trusses spanning 60' or more	Review approved submittal and installation of restraint/bracing	N	P	Field Review; IBC 1704.2.5, 1705.5, 1705.2		
Joist Hangers – Materials/Installation	Review manufacturer's material and test standards.	N	P	Field Review; IBC 1711, ASTM D 1761		
High-Load Diaphragms – Installation	Review submittal and as-built assemblies; inspection of sheathing, framing size, nail and staple diameter and length, number of fastener lines, and fastener spacing.	N	C	IBC 1705.5, 1705.5.1		
Wood Shear Walls–installation	Review nailing, bolting, anchoring, fastening, Diaphragms, struts, braces, and hold downs when fasteners are < 4" on center.	N	P	Field Review; IBC1705.10.1		
MAIN WIND FORCE RESISTING SYSTEM						
Wind requirements	Review of the system components and installation for wood construction, cold-formed steel light frame construction, components, and cladding	N	P	Submittal and Field Review; IBC 1609.1.2, 1704.5.2, 1705.10, 1705, 1705.4, 1705.4.1, 1705.4.2, 1710		
SEISMIC FORCE RESISTING SYSTEMS						
Seismic requirements	Review of the designated seismic systems and seismic force resistance systems	N	C	Submittal and Field Review; IBC 1613, 1704.5.1, 1705.11, 1705.12; ASCE 7		
SMOKE CONTROL						
Special Inspection of smoke control systems	Leakage testing and recording of device location. Pressure difference testing, flow measurement and detection, and control verification	Y	P	Field Review; IBC 1705.17, 1705.17.1, 1705.17.2		

SCHEDULE OF SPECIAL INSPECTIONS

MATERIAL/ACTIVITY	TYPE OF INSPECTION	APPLICABLE TO THIS PROJECT: Y/N	C/P	ENTENT/REFERENCE	AGENT	COMPLETED
SPRAYED FIRE RESISTIVE MATERIAL, FIRE PENETRATIONS;	JOINTS, MASTIC AND INTERMESCENT FIRE RESISTANT COATING					
Structural member surface conditions	Field Review of surface conditions prior to application	N	P	AWCI 12-B; IBC 1705.13, 1705.13.2		
Application/thickness/density/bond strength	Field review of application operations, thickness, and density	N	P	ASTM E605, AWCI 12-B; IBC 1705.13.2; 1705.13.1, 1705.13.3, 1705.13.4; IBC 1705.13.5, 1705.13.6		
Mastic & Intumescent Fire Resistant Coating	Field review of application operations and thickness	N	P	AWCI 12-B; IBC 1705.14		
Fire-resistant penetrations and joints. In high-rise buildings or in buildings assigned to Rick Category III or IV.	Field inspection per design	Y	P	IBC 1705.17.1, 1705.17.2, ASTM E2174.		
EXTERIOR INSULATION AND FINISH SYSTEMS (EIFS)						
Application	Field Review of application/installation	N	P	ASTM E2570, IBC 1705.15		
SPECIAL CASES						
Alternative Materials and Systems	As requested by Building Official, review system and installation	N	C	IBC 1705.1.1		

INSPECTION AGENTS	FIRM	ADDRESS	TELEPHONE
Special Inspections Engineer of Record			
Materials and Testing Laboratory			
Special Inspections Engineer of Record Smoke Control System			
Additional Agents			

Note: The Qualifications of the Special Inspections Engineer of Record and Testing Laboratories are subject to the Approval of the Chief Building Official.
The Schedule of Special Inspections includes certain Architectural, Mechanical, Electric components, Storage Racks and Isolation Systems specified in Section 1705.11 of the Construction Code.

NO.	DATE	ISSUE
A	09/30/2025	Permit
	10/29/2025	BID SET

SEAL

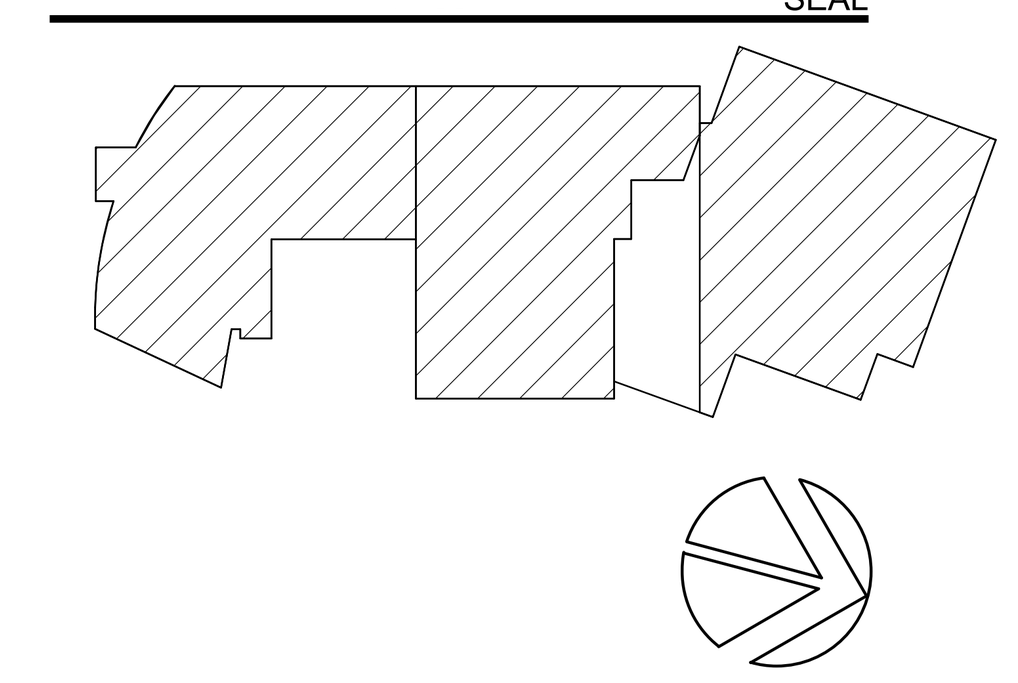

KEY PLAN

PERKINS EASTMAN
One Thomas Circle NW, Suite 200
Washington, DC 20005
T. +1 202 861 1325
F. +1 202 861 1326

Owner:
Sidwell Friends School
3825 Wisconsin Ave NW, Washington DC 20016

Construction Manager:
Advanced Project Management, Inc (APM)
4530 Walney Rd, Ste 202, Chantilly, VA 20151

Civil / Site:
Bowman Consulting Group, Ltd
888 17th St NW, Suite 510, Washington, DC 20006

Landscape:
Natural Resources Design, Inc (NRD)
1009 Shepherd Street NE, Washington, DC 20017

Structural:
Yun Associates LLC
1050 Connecticut Ave NW, Suite 500, Washington, DC 20036

MEP / FP / Lighting:
CMTA Inc
220 Lexington Green Circle, Suite 600, Lexington, KY 40503

AV / IT / Telecom / Security:
Educational Systems Planning (ESP)
2448 Holly Avenue, Suite 302, Annapolis, MD 21401

Food Service
Nyikos-Garcia Foodservice Design, Inc
7146 Starmount Way, New Market, MD 21774

Accessibility Consultant:
Galbo Wolf LLC
4410 Massachusetts Ave NW, #240, Washington, DC 20016

Acoustics:
Polysonics Corp
555 Hospital Drive, Warrenton, VA 20186

Building Envelope Consultant:
Sustainable Building Partners LLC
2701 Prosperity Ave, Suite 105, Fairfax, VA 22031

Code Consultant:
Campbell Code Consulting LLC
7834 Taggart Ct, Elkridge, MD 21075

Specifications:

PROJECT TITLE:

SIDWELL FRIENDS NEW LOWER SCHOOL AT DC CAMPUS

3825 WISCONSIN AVE NW
WASHINGTON, DC 20016

PROJECT No: 2025008

DRAWING TITLE:

STATEMENT OF SPECIAL INSPECTIONS FORM

SCALE:

S-003

BID SET
10/29/2025

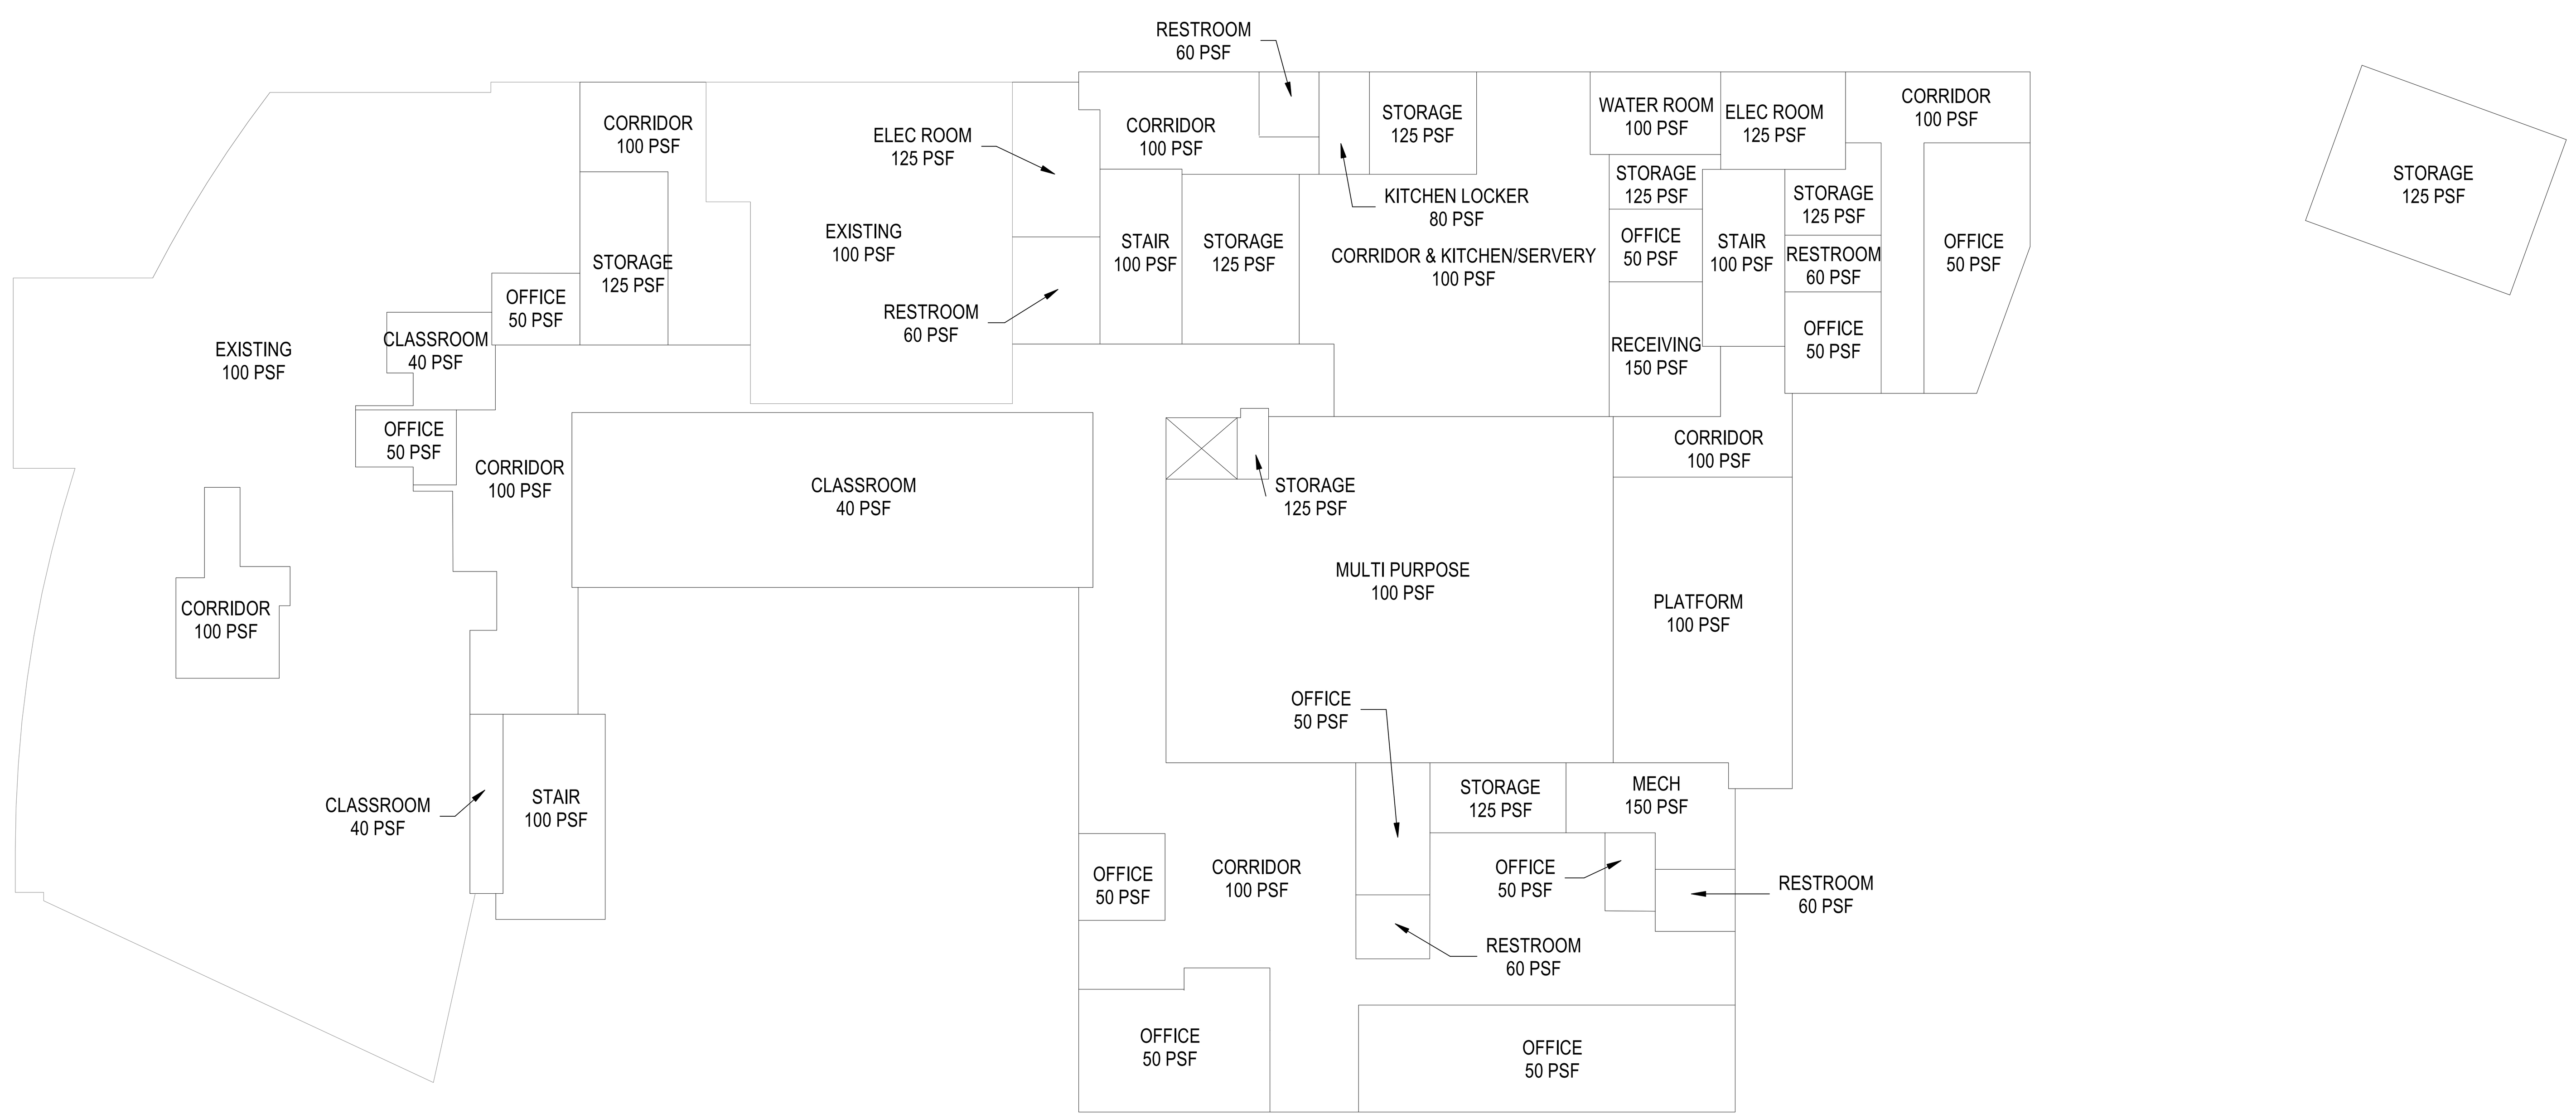

1 **FIRST FLOOR LOAD PLAN**

1/16" = 1'-0"

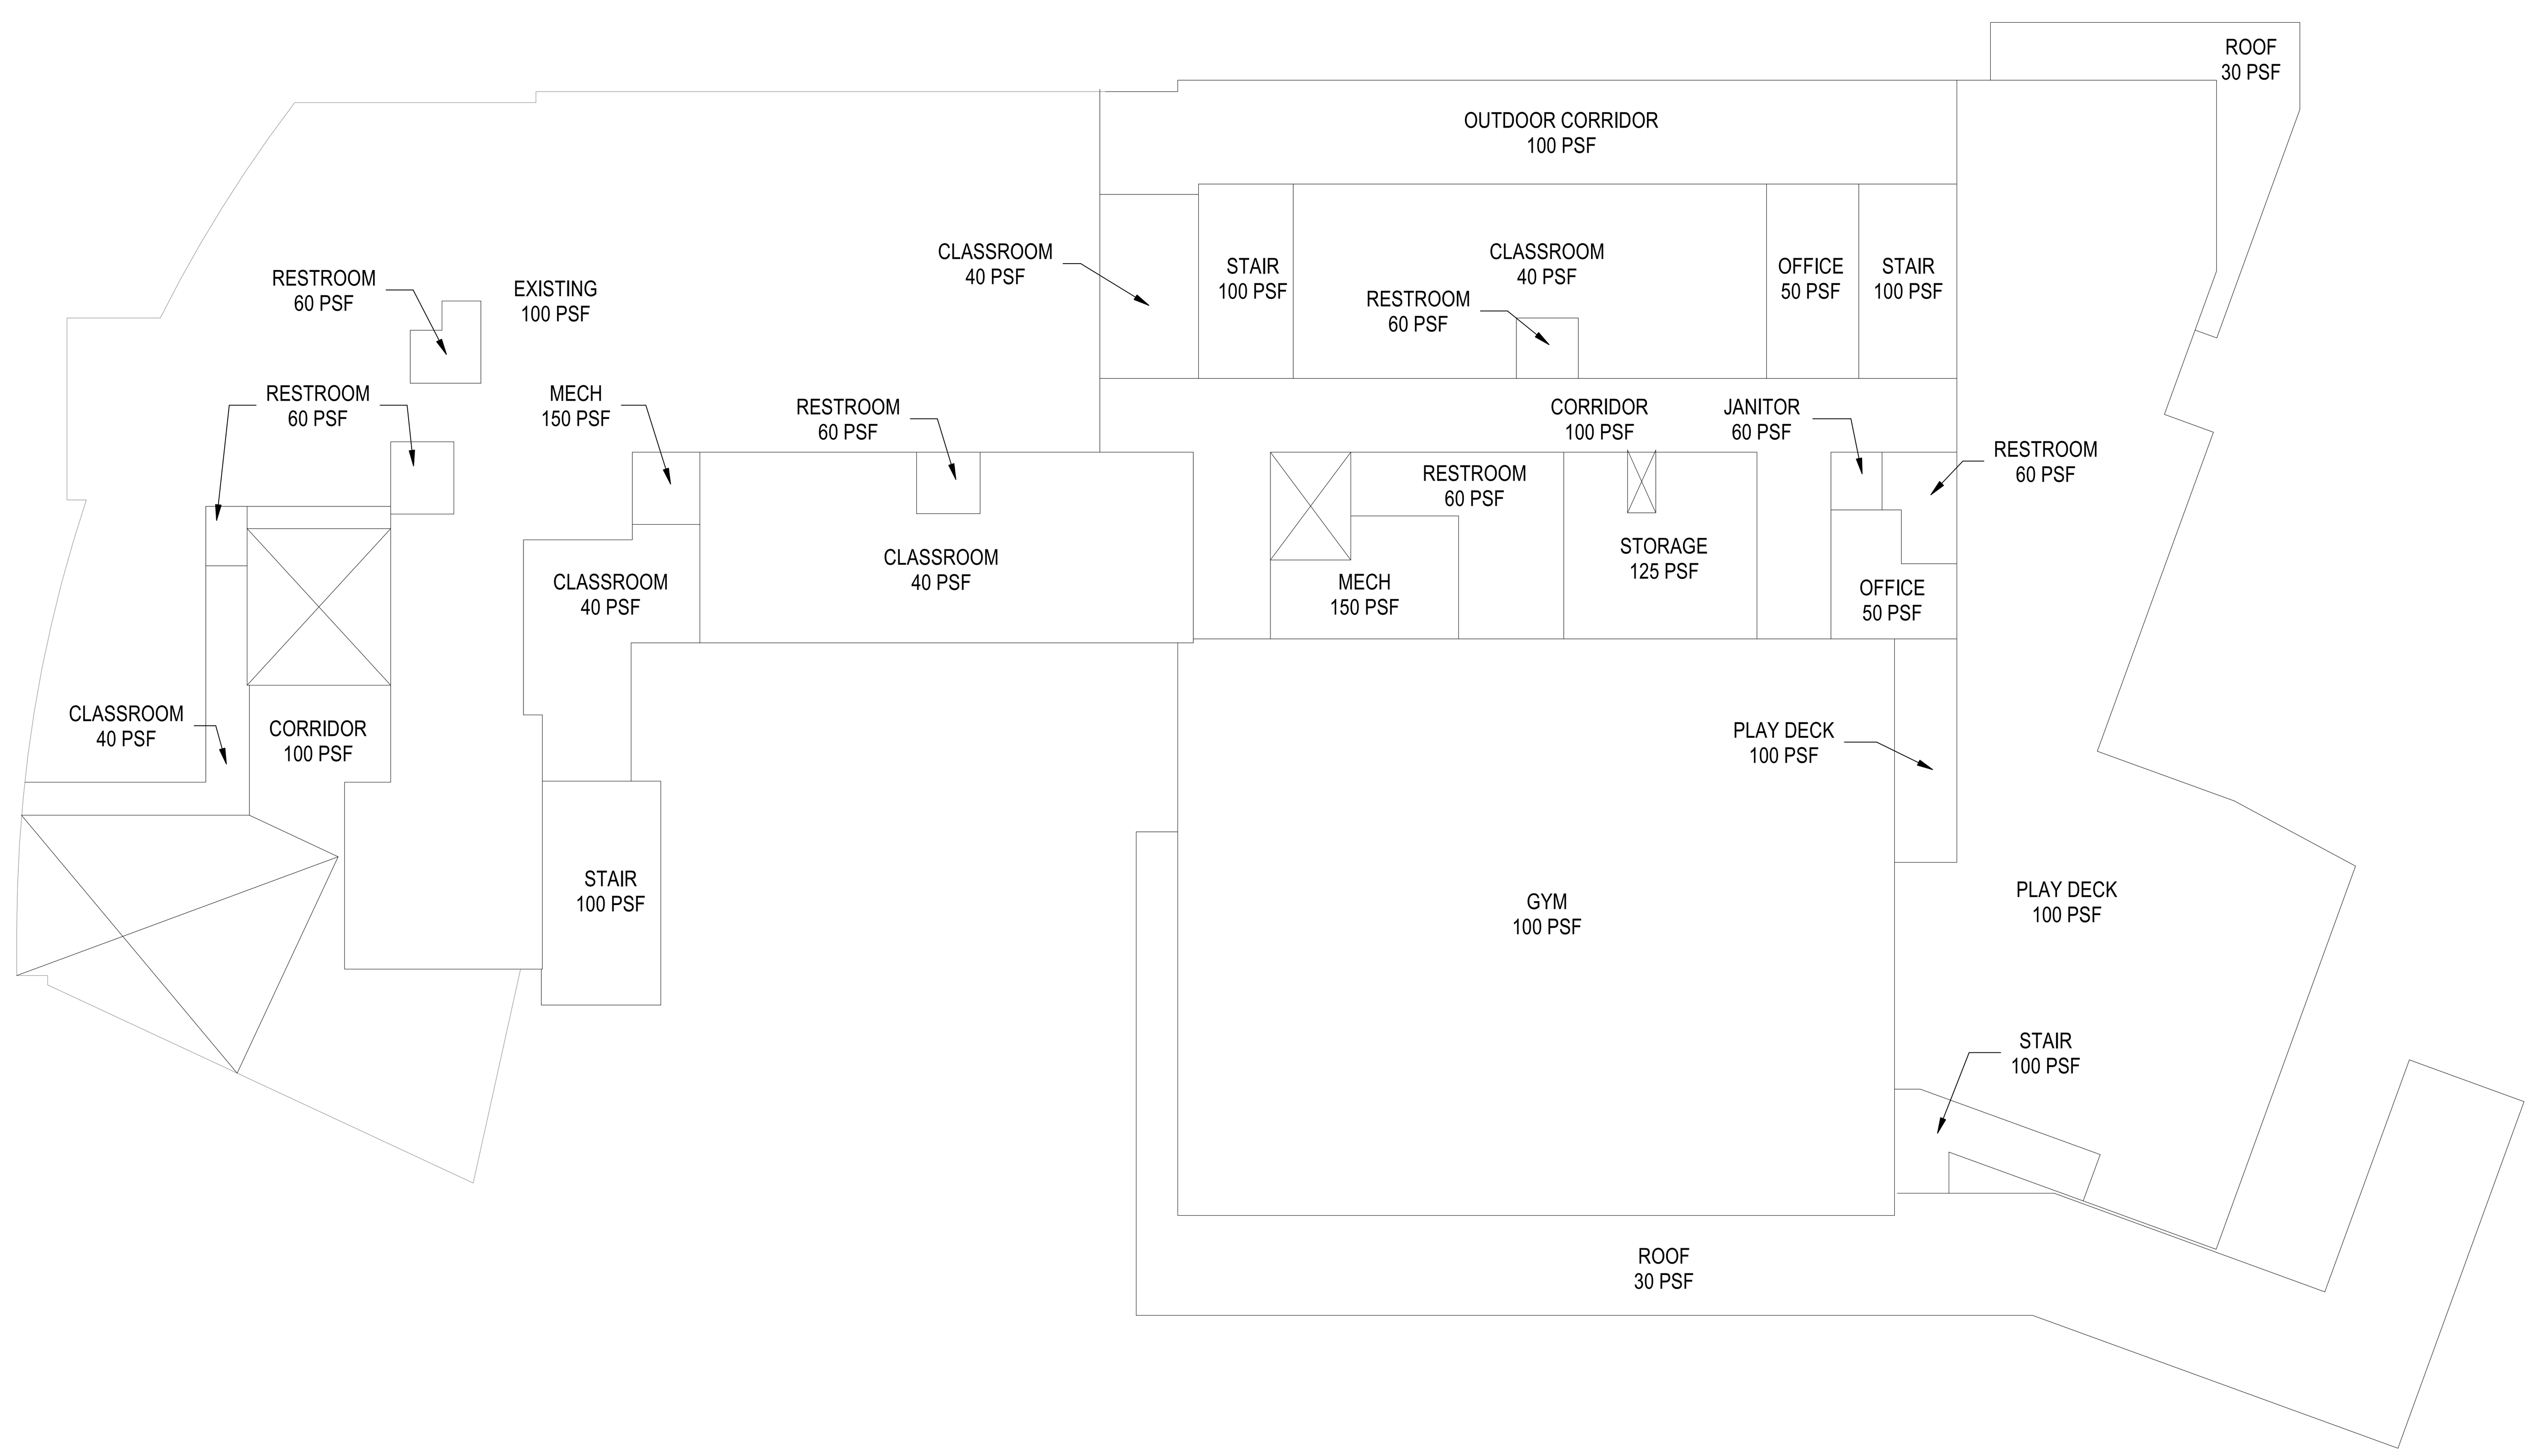

2 **SECOND FLOOR LOAD PLAN**

1/16" = 1'-0"

Autodesk Docs://Sidwell Lower School/Sidwell Lower School_ST_R24.rvt
10/28/2025 10:14:01 AM

NO.	DATE	ISSUE
A	09/30/2025	Permit
	10/29/2025	BID SET

0' 4' 8' 16' 24'

SCALE : 1/8" = 1'-0"

SEAL

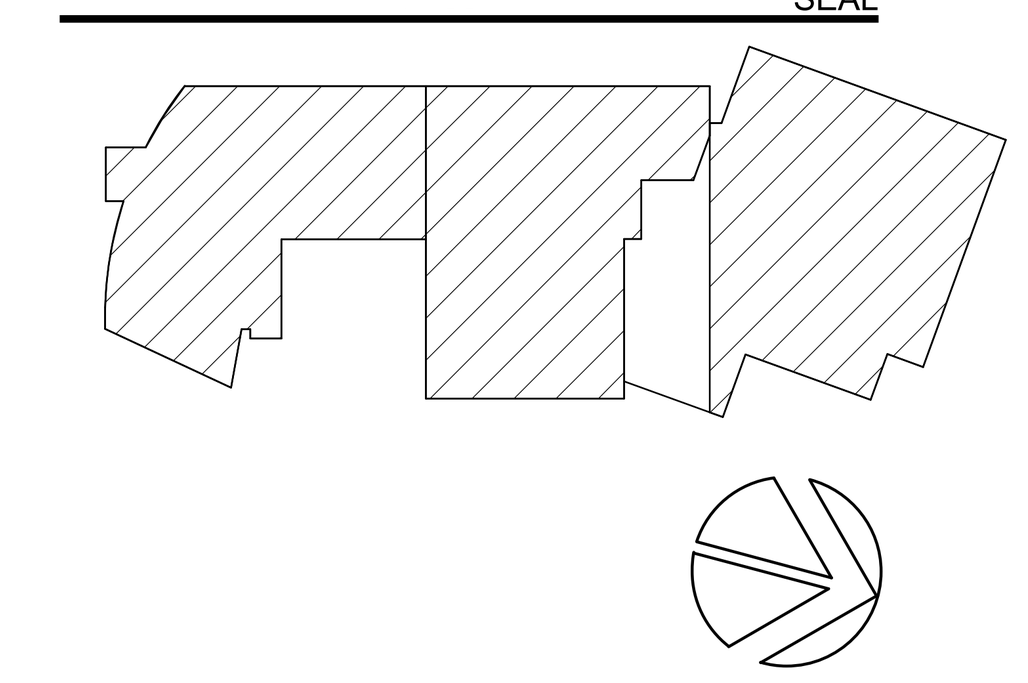

KEY PLAN

PERKINS EASTMAN
One Thomas Circle NW, Suite 200
Washington, DC 20005
T. +1 202 861 1325
F. +1 202 861 1326

Owner:
Sidwell Friends School
3825 Wisconsin Ave NW, Washington DC 20016

Construction Manager:
Advanced Project Management, Inc (APM)
4530 Walney Rd, Ste 202, Chantilly, VA 20151

Civil / Site:
Bowman Consulting Group, Ltd
888 17th St NW, Suite 510, Washington, DC 20006

Landscape:
Natural Resources Design, Inc (NRD)
1009 Shepherd Street NE, Washington, DC 20017

Structural:
Yun Associates LLC
1050 Connecticut Ave NW, Suite 500, Washington, DC 20036

MEP / FP / Lighting:
CMTA Inc
220 Lexington Green Circle, Suite 600, Lexington, KY 40503

AV / IT / Telecom / Security:
Educational Systems Planning (ESP)
2448 Holly Avenue, Suite 302, Annapolis, MD 21401

Food Service
Nyikos-Garcia Foodservice Design, Inc
7146 Starmount Way, New Market, MD 21774

Accessibility Consultant:
Galbo Wolf LLC
4410 Massachusetts Ave NW, #240, Washington, DC 20016

Acoustics:
Polysonics Corp
555 Hospital Drive, Warrenton, VA 20186

Building Envelope Consultant:
Sustainable Building Partners LLC
2701 Prosperity Ave, Suite 105, Fairfax, VA 22031

Code Consultant:
Campbell Code Consulting LLC
7834 Taggart Ct, Elkridge, MD 21075

Specifications:

PROJECT TITLE:

SIDWELL FRIENDS NEW LOWER SCHOOL AT DC CAMPUS

3825 WISCONSIN AVE NW
WASHINGTON, DC 20016

PROJECT No: 2025008

DRAWING TITLE:

LOAD PLANS

SCALE: 1/16" = 1'-0"

S-004

BID SET
10/29/2025

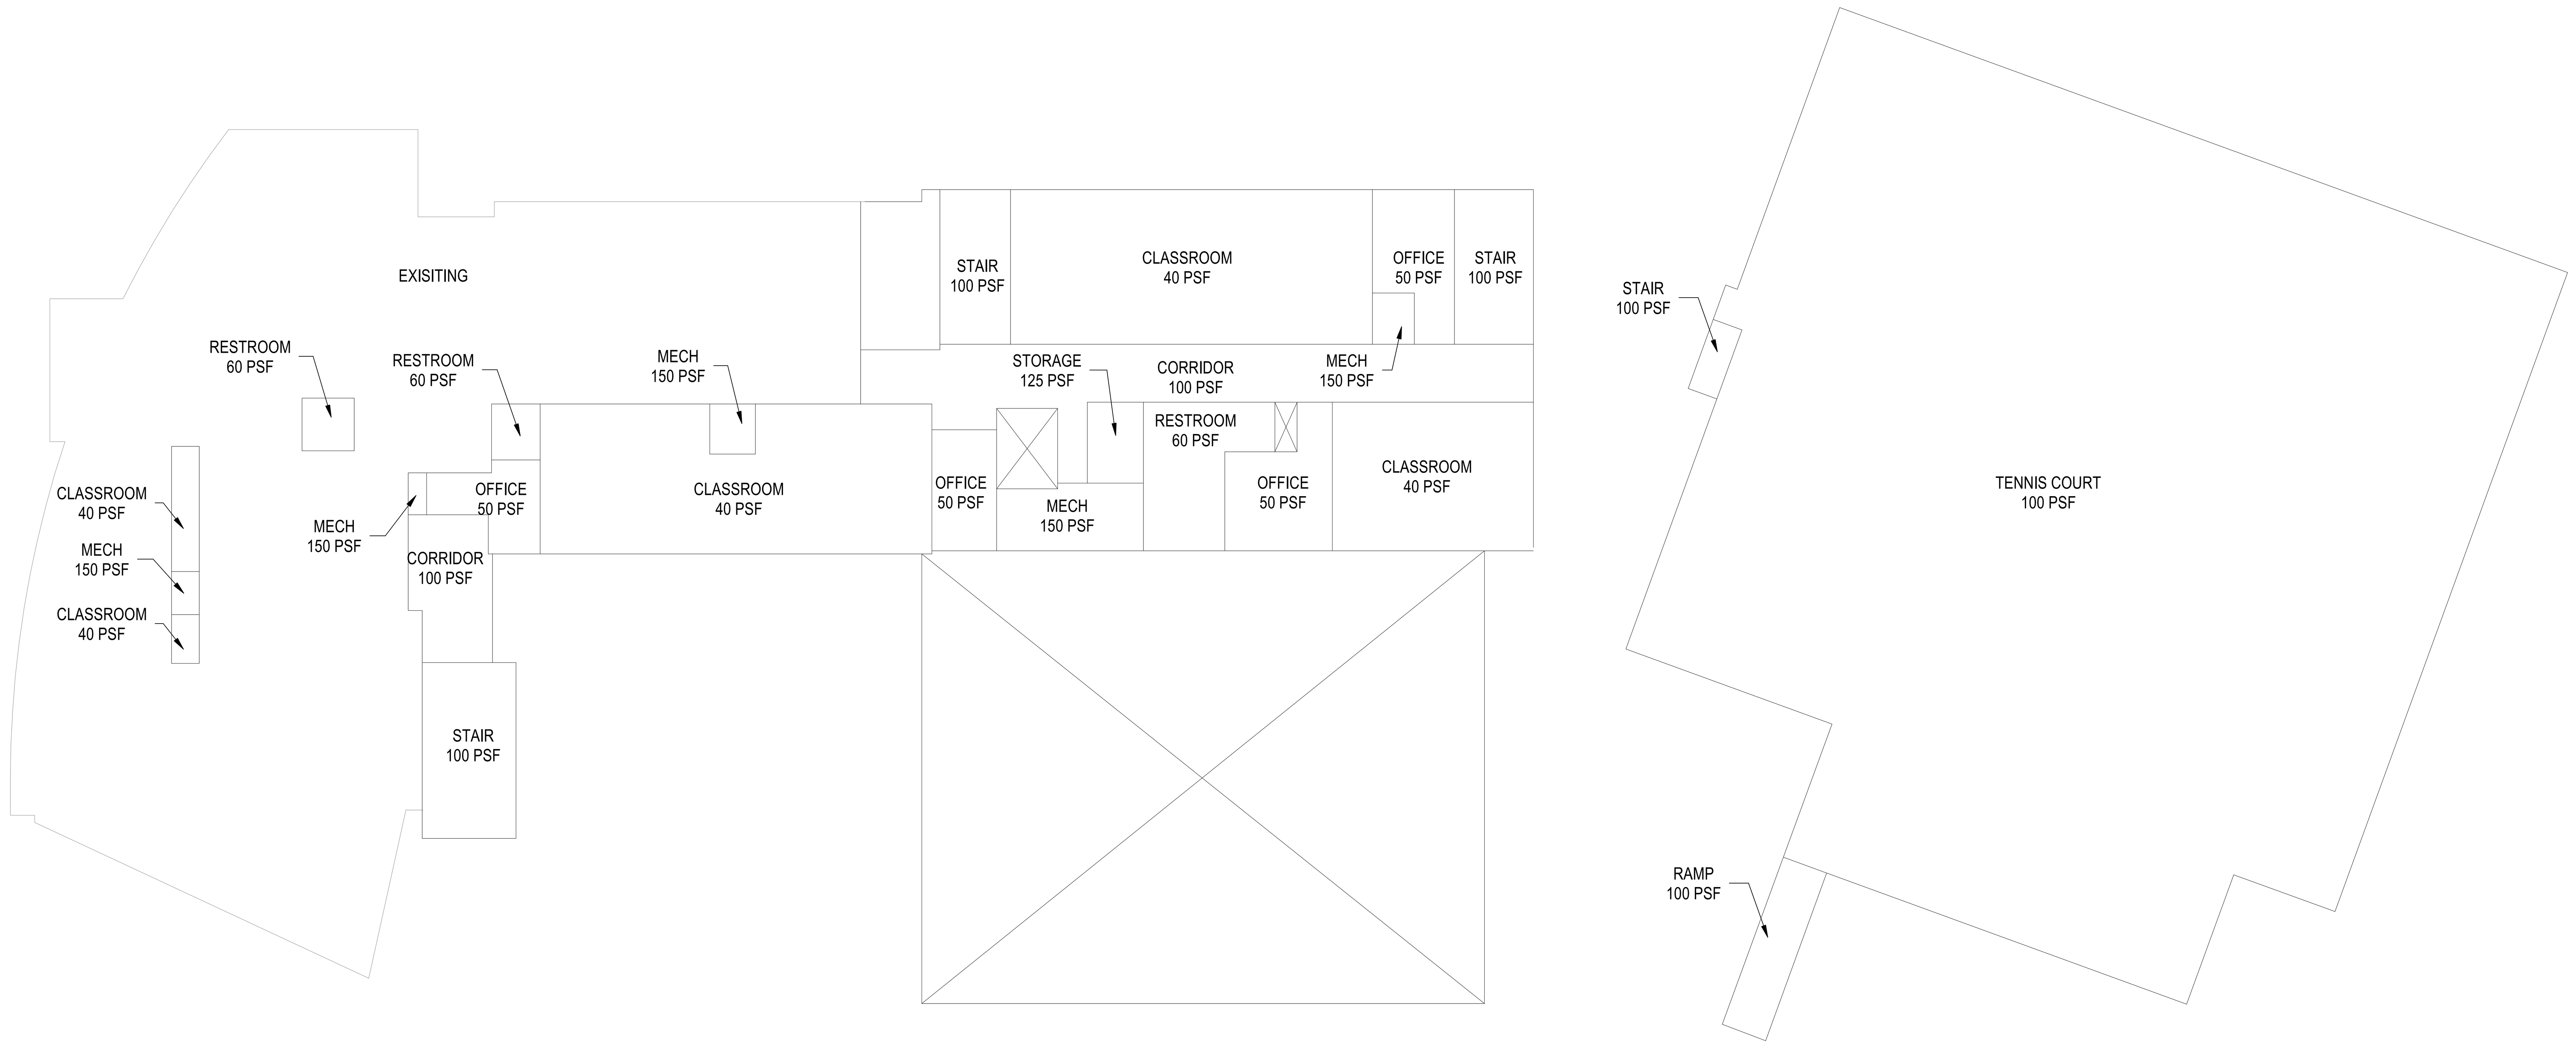

1 **THIRD FLOOR LOAD PLAN**
1/16" = 1'-0"

2 **ROOF LOAD PLAN**
1/16" = 1'-0"

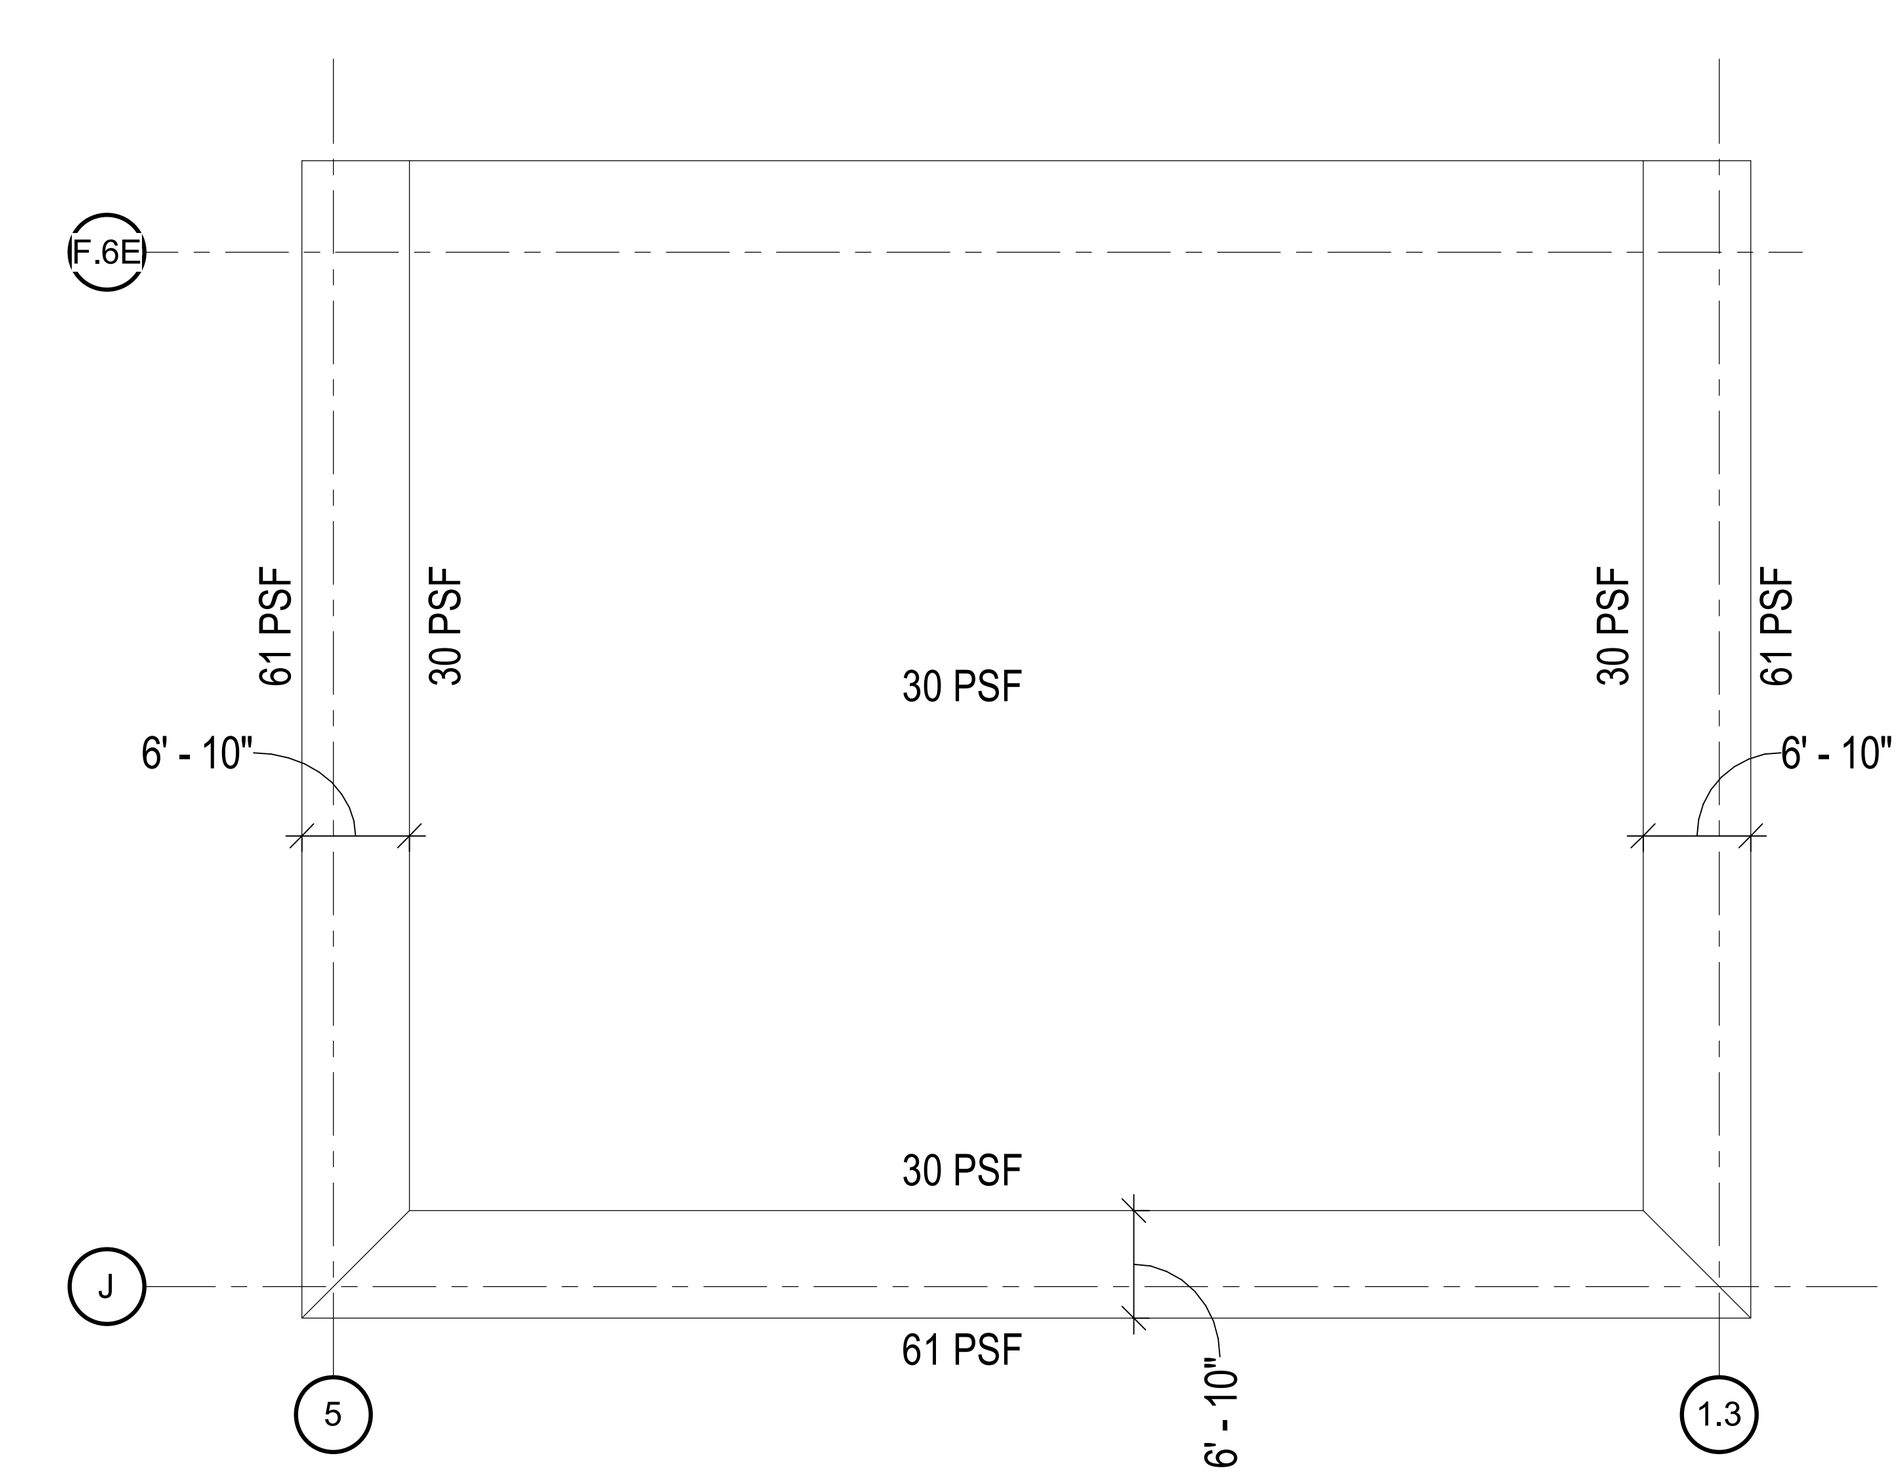

3 **SNOW DRIFT LOAD PLAN FOR STEEL JOISTS**
1/16" = 1'-0"

NOTES:

1. LOADINGS SHOWN ARE UNFACTORED LOADS.
2. REFER TO GENERAL NOTES FOR ADDITIONAL LOADINGS.
3. REFER TO ARCHITECTURAL DWGS FOR LOCATIONS OF BASKETBALL HOOPS AND DESIGN MINIMUM 1,000 LBS AT EACH BASKETBALL HOOP ATTACHMENT POINT.
4. SEE SECTION 5/S-321 FOR ADDITIONAL LOADS ON JOISTS.

NO.	DATE	ISSUE
A	09/30/2025	Permit
	10/29/2025	BID SET

0' 4' 8' 16' 24'
SCALE : 1/8" = 1'-0"

SEAL

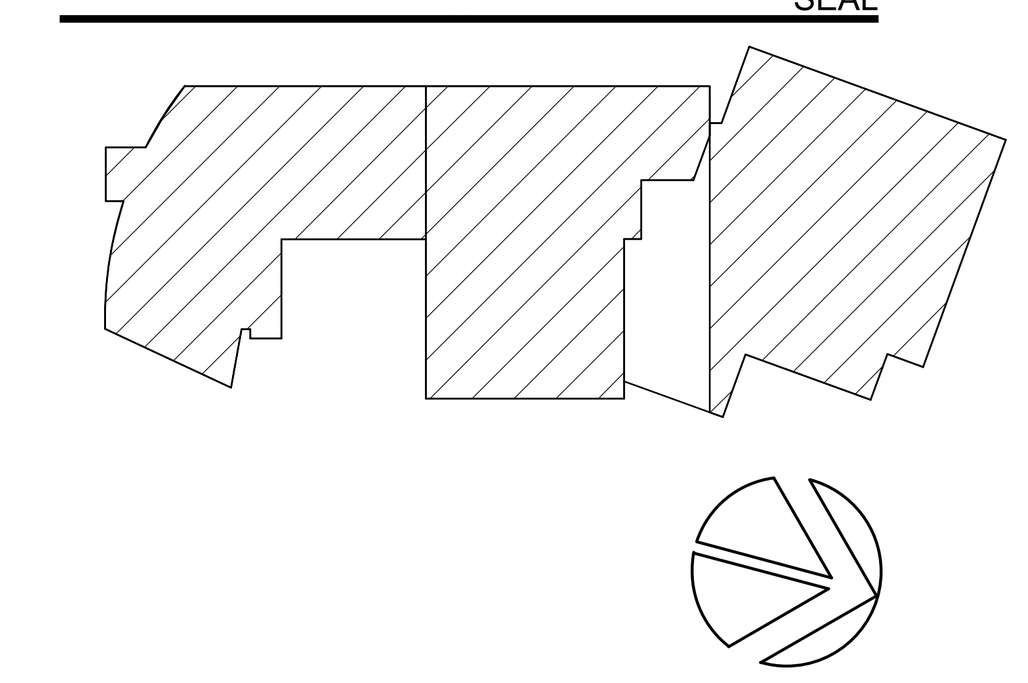

KEY PLAN

PERKINS EASTMAN
One Thomas Circle NW, Suite 200
Washington, DC 20005
T. +1 202 861 1325
F. +1 202 861 1326

Owner:
Sidwell Friends School
3825 Wisconsin Ave NW, Washington DC 20016

Construction Manager:
Advanced Project Management, Inc (APM)
4530 Walney Rd, Ste 202, Chantilly, VA 20151

Civil / Site:
Bowman Consulting Group, Ltd
888 17th St NW, Suite 510, Washington, DC 20006

Landscape:
Natural Resources Design, Inc (NRD)
1009 Shepherd Street NE, Washington, DC 20017

Structural:
Yun Associates LLC
1050 Connecticut Ave NW, Suite 500, Washington, DC 20036

MEP / FP / Lighting:
CMTA Inc
220 Lexington Green Circle, Suite 600, Lexington, KY 40503

AV / IT / Telecom / Security:
Educational Systems Planning (ESP)
2448 Holly Avenue, Suite 302, Annapolis, MD 21401

Food Service
Nyikos-Garcia Foodservice Design, Inc
7146 Starmount Way, New Market, MD 21774

Accessibility Consultant:
Galbo Wolf LLC
4410 Massachusetts Ave NW, #240, Washington, DC 20016

Acoustics:
Polysonics Corp
555 Hospital Drive, Warrenton, VA 20186

Building Envelope Consultant:
Sustainable Building Partners LLC
2701 Prosperity Ave, Suite 105, Fairfax, VA 22031

Code Consultant:
Campbell Code Consulting LLC
7834 Taggart Ct, Elkridge, MD 21075

Specifications:

PROJECT TITLE:

SIDWELL FRIENDS NEW LOWER SCHOOL AT DC CAMPUS

3825 WISCONSIN AVE NW
WASHINGTON, DC 20016

PROJECT No: 2025008

DRAWING TITLE:

LOAD PLANS

SCALE: 1/16" = 1'-0"

S-005

BID SET
10/29/2025

NO.	DATE	ISSUE
A	09/30/2025	Permit
	10/29/2025	BID SET

0' 4' 8' 16' 24'
SCALE : 1/8" = 1'-0"

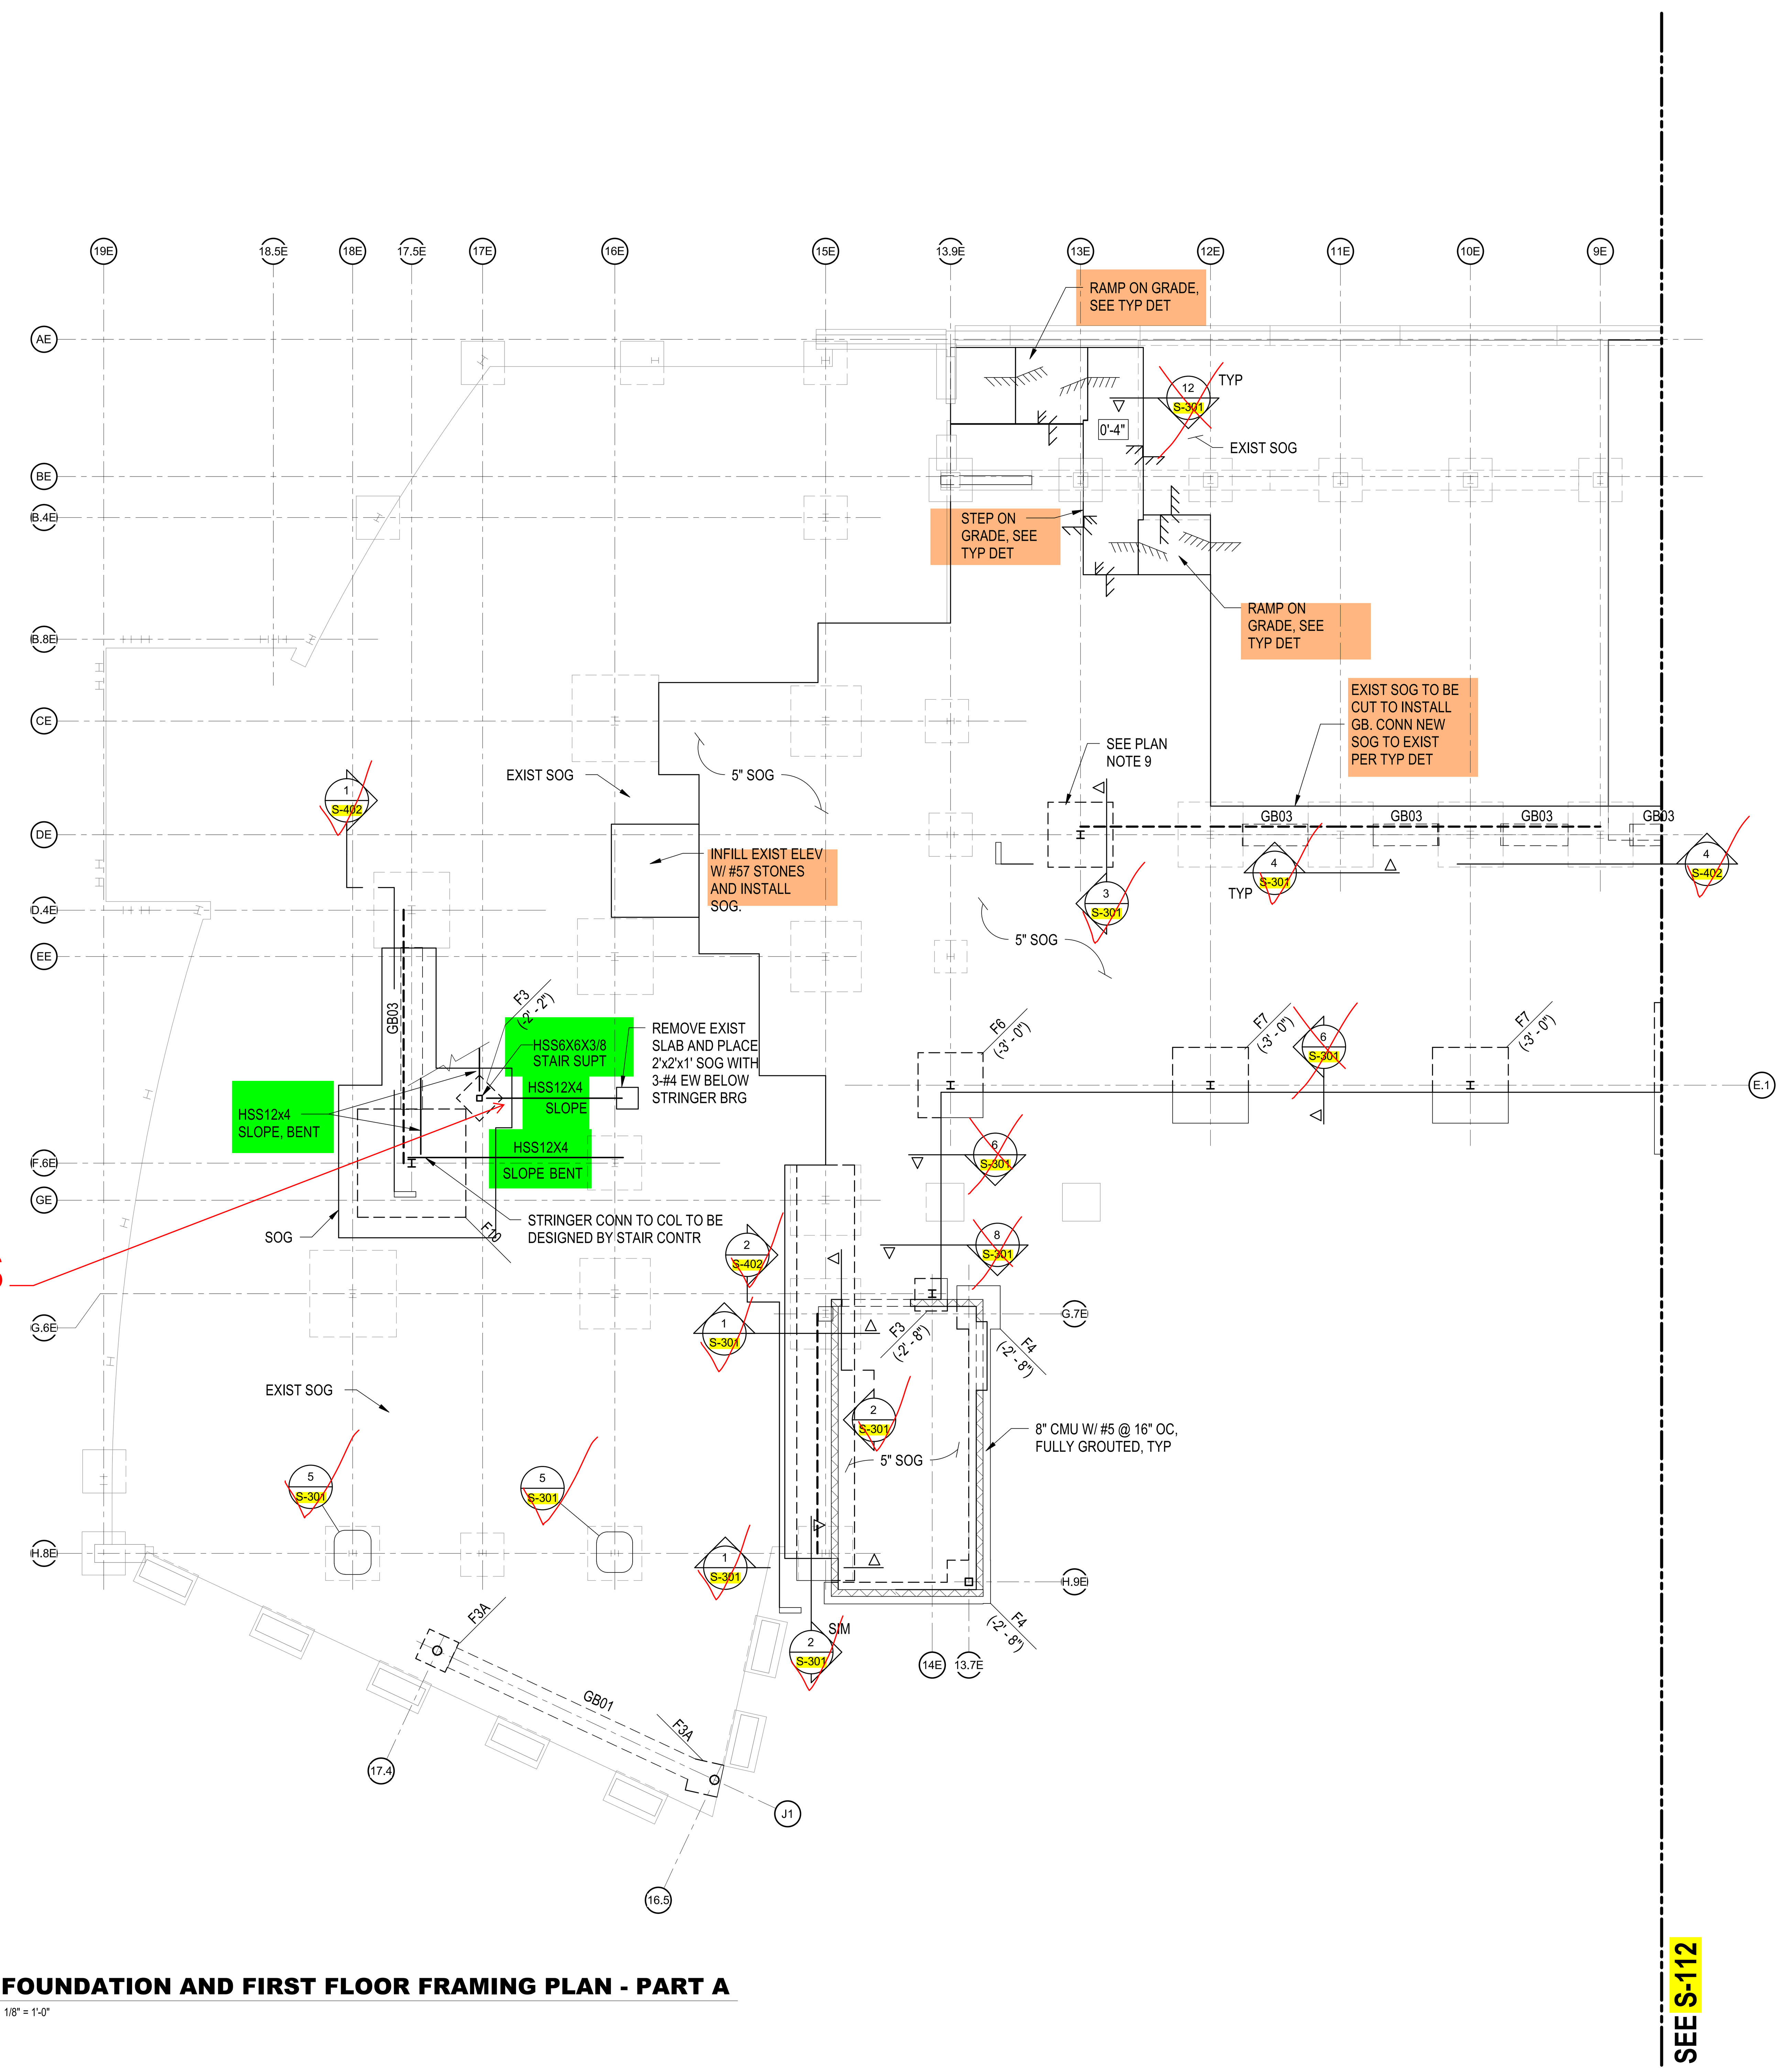

By misc metals

SEE S-112

1 **FOUNDATION AND FIRST FLOOR FRAMING PLAN - PART A**
1/8" = 1'-0"

THE SPREAD AND STRIP FOOTINGS SHOWN HAVE BEEN DESIGNED FOR A NET ALLOWABLE BEARING PRESSURE OF 4,000 PSF BASED ON PRIOR GEOTECHNICAL RECOMMENDATIONS. THE CURRENT GEOTECHNICAL REPORT IDENTIFIES ALLOWABLE BEARING PRESSURES OF 2,500 PSF AND 3,000 PSF, DEPENDING ON THE FOOTING BEARING ELEVATIONS, AND 5,000 PSF IF SUPPORTED ON GROUND IMPROVEMENT. PILE CAPS SUPPORTED ON MICROPILES ARE ALSO RECOMMENDED FOR COLUMNS ADJACENT TO THE UPPER SCHOOL DUE TO CONSTRUCTABILITY CONSIDERATIONS. THE FINAL FOUNDATION TYPE AND FOOTING SIZES ARE SUBJECT TO REVISION PENDING FURTHER INPUT FROM THE GEOTECHNICAL ENGINEER, OWNER, DESIGN TEAM, AND CONSTRUCTION TEAM.

FOUNDATION & FIRST FLOOR FRAMING PLAN NOTES:

1. REFERENCE ELEVATION IS TOP OF SLAB ON GRADE ELEVATION AT 0'-0", CORRESPONDING TO TRUE ELEVATION OF 390'-0", UNO THUS +/-X'-X" ON PLAN RELATIVE TO REFERENCE ELEVATION.
2. SLAB ON GRADE SHALL BE 5" NORMAL WEIGHT CONCRETE WITH 6x6 -W2.9xW2.9 WWF UNO ON PLAN. SEE TYPICAL DETAIL FOR SUBGRADE CONSTRUCTION UNO ON PLAN.
3. FOOTINGS SHALL BE CENTERED UNDER WALLS, COLUMNS, BEAMS AND PIERS UNO. SEE S-112 FOR SCHEDULE.
4. TOP OF INTERIOR FOOTINGS SHALL BE 1'-0" BELOW REFERENCE ELEVATION UNO THUS (+/-X'-X") ON PLAN RELATIVE TO REFERENCE ELEVATION. BOTTOM OF FOOTINGS SUBJECT TO FROST SHALL BE MINIMUM 2'-6" BELOW GRADE.
5. TOP OF GRADE BEAM SHALL BE AT TOP OF FOOTING, PIER OR GRADE BEAM IT CONNECTS TO UNO THUS (+/-X'-X") ON PLAN RELATIVE TO REFERENCE ELEVATION. SEE S-112 FOR GRADE BEAM SCHEDULE. SEE S-112 FOR CONCRETE PIER SCHEDULE.
6. WHERE GRADE BEAMS FRAME INTO COLUMN FOOTING, GRADE BEAM EREBARS SHALL EXTEND 3'-0" BEYOND CENTER OF FOOTING FOR FOOTINGS 6' OR LARGER, OR EXTEND TO THE END OF FOOTING WITH HOOKS FOR FOOTINGS SMALLER THAN 6'.
7. SEE ARCHITECTURAL DRAWINGS FOR GRID LINE DIMENSIONS AND OTHER DIMENSIONS THAT LOCATE ITEMS SUCH AS EDGE OF SLABS, OPENINGS, DEPRESSIONS AND CURBS.
8. DEMOLISH THE EXISTING FOOTING AND PLACE TOP OF NEW FOOTING ONE FOOT BELOW FINISH FLOOR. CONTRACTOR SHALL SUBMIT SIGNED AND SEALED TEMPORARY SHORING DESIGN FOR REVIEW AND APPROVAL BEFORE COMMENCING FOOTING DEMOLITION WORK.

SEAL

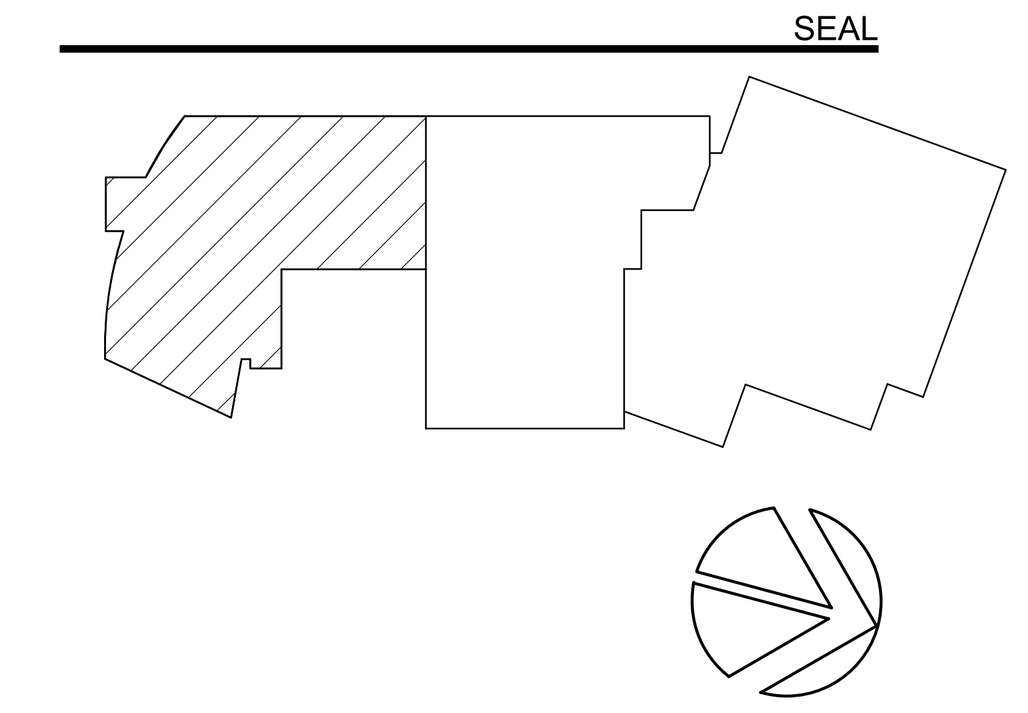

KEY PLAN

PERKINS — EASTMAN
One Thomas Circle NW, Suite 200
Washington, DC 20005
T. +1 202 861 1325
F. +1 202 861 1326

Owner:
Sidwell Friends School
3825 Wisconsin Ave NW, Washington DC 20016

Construction Manager:
Advanced Project Management, Inc (APM)
4530 Walney Rd, Ste 202, Chantilly, VA 20151

Civil / Site:
Bowman Consulting Group, Ltd
888 17th St NW, Suite 510, Washington, DC 20006

Landscape:
Natural Resources Design, Inc (NRD)
1009 Shepherd Street NE, Washington, DC 20017

Structural:
Yun Associates LLC
1050 Connecticut Ave NW, Suite 500, Washington, DC 20036

MEP / FP / Lighting:
CMTA Inc
220 Lexington Green Circle, Suite 600, Lexington, KY 40503

AV / IT / Telecom / Security:
Educational Systems Planning (ESP)
2448 Holly Avenue, Suite 302, Annapolis, MD 21401

Food Service
Nyikos-Garcia Foodservice Design, Inc
7146 Starmount Way, New Market, MD 21774

Accessibility Consultant:
Galbo Wolf LLC
4410 Massachusetts Ave NW, #240, Washington, DC 20016

Acoustics:
Polysonics Corp
555 Hospital Drive, Warrenton, VA 20186

Building Envelope Consultant:
Sustainable Building Partners LLC
2701 Prosperity Ave, Suite 105, Fairfax, VA 22031

Code Consultant:
Campbell Code Consulting LLC
7834 Taggart Ct, Elkridge, MD 21075

Specifications:

PROJECT TITLE:

SIDWELL FRIENDS NEW LOWER SCHOOL AT DC CAMPUS

3825 WISCONSIN AVE NW
WASHINGTON, DC 20016

PROJECT No: 2025008

DRAWING TITLE:

FDN AND 1ST FLOOR FRAMING PLAN - PART A

SCALE: As indicated

S-111

BID SET
10/29/2025

Autodesk Docs://Sidwell Lower School/Sidwell Lower School_ST_R24.rvt
10/28/2025 10:14:06 AM

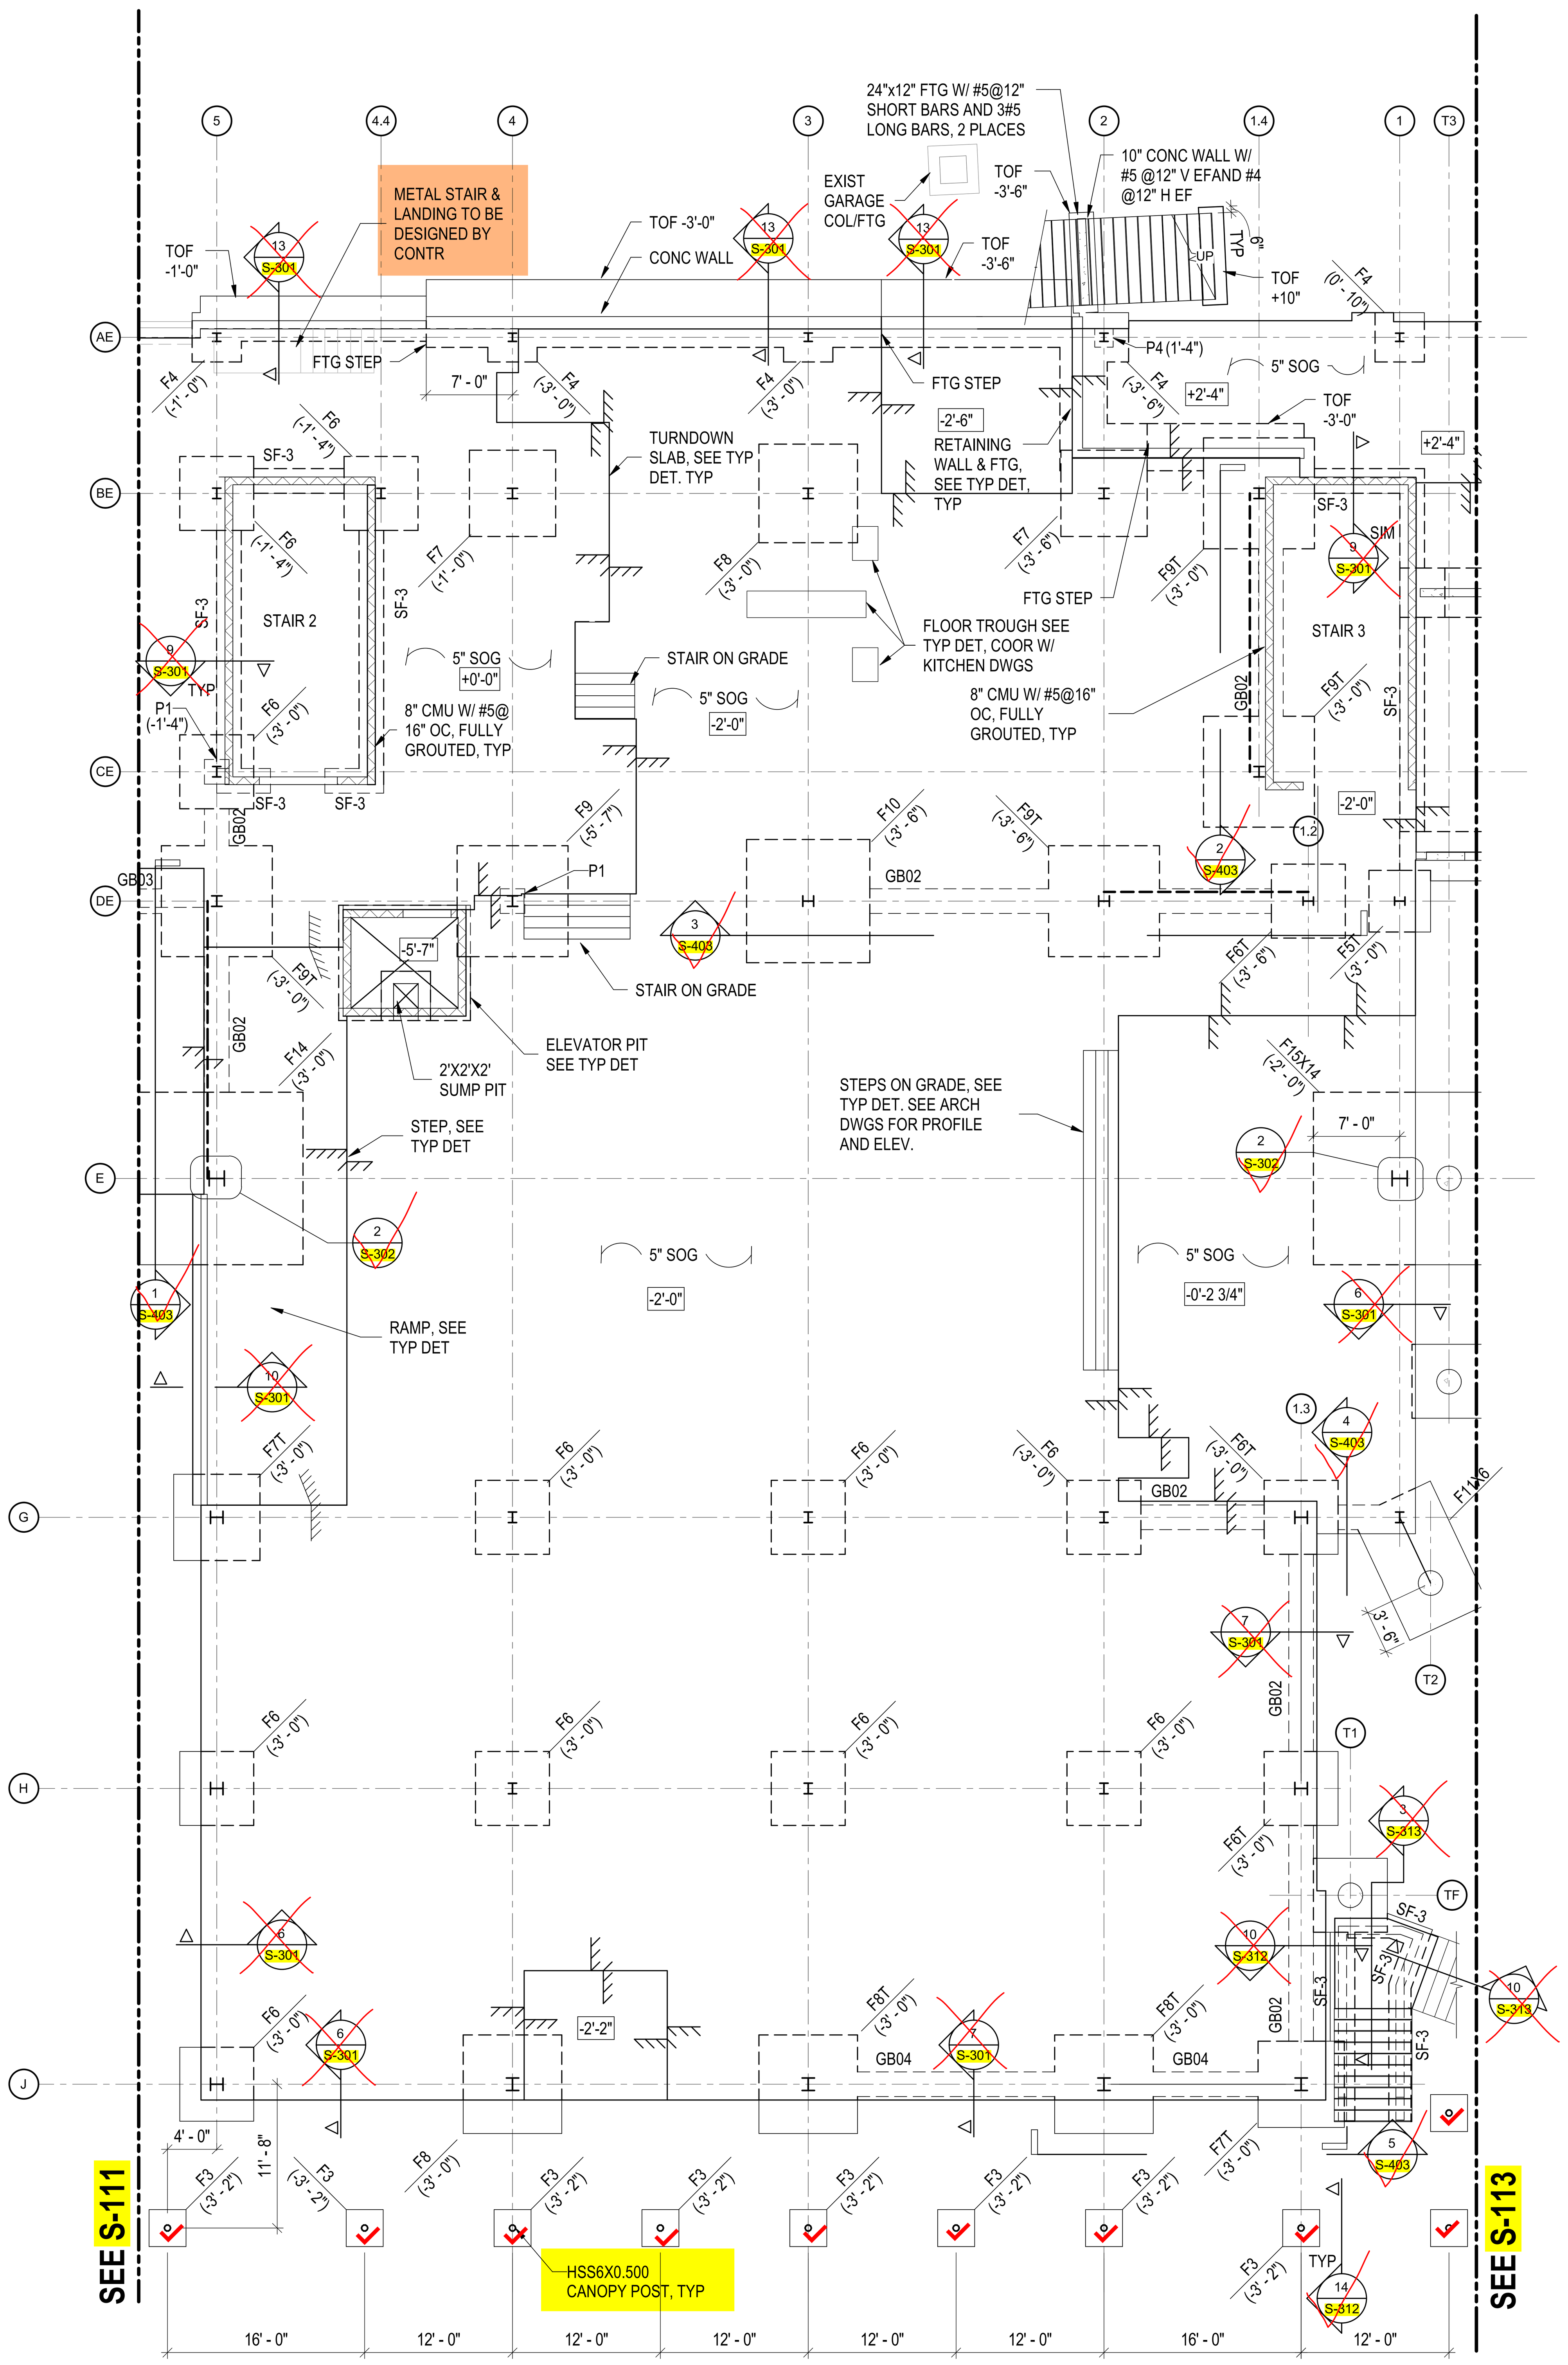

1 FOUNDATION AND FIRST FLOOR FRAMING PLAN - PART B

1/8" = 1'-0"

GRADE BEAM SCHEDULE								
TYPE	WIDTH	DEPTH	TOP	BOTTOM	SIDE	STIRRUPS	VERT TIES	HORZ TIES
GB01	2' - 0"	2' - 0"	(4) #7	(4) #7	(1) #7 ES	#4@12" OC	(1) #4@12" OC	NONE
GB02	2' - 0"	2' - 0"	(6) #8	(6) #8	(1) #8 ES	#4@12" OC	(2) #4@12" OC	NONE
GB03	2' - 0"	1' - 8"	(4) #9	(4) #9	(1) #8 ES	#4@12" OC	(2) #4@12" OC	NONE
GB04	2' - 0"	2' - 6"	(6) #8	(6) #8	(1) #8 ES	#4@12" OC	(2) #4@12" OC	NONE

STRIP FOOTING SCHEDULE			
TYPE	WIDTH	THICKNESS	REINFORCEMENT
SF1	4' - 0"	1' - 6"	#6@12" OC TRANS BOT, (5) #5 CONT LONG BOT
SF2	5' - 0"	1' - 6"	#6@12" OC TRANS BOT, (6) #5 CONT LONG BOT
SF3	2' - 0"	1' - 0"	#5@12" OC TRANS BOT, (3) #4 CONT LONG BOT

SPREAD FOOTING SCHEDULE				
TYPE	LENGTH	WIDTH	THICKNESS	REINFORCEMENT
F3	3' - 0"	3' - 0"	1' - 4"	(6) #4 EACH WAY TOP&BOT
F3A	3' - 0"	3' - 0"	2' - 0"	(8) #4 EACH WAY TOP&BOT
F4	4' - 0"	4' - 0"	1' - 0"	(11) #4 EACH WAY BOT
F5T	5' - 0"	5' - 0"	2' - 0"	(9) #5 EACH WAY TOP&BOT
F6	6' - 0"	6' - 0"	1' - 6"	(10) #5 EACH WAY BOT
F6T	6' - 0"	6' - 0"	2' - 6"	(13) #5 EACH WAY TOP&BOT
F7	7' - 0"	7' - 0"	1' - 6"	(11) #5 EACH WAY BOT
F7T	7' - 0"	7' - 0"	2' - 6"	(11) #6 EACH WAY TOP&BOT
F8	8' - 0"	8' - 0"	1' - 6"	(8) #6 EACH WAY BOT
F8T	8' - 0"	8' - 0"	2' - 6"	(12) #6 EACH WAY TOP&BOT
F9	9' - 0"	9' - 0"	2' - 0"	(11) #6 EACH WAY BOT
F9T	9' - 0"	9' - 0"	2' - 0"	(14) #6 EACH WAY TOP&BOT
F10	10' - 0"	10' - 0"	2' - 6"	(9) #7 EACH WAY TOP&BOT
F11	11' - 0"	11' - 0"	2' - 0"	(12) #7 EACH WAY TOP&BOT
F11X6	11' - 0"	7' - 0"	2' - 0"	(6) #7 LONG BAR T&B (12) #7 SHORT BAR T&B
F12	12' - 0"	12' - 0"	2' - 0"	(14) #7 EACH WAY TOP&BOT
F14	14' - 0"	14' - 0"	3' - 0"	(12) #9 EACH WAY TOP&BOT
F15X14	15' - 0"	14' - 0"	2' - 0"	(11) #9 LONG BAR T&B (15) #7 SHORT BAR T&B

CONCRETE PIER SCHEDULE			
TYPE	WIDTH	HEIGHT	REINFORCEMENT (SEE TYP DET FOR TIES)
P1	2' - 0"	2' - 0"	8-#8
P2	6' - 0"	4' - 0"	28-#10 (7 AT SHORT FACE)
P3	4' - 0"	4' - 0"	24-#9
P4	1' - 6"	1' - 6"	8-#6

FOUNDATION & FIRST FLOOR FRAMING PLAN NOTES:

1. SEE S-111 FOR FOUNDATION AND FIRST FLOOR FRAMING PLAN NOTES.

NO.	DATE	ISSUE
A	09/30/2025	Permit
	10/29/2025	BID SET

0' 4' 8' 16' 24'
SCALE : 1/8" = 1'-0"

SEAL

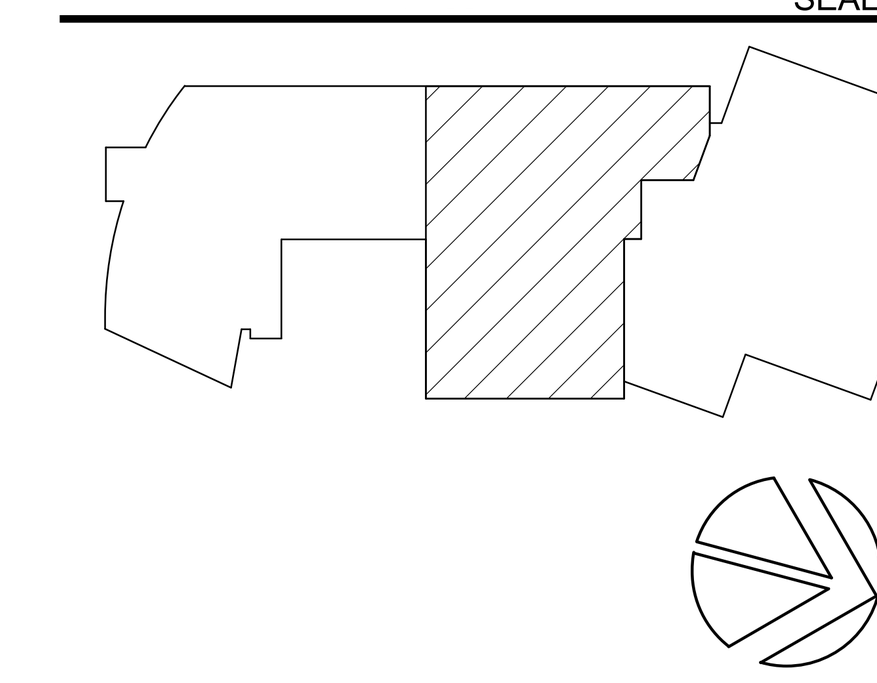

KEY PLAN

PERKINS EASTMAN
One Thomas Circle NW, Suite 200
Washington, DC 20005
T. +1 202 861 1325
F. +1 202 861 1326

Owner:
Sidwell Friends School
3825 Wisconsin Ave NW, Washington DC 20016

Construction Manager:
Advanced Project Management, Inc (APM)
4530 Walney Rd, Ste 202, Chantilly, VA 20151

Civil / Site:
Bowman Consulting Group, Ltd
888 17th St NW, Suite 510, Washington, DC 20006

Landscape:
Natural Resources Design, Inc (NRD)
1009 Shepherd Street NE, Washington, DC 20017

Structural:
Yun Associates LLC
1050 Connecticut Ave NW, Suite 500, Washington, DC 20036

MEP / FP / Lighting:
CMTA Inc
220 Lexington Green Circle, Suite 600, Lexington, KY 40503

AV / IT / Telecom / Security:
Educational Systems Planning (ESP)
2448 Holly Avenue, Suite 302, Annapolis, MD 21401

Food Service
Nyikos-Garcia Foodservice Design, Inc
7146 Starmount Way, New Market, MD 21774

Accessibility Consultant:
Galbo Wolf LLC
4410 Massachusetts Ave NW, #240, Washington, DC 20016

Acoustics:
Polysonics Corp
555 Hospital Drive, Warrenton, VA 20186

Building Envelope Consultant:
Sustainable Building Partners LLC
2701 Prosperity Ave, Suite 105, Fairfax, VA 22031

Code Consultant:
Campbell Code Consulting LLC
7834 Taggart Ct, Elkridge, MD 21075

Specifications:

PROJECT TITLE:

SIDWELL FRIENDS NEW LOWER SCHOOL AT DC CAMPUS

3825 WISCONSIN AVE NW
WASHINGTON, DC 20016

PROJECT No: 2025008

DRAWING TITLE:

FDN AND 1ST FLOOR FRAMING PLAN - PART B

SCALE: As indicated

S-112

BID SET
10/29/2025

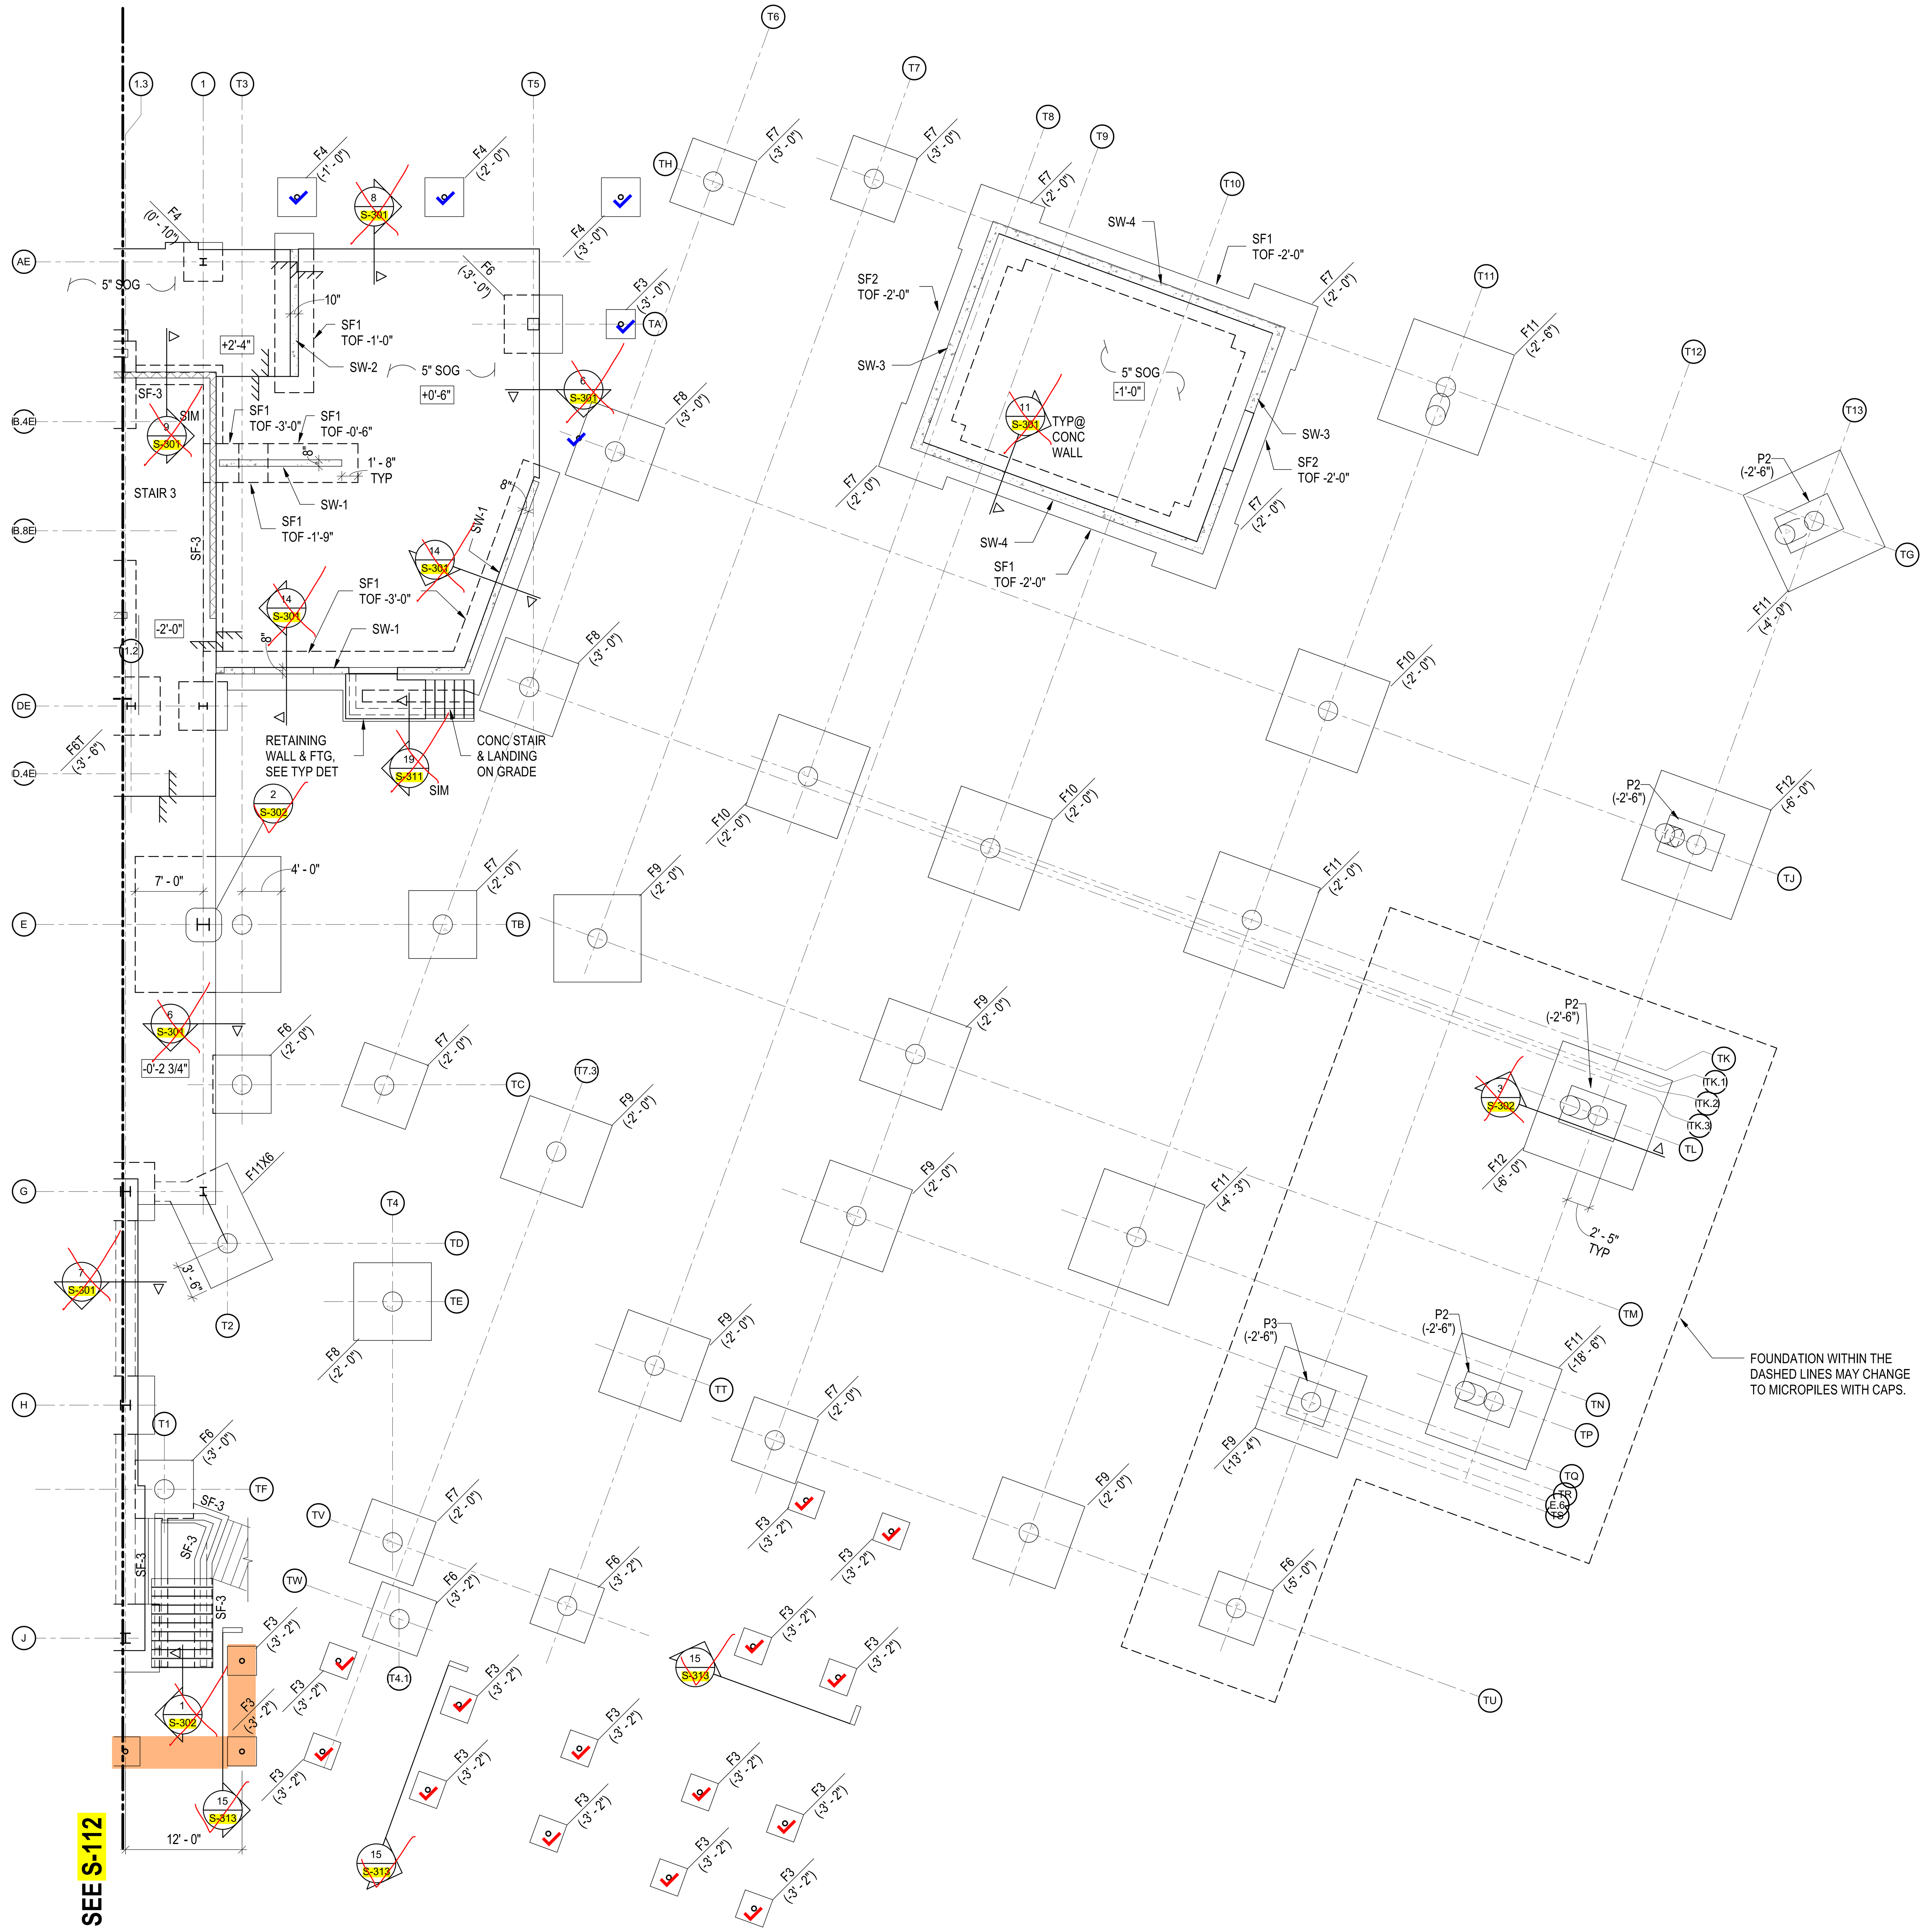

1 **FOUNDATION AND FIRST FLOOR FRAMING PLAN - PART C**

1/8" = 1'-0"

FOUNDATION & FIRST FLOOR FRAMING PLAN NOTES:

1. SEE S-111 FOR FOUNDATION AND FIRST FLOOR FRAMING PLAN NOTES.

NO.	DATE	ISSUE
A	09/30/2025	Permit
	10/29/2025	BID SET

0' 4' 8' 16' 24'

SCALE : 1/8" = 1'-0"

SEAL

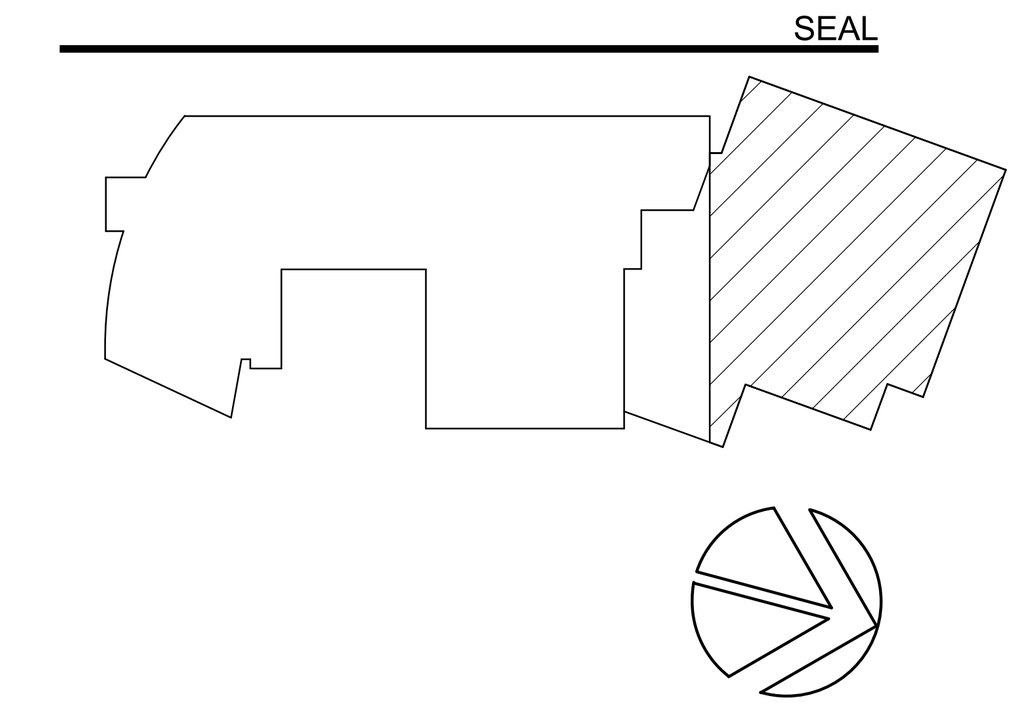

KEY PLAN

PERKINS EASTMAN
One Thomas Circle NW, Suite 200
Washington, DC 20005
T. +1 202 861 1325
F. +1 202 861 1326

Owner:
Sidwell Friends School
3825 Wisconsin Ave NW, Washington DC 20016

Construction Manager:
Advanced Project Management, Inc (APM)
4530 Walney Rd, Ste 202, Chantilly, VA 20151

Civil / Site:
Bowman Consulting Group, Ltd
888 17th St NW, Suite 510, Washington, DC 20006

Landscape:
Natural Resources Design, Inc (NRD)
1009 Shepherd Street NE, Washington, DC 20017

Structural:
Yun Associates LLC
1050 Connecticut Ave NW, Suite 500, Washington, DC 20036

MEP / FP / Lighting:
CMTA Inc
220 Lexington Green Circle, Suite 600, Lexington, KY 40503

AV / IT / Telecom / Security:
Educational Systems Planning (ESP)
2448 Holly Avenue, Suite 302, Annapolis, MD 21401

Food Service
Nyikos-Garcia Foodservice Design, Inc
7146 Starmount Way, New Market, MD 21774

Accessibility Consultant:
Galbo Wolf LLC
4410 Massachusetts Ave NW, #240, Washington, DC 20016

Acoustics:
Polysonics Corp
555 Hospital Drive, Warrenton, VA 20186

Building Envelope Consultant:
Sustainable Building Partners LLC
2701 Prosperity Ave, Suite 105, Fairfax, VA 22031

Code Consultant:
Campbell Code Consulting LLC
7834 Taggart Ct, Elkridge, MD 21075

Specifications:

PROJECT TITLE:

SIDWELL FRIENDS NEW LOWER SCHOOL AT DC CAMPUS

3825 WISCONSIN AVE NW
WASHINGTON, DC 20016

PROJECT No: 2025008

DRAWING TITLE:

FDN AND 1ST FLOOR FRAMING PLAN - PART C

SCALE: As indicated

S-113

BID SET
10/29/2025

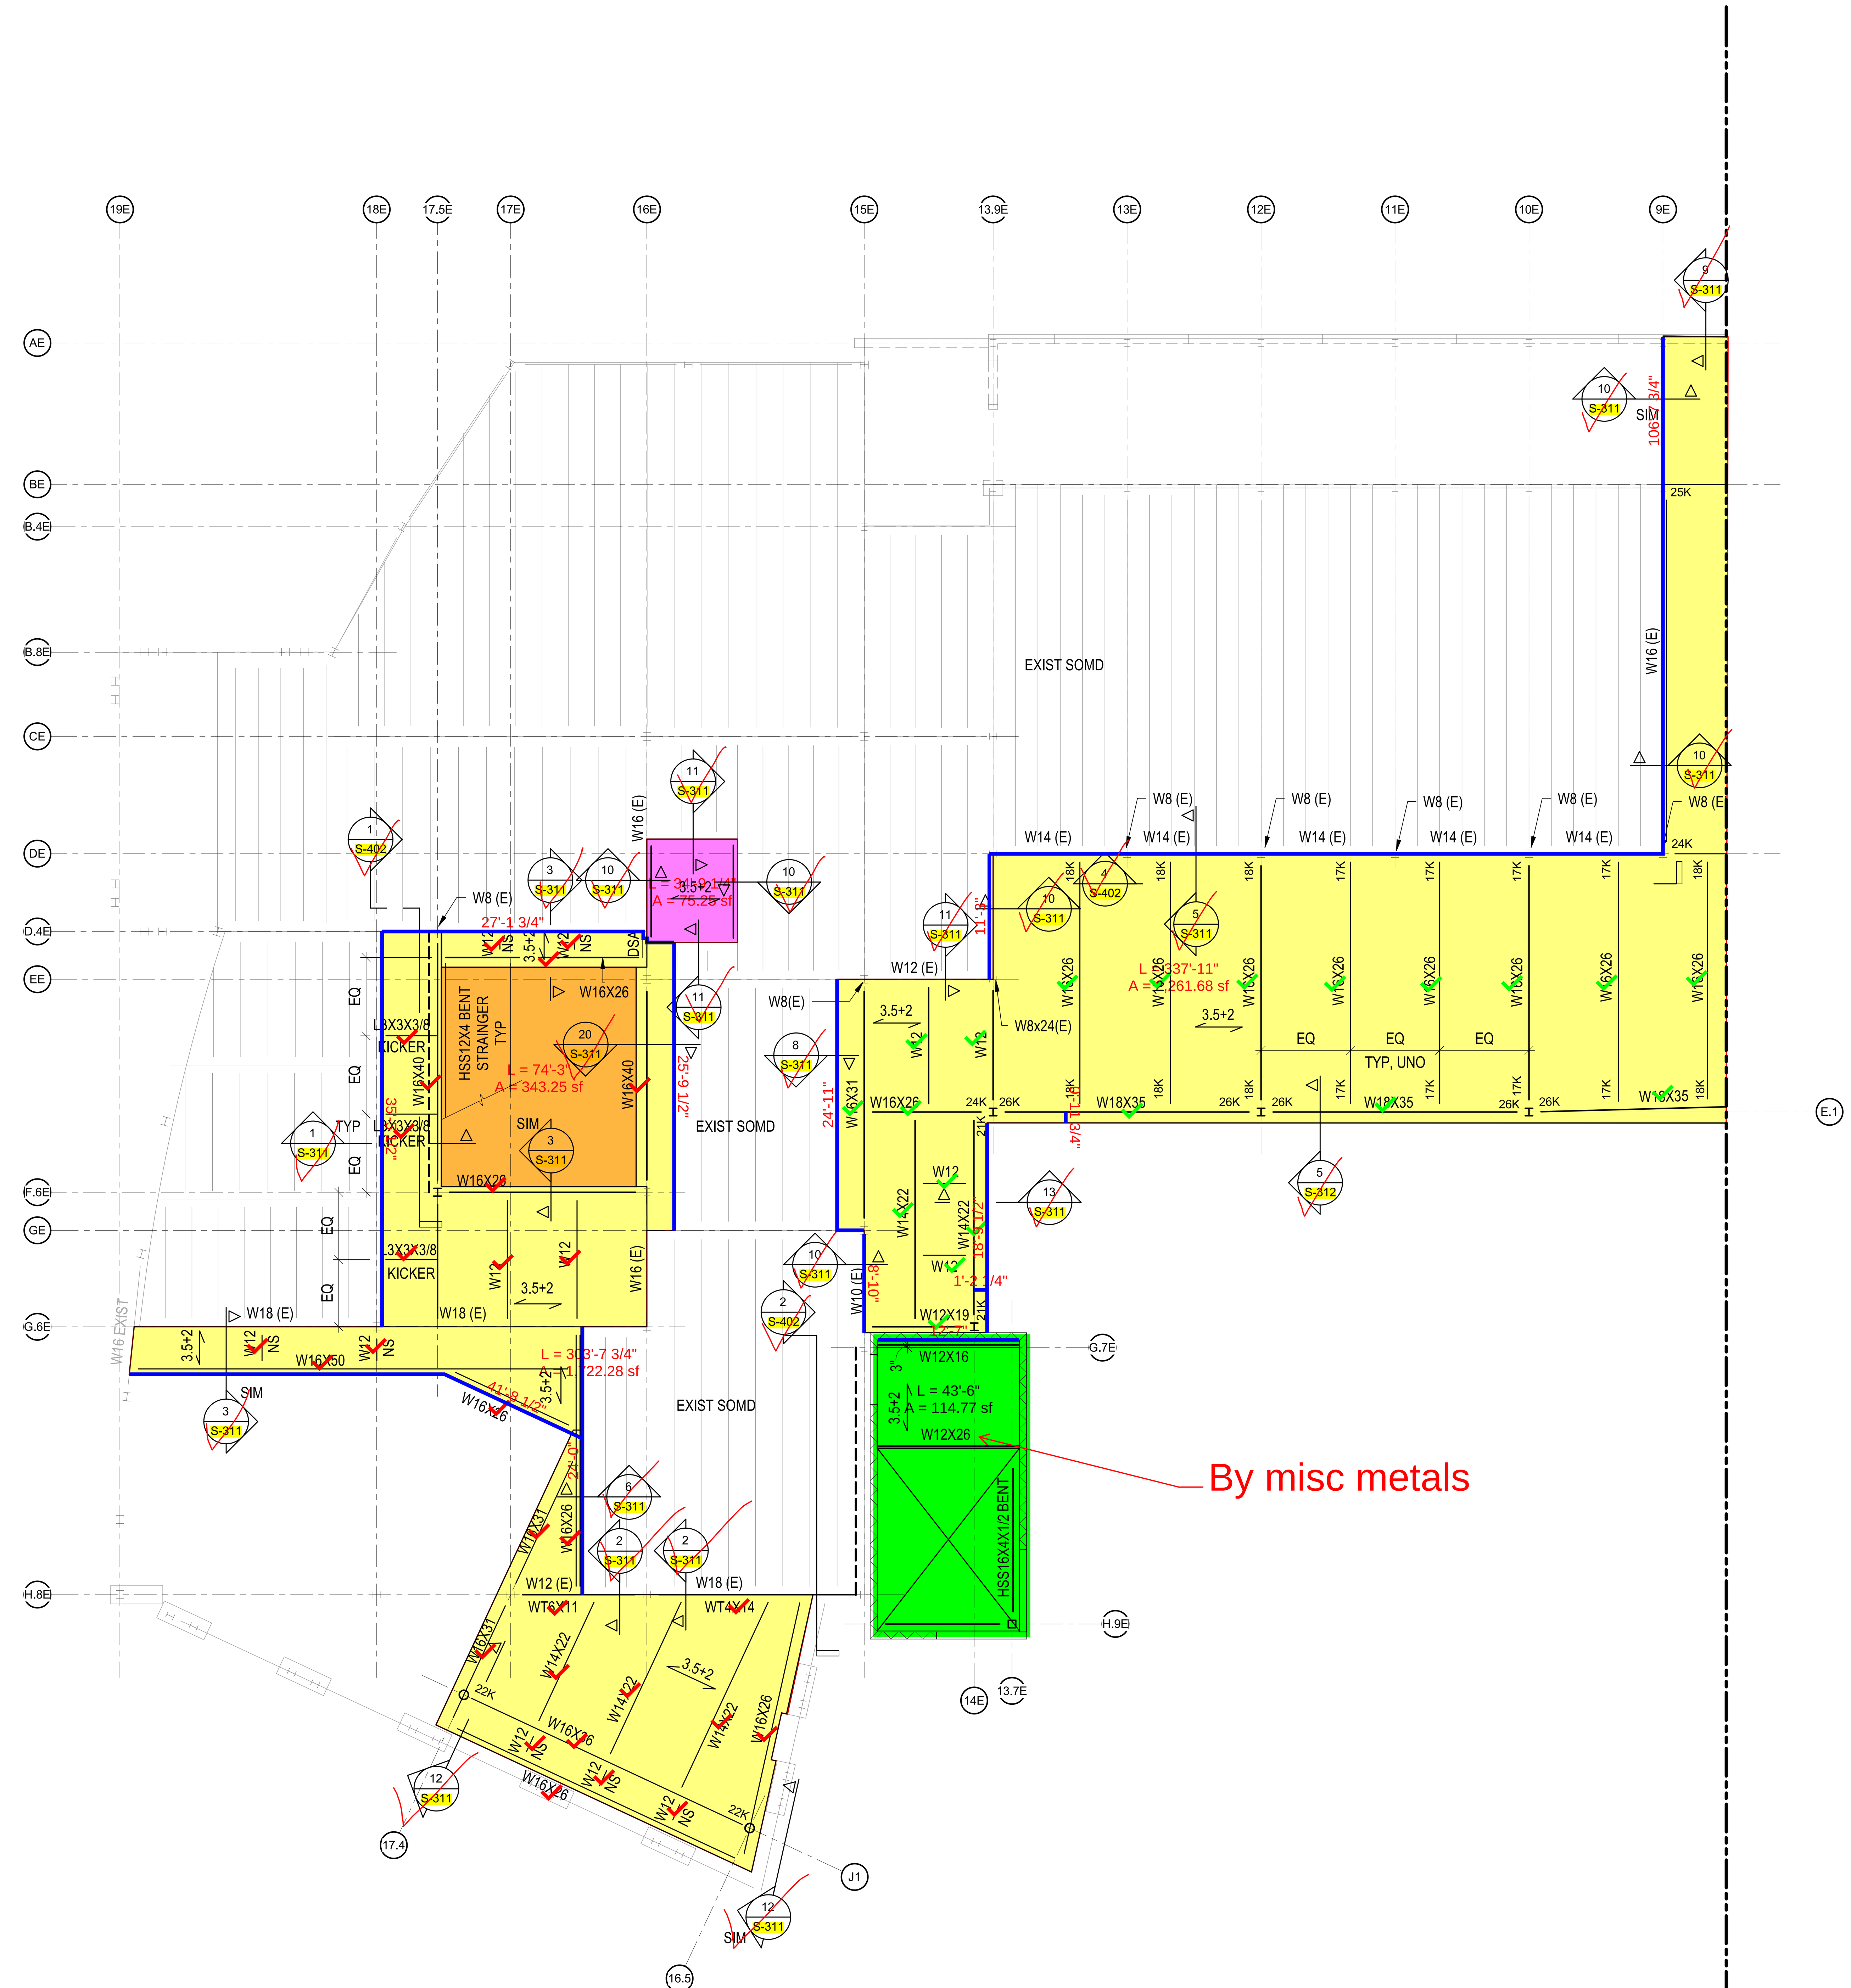

SEE S-122

1 **SECOND FLOOR FRAMING PLAN - PART A**
1/8" = 1'-0"

SECOND FLOOR FRAMING PLAN NOTES:

1. TOP OF SLAB IS AT REFERENCE ELEVATION OF 12'-8 1/8", CORRESPONDING TO TRUE ELEVATION OF 402'-10 1/2" UNO THUS $\boxed{\text{+/-X'-X"}}$ ON PLAN RELATIVE TO REFERENCE ELEVATION.
2. TOP OF STEEL IS AT BOTTOM OF DECK UNO THUS [+/- X'-X"] RELATIVE TO REFERENCE ELEVATION.
3. THE FOLLOWING SYMBOLS AND DESIGNATIONS APPLY TO THE ENTIRE PROJECT:

3.5+2	STANDS FOR THE METAL DECK DIRECTION OF 3-1/2" LIGHT WEIGHT CONCRETE ON 2" 20-GAGE COMPOSITE DECK REINFORCED WITH 6x6-W2.9xW2.9 WWF
3.5+2N	STANDS FOR THE METAL DECK DIRECTION OF 3-1/2" NORMAL WEIGHT CONCRETE ON 2" 20-GAGE COMPOSITE DECK REINFORCED WITH 6x6-W2.9xW2.9 WWF
2+9/16	STANDS FOR THE FORM DECK DIRECTION OF 2-1/2" NORMAL WEIGHT CONCRETE ON 9/16" FORM DECK REINFORCED WITH 6x6-W2.9xW2.9 WWF
3	STANDS FOR SPAN DIRECTION OF 3" THICK 19-GAGE ROOF DECK
3T	STANDS FOR SPAN DIRECTION OF 3" THICK 16-GAGE ROOF DECK
A	STANDS FOR SPAN DIRECTION OF 2" THICK 20-GAGE ACOUSTIC ROOF DECK
- - -	STANDS FOR STEEL BRACING
W12	STANDS FOR W12X16
W10	STANDS FOR W10X15
NS	NO STUDS
W8 (E)	STANDS FOR EXISTING W8 SECTION. EXACT SIZES SHALL BE VIF.

4. PROVIDE MINIMUM ONE STUD @ 12" OC FOR ALL BEAMS BELOW SLAB ON METAL DECK UNO. STUDS ARE NOT REQUIRED FOR BEAMS BELOW ROOF DECK AND CANTILEVER BEAMS.
5. PROVIDE STEEL LOOSE LINTELS PER GENERAL NOTES.
6. SEE ARCHITECTURAL DRAWINGS FOR GRID LINE DIMENSIONS AND OTHER DIMENSIONS THAT LOCATE ITEMS SUCH AS EDGE OF SLABS, OPENINGS, DEPRESSIONS AND CURBS.

NO.	DATE	ISSUE
A	09/30/2025	Permit
	10/29/2025	BID SET

0' 4' 8' 16' 24'
SCALE : 1/8" = 1'-0"

SEAL

KEY PLAN

PERKINS EASTMAN
One Thomas Circle NW, Suite 200
Washington, DC 20005
T: +1 202 861 1325
F: +1 202 861 1326

Owner:
Sidwell Friends School
3825 Wisconsin Ave NW, Washington DC 20016

Construction Manager:
Advanced Project Management, Inc (APM)
4530 Walney Rd, Ste 202, Chantilly, VA 20151

Civil / Site:
Bowman Consulting Group, Ltd
888 17th St NW, Suite 510, Washington, DC 20006

Landscape:
Natural Resources Design, Inc (NRD)
1009 Shepherd Street NE, Washington, DC 20017

Structural:
Yun Associates LLC
1050 Connecticut Ave NW, Suite 500, Washington, DC 20036

MEP / FP / Lighting:
CMTA Inc
220 Lexington Green Circle, Suite 600, Lexington, KY 40503

AV / IT / Telecom / Security:
Educational Systems Planning (ESP)
2448 Holly Avenue, Suite 302, Annapolis, MD 21401

Food Service
Nyikos-Garcia Foodservice Design, Inc
7146 Starmount Way, New Market, MD 21774

Accessibility Consultant:
Galbo Wolf LLC
4410 Massachusetts Ave NW, #240, Washington, DC 20016

Acoustics:
Polysonics Corp
555 Hospital Drive, Warrenton, VA 20186

Building Envelope Consultant:
Sustainable Building Partners LLC
2701 Prosperity Ave, Suite 105, Fairfax, VA 22031

Code Consultant:
Campbell Code Consulting LLC
7834 Taggart Ct, Elkridge, MD 21075

Specifications:

PROJECT TITLE:
SIDWELL FRIENDS NEW LOWER SCHOOL AT DC CAMPUS
3825 WISCONSIN AVE NW
WASHINGTON, DC 20016

PROJECT No: 2025008

DRAWING TITLE:
SECOND FLOOR FRAMING PLAN - PART A

SCALE: As indicated

S-121

BID SET
10/29/2025

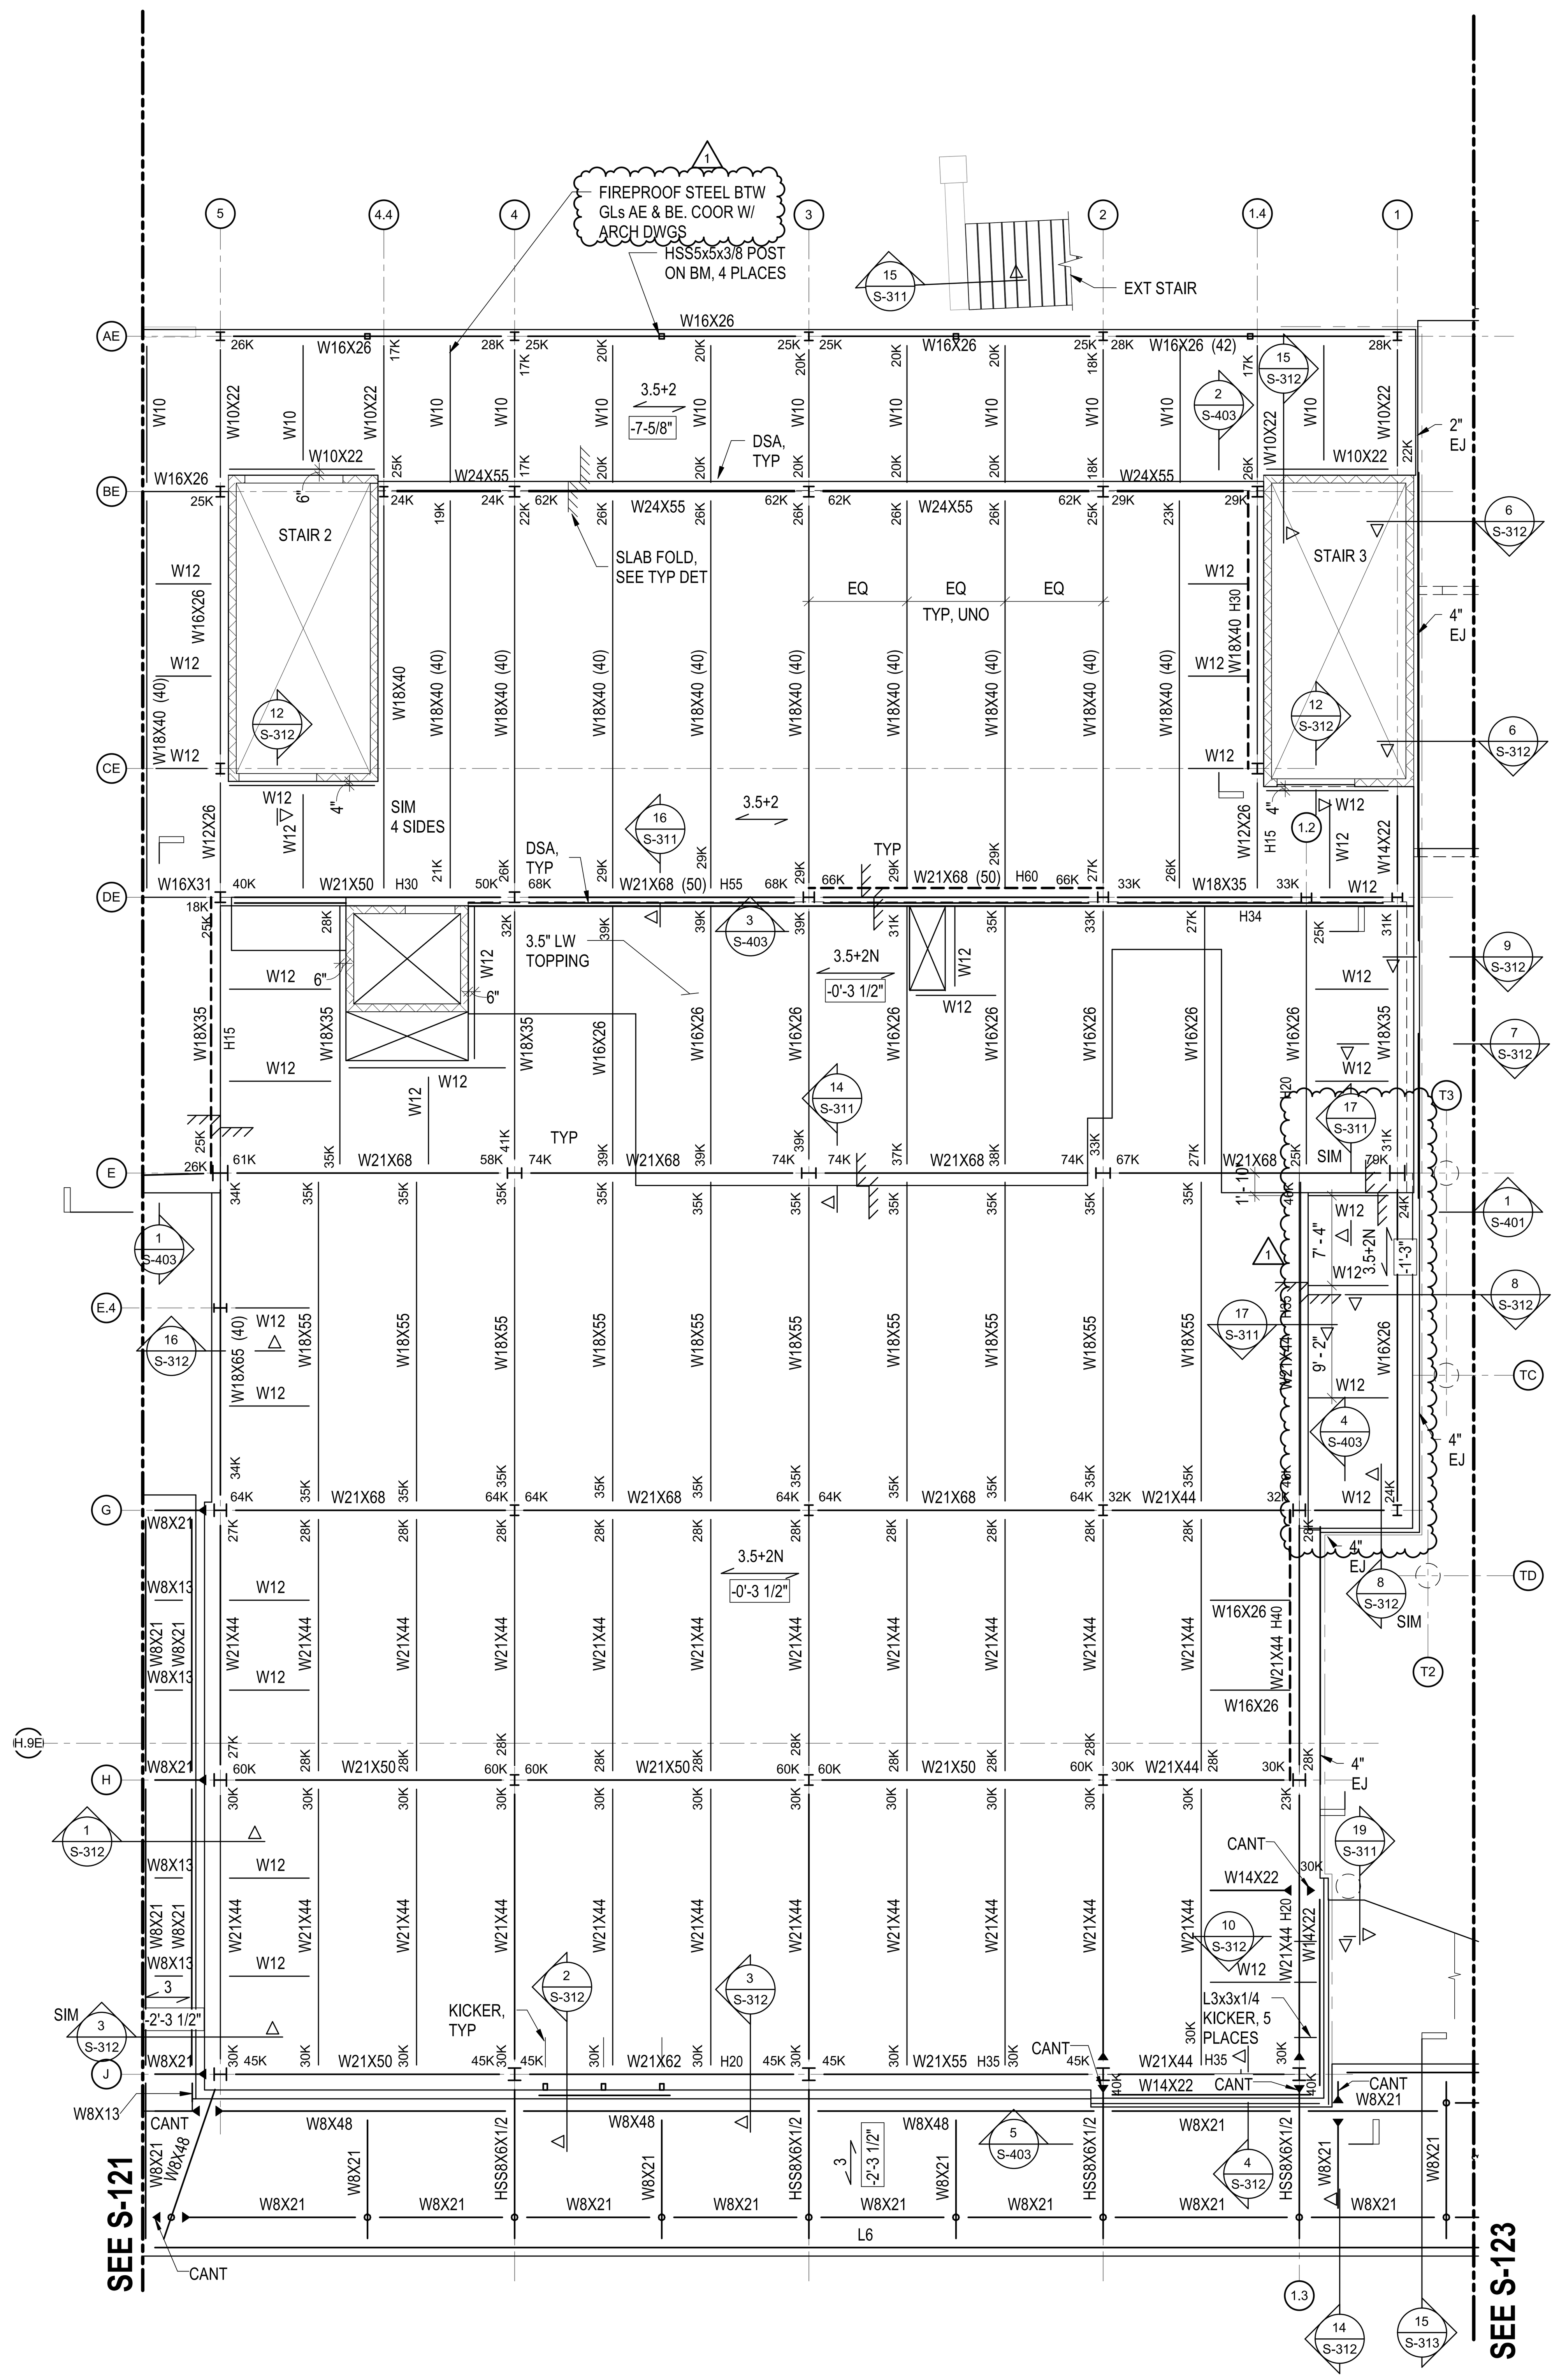

1 **SECOND FLOOR FRAMING PLAN - PART B**

1/8" = 1'-0"

SECOND FLOOR FRAMING PLAN NOTES:

1. SEE S-121 FOR FRAMING PLAN NOTES.
2. TOPPING SLAB SHALL BE LIGHT WEIGHT CONCRETE WITH fy = 3,500 PSI ATA 28 DAYS AND REINFORCED WITH 6x6W2.9xW2.9 WWF

Autodesk Docs://Sidwell Lower School/Sidwell Lower School_ST_R24.rvt
11/12/2025 4:40:06 PM

NO.	DATE	ISSUE
A	09/30/2025	Permit
	10/29/2025	BID SET
1	11/12/2025	BID ADDENDUM 1

0' 4' 8' 16' 24'

SCALE : 1/8" = 1'-0"

SEAL

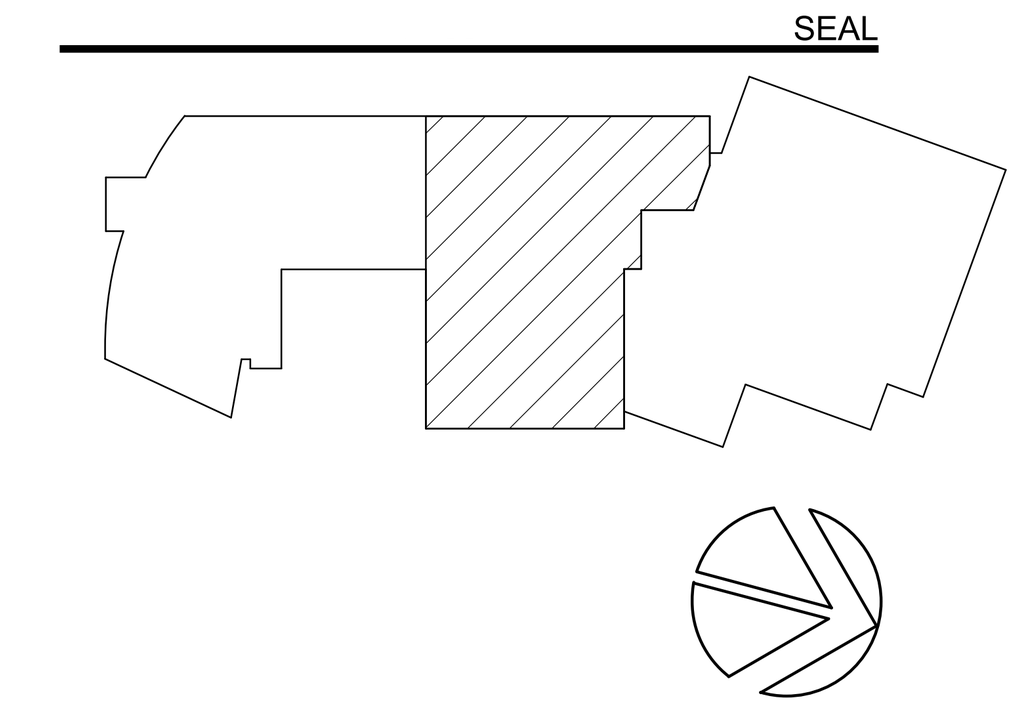

KEY PLAN

PERKINS EASTMAN
One Thomas Circle NW, Suite 200
Washington, DC 20005
T. +1 202 861 1325
F. +1 202 861 1326

Owner:
Sidwell Friends School
3825 Wisconsin Ave NW, Washington DC 20016

Construction Manager:
Advanced Project Management, Inc (APM)
4530 Walney Rd, Ste 202, Chantilly, VA 20151

Civil / Site:
Bowman Consulting Group, Ltd
888 17th St NW, Suite 510, Washington, DC 20006

Landscape:
Natural Resources Design, Inc (NRD)
1009 Shepherd Street NE, Washington, DC 20017

Structural:
Yun Associates LLC
1050 Connecticut Ave NW, Suite 500, Washington, DC 20036

MEP / FP / Lighting:
CMTA Inc
220 Lexington Green Circle, Suite 600, Lexington, KY 40503

AV / IT / Telecom / Security:
Educational Systems Planning (ESP)
2448 Holly Avenue, Suite 302, Annapolis, MD 21401

Food Service
Nyikos-Garcia Foodservice Design, Inc
7146 Starmount Way, New Market, MD 21774

Accessibility Consultant:
Galbo Wolf LLC
4410 Massachusetts Ave NW, #240, Washington, DC 20016

Acoustics:
Polysonics Corp
555 Hospital Drive, Warrenton, VA 20186

Building Envelope Consultant:
Sustainable Building Partners LLC
2701 Prosperity Ave, Suite 105, Fairfax, VA 22031

Code Consultant:
Campbell Code Consulting LLC
7834 Taggart Ct, Elkridge, MD 21075

Specifications:

PROJECT TITLE:

SIDWELL FRIENDS NEW LOWER SCHOOL AT DC CAMPUS

3825 WISCONSIN AVE NW
WASHINGTON, DC 20016

PROJECT No: 2025008

DRAWING TITLE:

SECOND FLOOR FRAMING PLAN - PART B

SCALE: As indicated

S-122

ISSUED FOR BID
10/29/2025

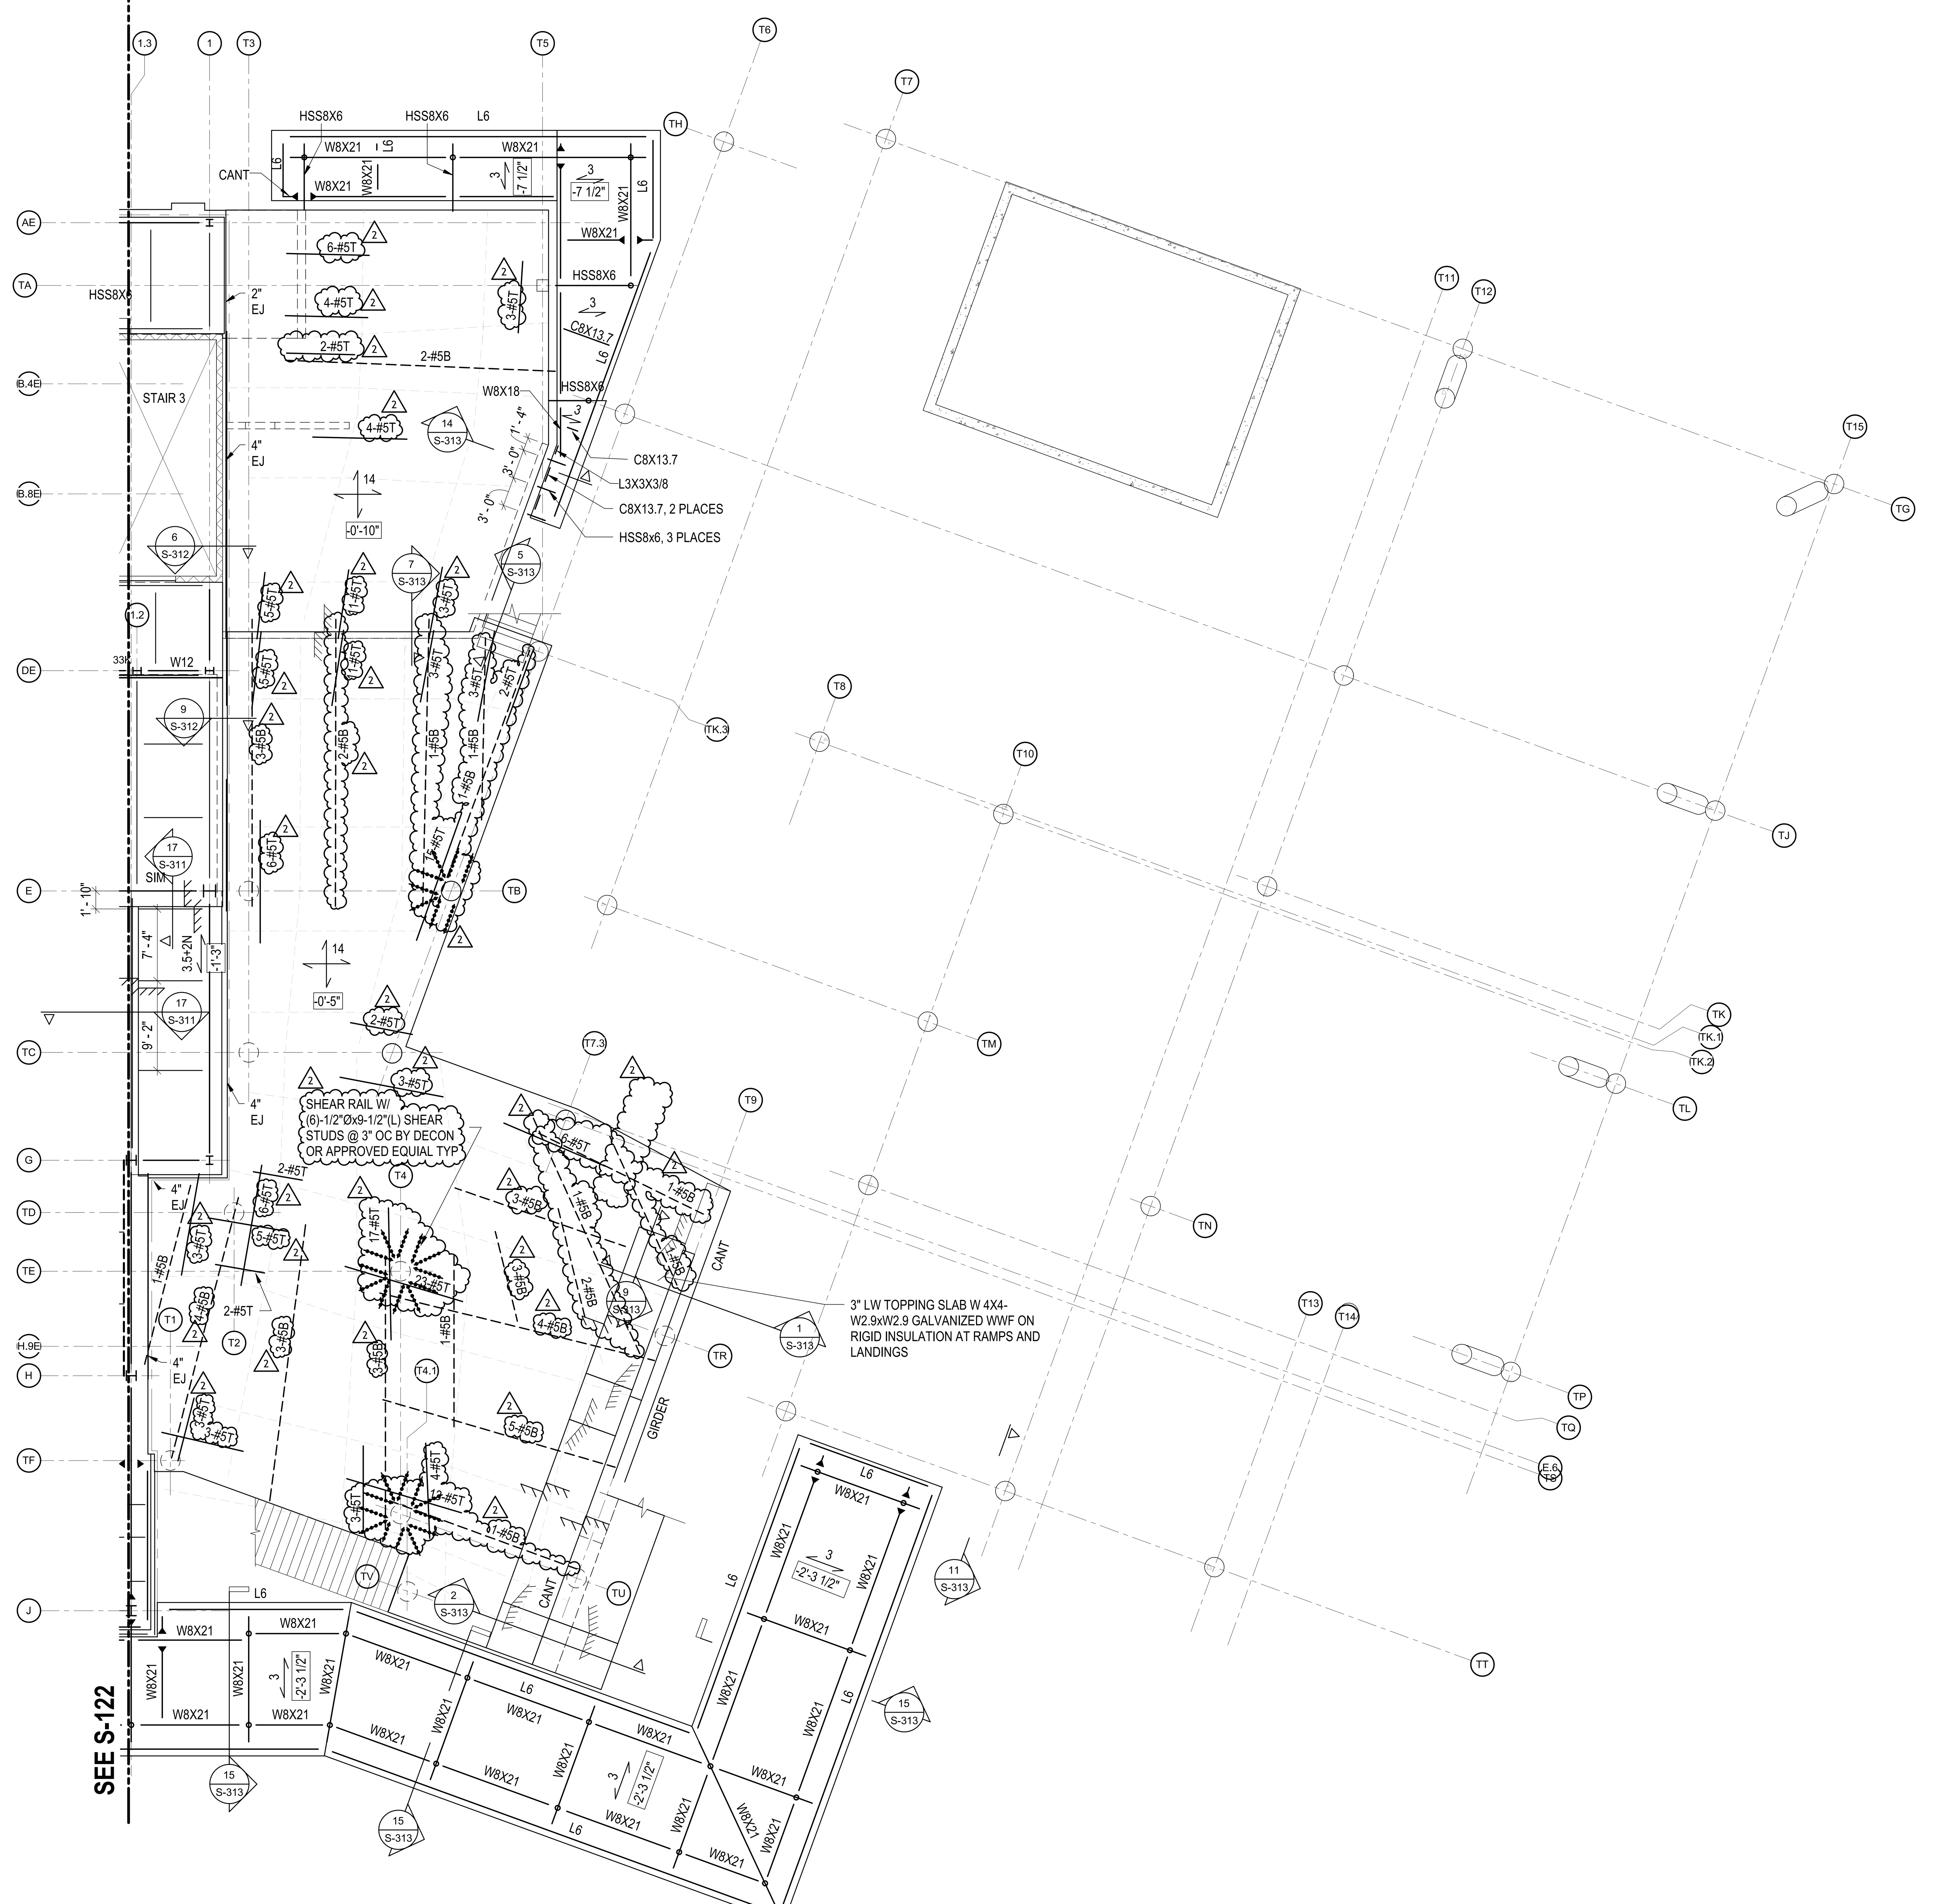

1 SECOND FLOOR FRAMING PLAN - PART C

1/8" = 1'-0"

SECOND FLOOR FRAMING PLAN NOTES:

1. REFERENCE ELEVATION IS THE SECOND FLOOR ELEVATION OF 402'-10 1/2".
2. TOP OF STRUCTURAL SLAB IS 6" BELOW REFERENCE ELEVATION UNO THUS $\boxed{\text{+/-X'-X"}}$ RELATIVE TO REFERENCE ELEVATION.
3. FINISH FLOOR OF PLAY DECK CONSISTS OF SLOPED NOMINAL 5" NORMAL WEIGHT CONCRETE TOPPING SLAB REINFORCED WITH 6x6 -W2.9xW2.9 GALVANIZED WWF. WWF SHALL BE HELD SECURELY IN PLACE AT MID DEPTH OF THE TOPPING SLAB BY GALVANIZED CHAIRS AT NO MORE THAN 3 FEET ON CENTER. SEE ARCHITECTURAL DRAWINGS FOR SLOPE.
4. 14 STANDS FOR 14" THICK CONCRETE SLAB WITH #6@12" OC TOP AND BOTTOM MAT AND ADDITONAL REINFORCING AS SHOWN ON PLAN.

   3 STANDS FOR SPAN DIRECTION OF 3" THICK 20-GAGE ROOF DECK
5. REBAR NOTED WITH "T" STANDS FOR TOP BARS AND NOTED WITH "B" STANDS FOR BOTTOM BARS. ADDITIONAL REINFORCING SHOWN IN PLAN SUCH AS 6-#6T STANDS FOR 6 #6 BARS AT TOP SPACED EVENLY WITHIN THE RESPECTIVE COLUMN STRIP OR MIDDLE STRIP. ALL TOP BARS TERMINATED AT EDGE OF SLAB SHALL BE HOOKED
6. L6 STANDS FOR L6X6X3/8

   HSS8X6 STANDS FOR HSS8X6X3/8

NO.	DATE	ISSUE
A	09/30/2025	Permit
	10/29/2025	BID SET
2	11/17/2025	BID ADDENDUM 2

0' 4' 8' 16' 24'

SCALE : 1/8" = 1'-0"

SEAL

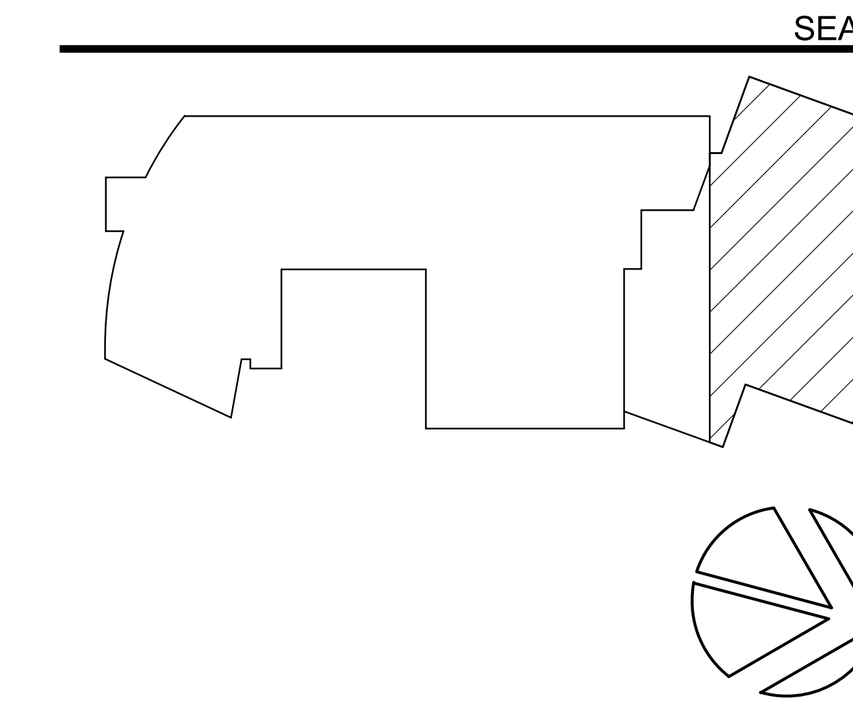

KEY PLAN

PERKINS EASTMAN
One Thomas Circle NW, Suite 200
Washington, DC 20005
T. +1 202 861 1325
F. +1 202 861 1326

Owner:
Sidwell Friends School
3825 Wisconsin Ave NW, Washington DC 20016

Construction Manager:
Advanced Project Management, Inc (APM)
4530 Walney Rd, Ste 202, Chantilly, VA 20151

Civil / Site:
Bowman Consulting Group, Ltd
888 17th St NW, Suite 510, Washington, DC 20006

Landscape:
Natural Resources Design, Inc (NRD)
1009 Shepherd Street NE, Washington, DC 20017

Structural:
Yun Associates LLC
1050 Connecticut Ave NW, Suite 500, Washington, DC 20036

MEP / FP / Lighting:
CMTA Inc
220 Lexington Green Circle, Suite 600, Lexington, KY 40503

AV / IT / Telecom / Security:
Educational Systems Planning (ESP)
2448 Holly Avenue, Suite 302, Annapolis, MD 21401

Food Service
Nyikos-Garcia Foodservice Design, Inc
7146 Starmount Way, New Market, MD 21774

Accessibility Consultant:
Galbo Wolf LLC
4410 Massachusetts Ave NW, #240, Washington, DC 20016

Acoustics:
Polysonics Corp
555 Hospital Drive, Warrenton, VA 20186

Building Envelope Consultant:
Sustainable Building Partners LLC
2701 Prosperity Ave, Suite 105, Fairfax, VA 22031

Code Consultant:
Campbell Code Consulting LLC
7834 Taggart Ct, Elkridge, MD 21075

Specifications:

PROJECT TITLE:

SIDWELL FRIENDS NEW LOWER SCHOOL AT DC CAMPUS

3825 WISCONSIN AVE NW
WASHINGTON, DC 20016

PROJECT No: 2025008

DRAWING TITLE:

SECOND FLOOR FRAMING PLAN - PART C

SCALE: As indicated

S-123

ISSUED FOR BID
10/29/2025

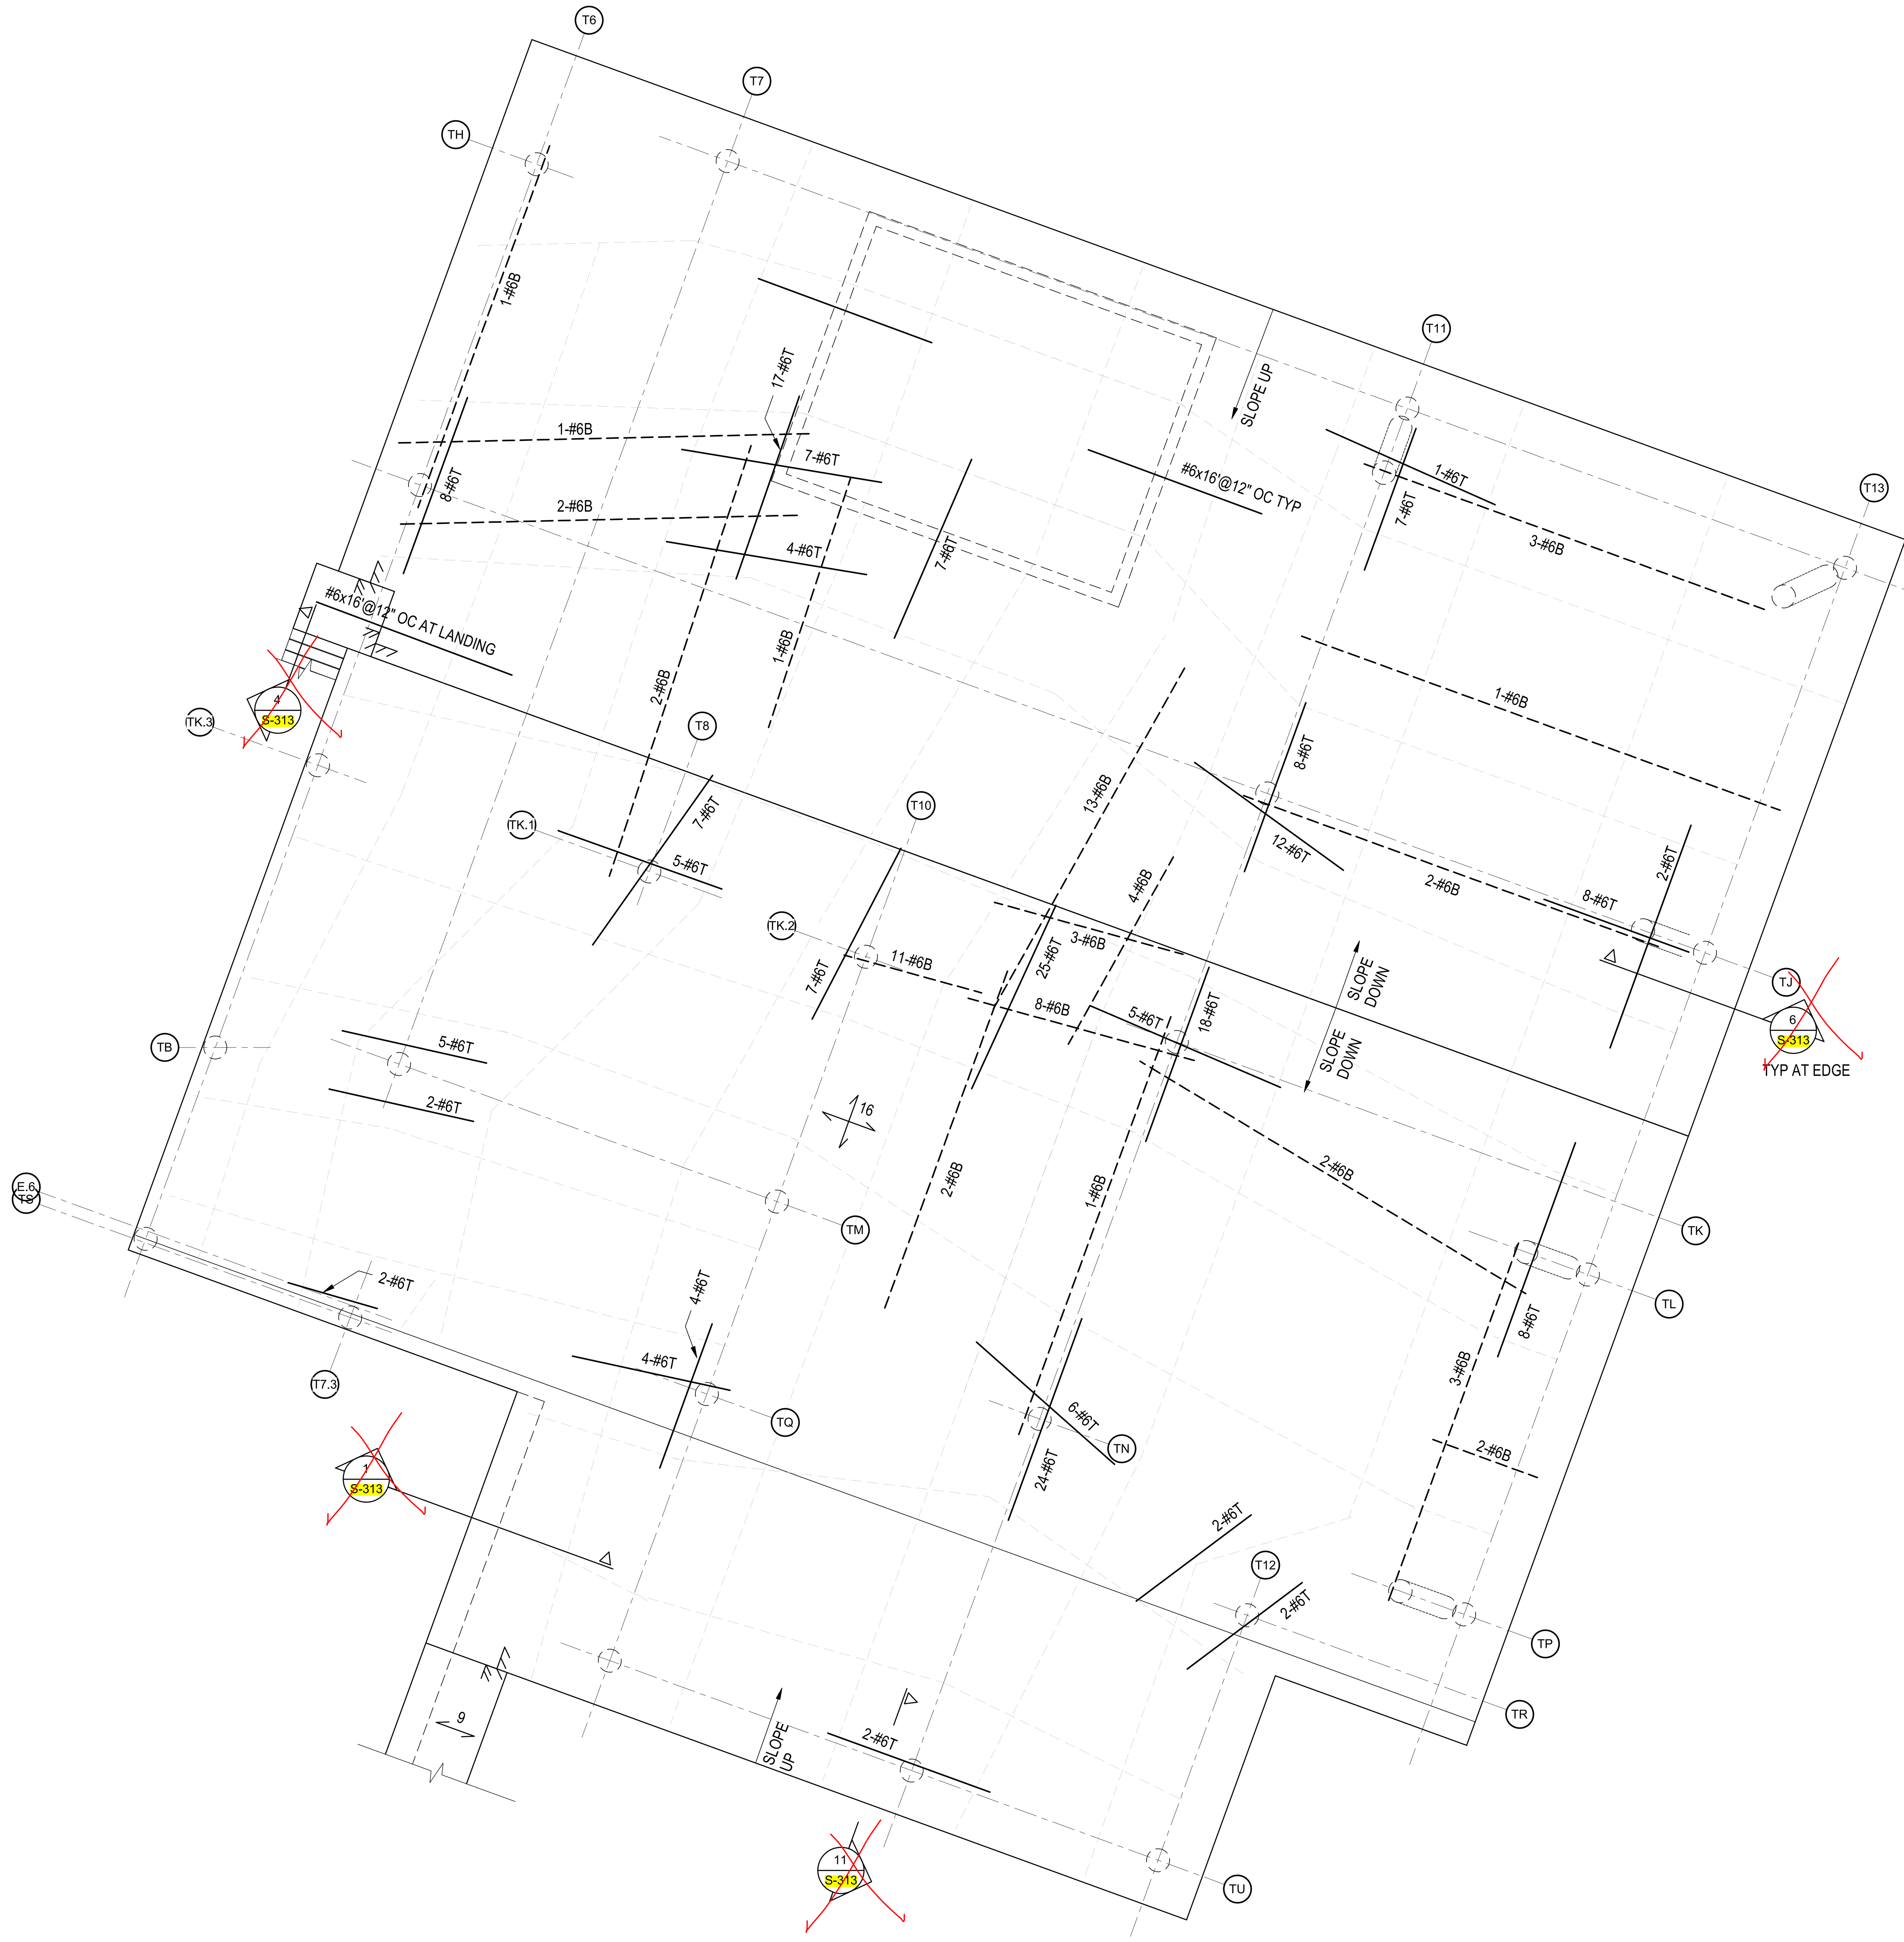

1 **TENNIS DECK FRAMING PLAN**
1/8" = 1'-0"

TENNIS DECK FRAMING PLAN NOTES:

1. REFERENCE ELEVATION IS TENNIS DECK HIGH POINT FINISH FLOOR ELEVATION AT 409'-6". FINISH FLOOR SLOPES AT 1 OVER 120. ELEVATION NOTED THUS $\boxed{\text{+/-X'-X"}}$ IS RELATIVE TO REFERENCE ELEVATION.

2. FINISH FLOOR CONSISTS OF NOMINAL 3" NORMAL WEIGHT CONCRETE TOPPING SLAB REINFORCED WITH 4x4 W2.9xW2.9 GALVANIZED WWF. WWF SHALL BE HELD SECURELY IN PLACE AT MID DEPTH OF THE TOPPING SLAB BY GALVANIZED CHAIRS AT NO MORE THAN 3 FEET ON CENTER. COORDINATE WITH TENNIS DECK VENDOR FOR CONTROL JOINT LAYOUT AND SUBMIT FOR APPROVAL PRIOR TO PLACEMENT.

3. 16 — STAND FOR 16" THICK NORMAL WEIGHT CONCRETE SLAB REINFORCED WITH #6@12" OC TOP AND BOTTOM MAT. ADDITONAL REINFORCING ARE SHOWN ON PLAN. ALL REINFORCING BARS SHALL BE EPOXY COATED.

   9 — STAND FOR 9" THICK CONCRETE SLAB REINFORCED WITH #6@12" OC AT TOP AND #4@12" OC AT BOTTOM IN THE DIRECTION OF ARROW, AND #4@12" OC T&B IN THE PERPENDICULAR DIRECTION. ALL REINFORCING BARS SHALL BE EPOXY COATED.

4. REBAR NOTED WITH "T" STANDS FOR TOP BARS AND NOTED WITH "B" STANDS FOR BOTTOM BARS. ADDITIONAL REINFORCING SHOWN IN PLAN SUCH AS 6-#6T STANDS FOR 6 #6 BARS AT TOP SPACED EVENLY WITHIN THE RESPECTIVE COLUMN STRIP OR MIDDLE STRIP. ALL TOP BARS TERMINATED AT EDGE OF SLAB SHALL BE HOOKED.

5. SEE ARCHITECTURAL DRAWINGS FOR GRID LINE DIMENSIONS AND OTHER DIMENSIONS THAT LOCATE ITEMS SUCH AS EDGE OF SLABS, EMBEDS, OPENINGS, DEPRESSIONS AND CURBS.

6. CONTRACTOR SHALL INSTALL SLEEVES AND CENTER ANCHORS FOR TENNIS NETS BEFORE CONCRETE PLACEMENT . SEE ARCHITECTURAL DRAWINGS FOR LOCATION.

NO.	DATE	ISSUE
A	09/30/2025	Permit
	10/29/2025	BID SET

0' 4' 8' 16' 24'
SCALE : 1/8" = 1'-0"

SEAL

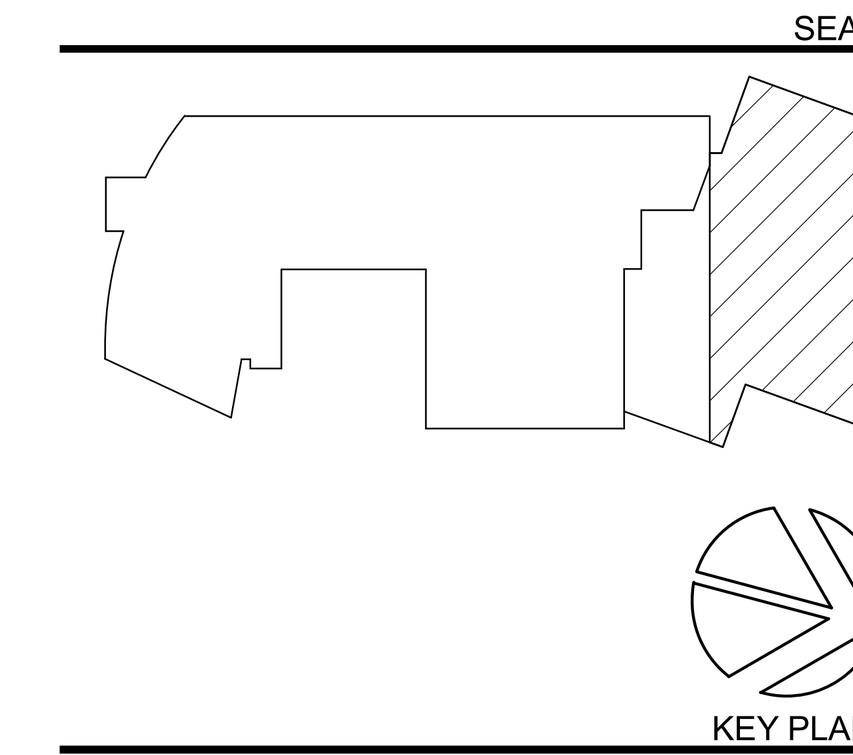

PERKINS EASTMAN
One Thomas Circle NW, Suite 200
Washington, DC 20005
T. +1 202 861 1325
F. +1 202 861 1326

Owner:
Sidwell Friends School
3825 Wisconsin Ave NW, Washington DC 20016

Construction Manager:
Advanced Project Management, Inc (APM)
4530 Walney Rd, Ste 202, Chantilly, VA 20151

Civil / Site:
Bowman Consulting Group, Ltd
888 17th St NW, Suite 510, Washington, DC 20006

Landscape:
Natural Resources Design, Inc (NRD)
1009 Shepherd Street NE, Washington, DC 20017

Structural:
Yun Associates LLC
1050 Connecticut Ave NW, Suite 500, Washington, DC 20036

MEP / FP / Lighting:
CMTA Inc
220 Lexington Green Circle, Suite 600, Lexington, KY 40503

AV / IT / Telecom / Security:
Educational Systems Planning (ESP)
2448 Holly Avenue, Suite 302, Annapolis, MD 21401

Food Service
Nyikos-Garcia Foodservice Design, Inc
7146 Starmount Way, New Market, MD 21774

Accessibility Consultant:
Galbo Wolf LLC
4410 Massachusetts Ave NW, #240, Washington, DC 20016

Acoustics:
Polysonics Corp
555 Hospital Drive, Warrenton, VA 20186

Building Envelope Consultant:
Sustainable Building Partners LLC
2701 Prosperity Ave, Suite 105, Fairfax, VA 22031

Code Consultant:
Campbell Code Consulting LLC
7834 Taggart Ct, Elkridge, MD 21075

Specifications:

PROJECT TITLE:

SIDWELL FRIENDS NEW LOWER SCHOOL AT DC CAMPUS

3825 WISCONSIN AVE NW
WASHINGTON, DC 20016

PROJECT No: 2025008

DRAWING TITLE:

TENNIS DECK FRAMING PLAN

SCALE: As indicated

S-124

BID SET
10/29/2025

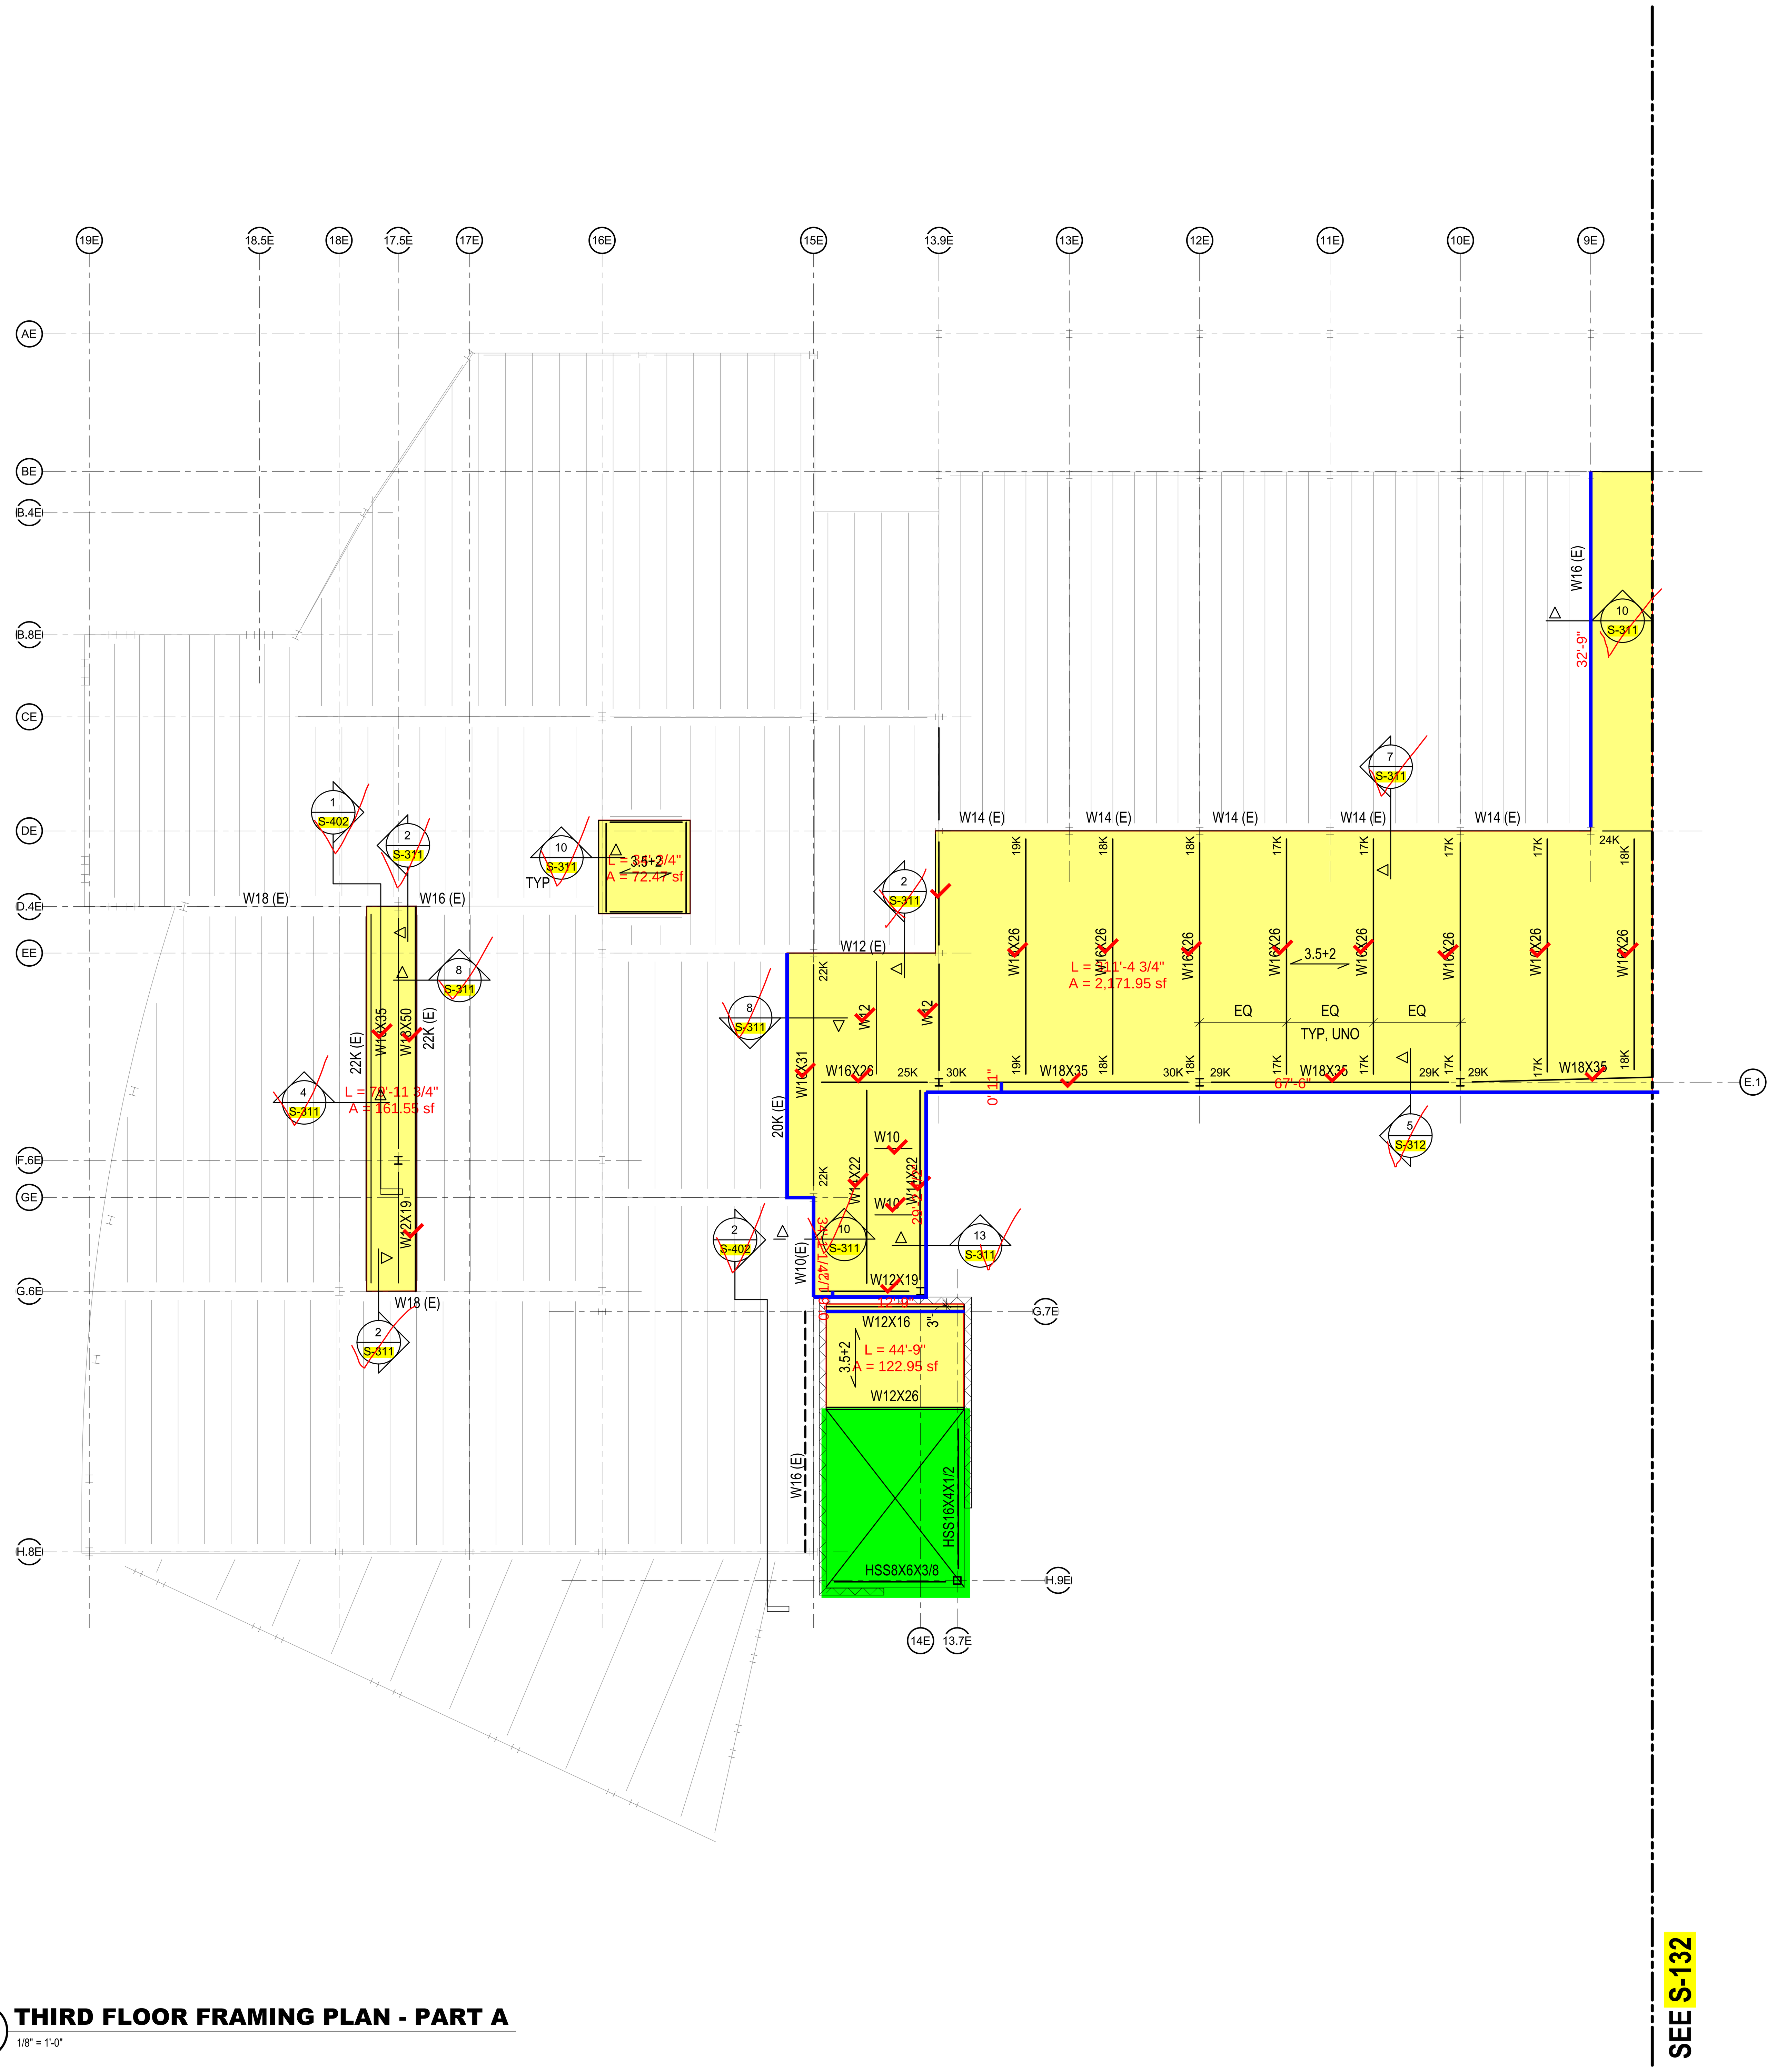

1 **THIRD FLOOR FRAMING PLAN - PART A**

1/8" = 1'-0"

Autodesk Docs://Sidwell Lower School/Sidwell Lower School_ST_R24.rvt
10/28/2025 10:14:35 AM

THIRD FLOOR FRAMING PLAN NOTES:

1. TOP OF SLAB IS AT REFERENCE ELEVATION OF 25'-4", CORRESPONDING TO TRUE ELEVATION OF 415'-6 3/8" UNO THUS +/-X'-X" ON PLAN RELATIVE TO REFERENCE ELEVATION.
2. TOP OF STEEL IS AT BOTTOM OF DECK UNO THUS [+/- X'-X"] RELATIVE TO REFERENCE ELEVATION.
3. THE FOLLOWING SYMBOLS AND DESIGNATIONS APPLY TO THE ENTIRE PROJECT:

3.5+2	STANDS FOR THE METAL DECK DIRECTION OF 3-1/2" LIGHTWEIGHT CONCRETE ON 2" THICK 20-GAGE COMPOSITE DECK REINFORCED WITH 6x6-W2.9xW2.9 WWF
3	STANDS FOR SPAN DIRECTION OF 3" THICK 19-GAGE ROOF DECK
– – – –	STANDS FOR STEEL BRACING
W12	STANDS FOR W12X16

4. PROVIDE MINIMUM ONE STUD @ 12" OC FOR ALL BEAMS BELOW SLAB ON METAL DECK UNO.
5. PROVIDE STEEL LOOSE LINTELS PER GENERAL NOTES.
6. SEE ARCHITECTURAL DRAWINGS FOR GRID LINE DIMENSIONS AND OTHER DIMENSIONS THAT LOCATE ITEMS SUCH AS EDGE OF SLABS, OPENINGS, DEPRESSIONS AND CURBS.

NO.	DATE	ISSUE
A	09/30/2025	Permit
	10/29/2025	BID SET

0' 4' 8' 16' 24'
SCALE : 1/8" = 1'-0"

SEAL

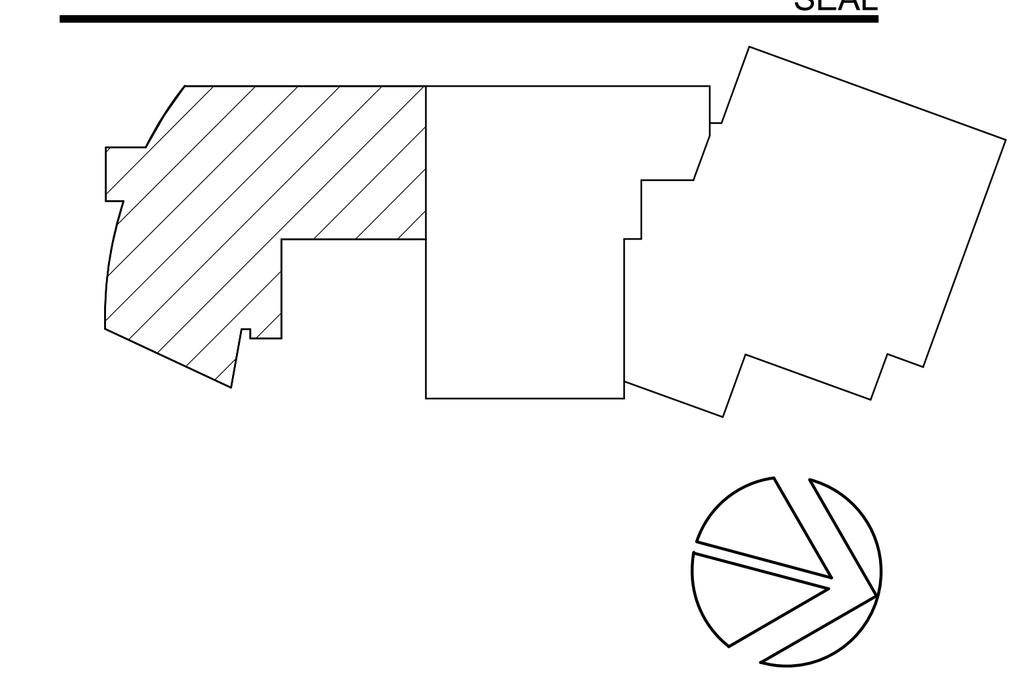

KEY PLAN

PERKINS — EASTMAN
One Thomas Circle NW, Suite 200
Washington, DC 20005
T. +1 202 861 1325
F. +1 202 861 1326

Owner:
Sidwell Friends School
3825 Wisconsin Ave NW, Washington DC 20016

Construction Manager:
Advanced Project Management, Inc (APM)
4530 Walney Rd, Ste 202, Chantilly, VA 20151

Civil / Site:
Bowman Consulting Group, Ltd
888 17th St NW, Suite 510, Washington, DC 20006

Landscape:
Natural Resources Design, Inc (NRD)
1009 Shepherd Street NE, Washington, DC 20017

Structural:
Yun Associates LLC
1050 Connecticut Ave NW, Suite 500, Washington, DC 20036

MEP / FP / Lighting:
CMTA Inc
220 Lexington Green Circle, Suite 600, Lexington, KY 40503

AV / IT / Telecom / Security:
Educational Systems Planning (ESP)
2448 Holly Avenue, Suite 302, Annapolis, MD 21401

Food Service
Nyikos-Garcia Foodservice Design, Inc
7146 Starmount Way, New Market, MD 21774

Accessibility Consultant:
Galbo Wolf LLC
4410 Massachusetts Ave NW, #240, Washington, DC 20016

Acoustics:
Polysonics Corp
555 Hospital Drive, Warrenton, VA 20186

Building Envelope Consultant:
Sustainable Building Partners LLC
2701 Prosperity Ave, Suite 105, Fairfax, VA 22031

Code Consultant:
Campbell Code Consulting LLC
7834 Taggart Ct, Elkridge, MD 21075

Specifications:

PROJECT TITLE:

SIDWELL FRIENDS NEW LOWER SCHOOL AT DC CAMPUS

3825 WISCONSIN AVE NW
WASHINGTON, DC 20016

PROJECT No: 2025008

DRAWING TITLE:

THIRD FLOOR FRAMING PLAN - PART A

SCALE: As indicated

S-131

BID SET
10/29/2025

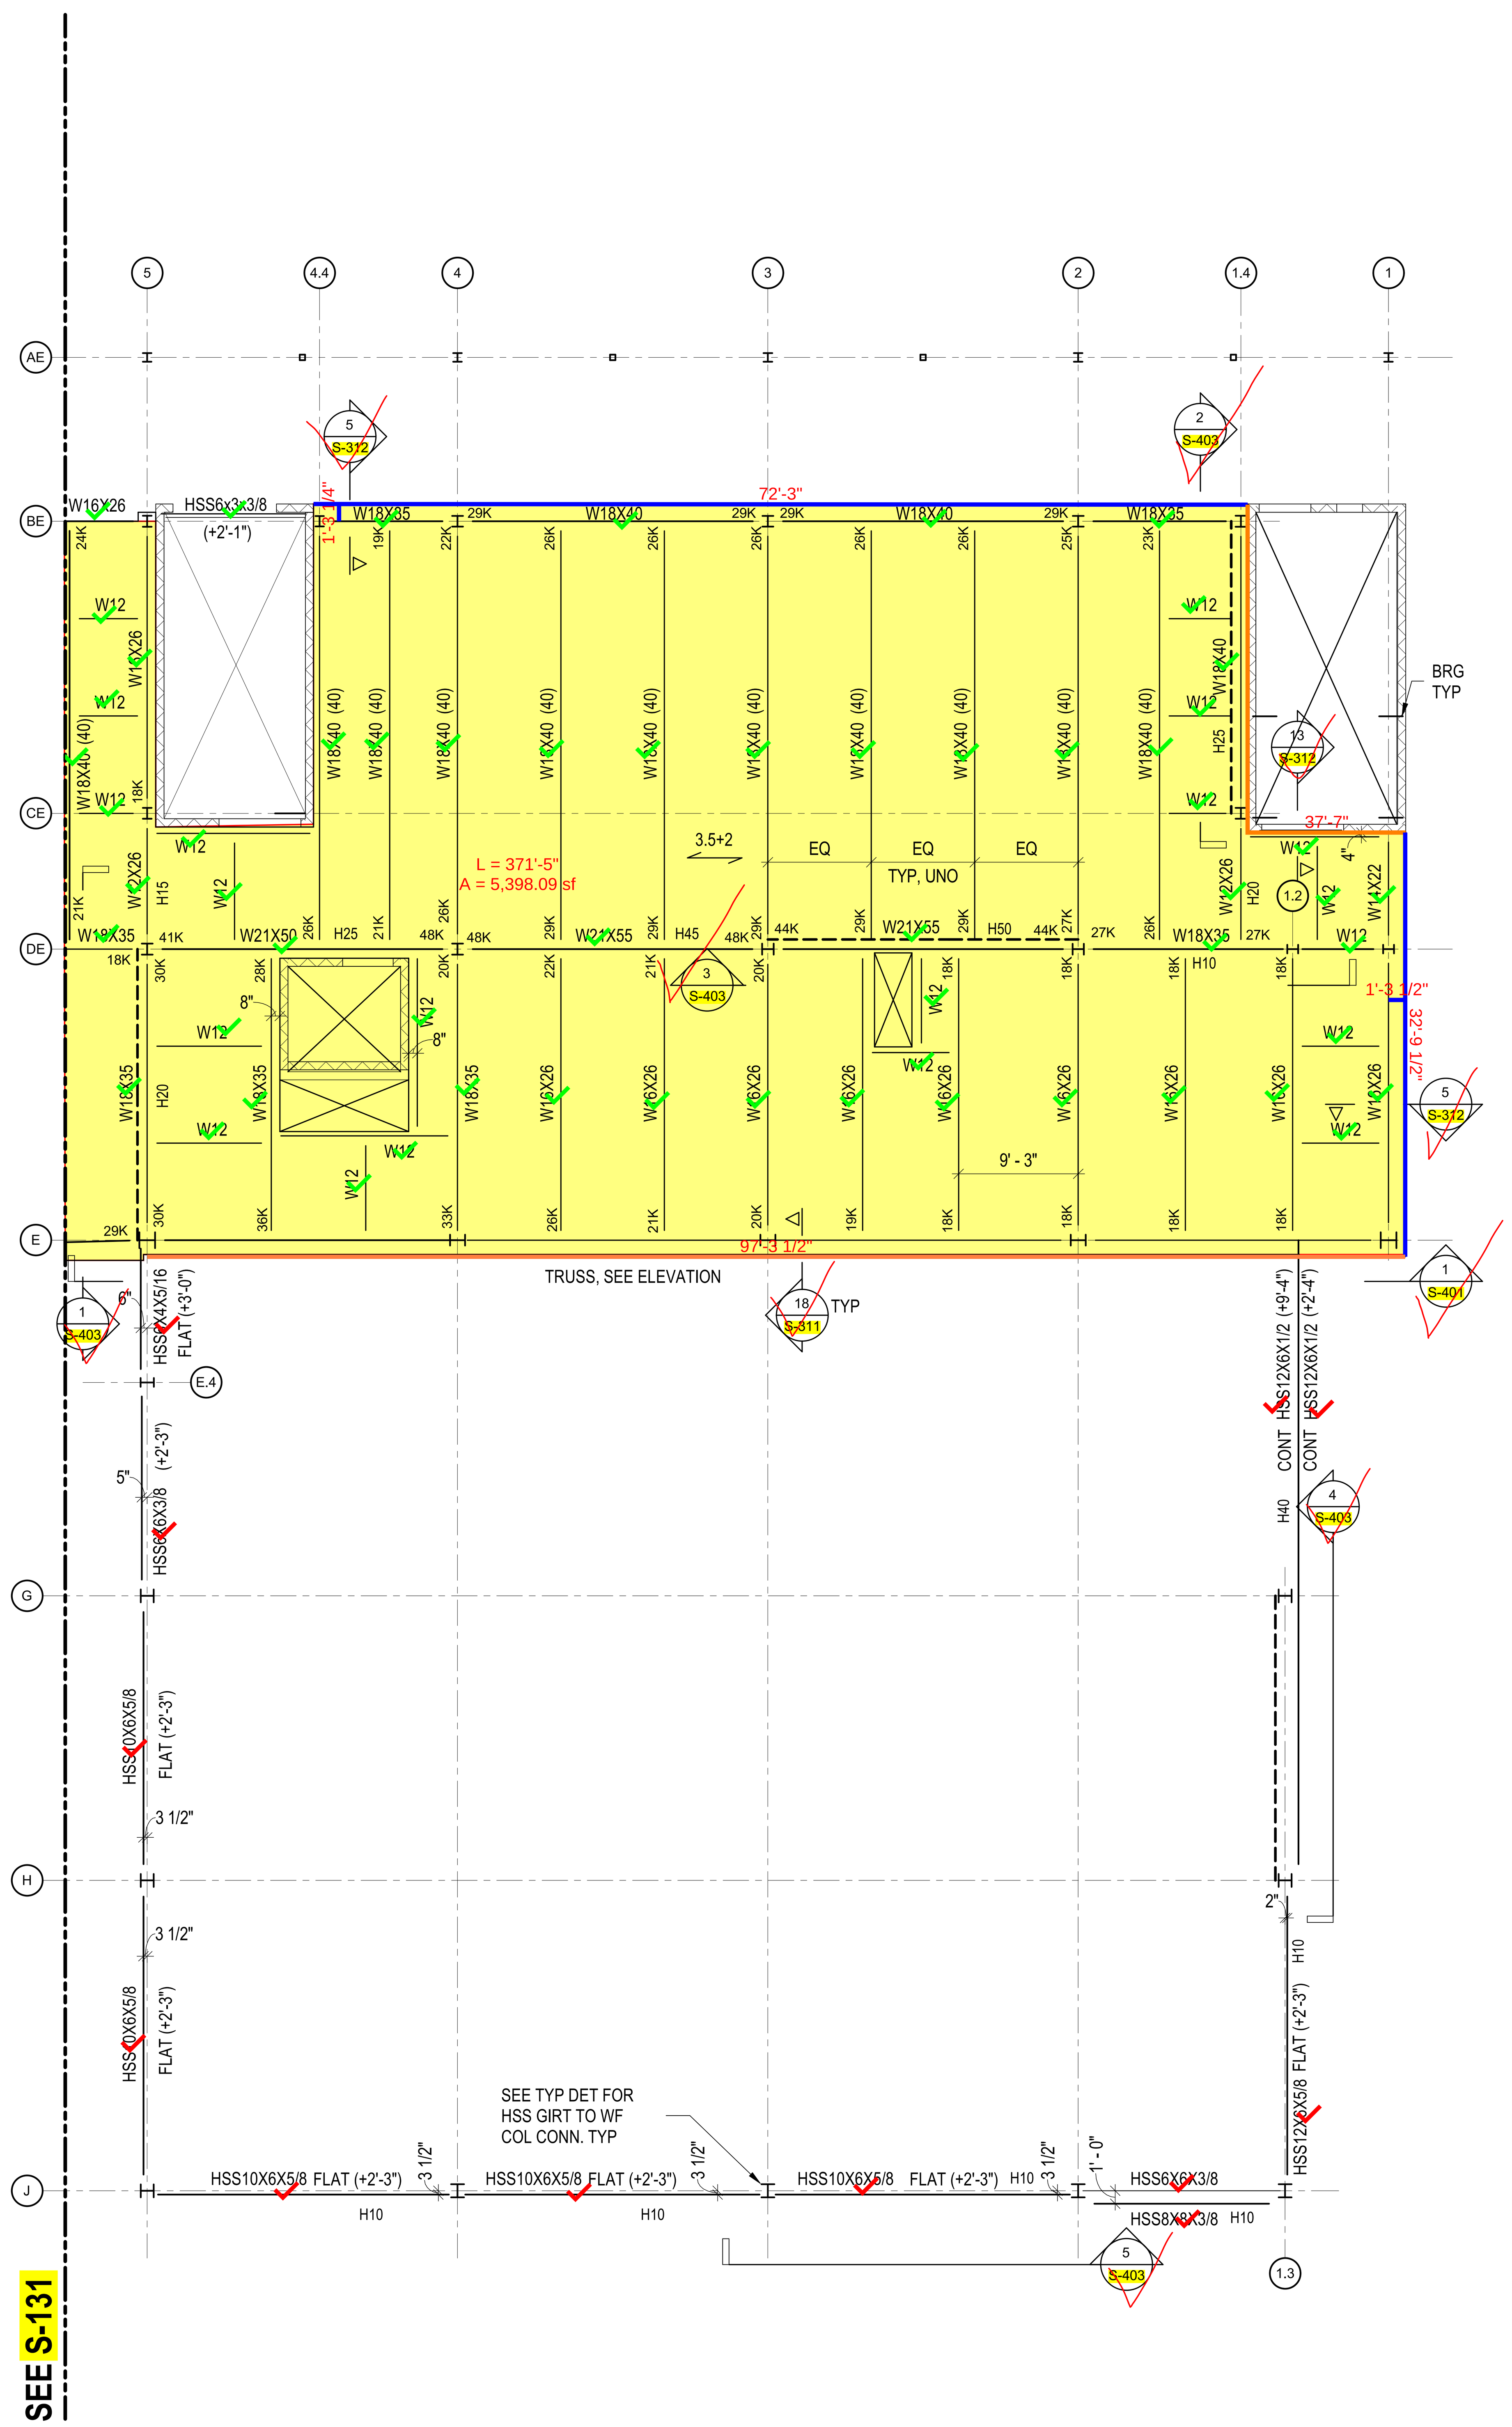

1 **THIRD FLOOR FRAMING PLAN - PART B**
1/8" = 1'-0"

THIRD FLOOR FRAMING PLAN NOTES:

1. SEE S-131 FOR FRAMING PLAN NOTES.

Autodesk Docs://Sidwell Lower School/Sidwell Lower School_ST_R24.rvt
10/28/2025 10:14:38 AM

NO.	DATE	ISSUE
A	09/30/2025	Permit
	10/29/2025	BID SET

0' 4' 8' 16' 24'
SCALE : 1/8" = 1'-0"

SEAL

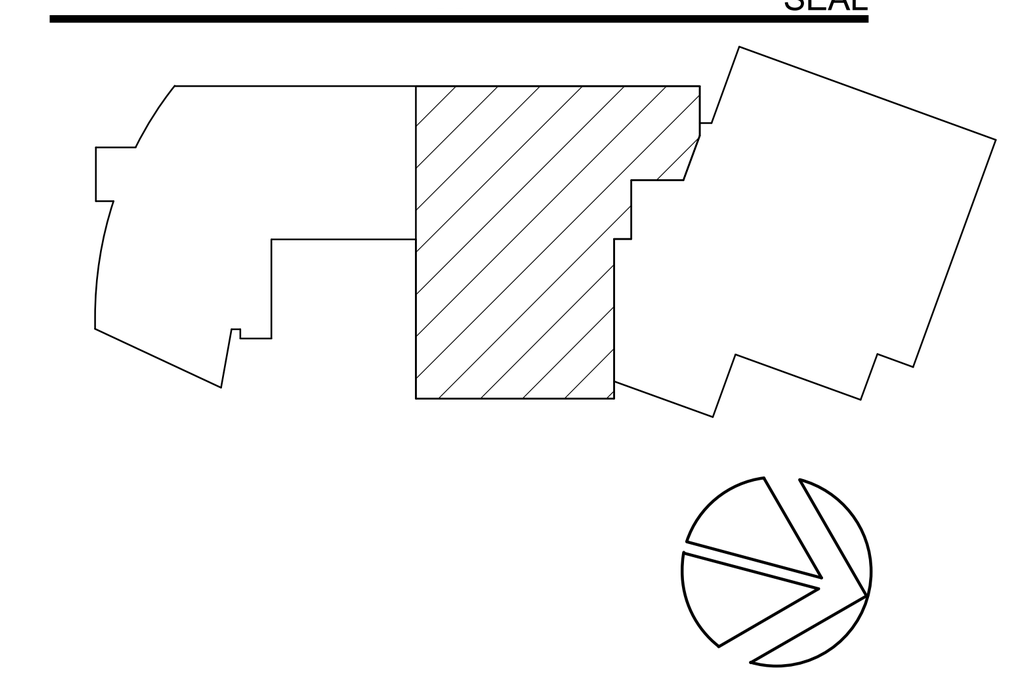

KEY PLAN

PERKINS EASTMAN
One Thomas Circle NW, Suite 200
Washington, DC 20005
T: +1 202 861 1325
F: +1 202 861 1326

Owner:
Sidwell Friends School
3825 Wisconsin Ave NW, Washington DC 20016

Construction Manager:
Advanced Project Management, Inc (APM)
4530 Walney Rd, Ste 202, Chantilly, VA 20151

Civil / Site:
Bowman Consulting Group, Ltd
888 17th St NW, Suite 510, Washington, DC 20006

Landscape:
Natural Resources Design, Inc (NRD)
1009 Shepherd Street NE, Washington, DC 20017

Structural:
Yun Associates LLC
1050 Connecticut Ave NW, Suite 500, Washington, DC 20036

MEP / FP / Lighting:
CMTA Inc
220 Lexington Green Circle, Suite 600, Lexington, KY 40503

AV / IT / Telecom / Security:
Educational Systems Planning (ESP)
2448 Holly Avenue, Suite 302, Annapolis, MD 21401

Food Service
Nyikos-Garcia Foodservice Design, Inc
7146 Starmount Way, New Market, MD 21774

Accessibility Consultant:
Galbo Wolf LLC
4410 Massachusetts Ave NW, #240, Washington, DC 20016

Acoustics:
Polysonics Corp
555 Hospital Drive, Warrenton, VA 20186

Building Envelope Consultant:
Sustainable Building Partners LLC
2701 Prosperity Ave, Suite 105, Fairfax, VA 22031

Code Consultant:
Campbell Code Consulting LLC
7834 Taggart Ct, Elkridge, MD 21075

Specifications:

PROJECT TITLE:

SIDWELL FRIENDS NEW LOWER SCHOOL AT DC CAMPUS

3825 WISCONSIN AVE NW
WASHINGTON, DC 20016

PROJECT No: 2025008

DRAWING TITLE:

THIRD FLOOR FRAMING PLAN - PART B

SCALE: As indicated

S-132

BID SET
10/29/2025

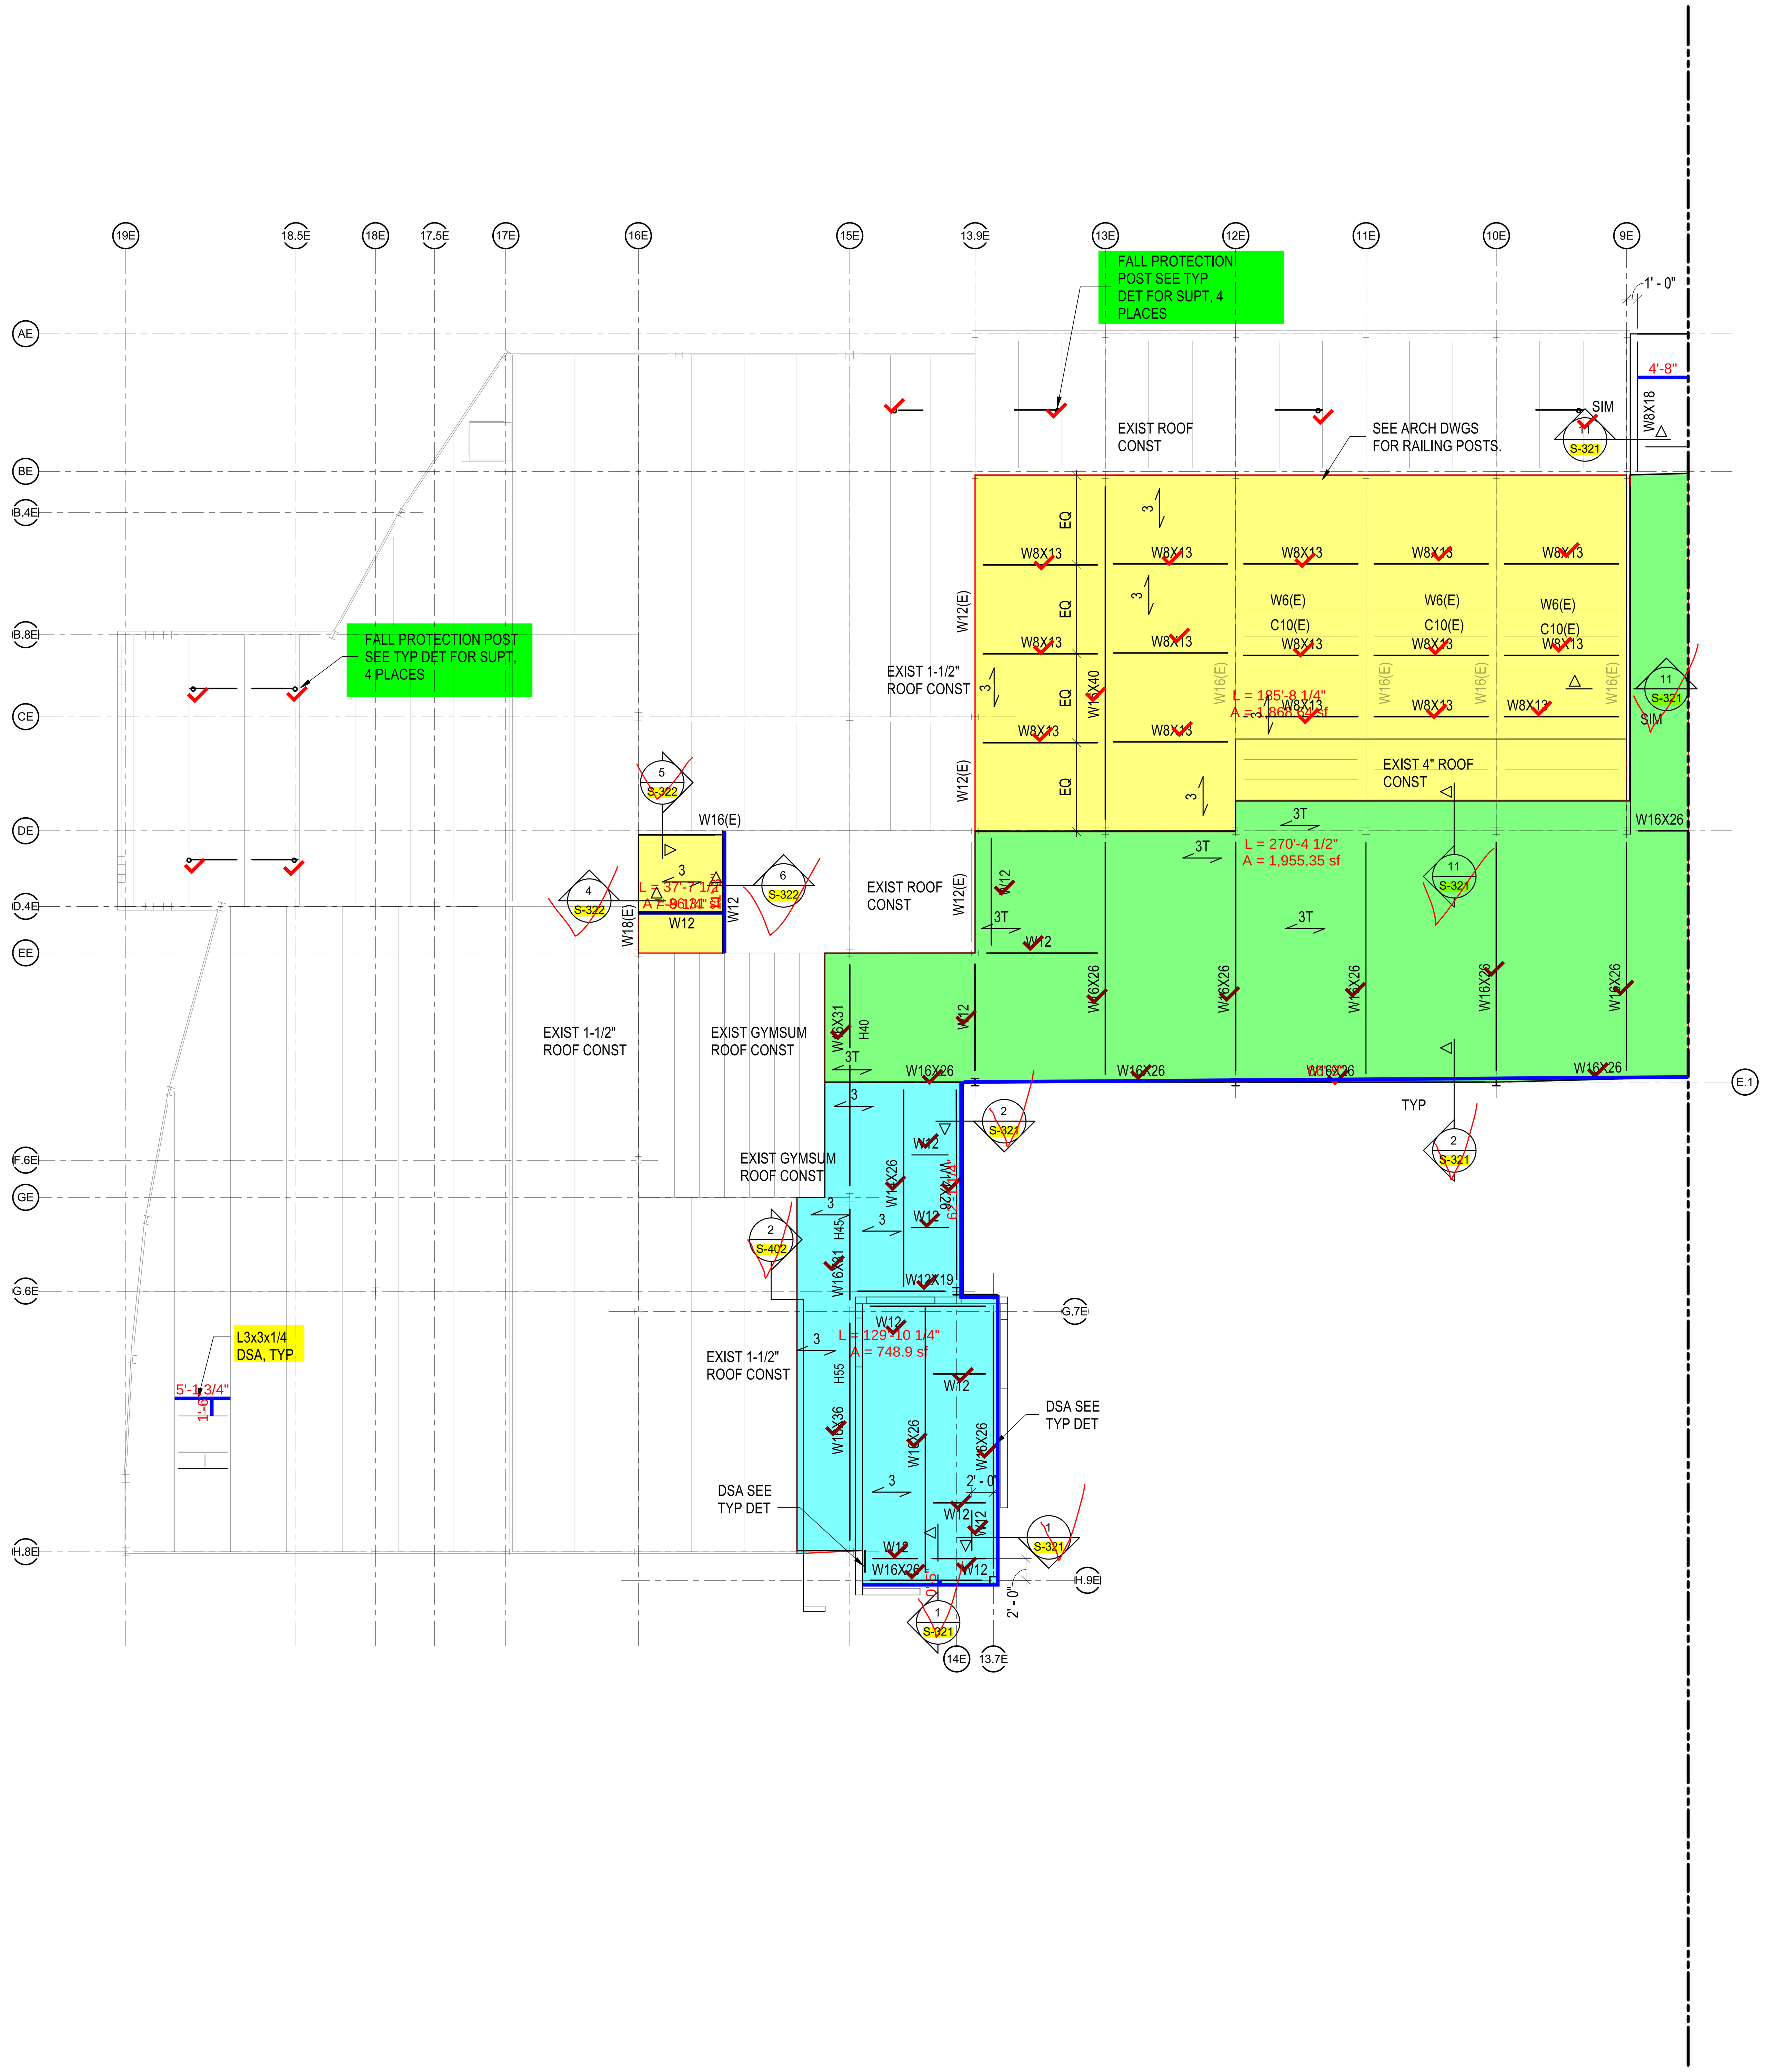

1

ROOF FRAMING PLAN - PART A

1/8" = 1'-0"

ROOF FRAMING PLAN NOTES:

1. TOP OF ROOF DECK IS AT REFERENCE ELEVATION OF 38'-0", CORRESPONDING TO TRUE ELEVATION OF 428'-2 3/8" UNO THUS $\boxed{\text{+/-X'-X"}}$ ON PLAN RELATIVE TO REFERENCE ELEVATION.
2. TOP OF STEEL IS AT BOTTOM OF DECK UNO THUS [+/- X'-X"] RELATIVE TO REFERENCE ELEVATION.
3. SEE S-121 FOR OTHER SYMBOLS AND DESIGNATIONS.
4. COORDINATE WITH ARCHITECTURAL AND MECHANCIAL DRAWINGS FOR ROOF OPENINGS. COORDINATE FRAMING WITH ROOF MECHANICAL EQUIPMENT MANUFACTURER SO THAT THE CURBS BEAR DIRECTLY ON TOP OF FRAMING.
5. SEE ARCHITECTURAL DRAWINGS FOR FALL PROTECTION LAYOUT. SEE TYPICAL FALL PROTECTION DETAIL FOR ADDITIONAL FRAMING REQUIRED NOT SHOWN ON PLAN.

NO.	DATE	ISSUE
A	09/30/2025	Permit
	10/29/2025	BID SET

0' 4' 8' 16' 24'

SCALE : 1/8" = 1'-0"

SEAL

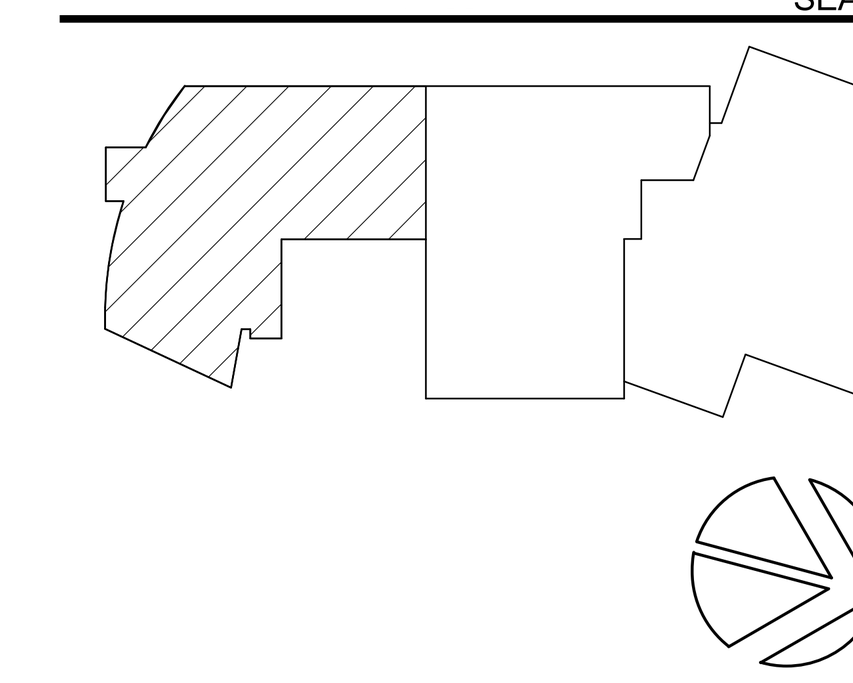

KEY PLAN

PERKINS EASTMAN
One Thomas Circle NW, Suite 200
Washington, DC 20005
T. +1 202 861 1325
F. +1 202 861 1326

Owner:
Sidwell Friends School
3825 Wisconsin Ave NW, Washington DC 20016

Construction Manager:
Advanced Project Management, Inc (APM)
4530 Walney Rd, Ste 202, Chantilly, VA 20151

Civil / Site:
Bowman Consulting Group, Ltd
888 17th St NW, Suite 510, Washington, DC 20006

Landscape:
Natural Resources Design, Inc (NRD)
1009 Shepherd Street NE, Washington, DC 20017

Structural:
Yun Associates LLC
1050 Connecticut Ave NW, Suite 500, Washington, DC 20036

MEP / FP / Lighting:
CMTA Inc
220 Lexington Green Circle, Suite 600, Lexington, KY 40503

AV / IT / Telecom / Security:
Educational Systems Planning (ESP)
2448 Holly Avenue, Suite 302, Annapolis, MD 21401

Food Service
Nyikos-Garcia Foodservice Design, Inc
7146 Starmount Way, New Market, MD 21774

Accessibility Consultant:
Galbo Wolf LLC
4410 Massachusetts Ave NW, #240, Washington, DC 20016

Acoustics:
Polysonics Corp
555 Hospital Drive, Warrenton, VA 20186

Building Envelope Consultant:
Sustainable Building Partners LLC
2701 Prosperity Ave, Suite 105, Fairfax, VA 22031

Code Consultant:
Campbell Code Consulting LLC
7834 Taggart Ct, Elkridge, MD 21075

Specifications:

PROJECT TITLE:

SIDWELL FRIENDS NEW LOWER SCHOOL AT DC CAMPUS

3825 WISCONSIN AVE NW
WASHINGTON, DC 20016

PROJECT No: 2025008

DRAWING TITLE:

ROOF FRAMING PLAN - PART A

SCALE: As indicated

S-141

BID SET
10/29/2025

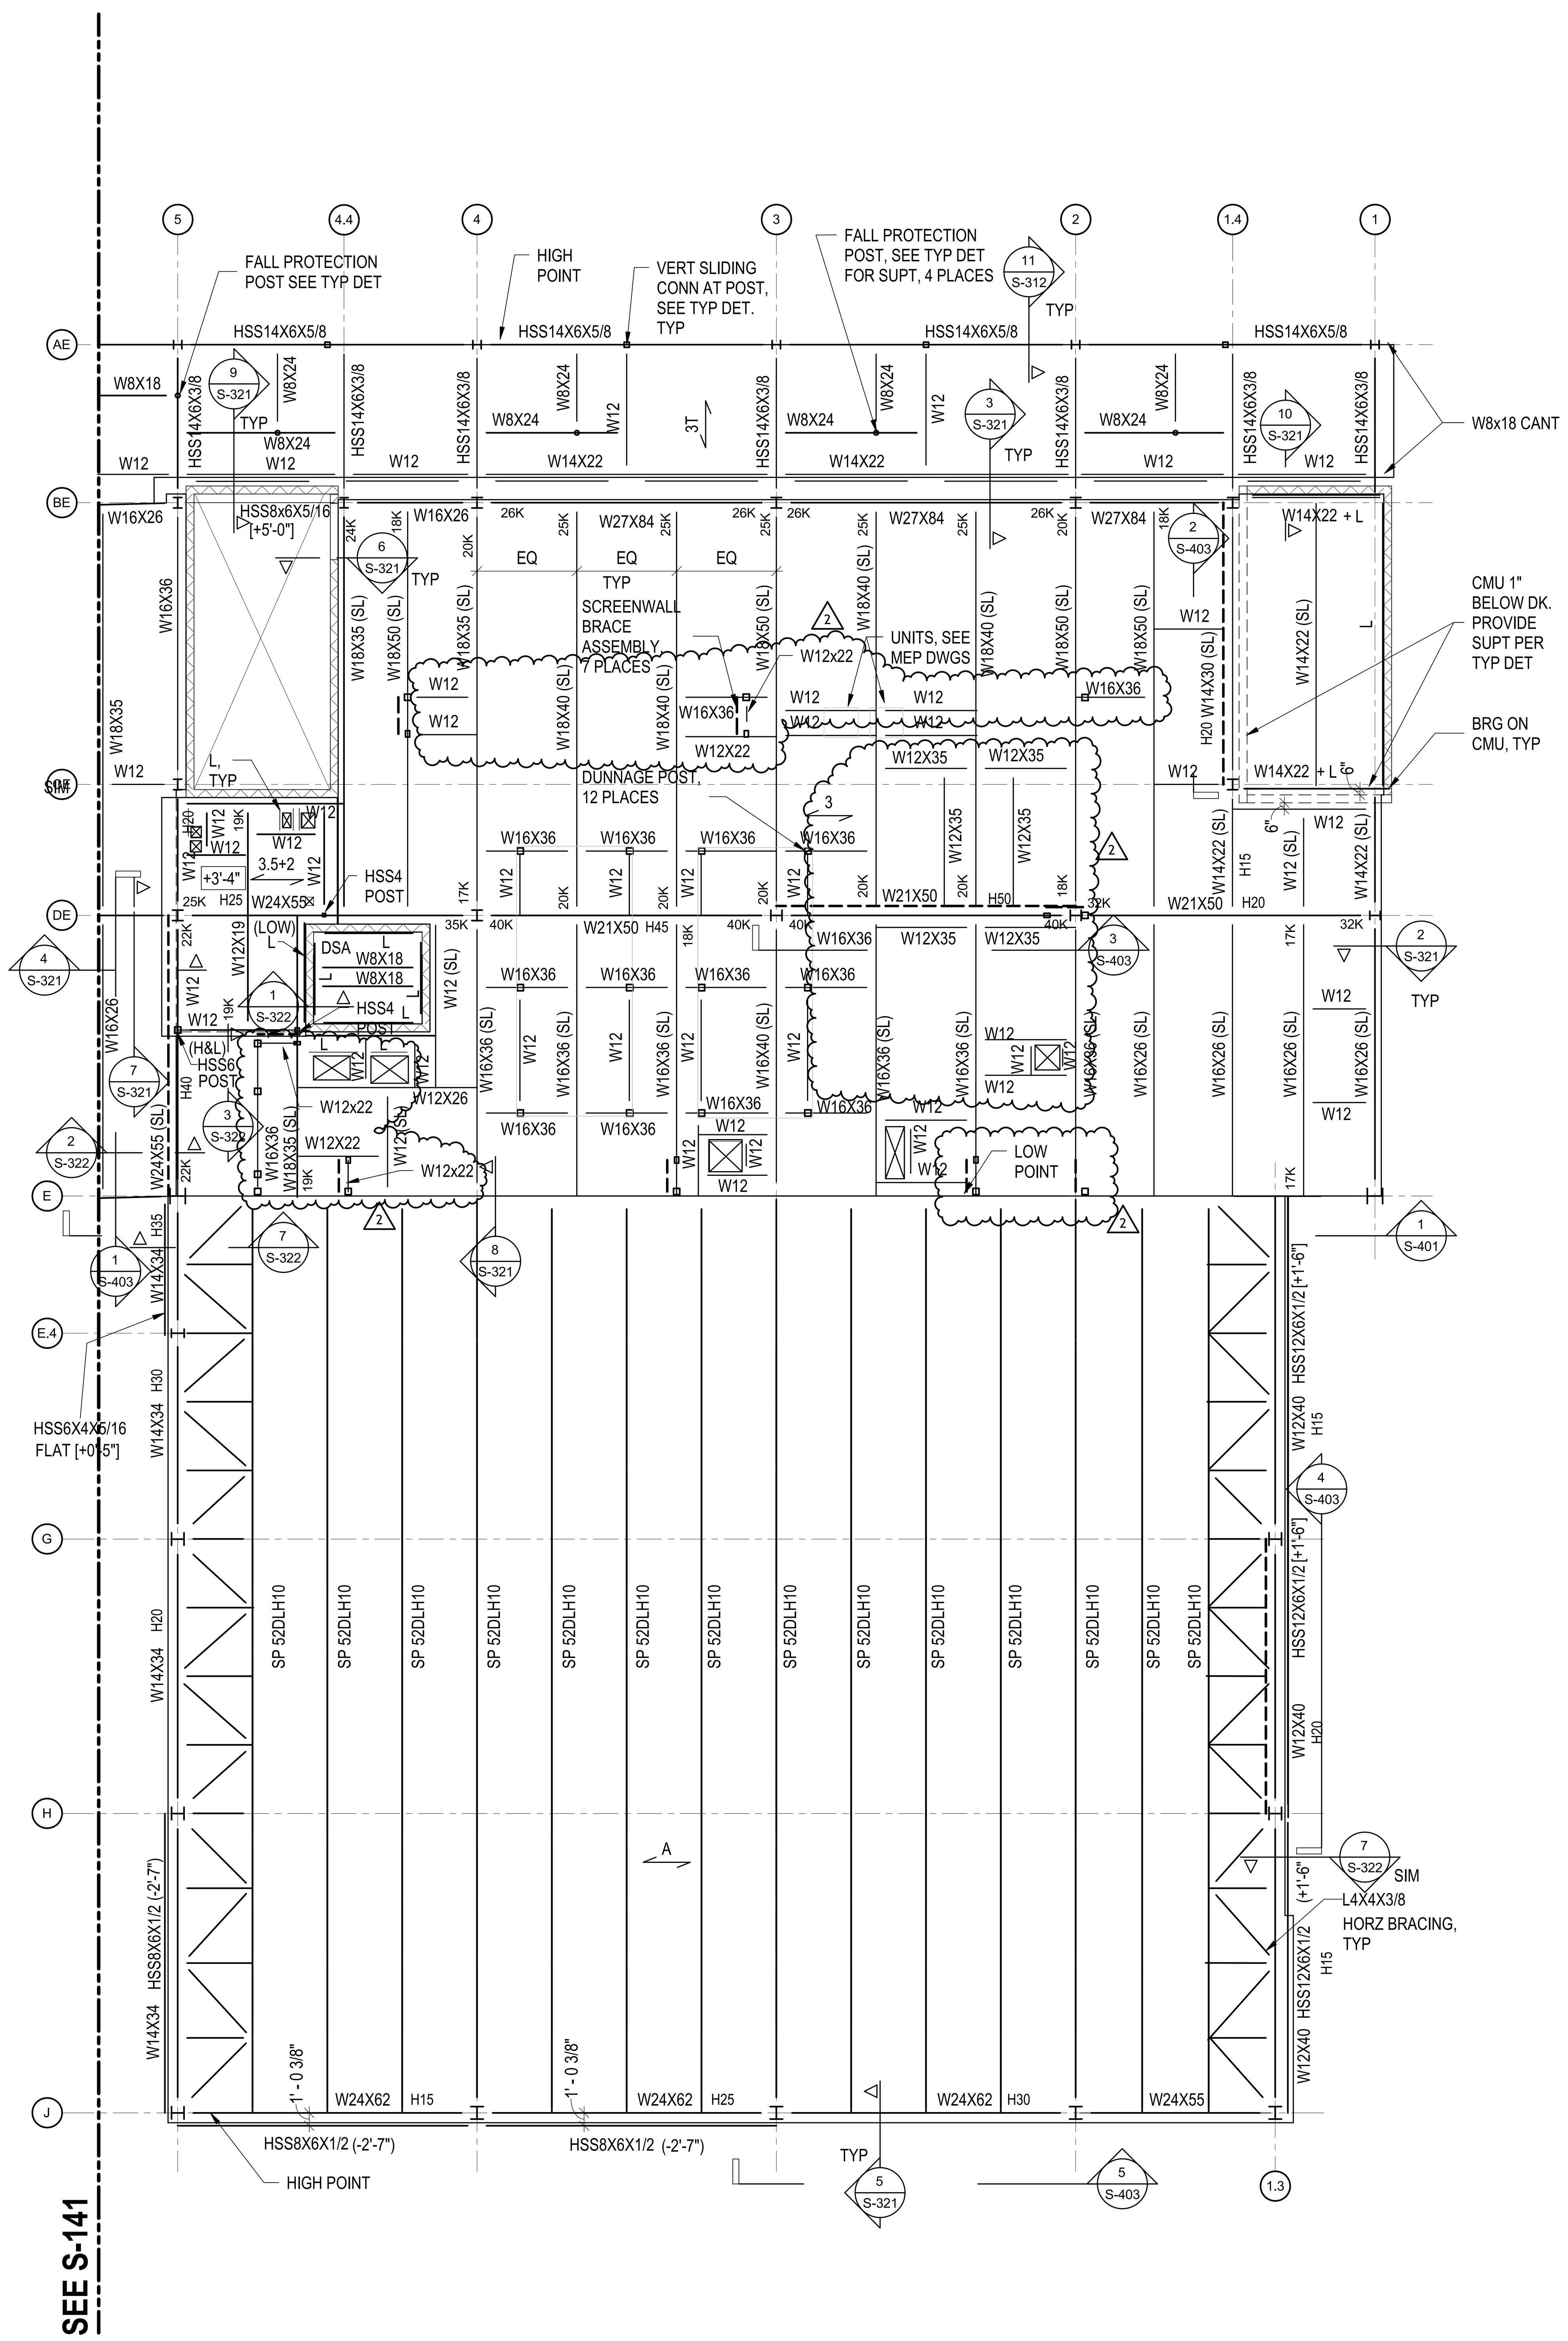

ROOF FRAMING PLAN - PART B

1/8" = 1'-0"

ROOF FRAMING PLAN NOTES:

1. SEE S-141 FOR ROOF FRAMING PLAN NOTES.
2. L STANDS FOR DESK SUPPORT ANGLE L4x4x5/16. SEE TYPICAL DETAIL FOR CONNECTION.
3. HSS4 STANDS FOR HSS4x4x3/8.
4. HSS6 STNADS FOR HSS6x6x3/8.
5. JOISTS SHOWN ARE PRELIMINARY AND SHALL BE DESIGNED BY JOIST CONTRACTOR. JOIST BRIDGING IS NOT SHOWN AND SHALL BE DESIGNED BY THE JOST CONTRACTOR. SEE GENERAL NOTES, PLANS, SECTIONS AND LOADING PLAN FOR LOADING CONDITIONS.

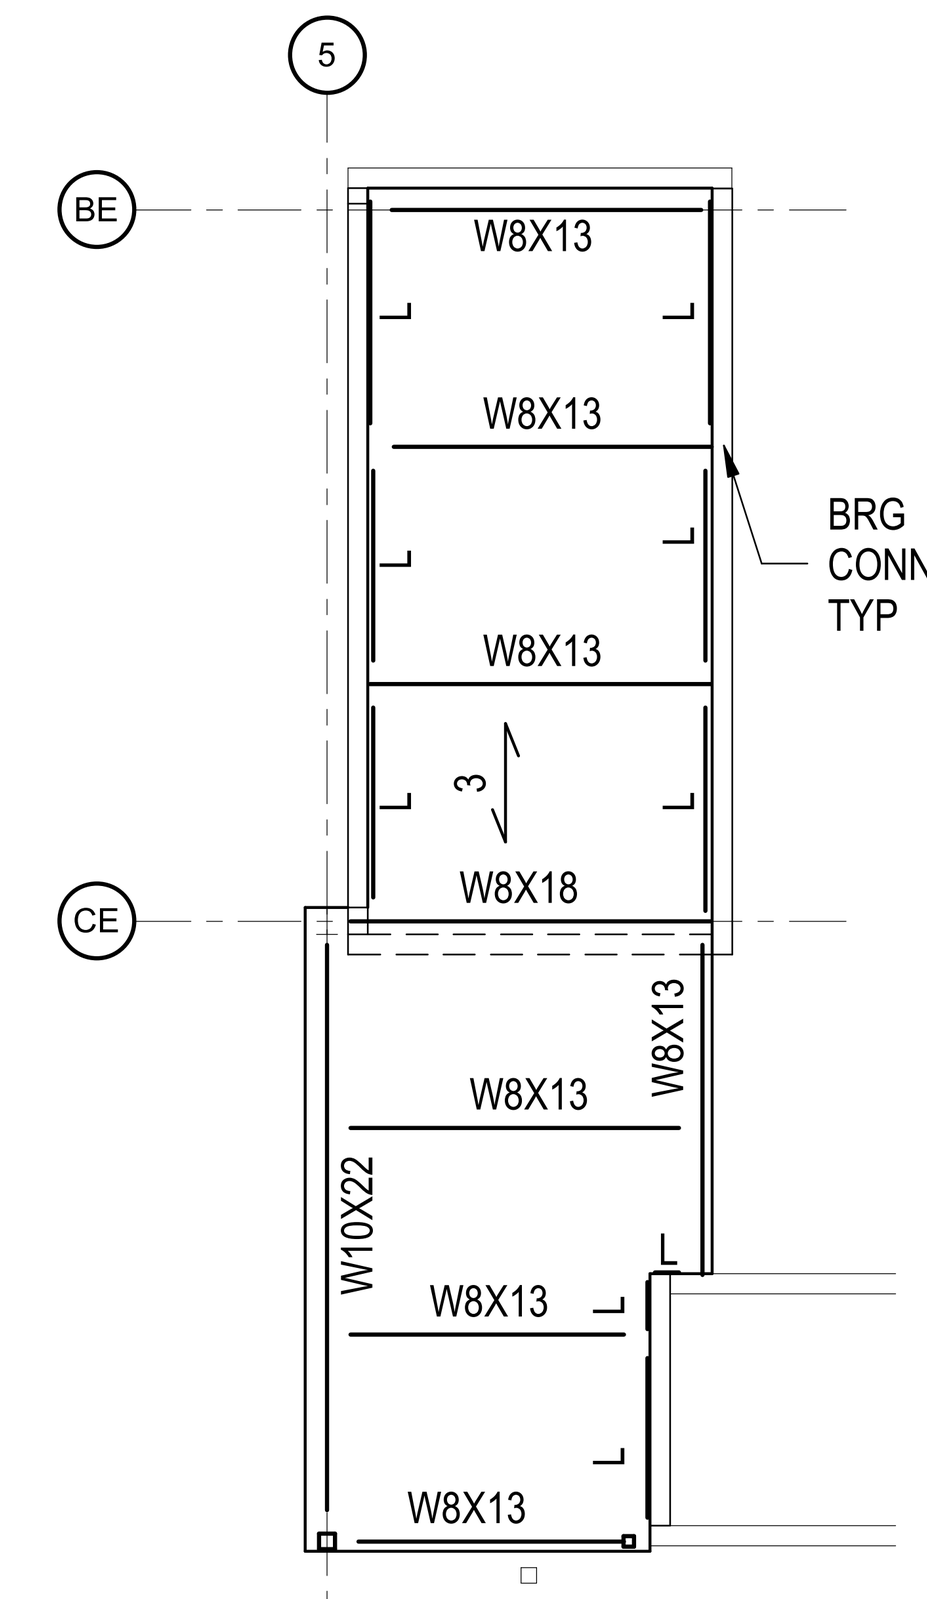

STAIR ROOF FRAMING PLAN

1/8" = 1'-0"

STAIR ROOF FRAMING PLAN NOTES:

1. TOP OF STEEL SHALL BE AT ELE 440' - 10 3/8" UON. OTES.
2. L STANDS FOR DESK SUPPORT ANGLE L4x4x5/16. SEE TYPICAL DETAIL FOR CONNECTION.

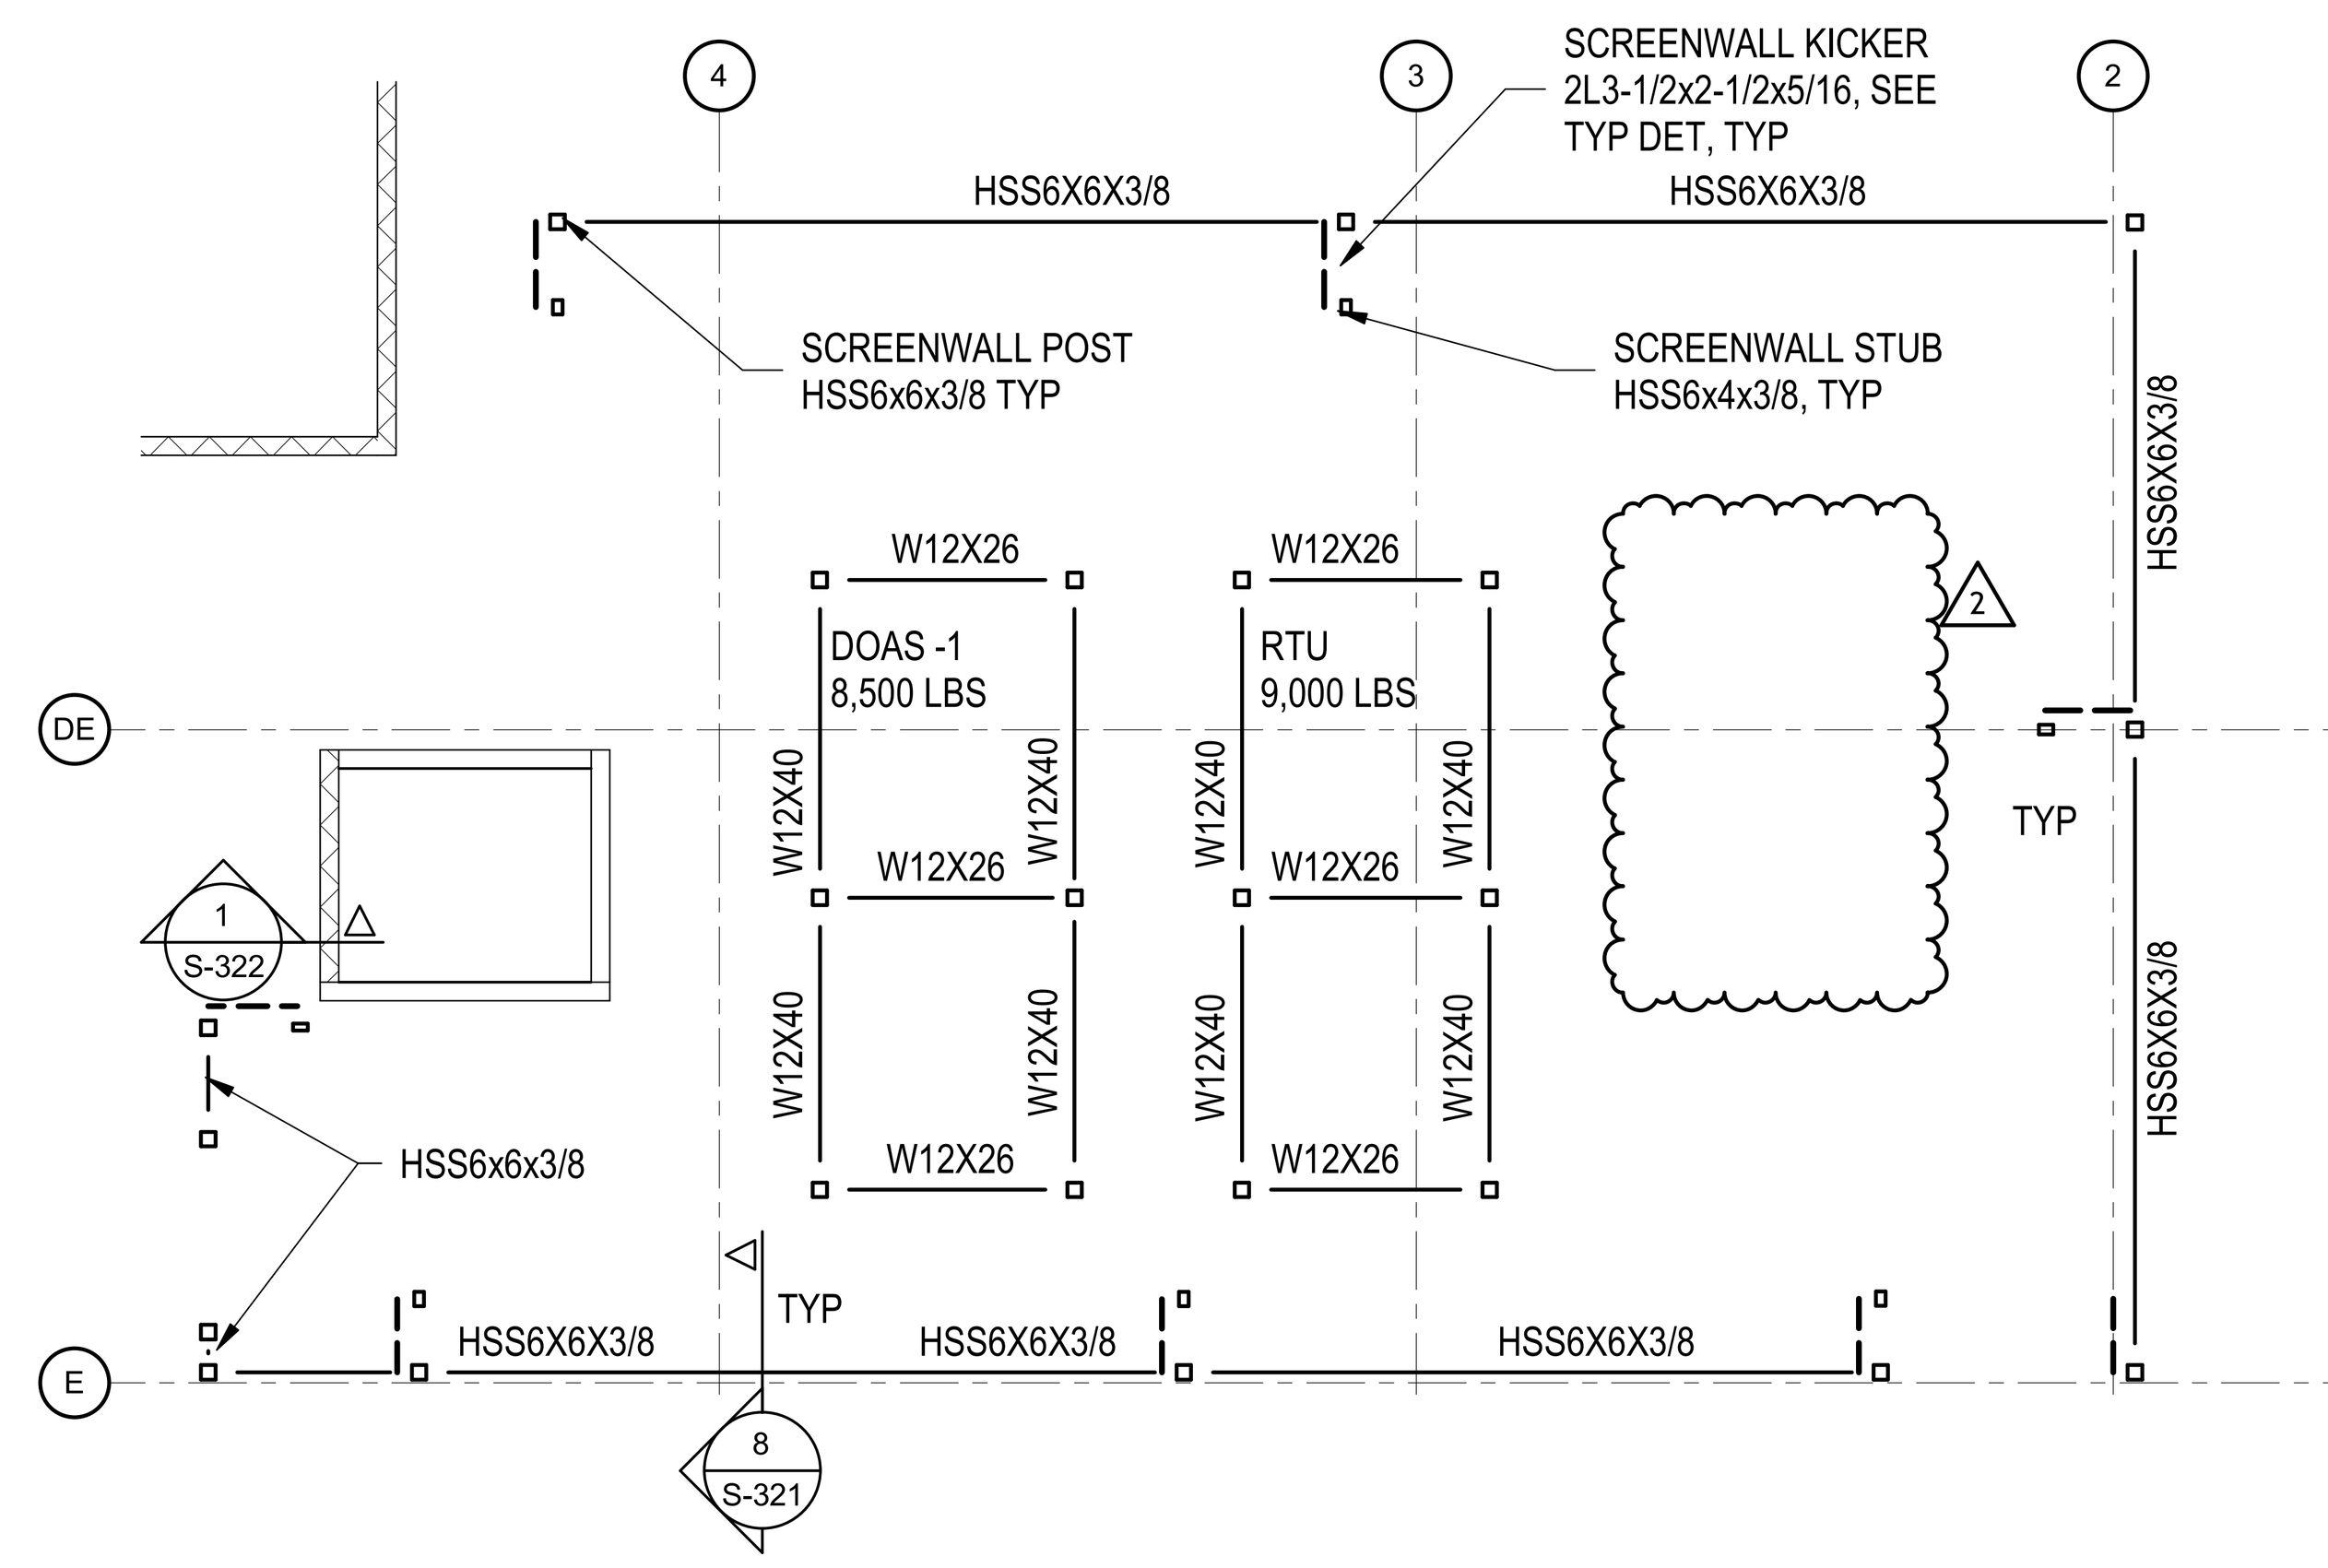

DUNNAGE & SCREEN WALL FRAMING PLAN - LOWER LEVEL

1/8" = 1'-0"

DUNNAGE & SCREEN WALL FRAMING PLAN NOTES:

1. TOP OF DUNNAGE STEEL SHALL BE AT ELEV 433' - 2 3/8" UON.
2. TOP OF HSS6x6 BEAMS SHALL BE AT ELEV 432' - 2 3/8" UON.
3. COORDINATE LOCATION OF POSTS WITH ARCH/MECH DWGS AND MECH UNIT CUT SHEETS.
4. ALL EXPOSED STEEL AND CONNECTINS SHALL BE HDG.

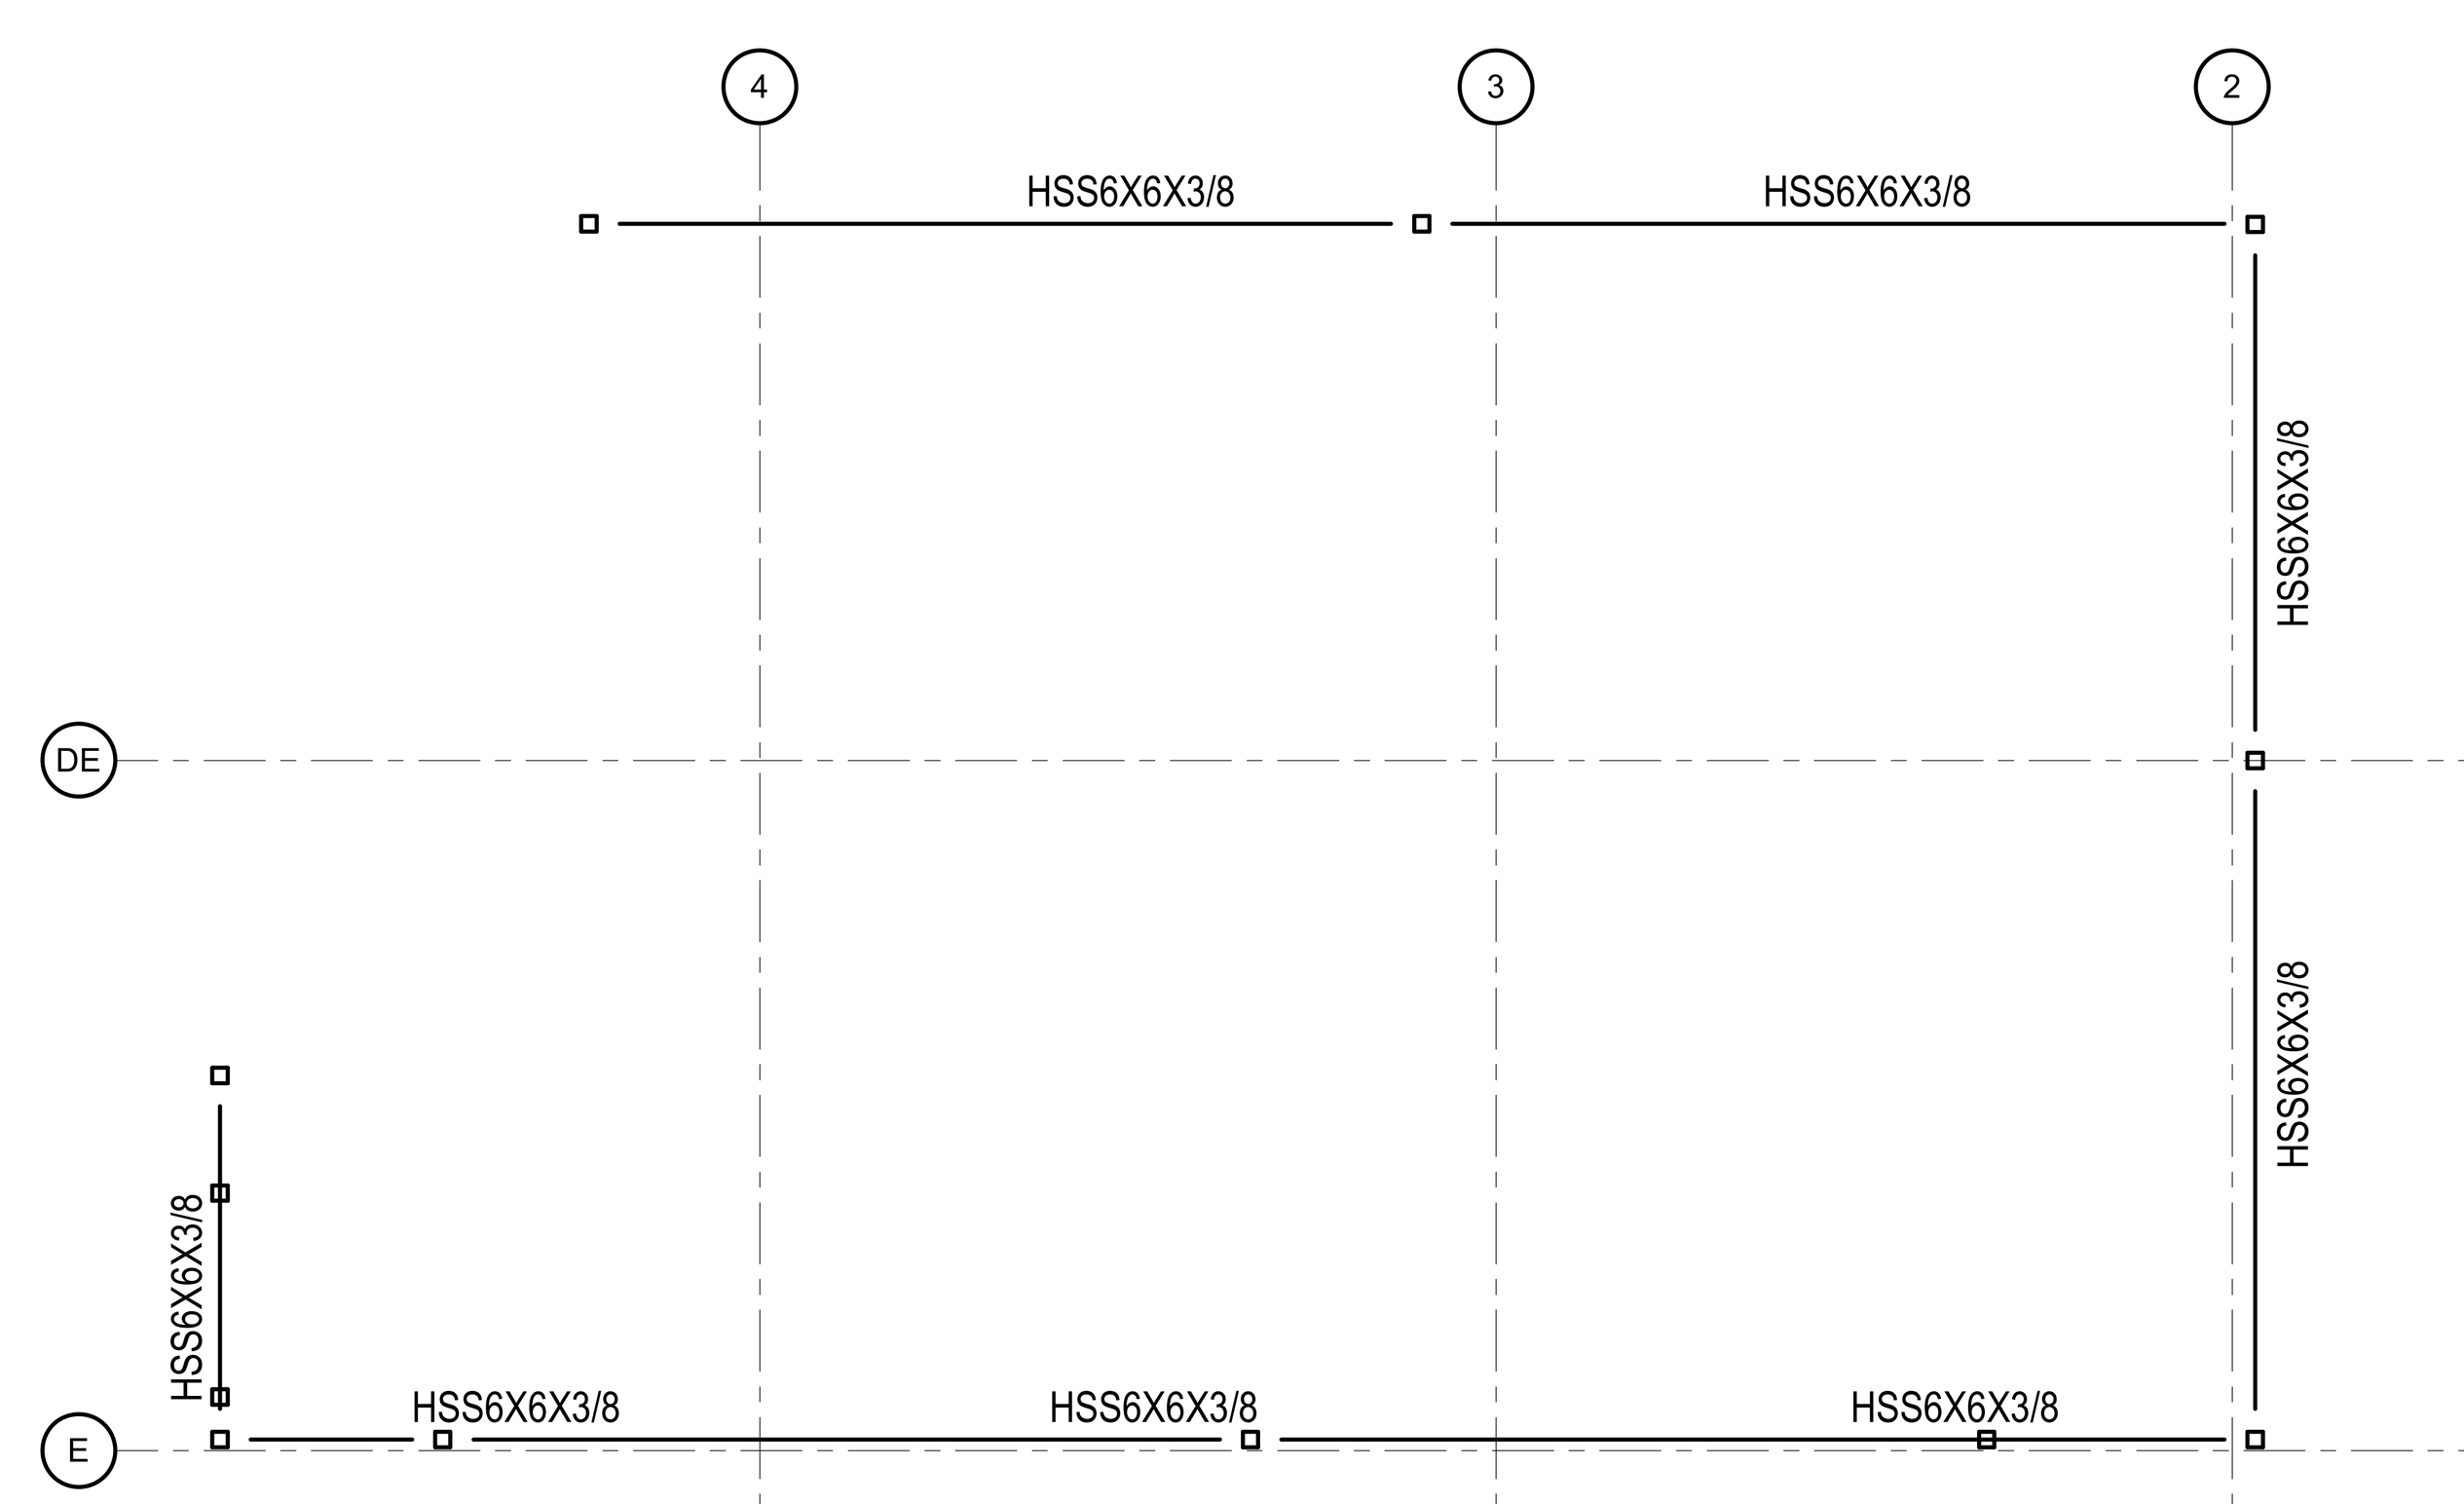

SCREEN WALL FRAMING PLAN - HIGHER LEVEL

1/8" = 1'-0"

SCREEN WALL HIGH LEVEL FRAMING PLAN NOTES:

1. TOP OF STEEL SHALL BE AT ELE 438' - 2 3/8".
2. ALL EXPOSED STEEL AND CONNECTIONS SHALL BE HDG.

NO.	DATE	ISSUE
A	09/30/2025	Permit
	10/29/2025	BID SET
2	11/17/2025	BID ADDENDUM 2

SCALE : 1/8" = 1'-0"

SEAL

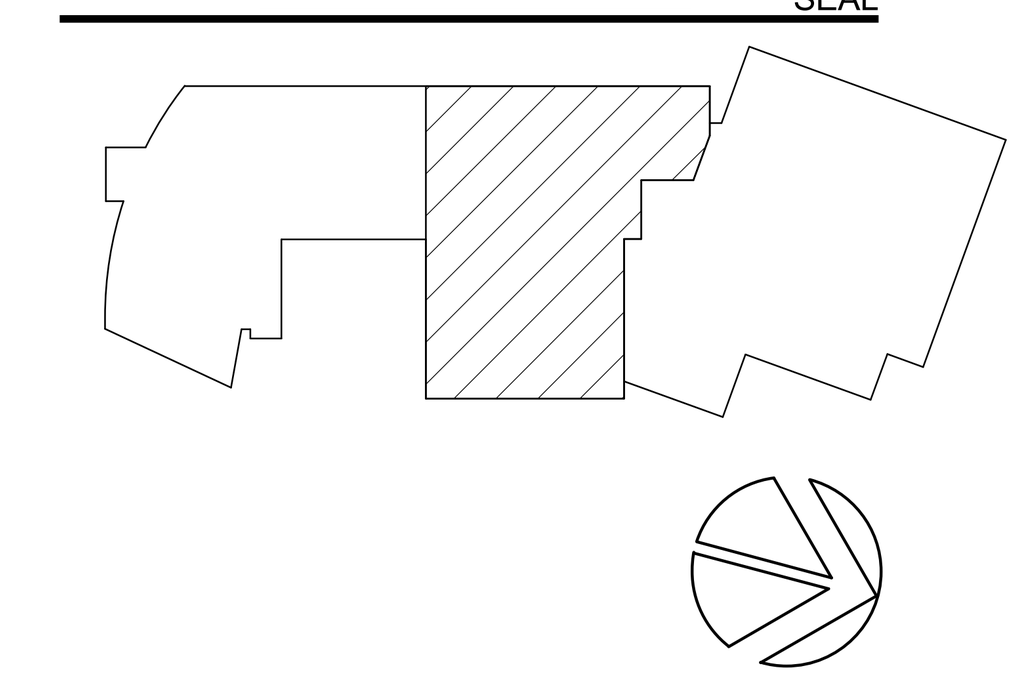

KEY PLAN

PERKINS EASTMAN

One Thomas Circle NW, Suite 200
Washington, DC 20005
T: +1 202 861 1325
F: +1 202 861 1326

Owner:
Sidwell Friends School
3825 Wisconsin Ave NW, Washington DC 20016

Construction Manager:
Advanced Project Management, Inc (APM)
4530 Walney Rd, Ste 202, Chantilly, VA 20151

Civil / Site:
Bowman Consulting Group, Ltd
888 17th St NW, Suite 510, Washington, DC 20006

Landscape:
Natural Resources Design, Inc (NRD)
1009 Shepherd Street NE, Washington, DC 20017

Structural:
Yun Associates LLC
1050 Connecticut Ave NW, Suite 500, Washington, DC 20036

MEP / FP / Lighting:
CMTA Inc
220 Lexington Green Circle, Suite 600, Lexington, KY 40503

AV / IT / Telecom / Security:
Educational Systems Planning (ESP)
2448 Holly Avenue, Suite 302, Annapolis, MD 21401

Food Service
Nyikos-Garcia Foodservice Design, Inc
7146 Starmount Way, New Market, MD 21774

Accessibility Consultant:
Galbo Wolf LLC
4410 Massachusetts Ave NW, #240, Washington, DC 20016

Acoustics:
Polysonics Corp
555 Hospital Drive, Warrenton, VA 20186

Building Envelope Consultant:
Sustainable Building Partners LLC
2701 Prosperity Ave, Suite 105, Fairfax, VA 22031

Code Consultant:
Campbell Code Consulting LLC
7834 Taggart Ct, Elkridge, MD 21075

Specifications:

PROJECT TITLE:

SIDWELL FRIENDS NEW LOWER SCHOOL AT DC CAMPUS

3825 WISCONSIN AVE NW
WASHINGTON, DC 20016

PROJECT No: 2025008

DRAWING TITLE:

ROOF FRAMING PLAN - PART B

SCALE: As indicated

S-142

ISSUED FOR BID
10/29/2025

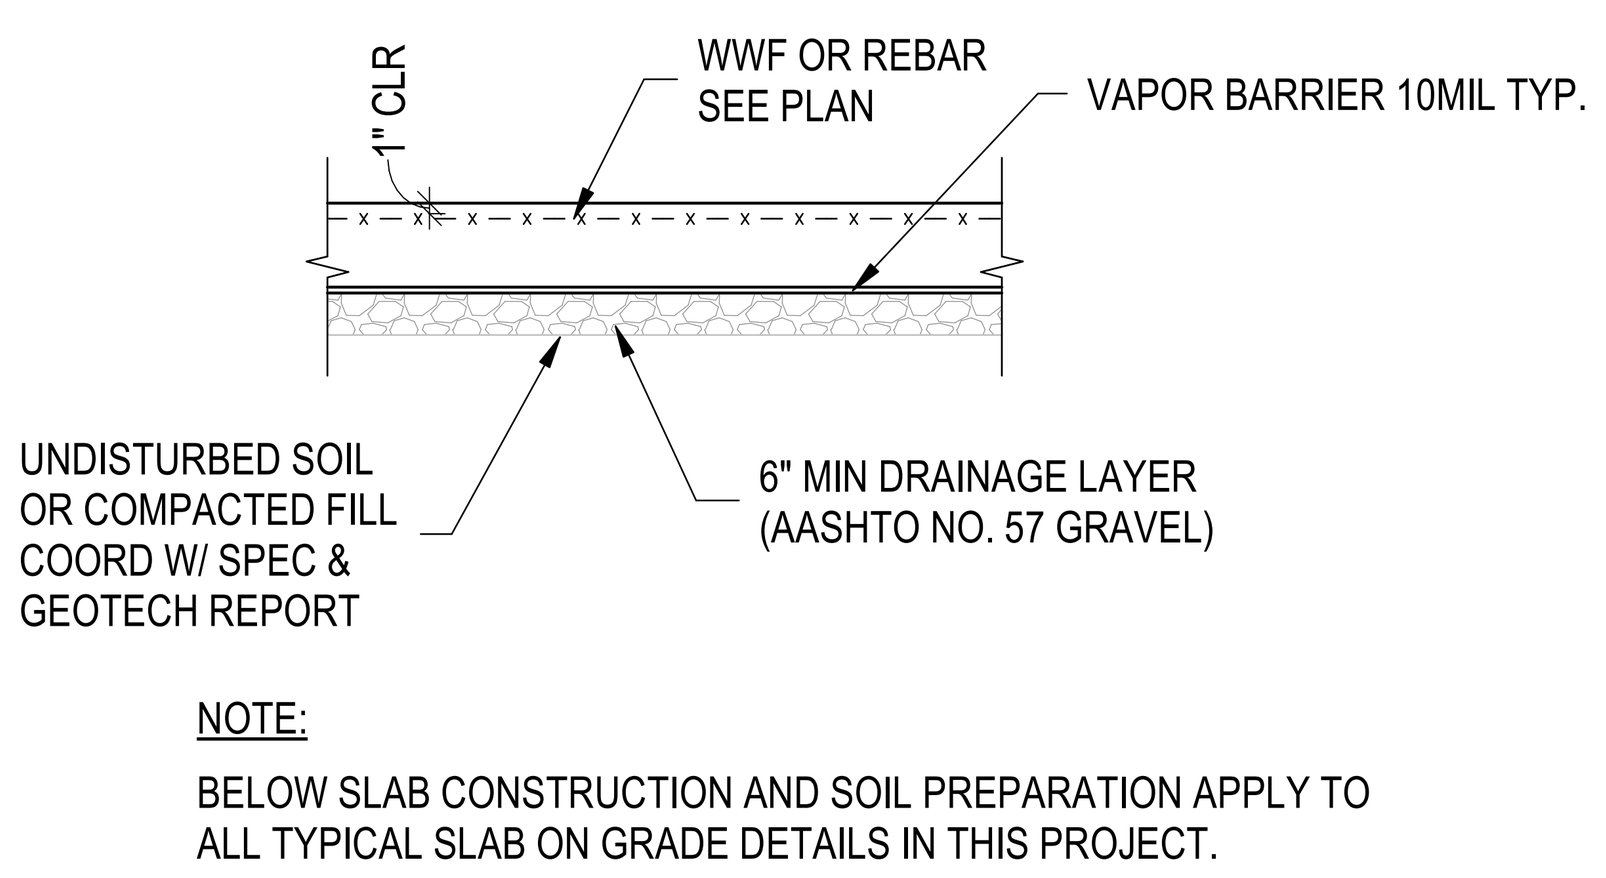

NOTE:
BELOW SLAB CONSTRUCTION AND SOIL PREPARATION APPLY TO ALL TYPICAL SLAB ON GRADE DETAILS IN THIS PROJECT.

TYPICAL SLAB ON GRADE DETAIL

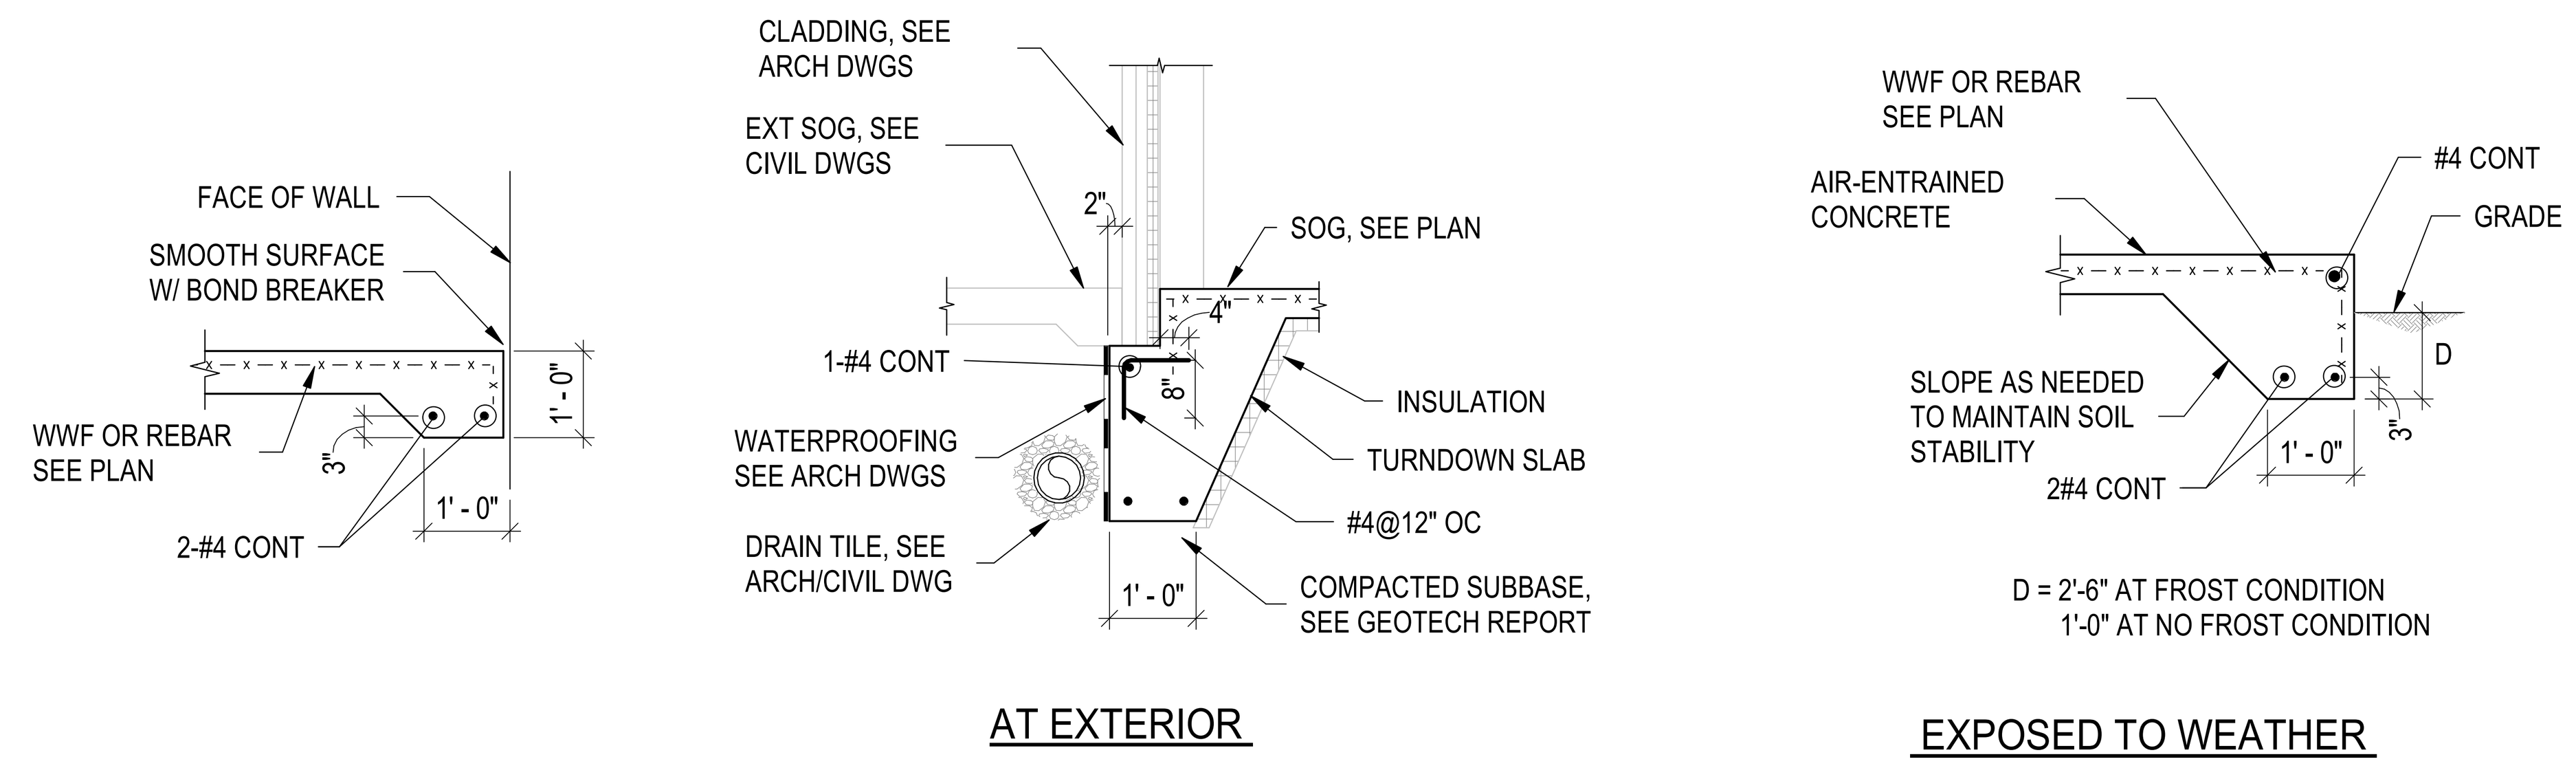

TYPICAL SLAB EDGE ON GRADE DETAIL

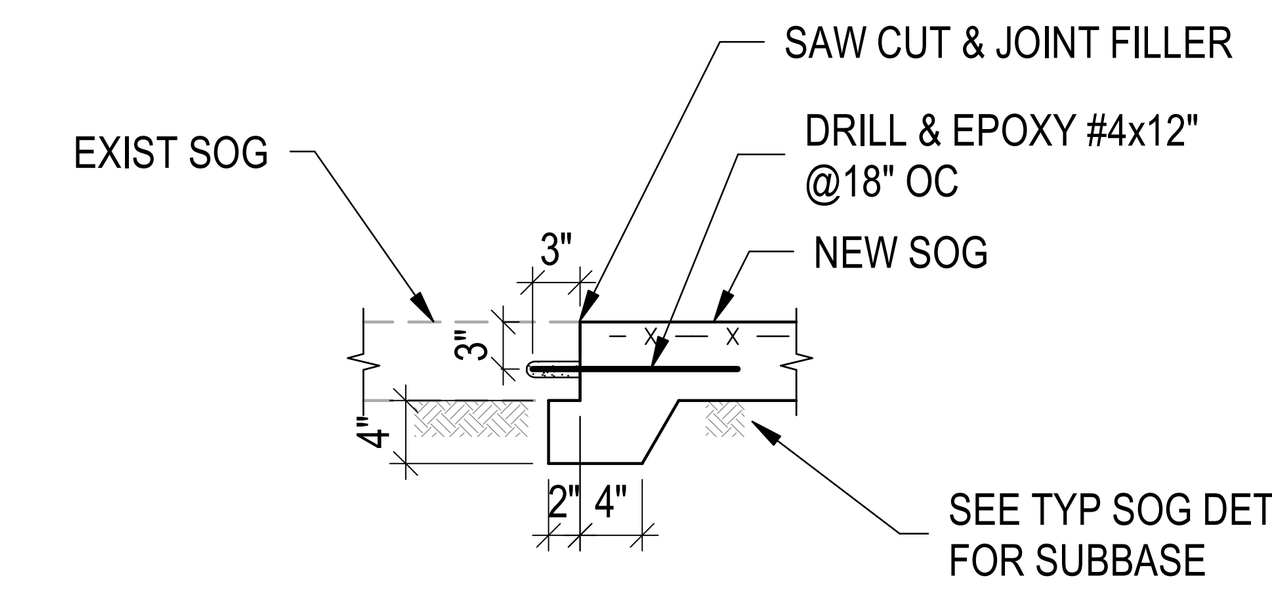

TYPICAL NEW SOG TO EXIST DETAIL

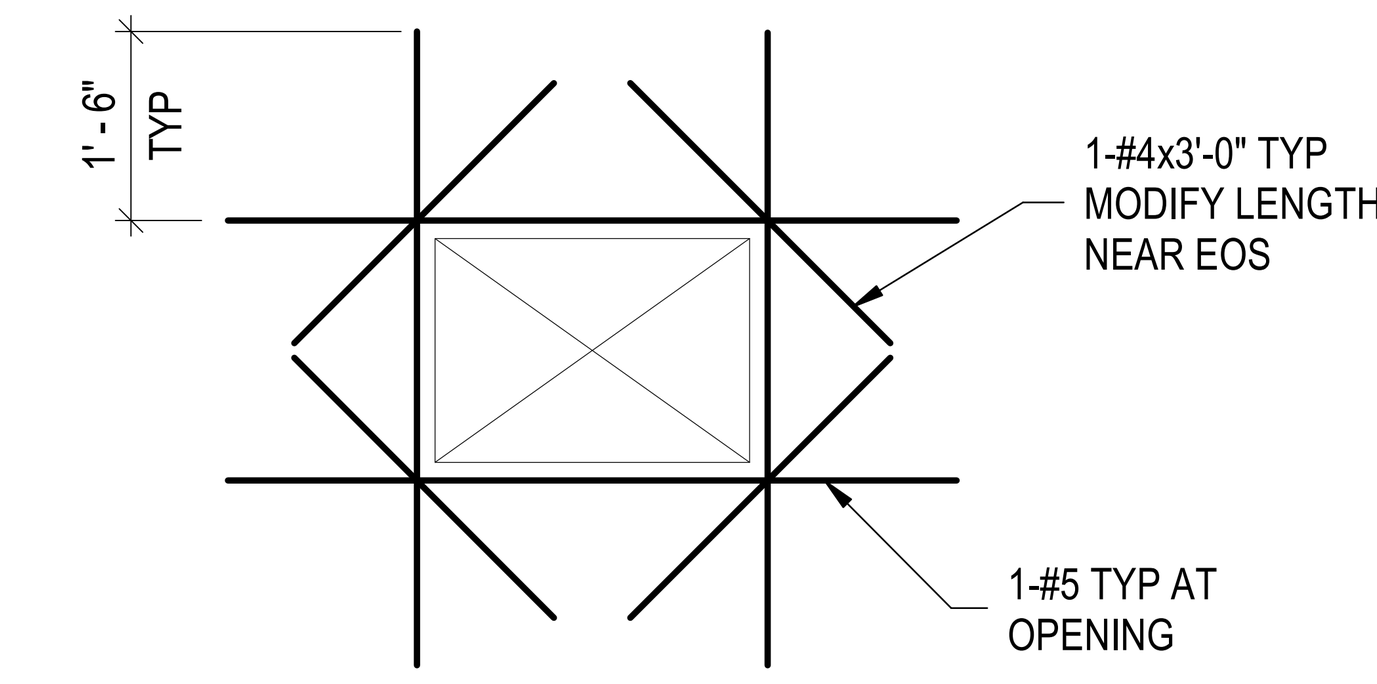

NOTE:
#5 BARS ARE NOT REQUIRED WHEN OPENING IS LESS THAN 6" IN BOTH DIRECTIONS.

TYPICAL OPENING IN SLAB ON GRADE DETAIL

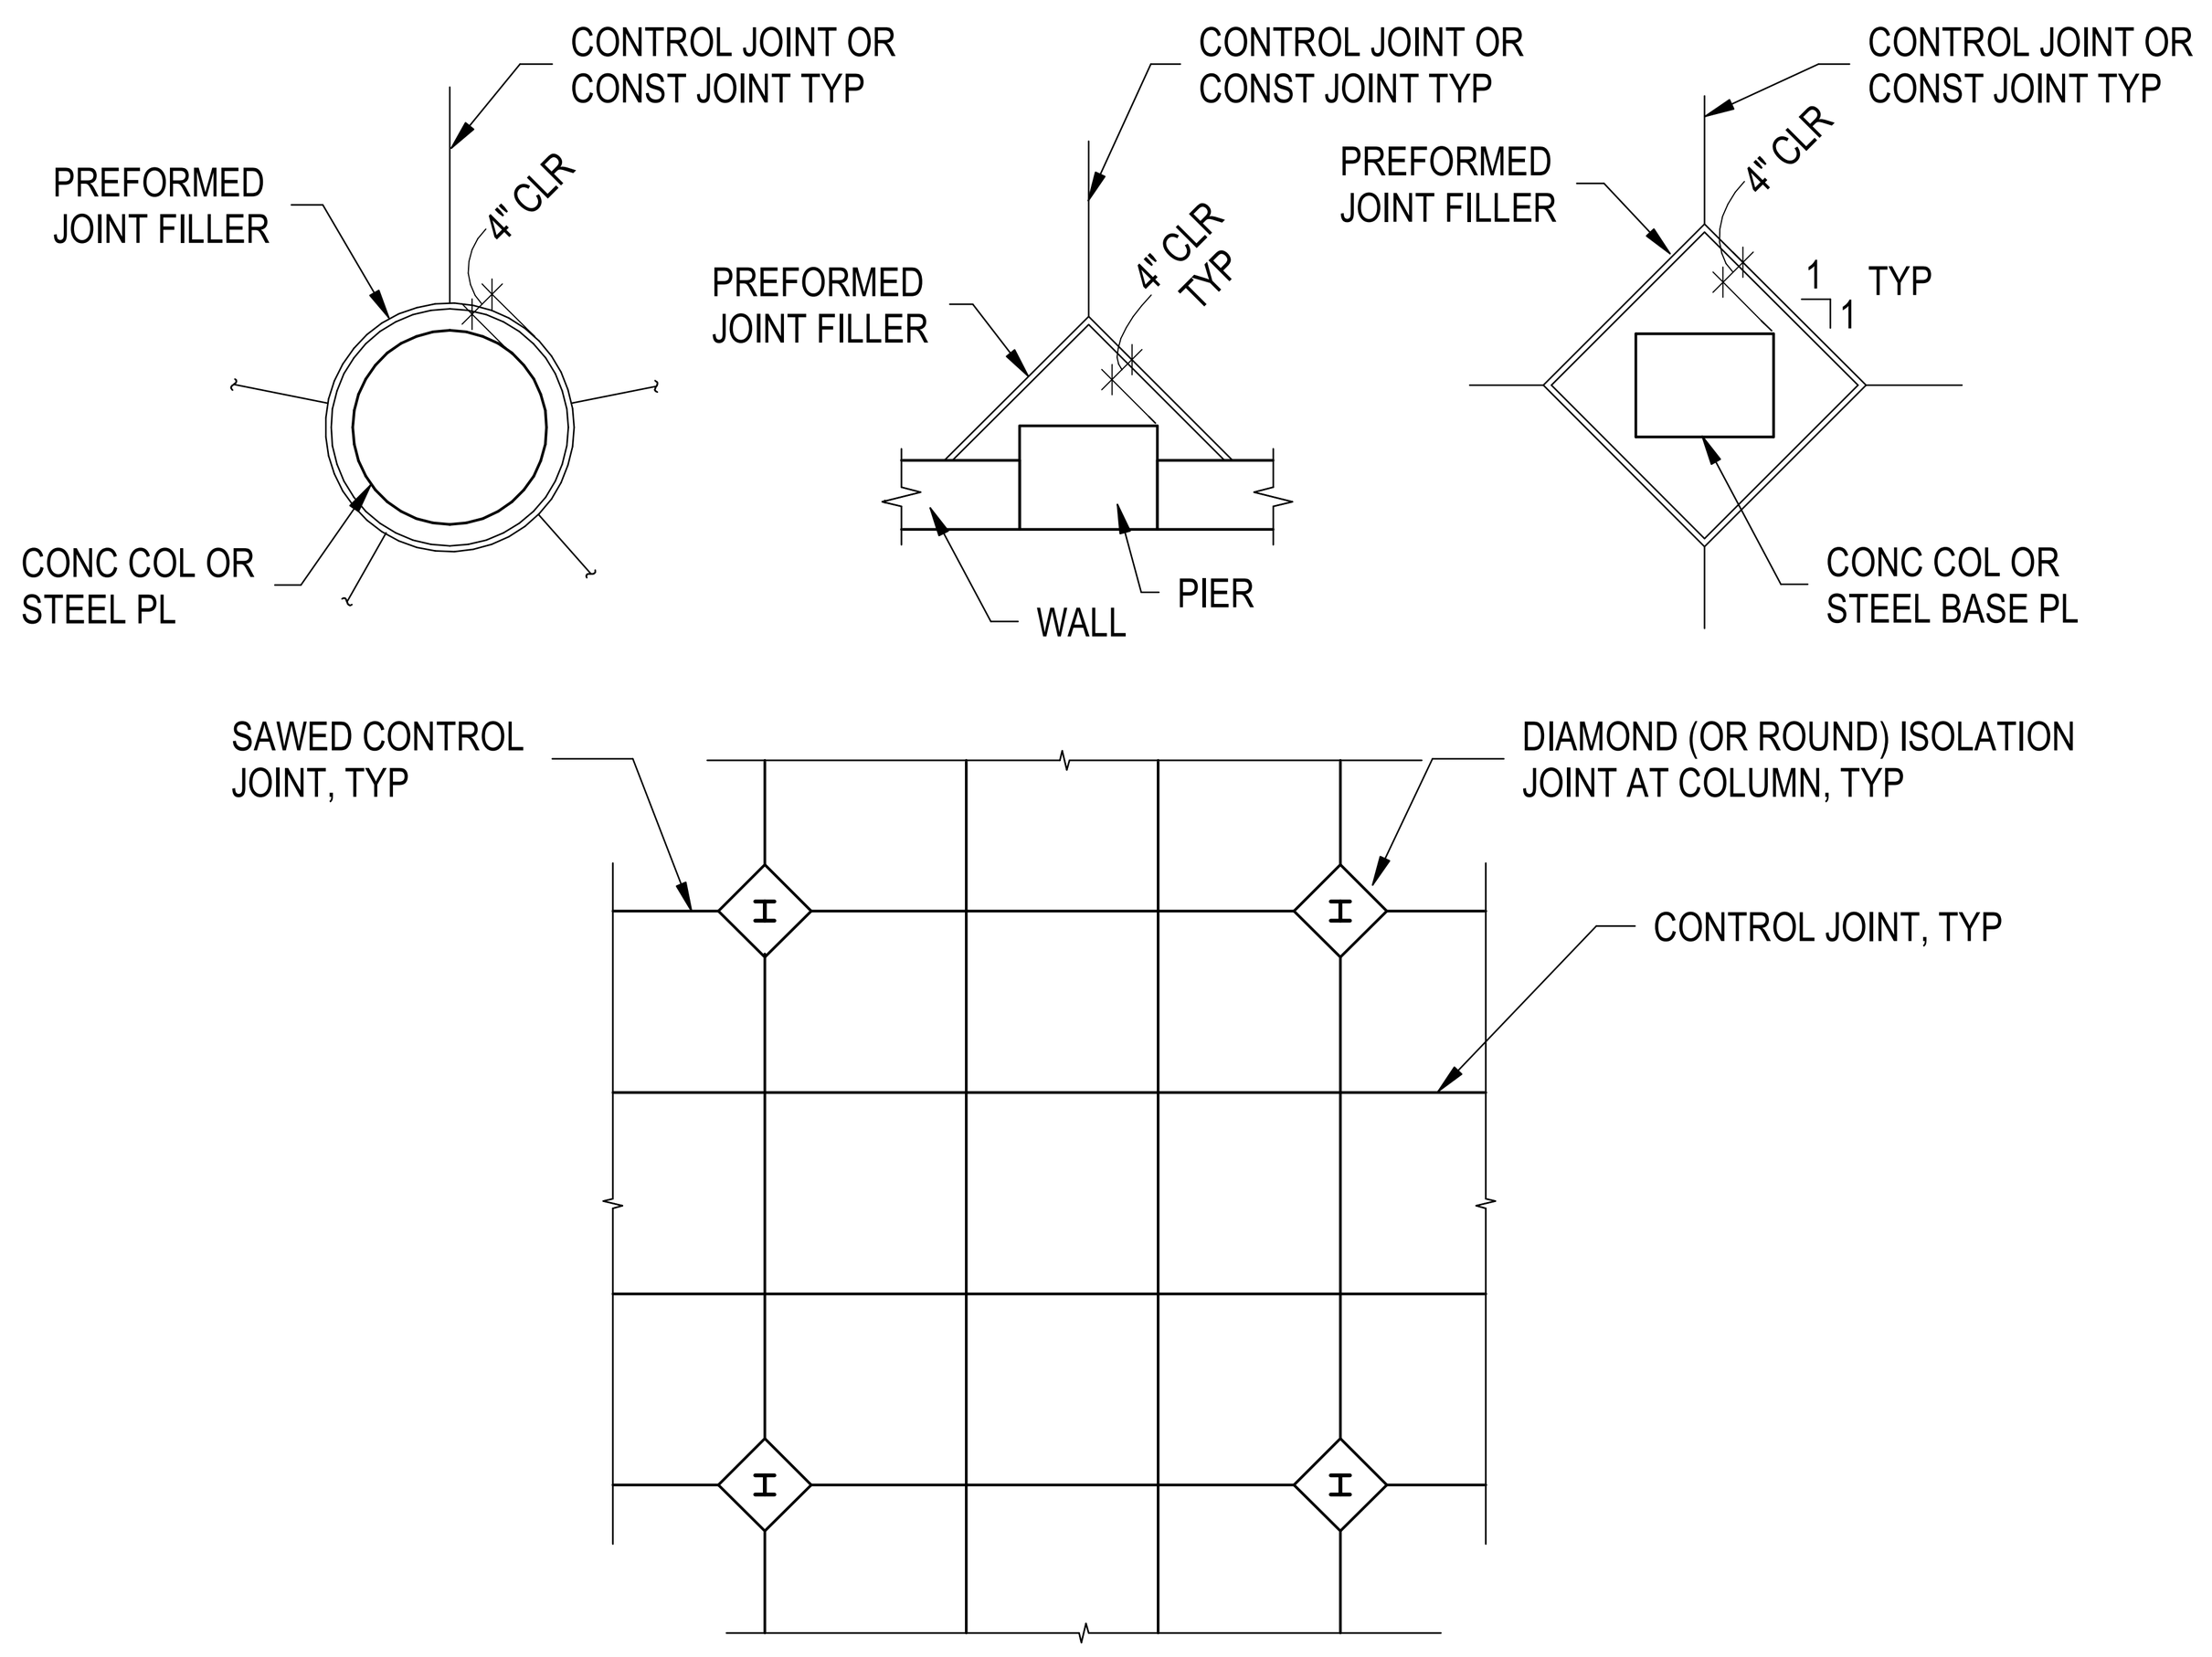

TYPICAL CONTROL JOINT LAYOUT DETAIL

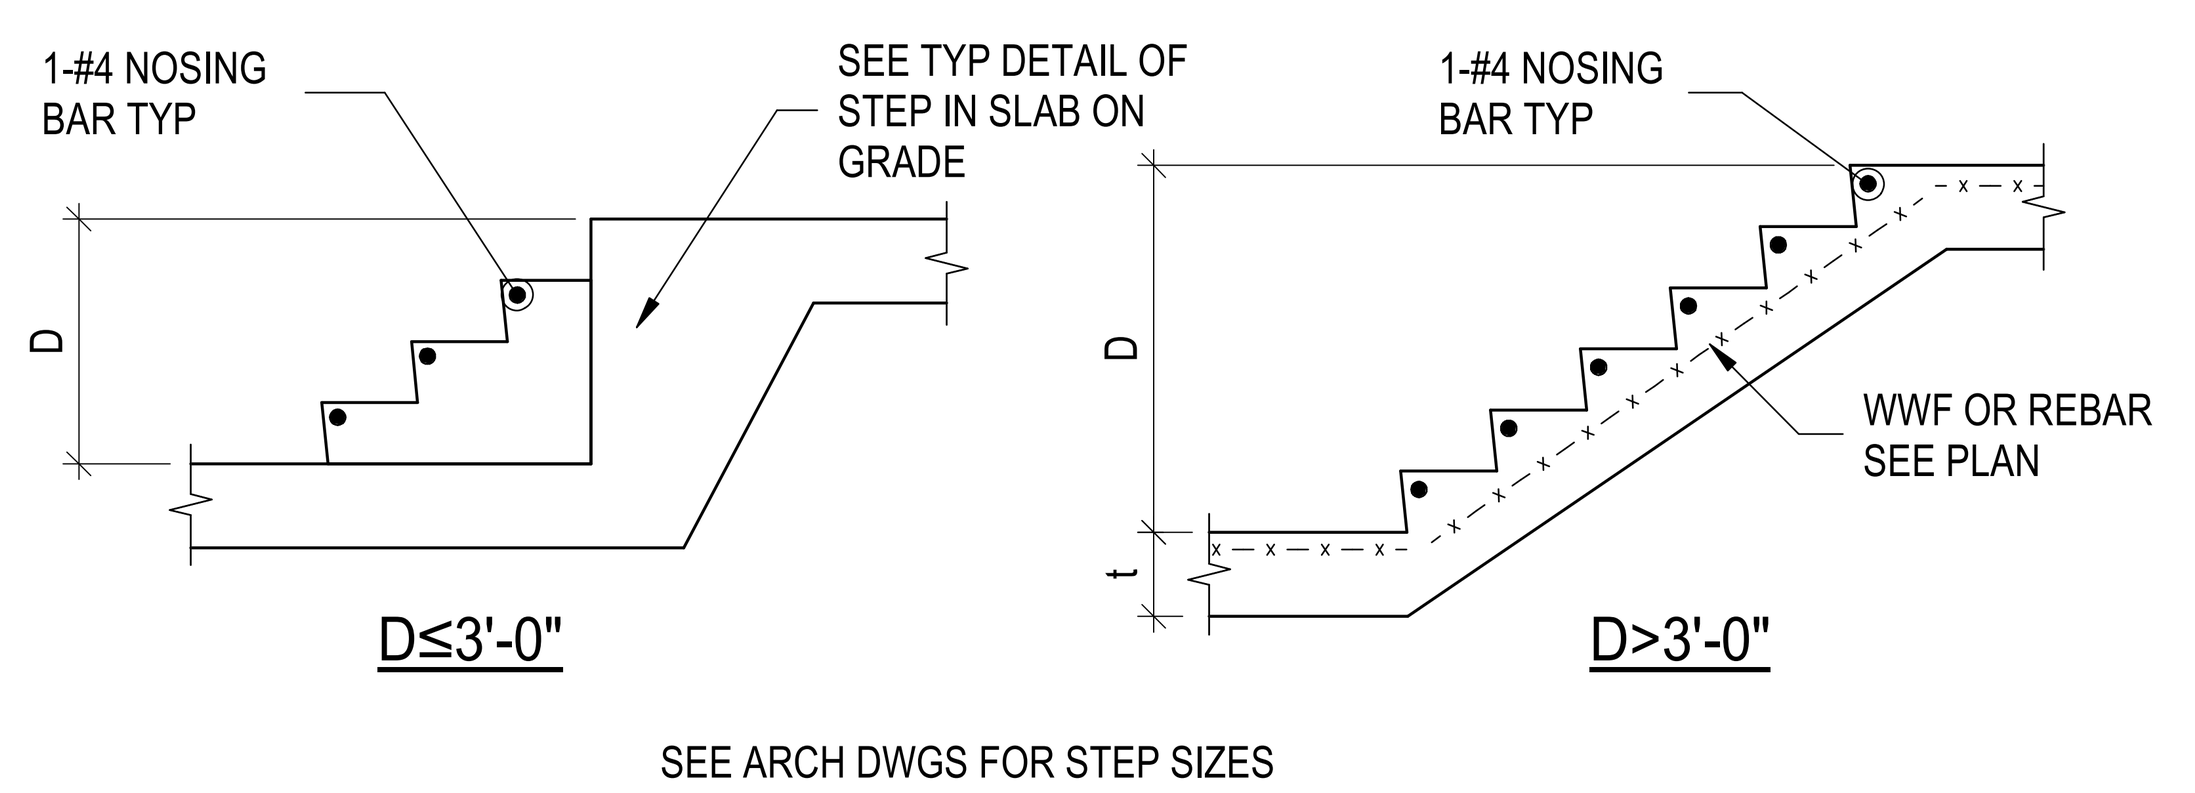

TYPICAL INTERIOR STAIR IN SLAB ON GRADE DETAIL

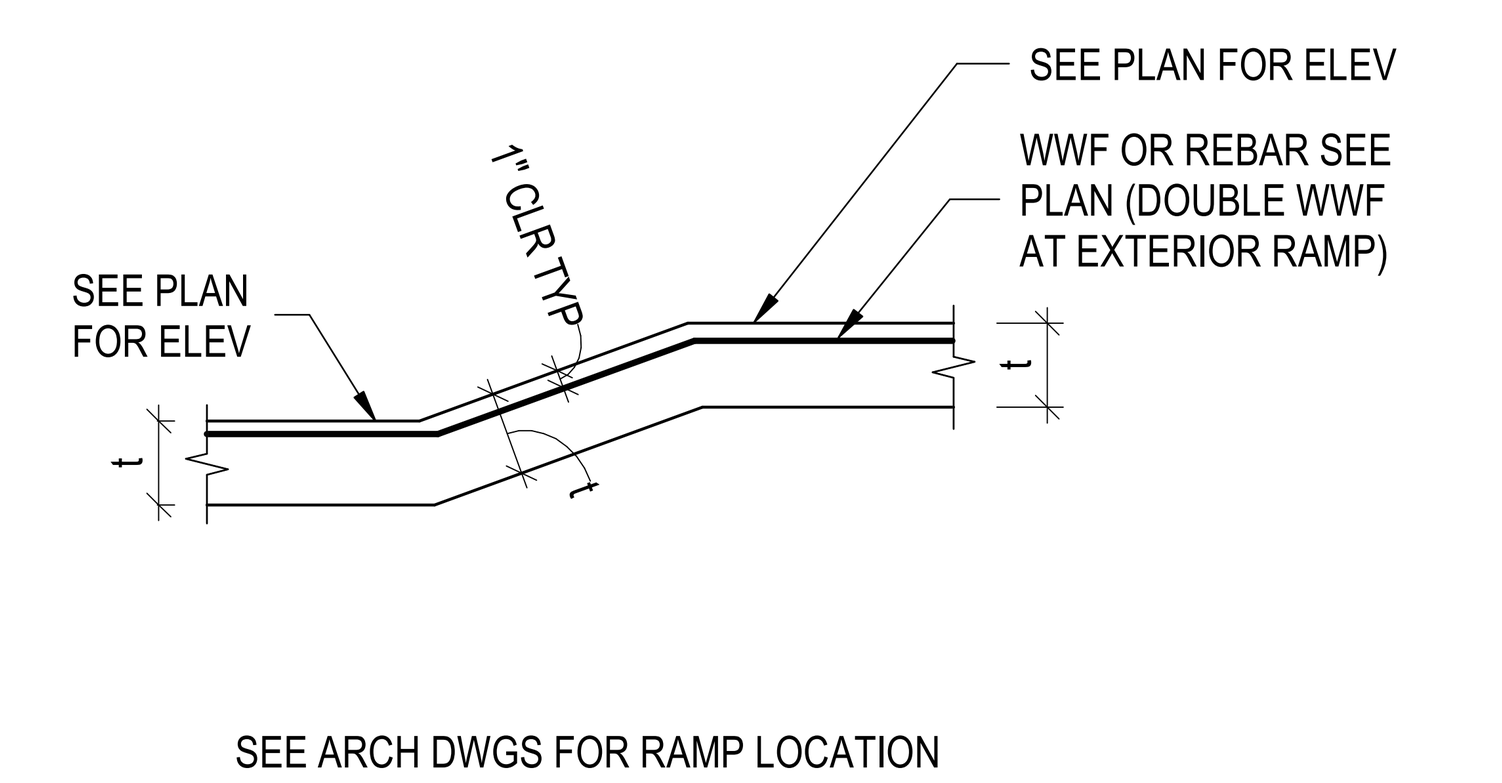

TYPICAL INTERIOR RAMP IN SLAB ON GRADE DETAIL

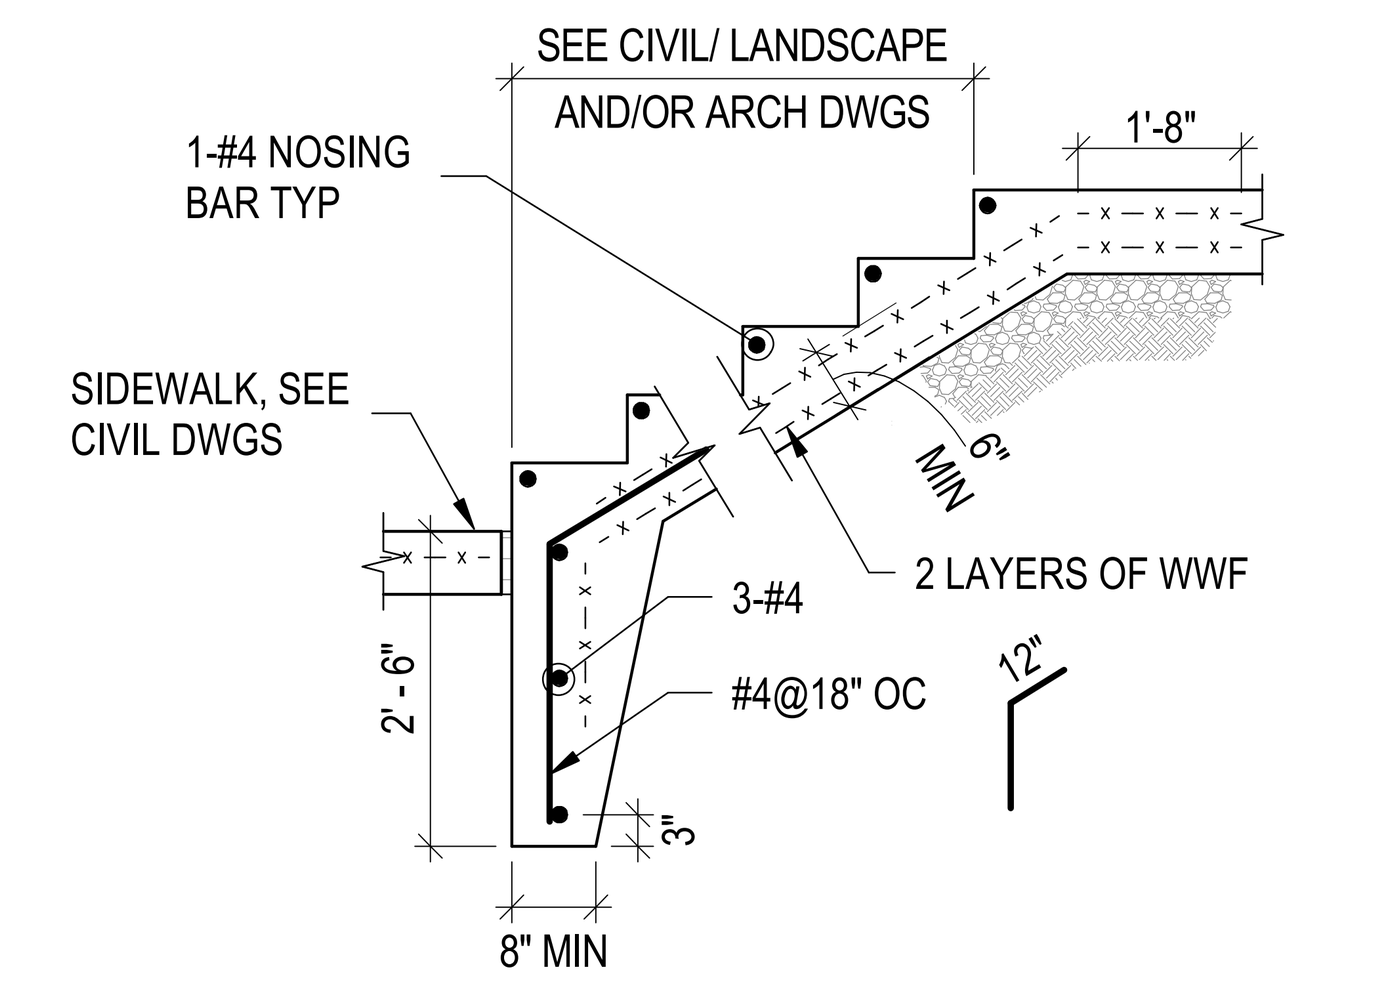

TYPICAL EXTERIOR STAIR ON GRADE DETAIL

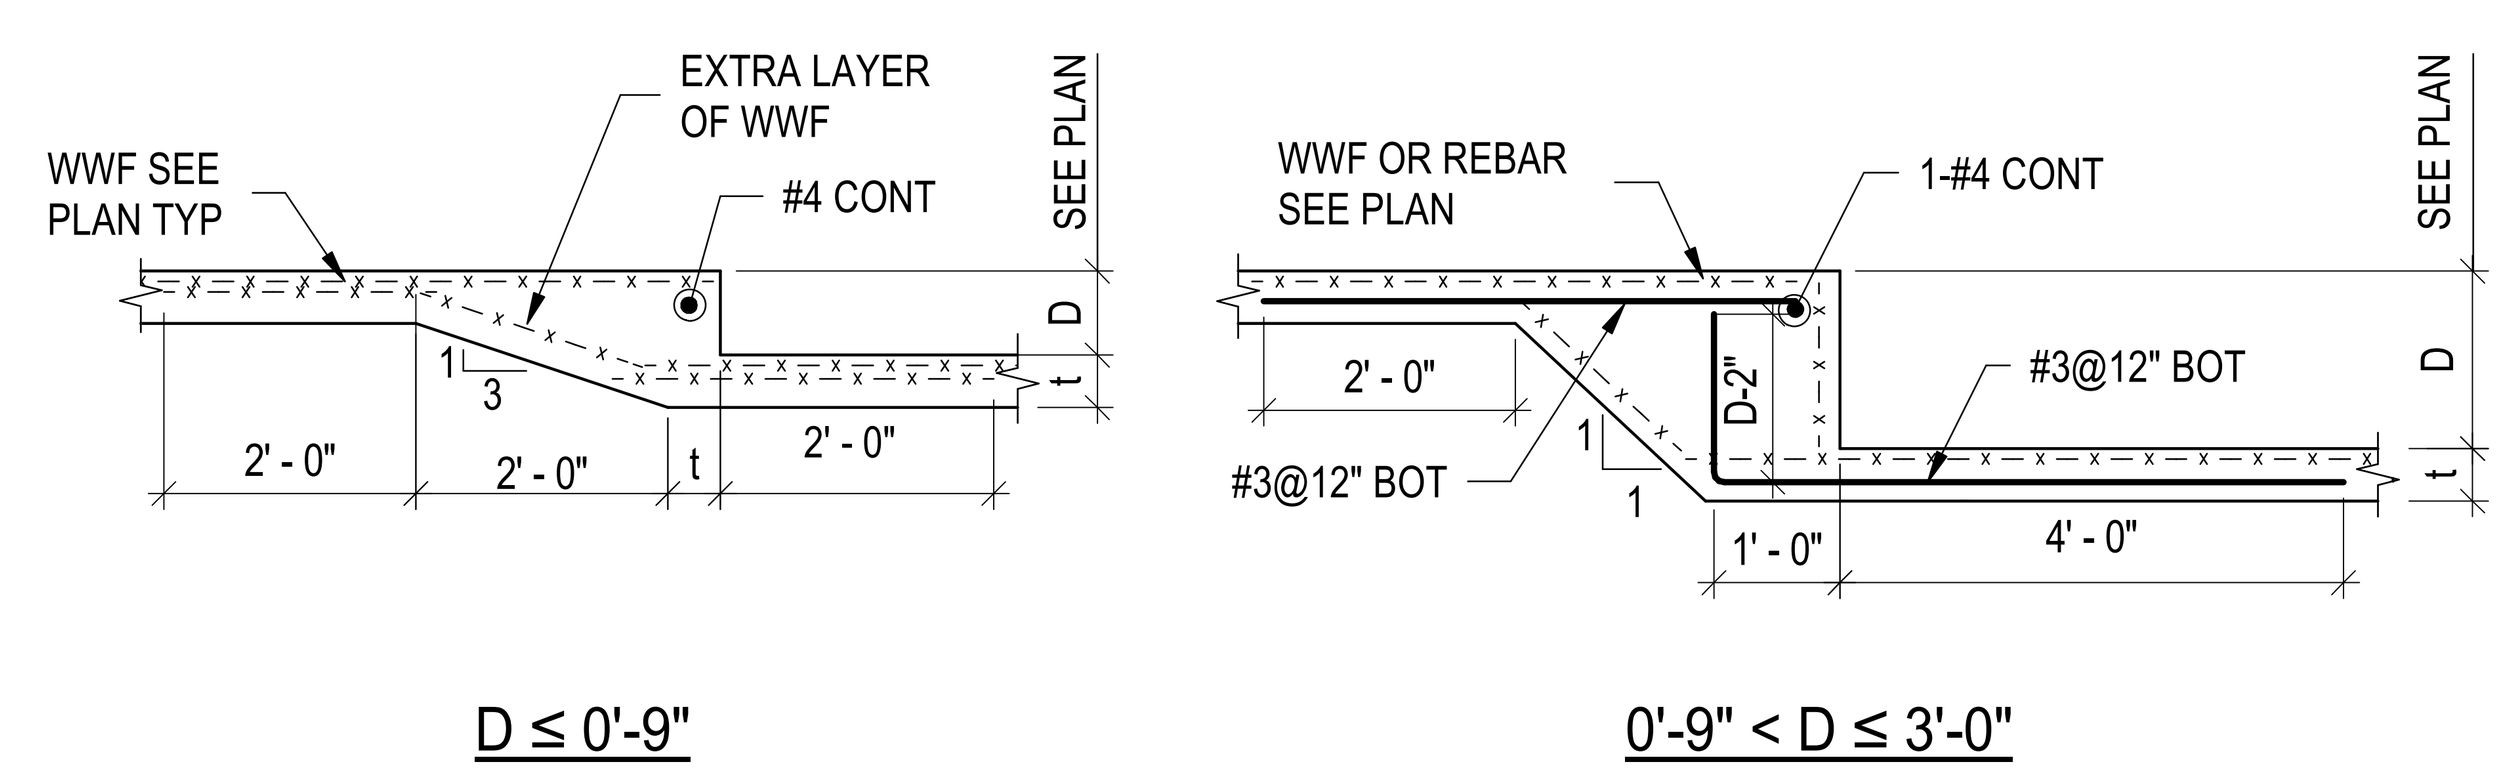

TYPICAL STEP IN SLAB ON GRADE DETAIL

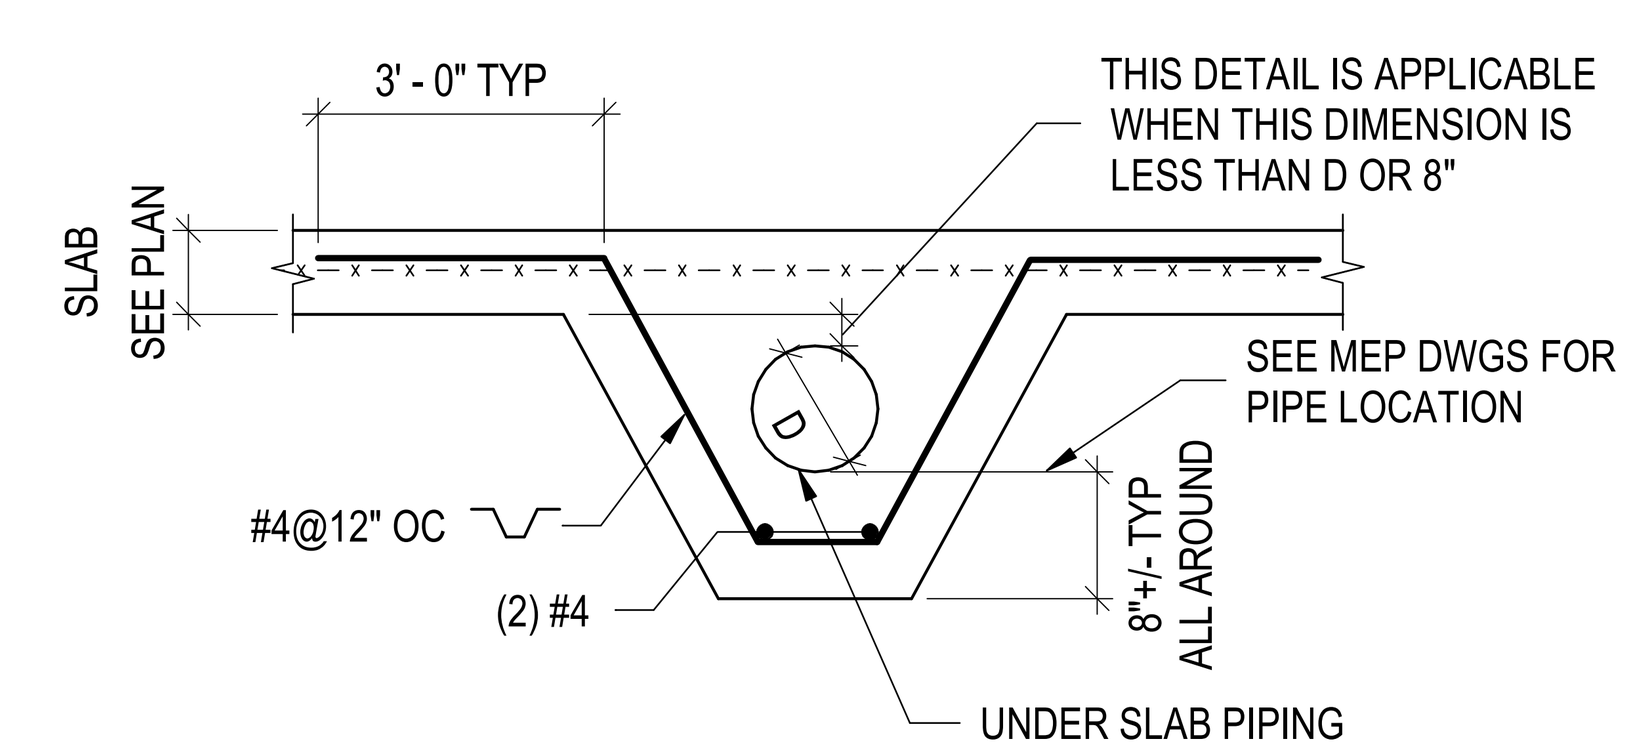

TYPICAL PIPE UNDER SLAB DETAIL

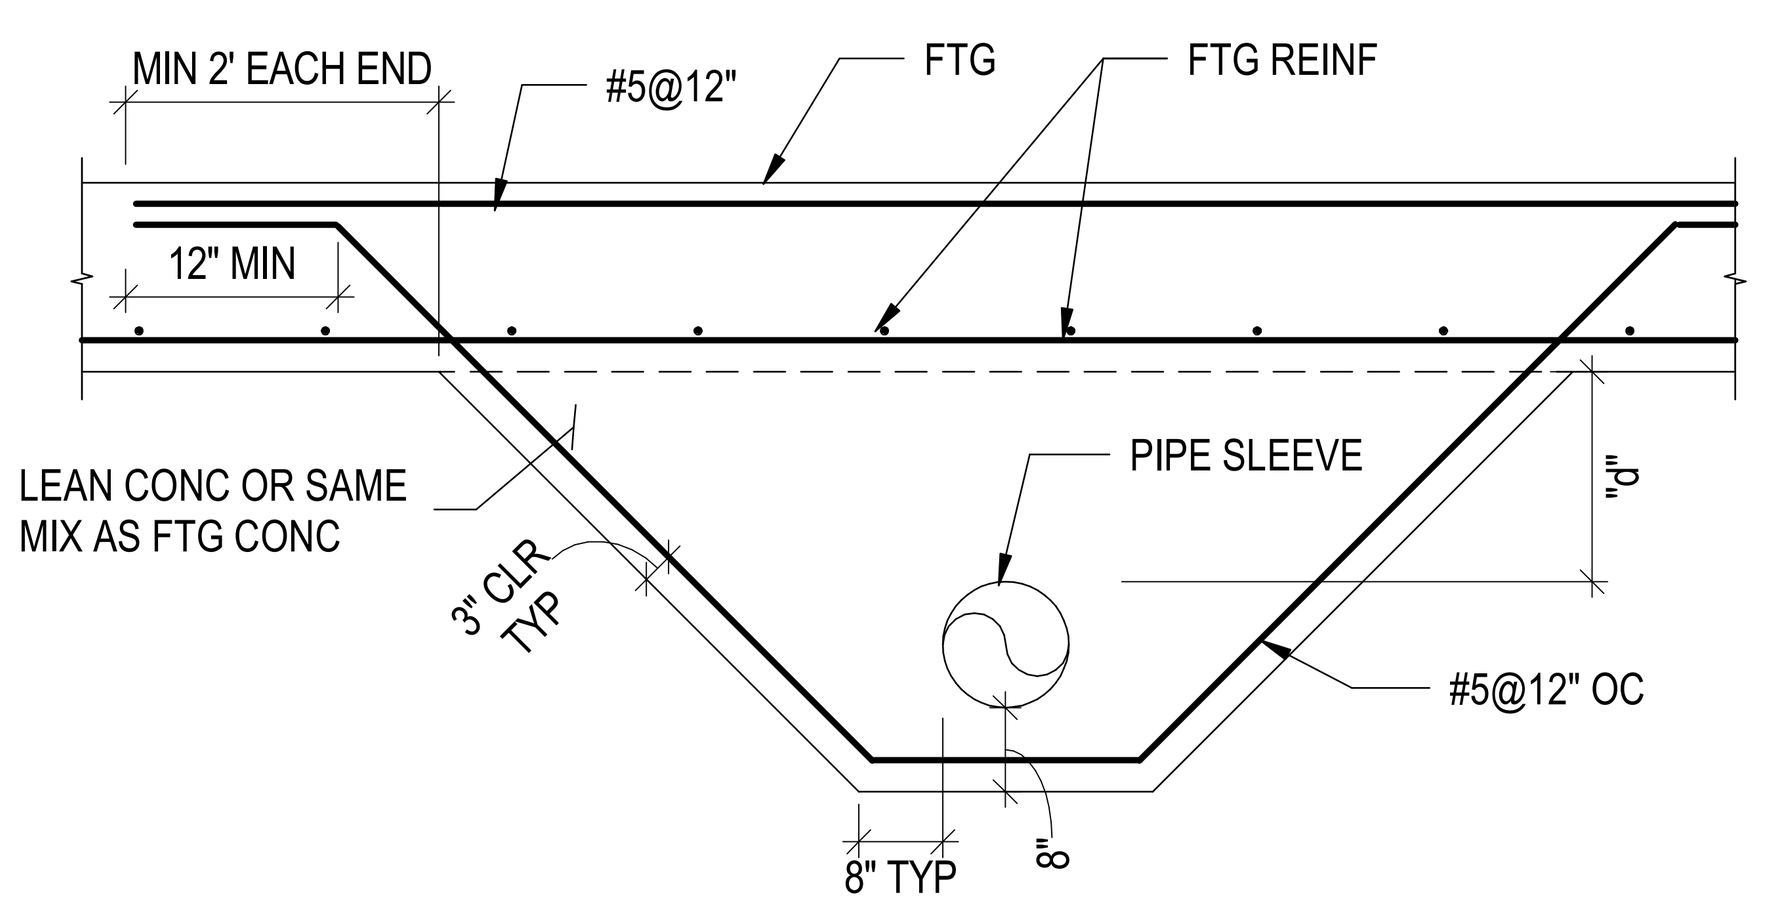

NOTE: THIS DEAIL APPLIES ONLY WHEN d IS LESS THAN 12" AND PIPE SLEEVE DIAMETER IS MORE THAN 12".

TYPICAL PIPE UNDER FOOTING DETAIL

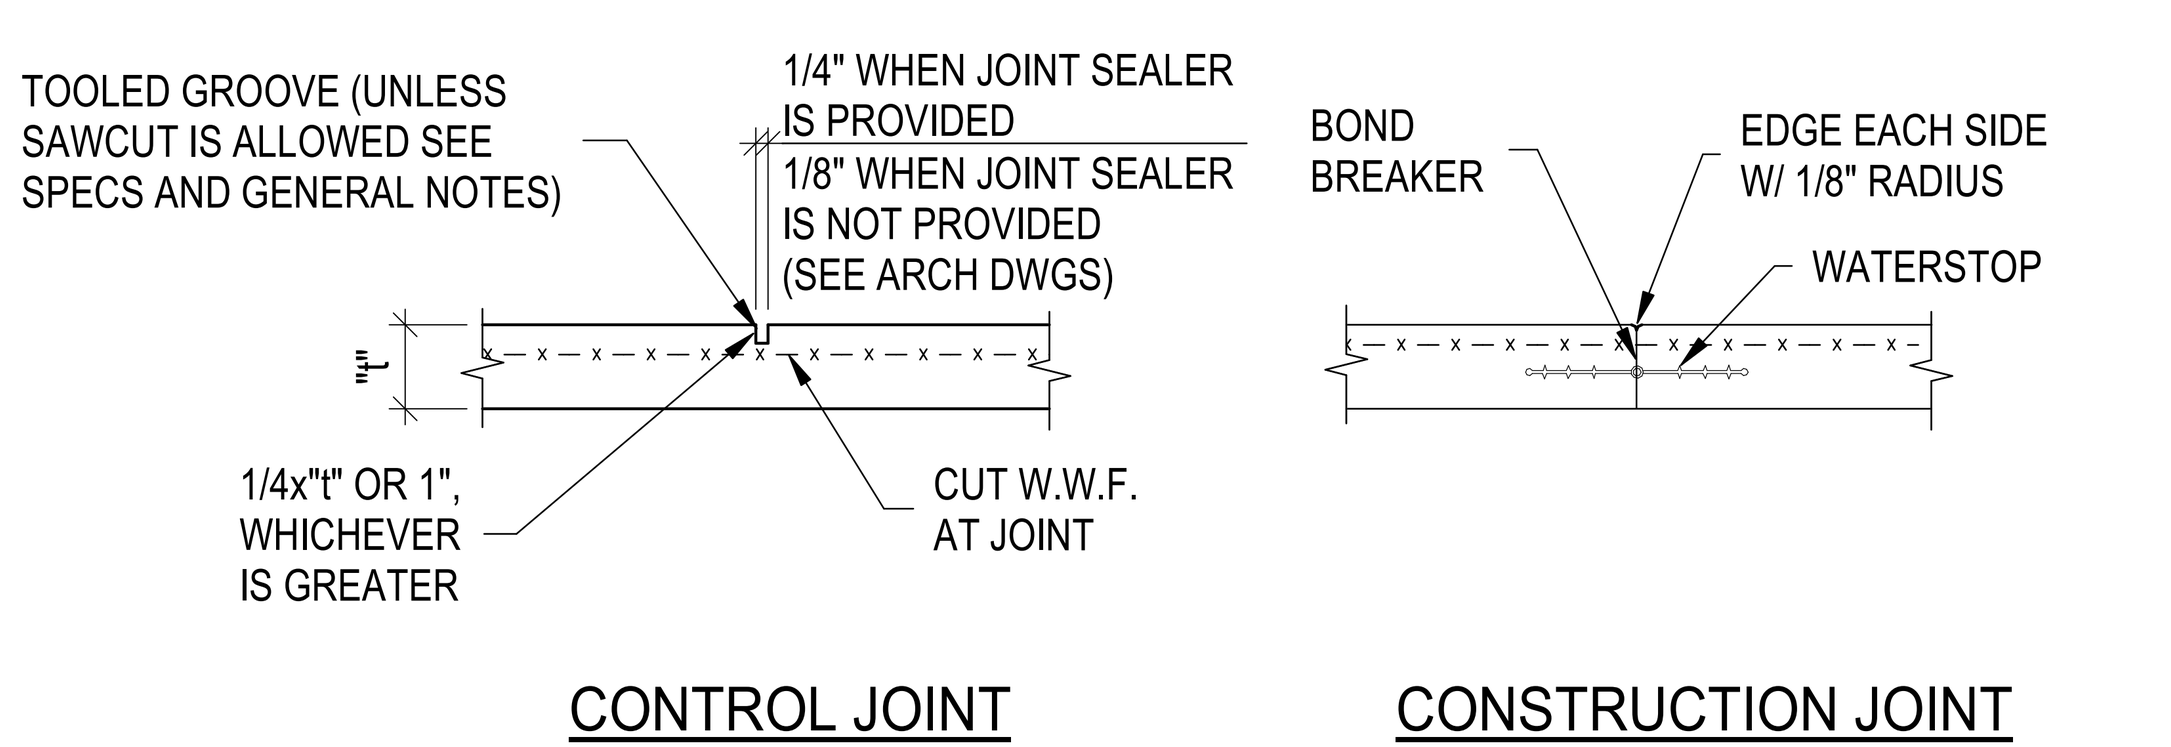

NOTES:
1. CONTRACTOR TO PROVIDE JOINT LAYOUT SUBMITTAL FOR REVIEW & APPROVAL.
2. MAXIMUM CONTROL JOINT SPACING IS 12 FEET. CONSTRUCTION JOINT SHALL OCCUR AT CONTROL JOINT.
3. COORDINATE TYPE & LAYOUT OF ISOLATION JOINTS W/ ARCHITECTURAL FINISHES.

TYPICAL JOINTS IN SLAB ON GRADE DETAIL

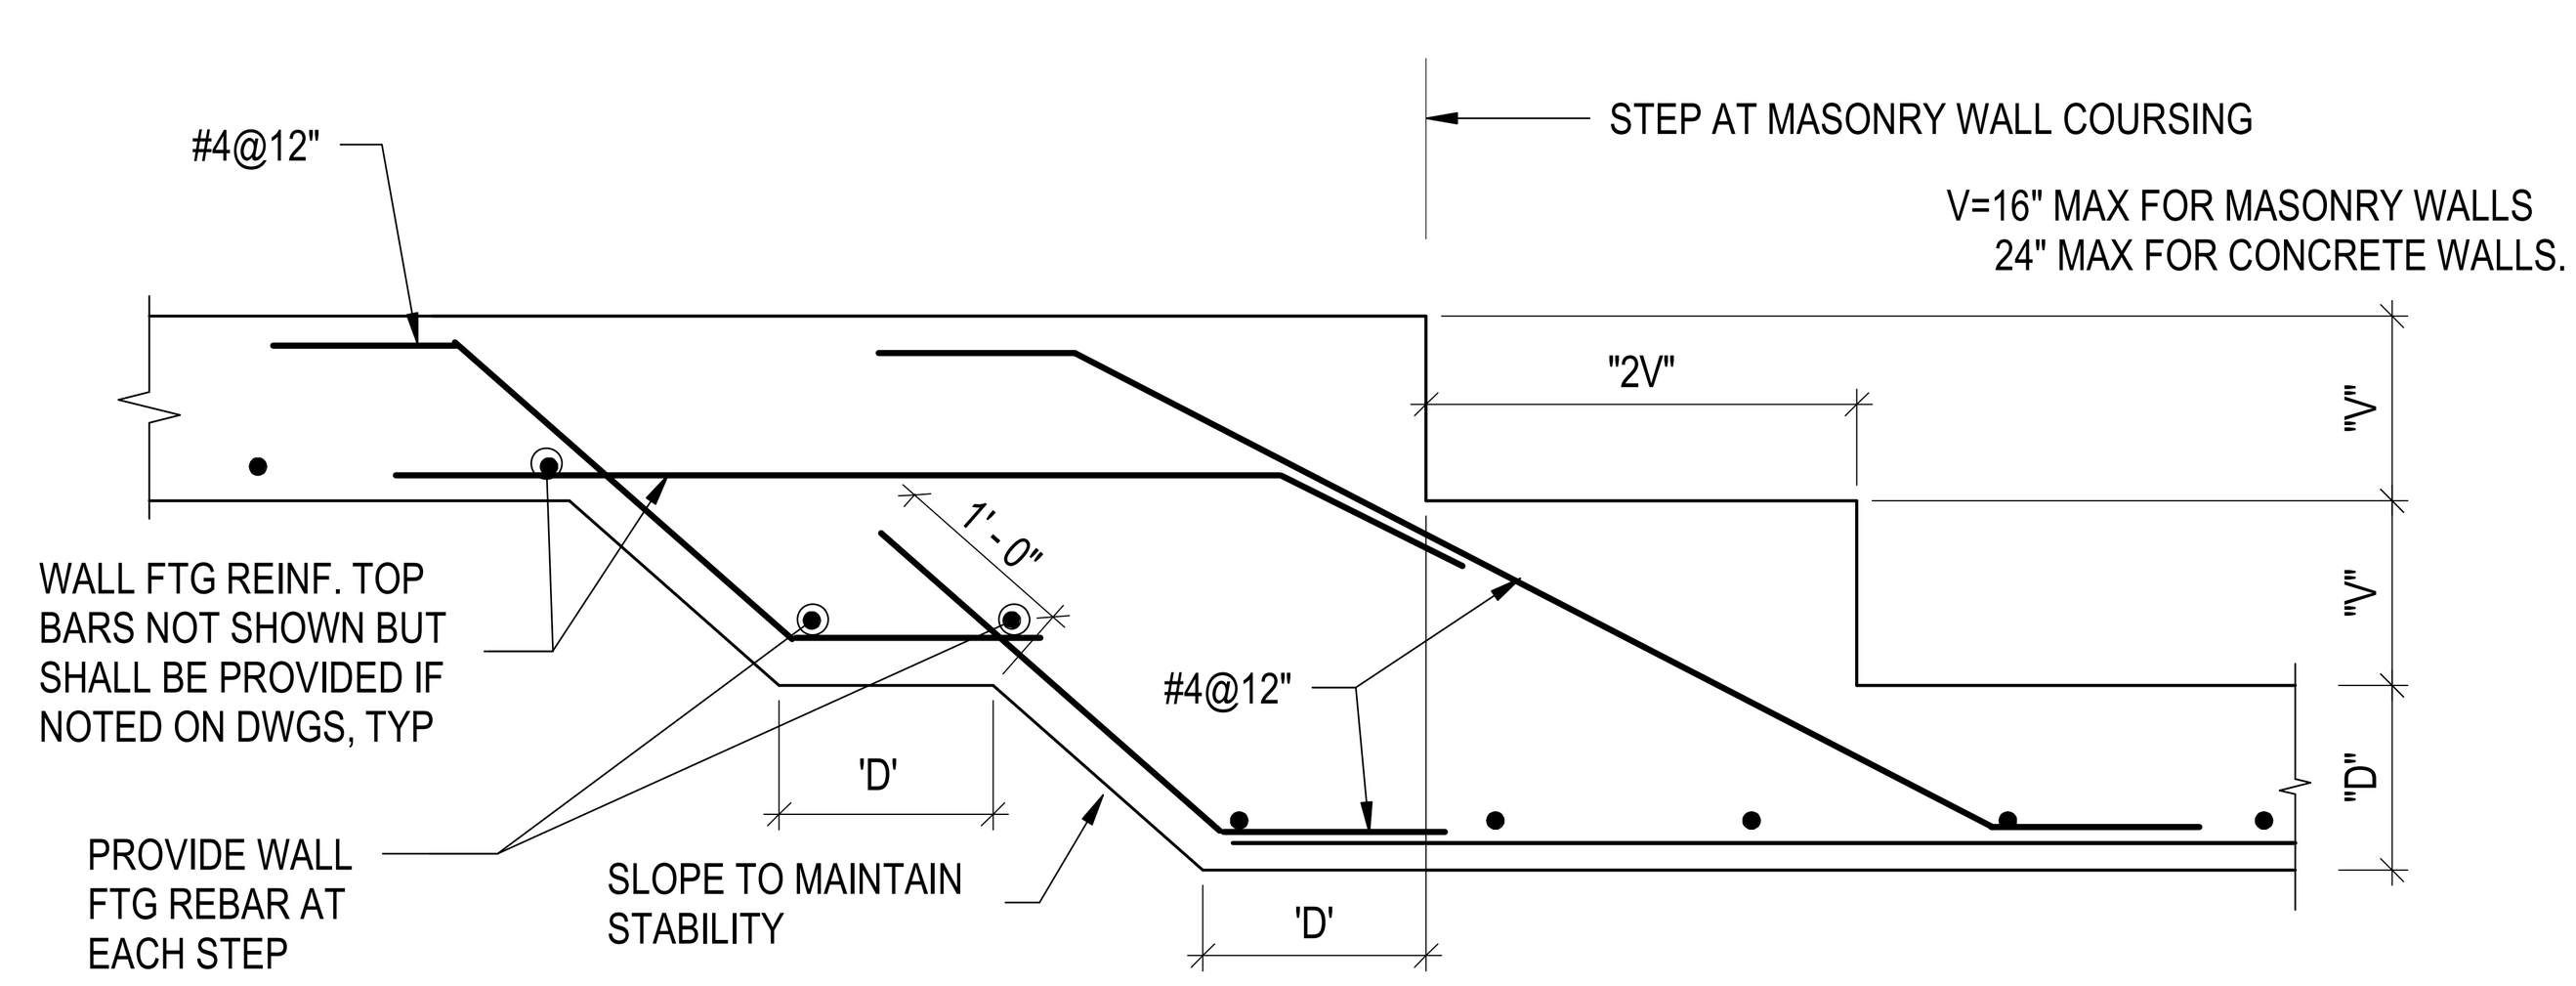

TYPICAL STEPPED FOOTING DETAIL

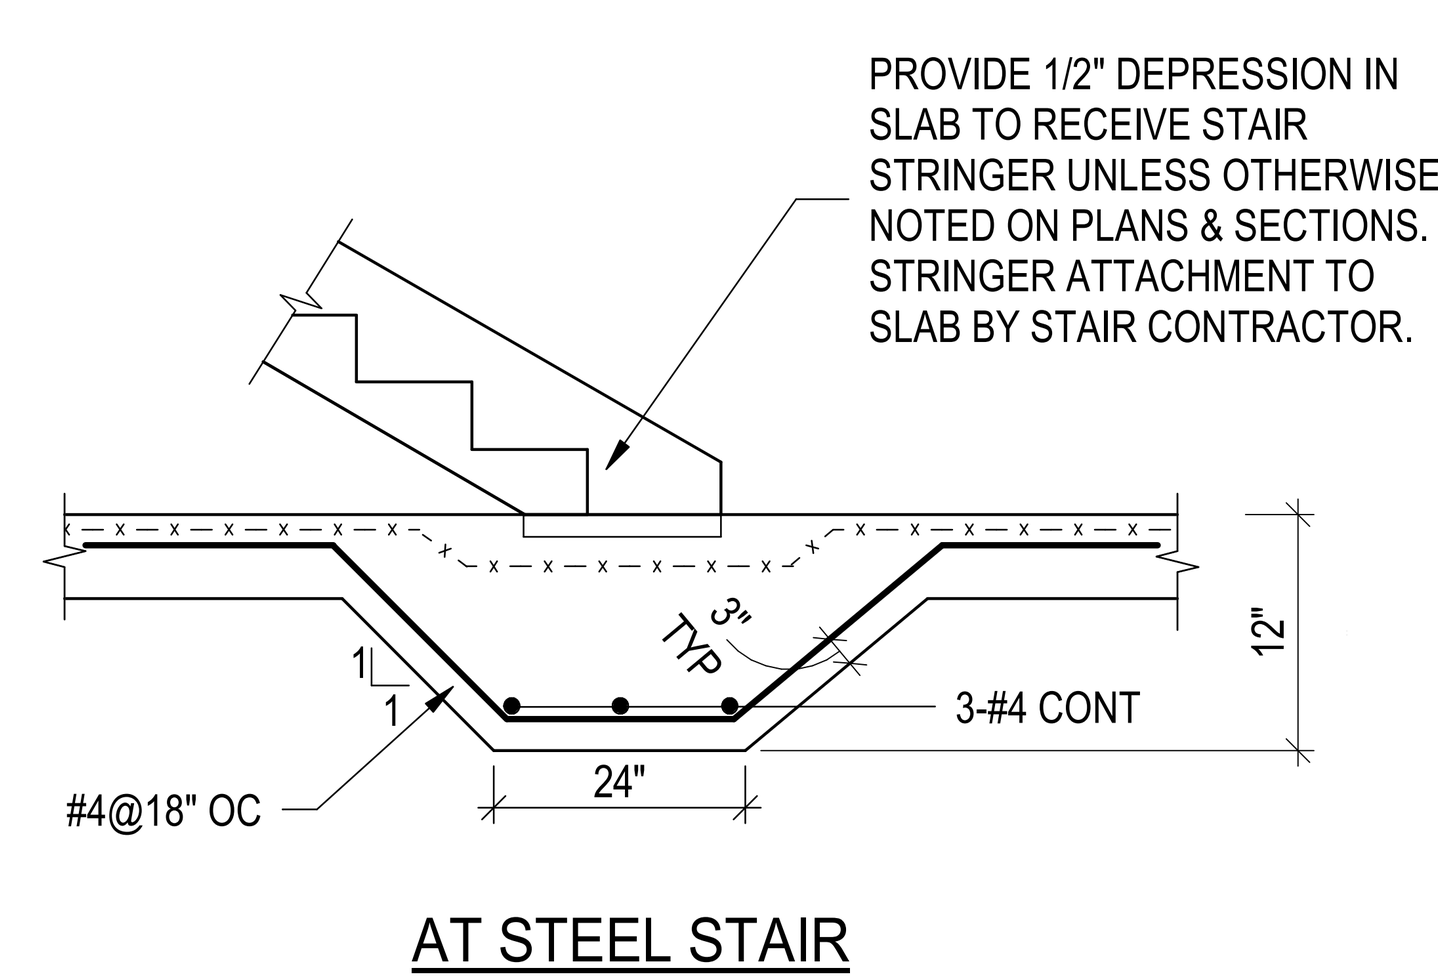

TYPICAL THICKENED SLAB ON GRADE DETAIL

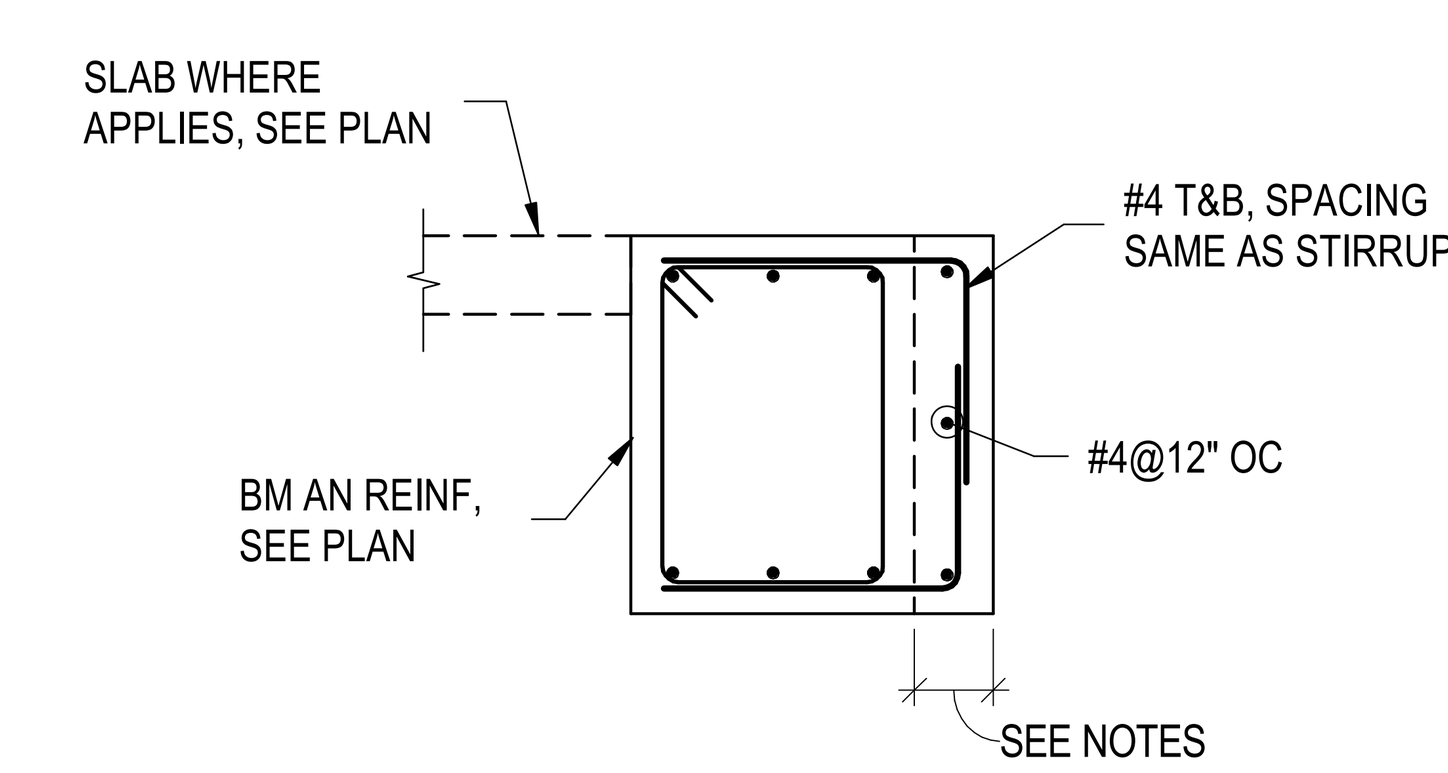

NOTES:
1. OVER POUR FACE OF BEAM TO EDGE OF SLAB WHERE INDICATED ON PLAN OR SECTION. WIDTH OF OVER POUR VARIES.
2. PROVIDE ADDITIAONL REINFORCING INDICATED WHERE DIMENSION EXCEEDS 2 INCHES.

TYPICAL BEAM SIDE OVERPOUR DETAIL

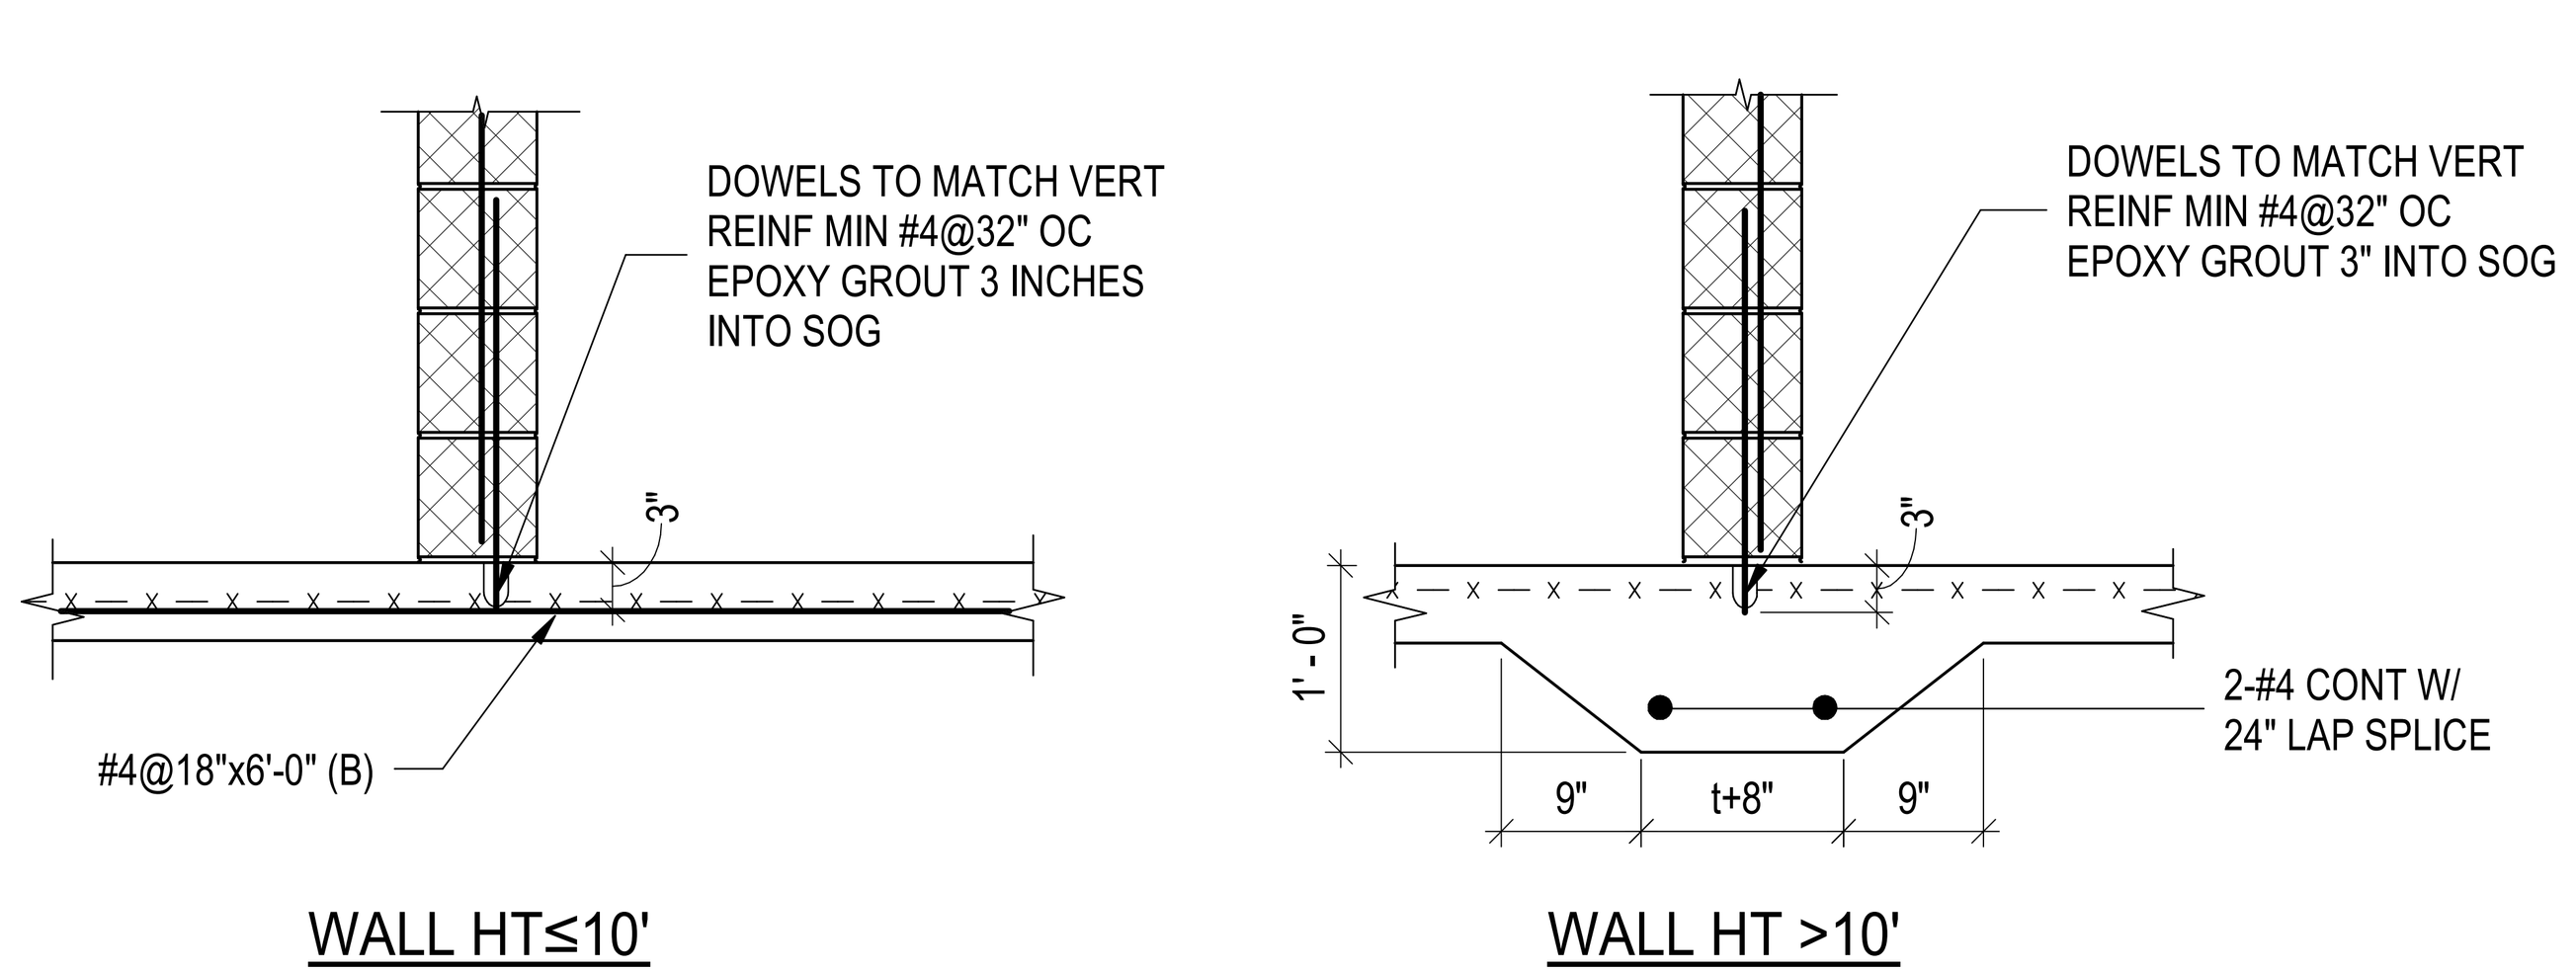

TYPICAL NON-LOAD BEARING CMU ON SLAB ON GRADE DETAIL

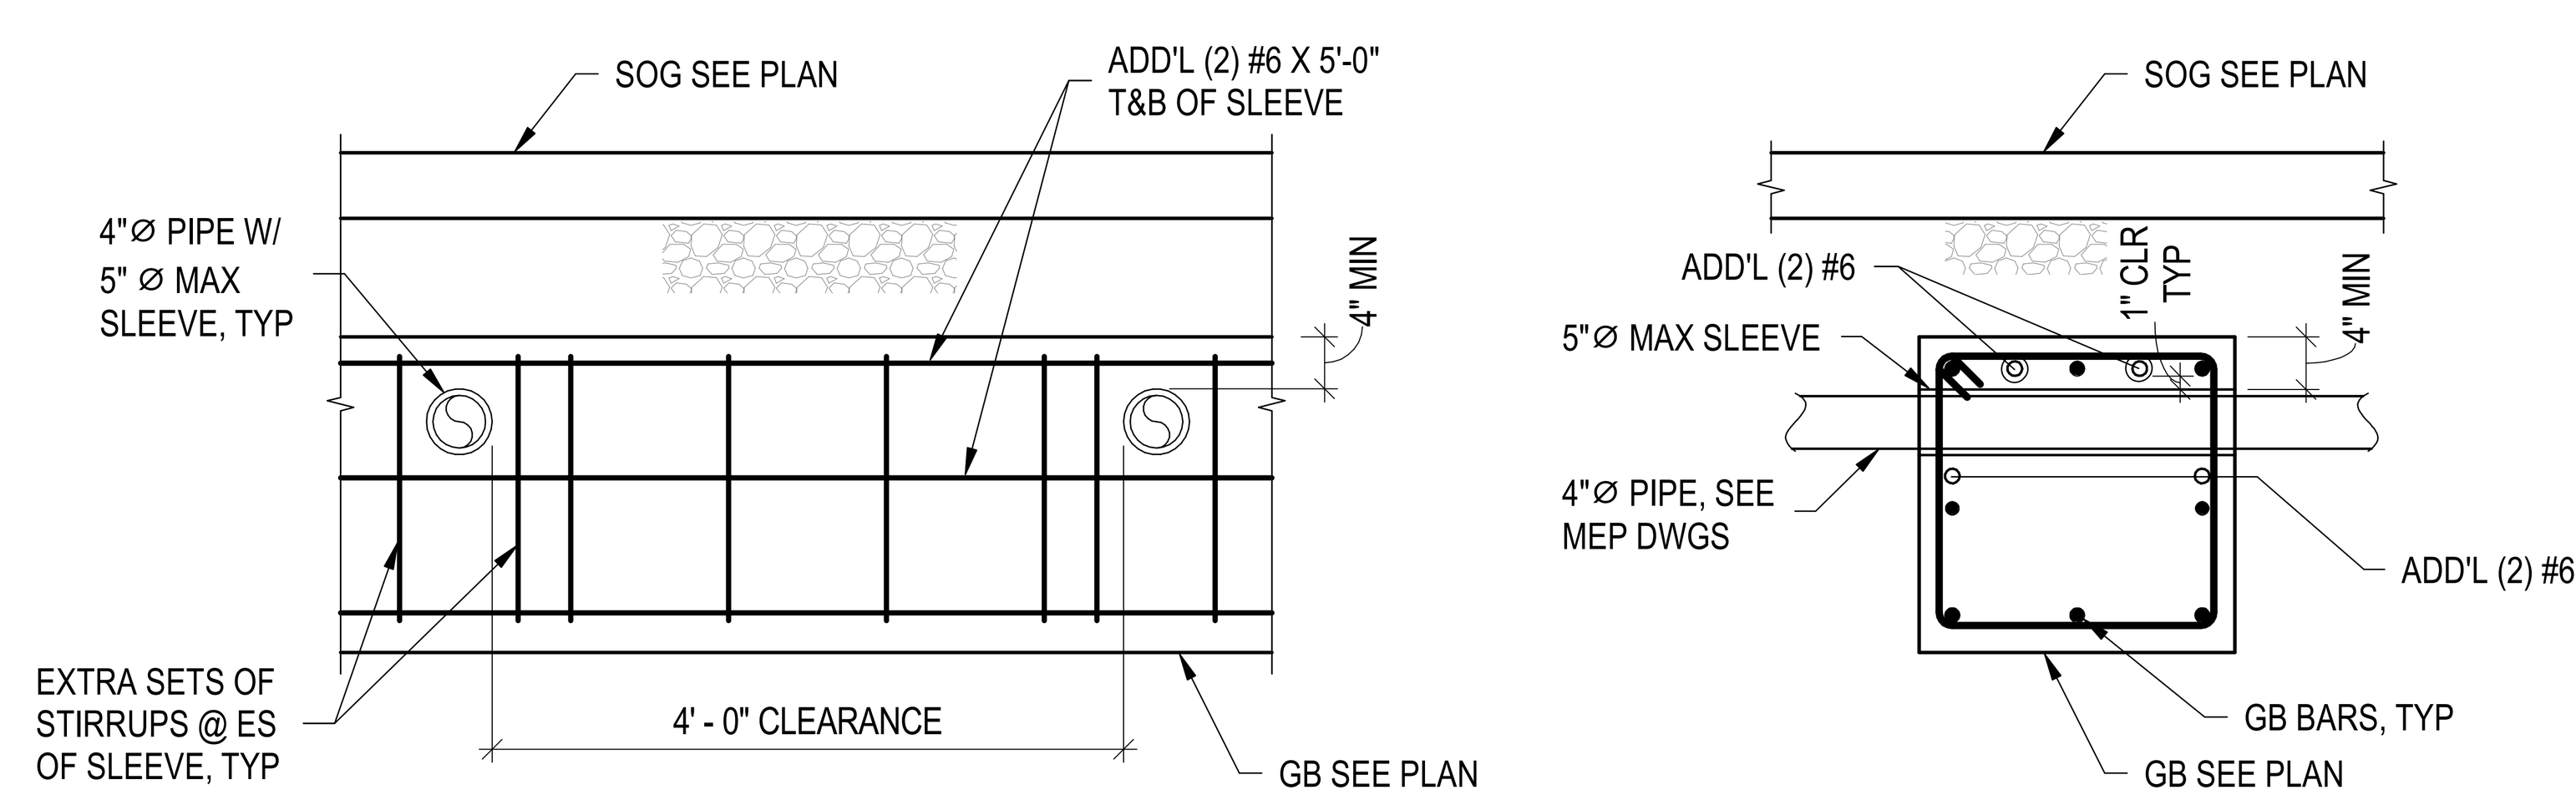

TYPICAL SLEEVE PENETRATION DETAIL AT GRADE BEAM

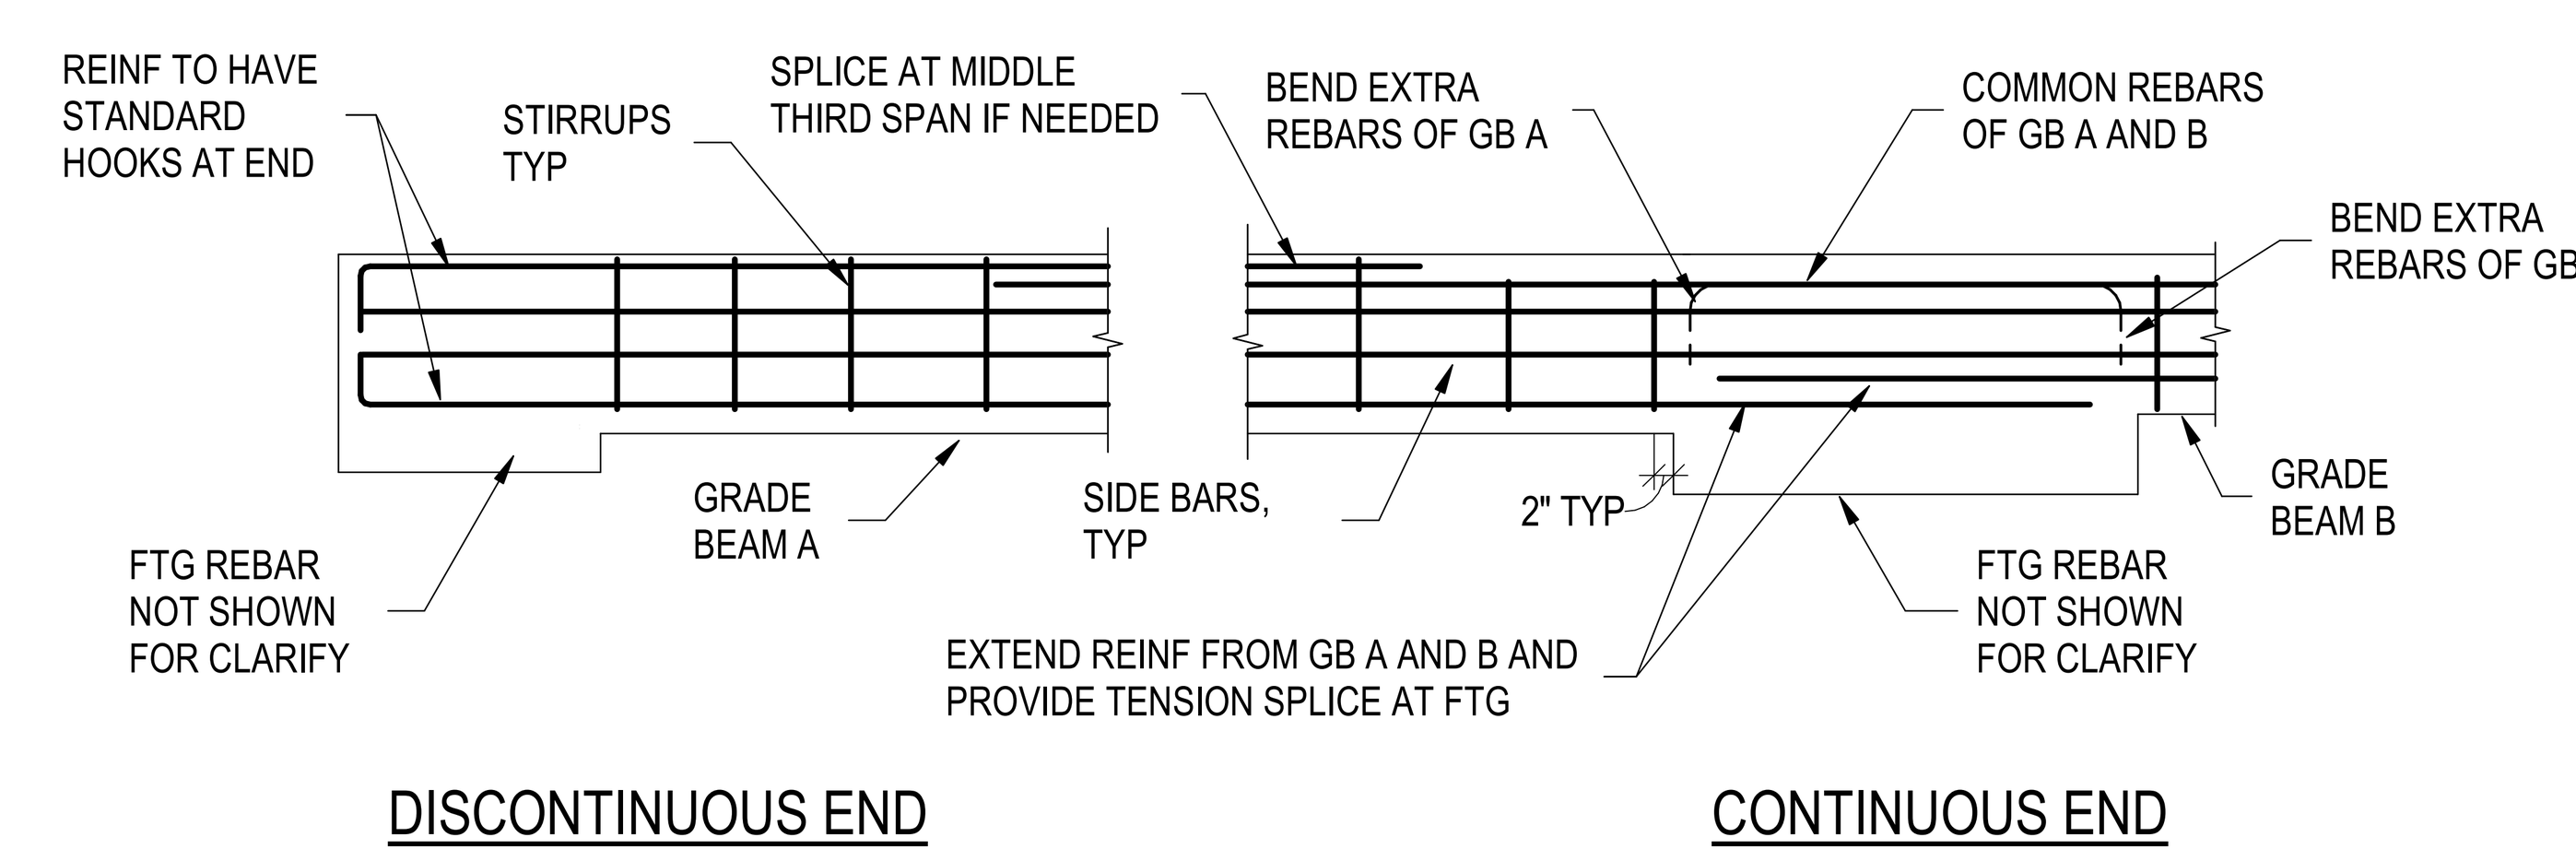

NOTES:
1. CARRY BEAM REINFORCEMENT CONTINUOUS W/O SPLICE WHERE PRACTICAL.
2. SPLICES FOR BEAM REINFORCEMENT TO BE MADE AT MID-SPAN FOR TOP REINFORCEMENT AND AT SUPPORT FOR BOTTOM REINFORCEMENT UON.
3. BARS ON THE SIDE FACING RETAINED SOIL SHALL FOLLOW THE TOP BAR ARRANGEMENT, AND FOLLOW THE BOTTOM BAR ARRANGEMENT AT THE OTHER FACE. IF THE GRADE BEAMS DO NOT SUPPORT RETAINED SOIL, SIDE BARS CAN BE TENSION SPLICED AT LOCATIONS DETERMINED BY THE CONTRACTOR.

TYPICAL GRADE BEAM OVER FOOTING REINFORCING DETAIL

Autodesk Docs://Sidwell Lower School/Sidwell Lower School_ST_R24.rvt
10/28/2025 10:14:45 AM

NO.	DATE	ISSUE
A	09/30/2025	Permit
	10/29/2025	BID SET

SEAL

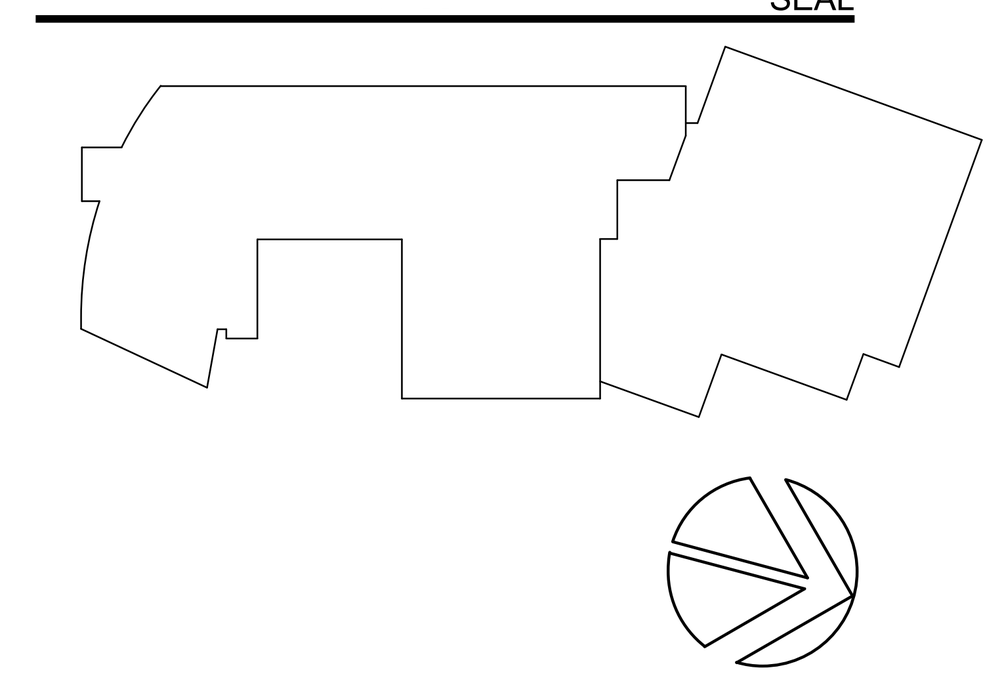

KEY PLAN

PERKINS EASTMAN
One Thomas Circle NW, Suite 200
Washington, DC 20005
T: +1 202 861 1325
F: +1 202 861 1326

Owner:
Sidwell Friends School
3825 Wisconsin Ave NW, Washington DC 20016

Construction Manager:
Advanced Project Management, Inc (APM)
4530 Walney Rd, Ste 202, Chantilly, VA 20151

Civil / Site:
Bowman Consulting Group, Ltd
888 17th St NW, Suite 510, Washington, DC 20006

Landscape:
Natural Resources Design, Inc (NRD)
1009 Shepherd Street NE, Washington, DC 20017

Structural:
Yun Associates LLC
1050 Connecticut Ave NW, Suite 500, Washington, DC 20036

MEP / FP / Lighting:
CMTA Inc
220 Lexington Green Circle, Suite 600, Lexington, KY 40503

AV / IT / Telecom / Security:
Educational Systems Planning (ESP)
2448 Holly Avenue, Suite 302, Annapolis, MD 21401

Food Service
Nyikos-Garcia Foodservice Design, Inc
7146 Starmount Way, New Market, MD 21774

Accessibility Consultant:
Galbo Wolf LLC
4410 Massachusetts Ave NW, #240, Washington, DC 20016

Acoustics:
Polysonics Corp
555 Hospital Drive, Warrenton, VA 20186

Building Envelope Consultant:
Sustainable Building Partners LLC
2701 Prosperity Ave, Suite 105, Fairfax, VA 22031

Code Consultant:
Campbell Code Consulting LLC
7834 Taggart Ct, Elkridge, MD 21075

Specifications:

PROJECT TITLE:
SIDWELL FRIENDS NEW LOWER SCHOOL AT DC CAMPUS
3825 WISCONSIN AVE NW
WASHINGTON, DC 20016

PROJECT No: 2025008

DRAWING TITLE:
TYPICAL DETAILS

SCALE: As indicated

S-201

BID SET
10/29/2025

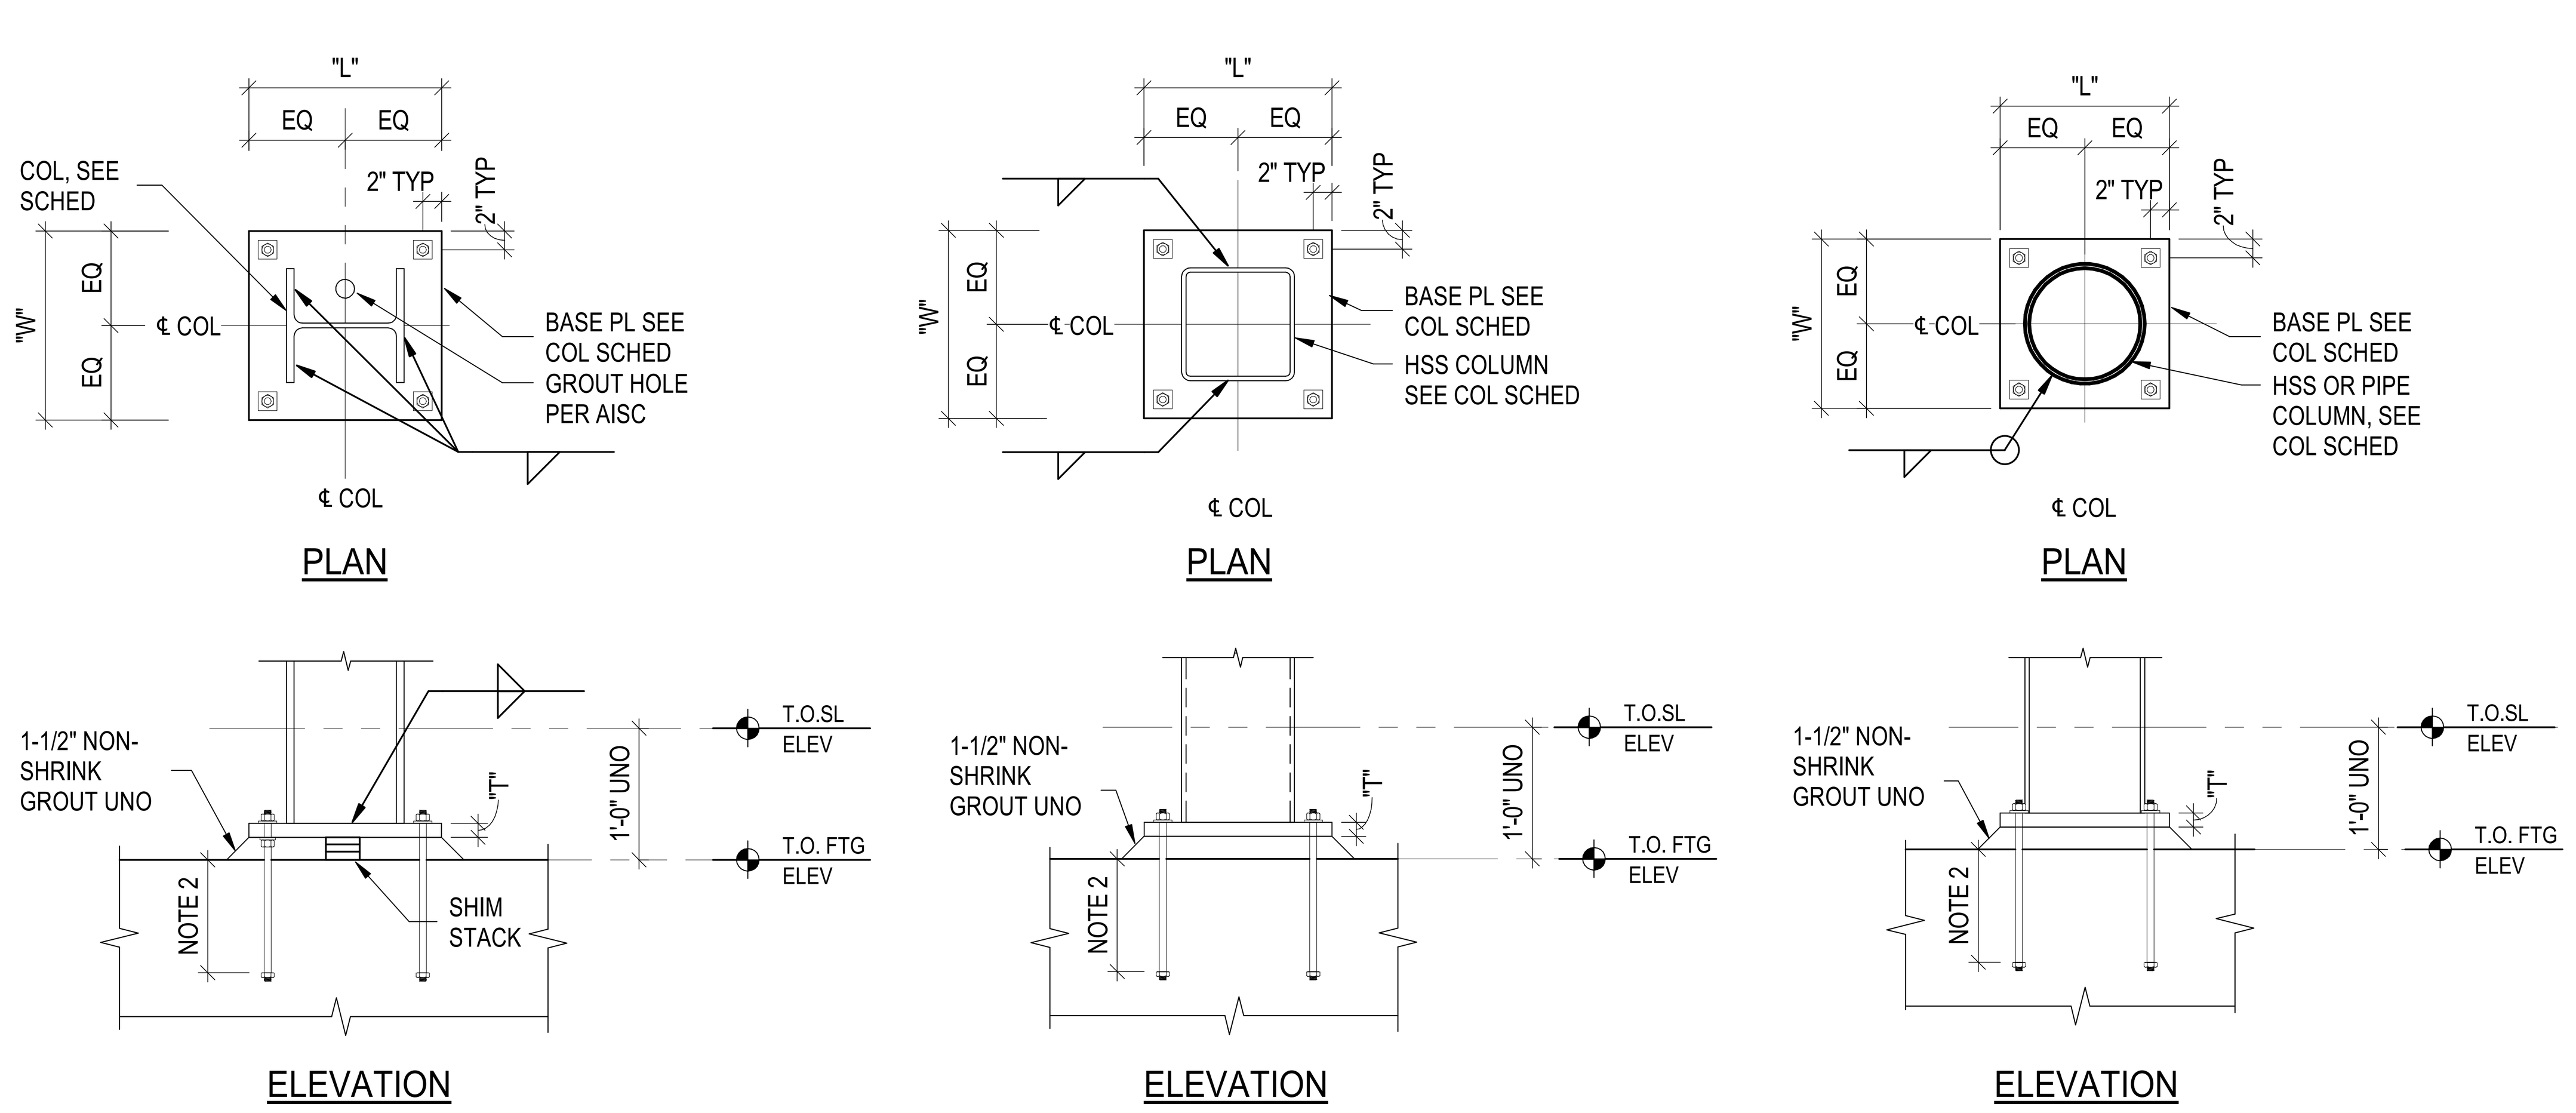

NOTES:

1. ANCHOR RODS SHALL BE 3/4"Ø F1554 GR 36 UNO. PROVIDE FOUR ANCHORS UNO.
2. EMBEDMENT SHALL BE 12" TYPICAL AND 18" FOR TENSION COLUMNS AS NOTED IN COLUMN SCHEDULE.
3. CONTR SHALL HOLD BASE PLATE RIGIDLY IN PLACE WHILE GROUTING.
4. BASE PLATE HOLE DIAMETER AND PLATE WASHER SHALL BE SIZED PER "AISC MANUAL - TABLE 14-2". IF HOLES ARE OVERSIZED, USE 5/16" THICK WASHER AND WELD WASHER TO BASE PLATE WITH 1/8" FILLET WELD AROUND.
5. TIGHTEN ANCHOR RODS SNUG TIGHT AND SCORE ROD THREADS TO PREVENT LOOSENING.
6. BASE PLATES SHALL HAVE Fy = 50 KSI, UNO.
7. BASE PLATE MINIMUM THICKNESS SHALL BE 1/2" UNO.
8. LEVELING NUTS AND WASHERS ARE ALLOWED WITH SHIM STACKS ARE USED. GROUT BASE PLATES SOLID BEFORE PLACING ELEVATED SLAB.
9. SEE COLUMN SCHEDULE FOR TENSION COLUMN LOCATIONS.

TYPICAL COLUMN BASE PLATE DETAIL

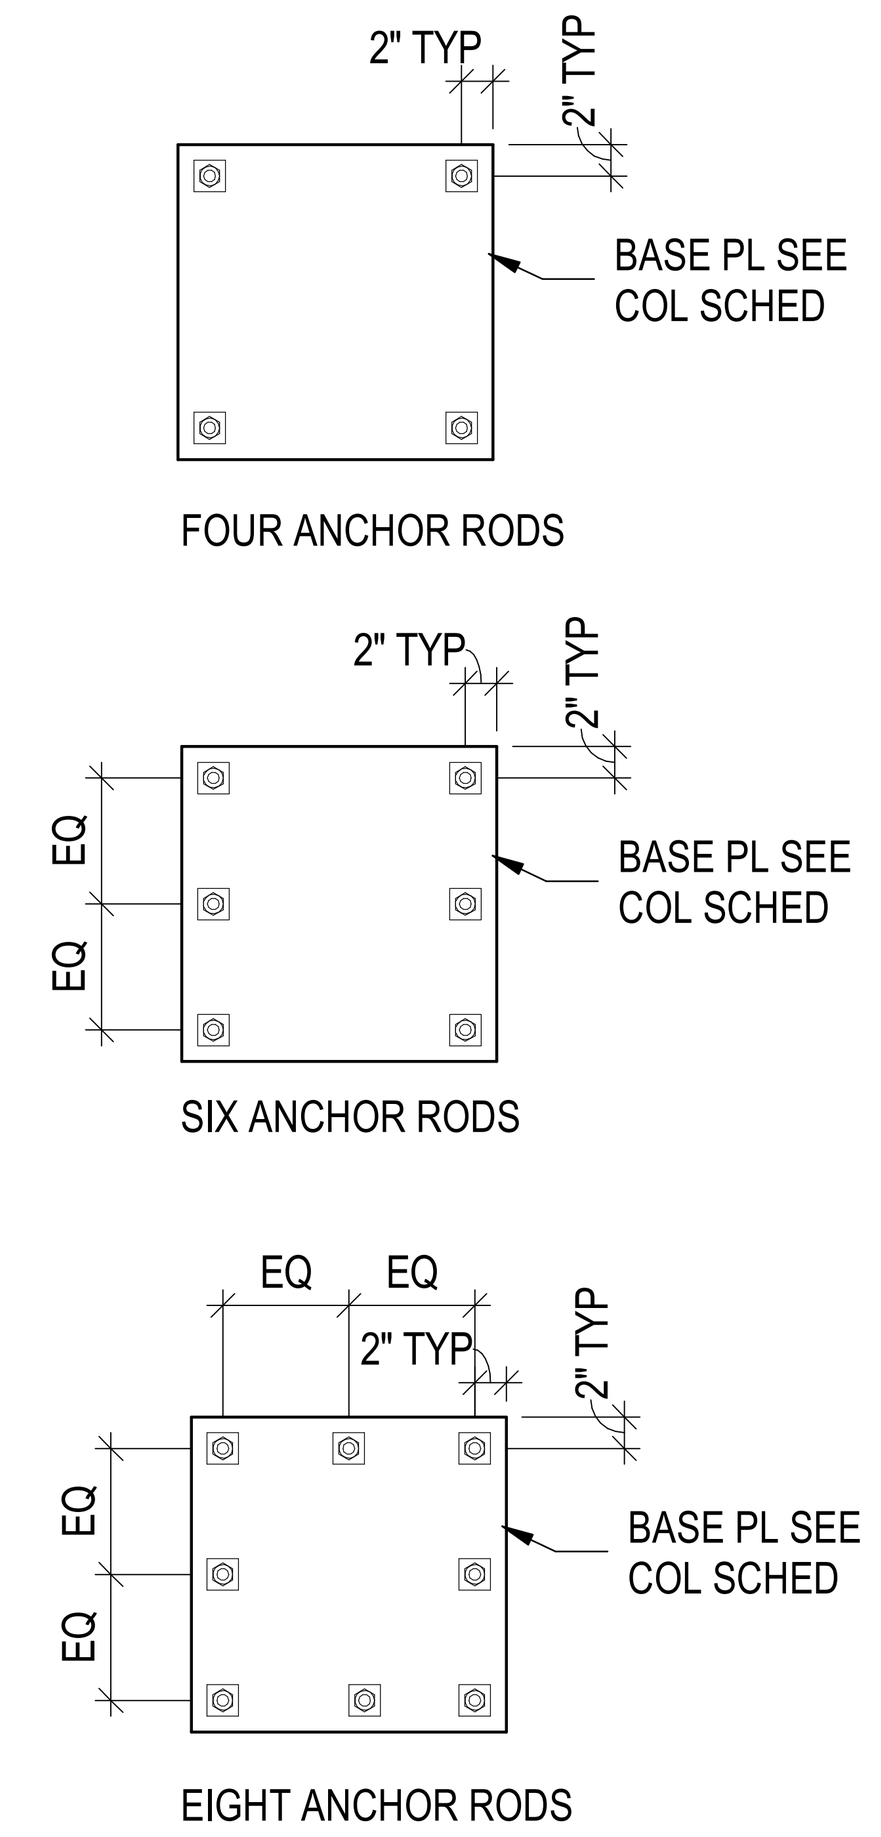

ANCHOR ROD LAYOUT

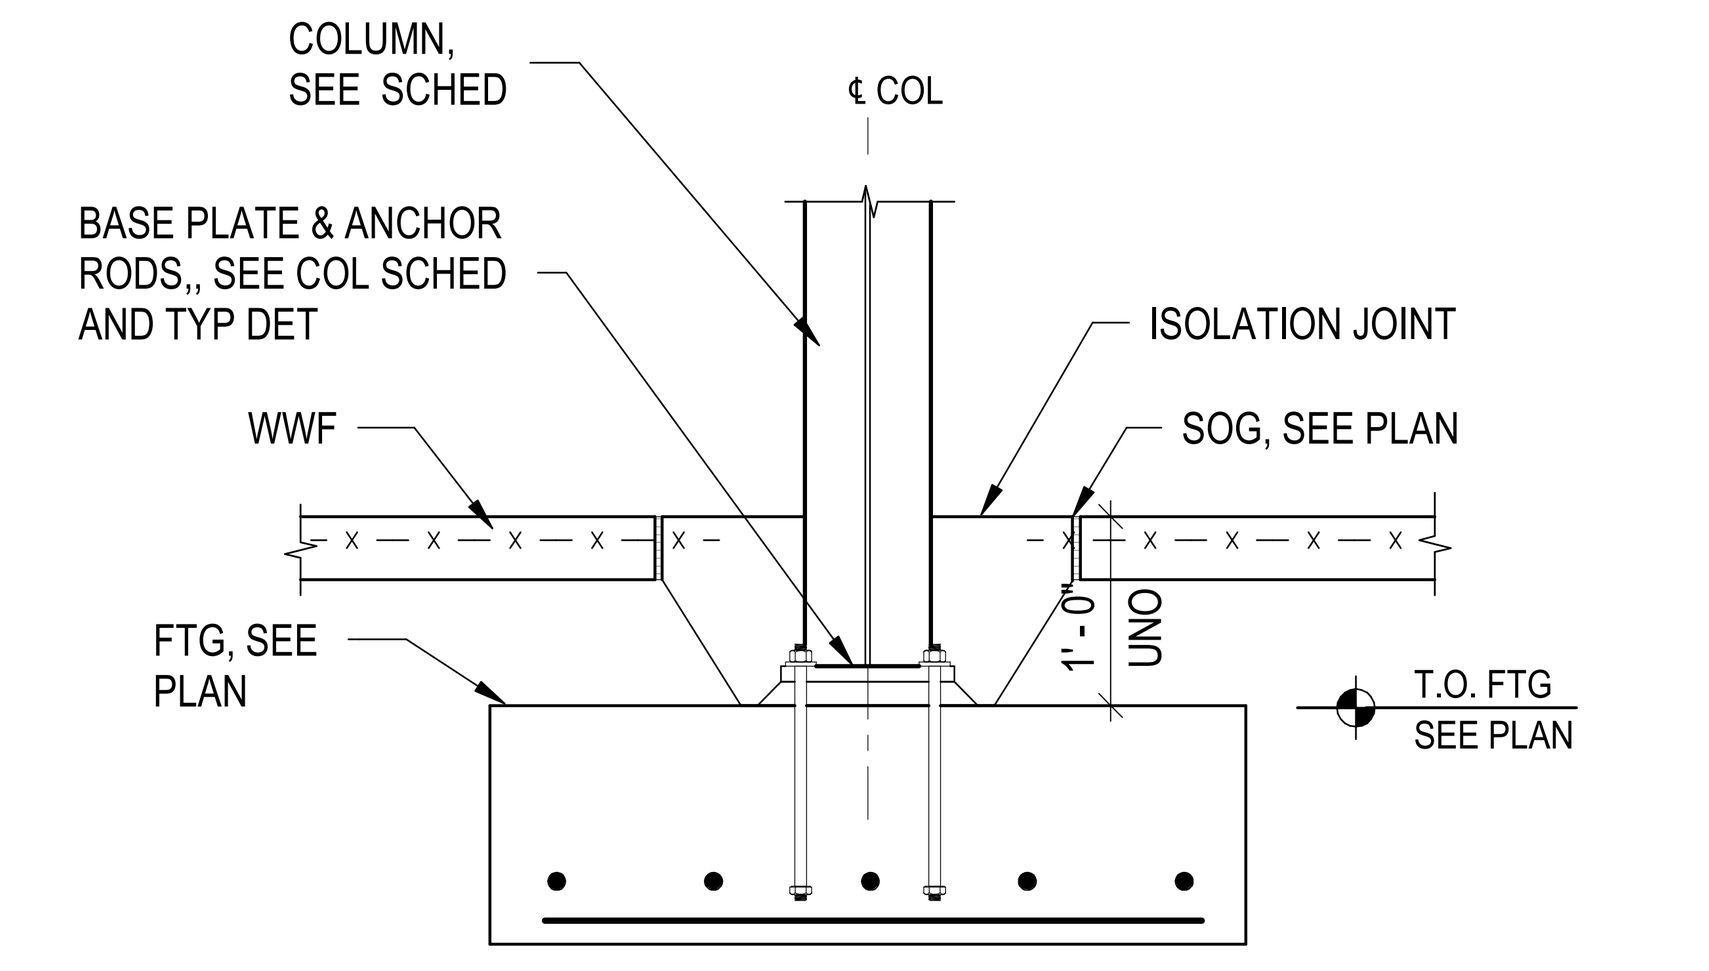

TYPICAL STEEL COLUMN ON FOOTING DETAIL

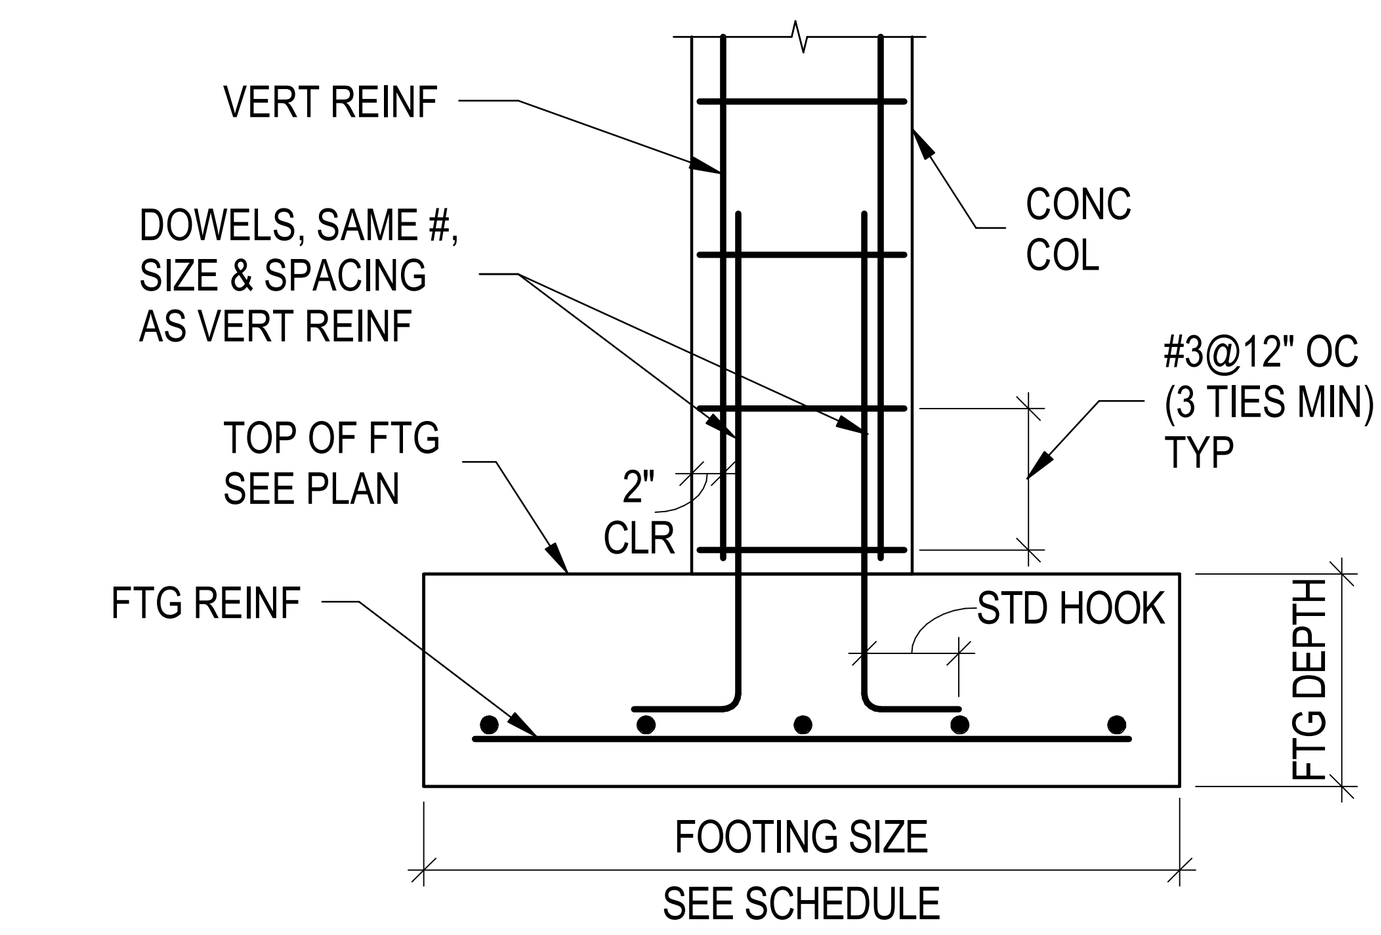

TYPICAL CONCRETE COLUMN ON FOOTING DETAIL

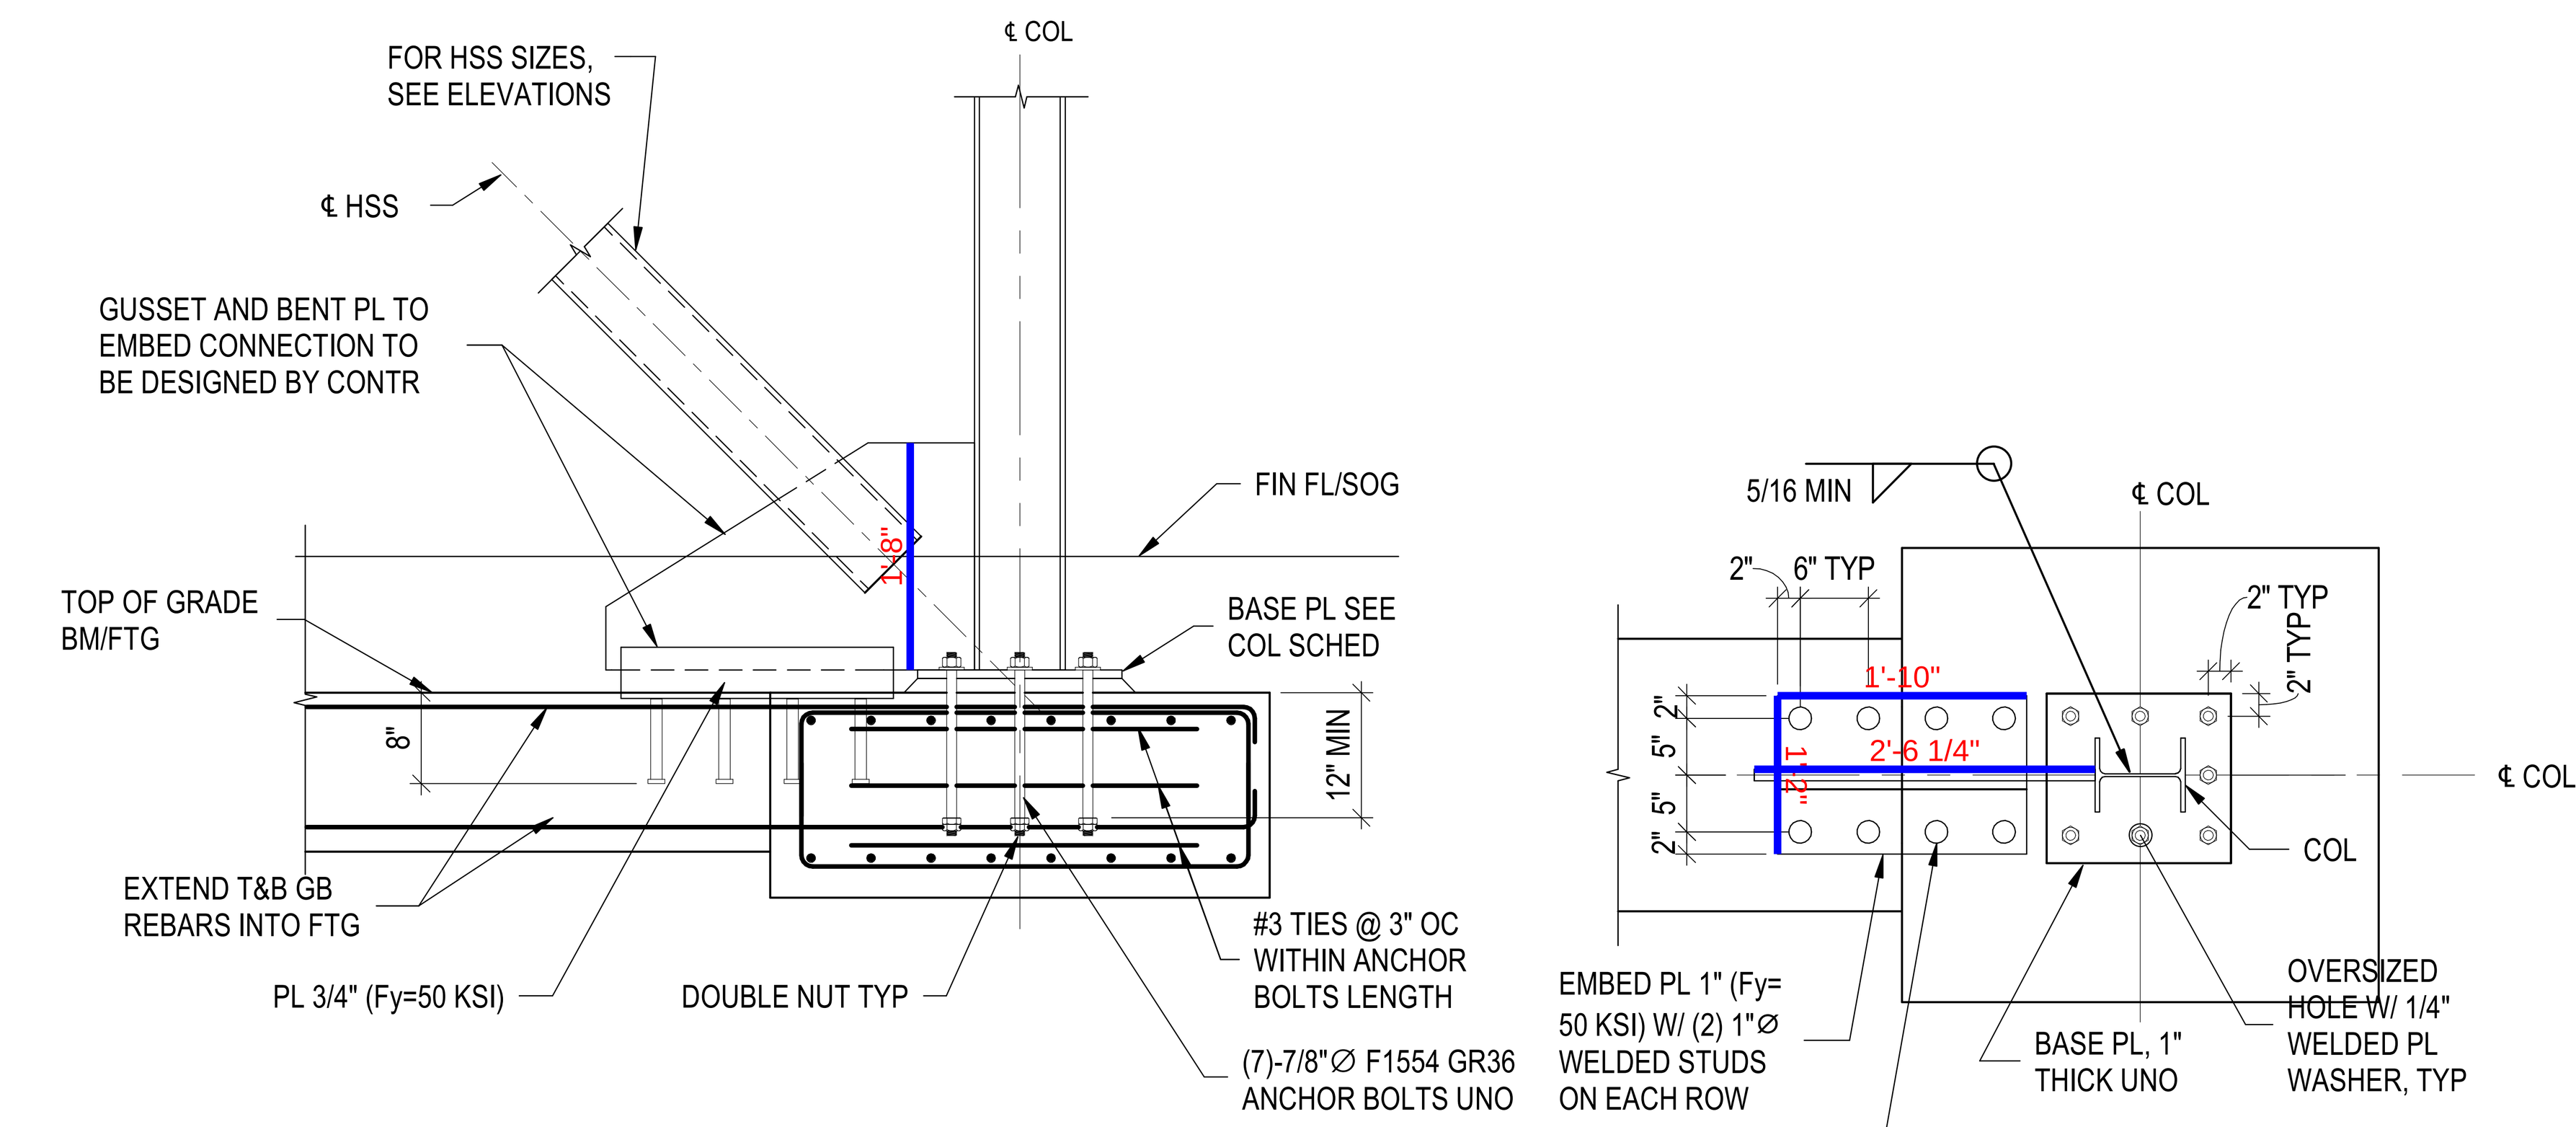

3 ROWS OF STUDS FOR BRACING FORCE LESS THAN OR EQUAL TO 95 KIPS
4 ROWS OF STUDS FOR BRACING FORCE LESS THAN OR EQUAL TO 115 KIPS
5 ROWS OF STUDS FOR BRACING FORCE LESS THAN OR EQUAL TO 135 KIPS
6 ROWS OF STUDS FOR BRACING FORCE LESS THAN OR EQUAL TO 155 KIPS
7 ROWS OF STUDS FOR BRACING FORCE LESS THAN OR EQUAL TO 175 KIPS
8 ROWS OF STUDS FOR BRACING FORCE LESS THAN OR EQUAL TO 195 KIPS

TYPICAL BRACE TO CONCRETE SLAB / COLUMN DETAIL

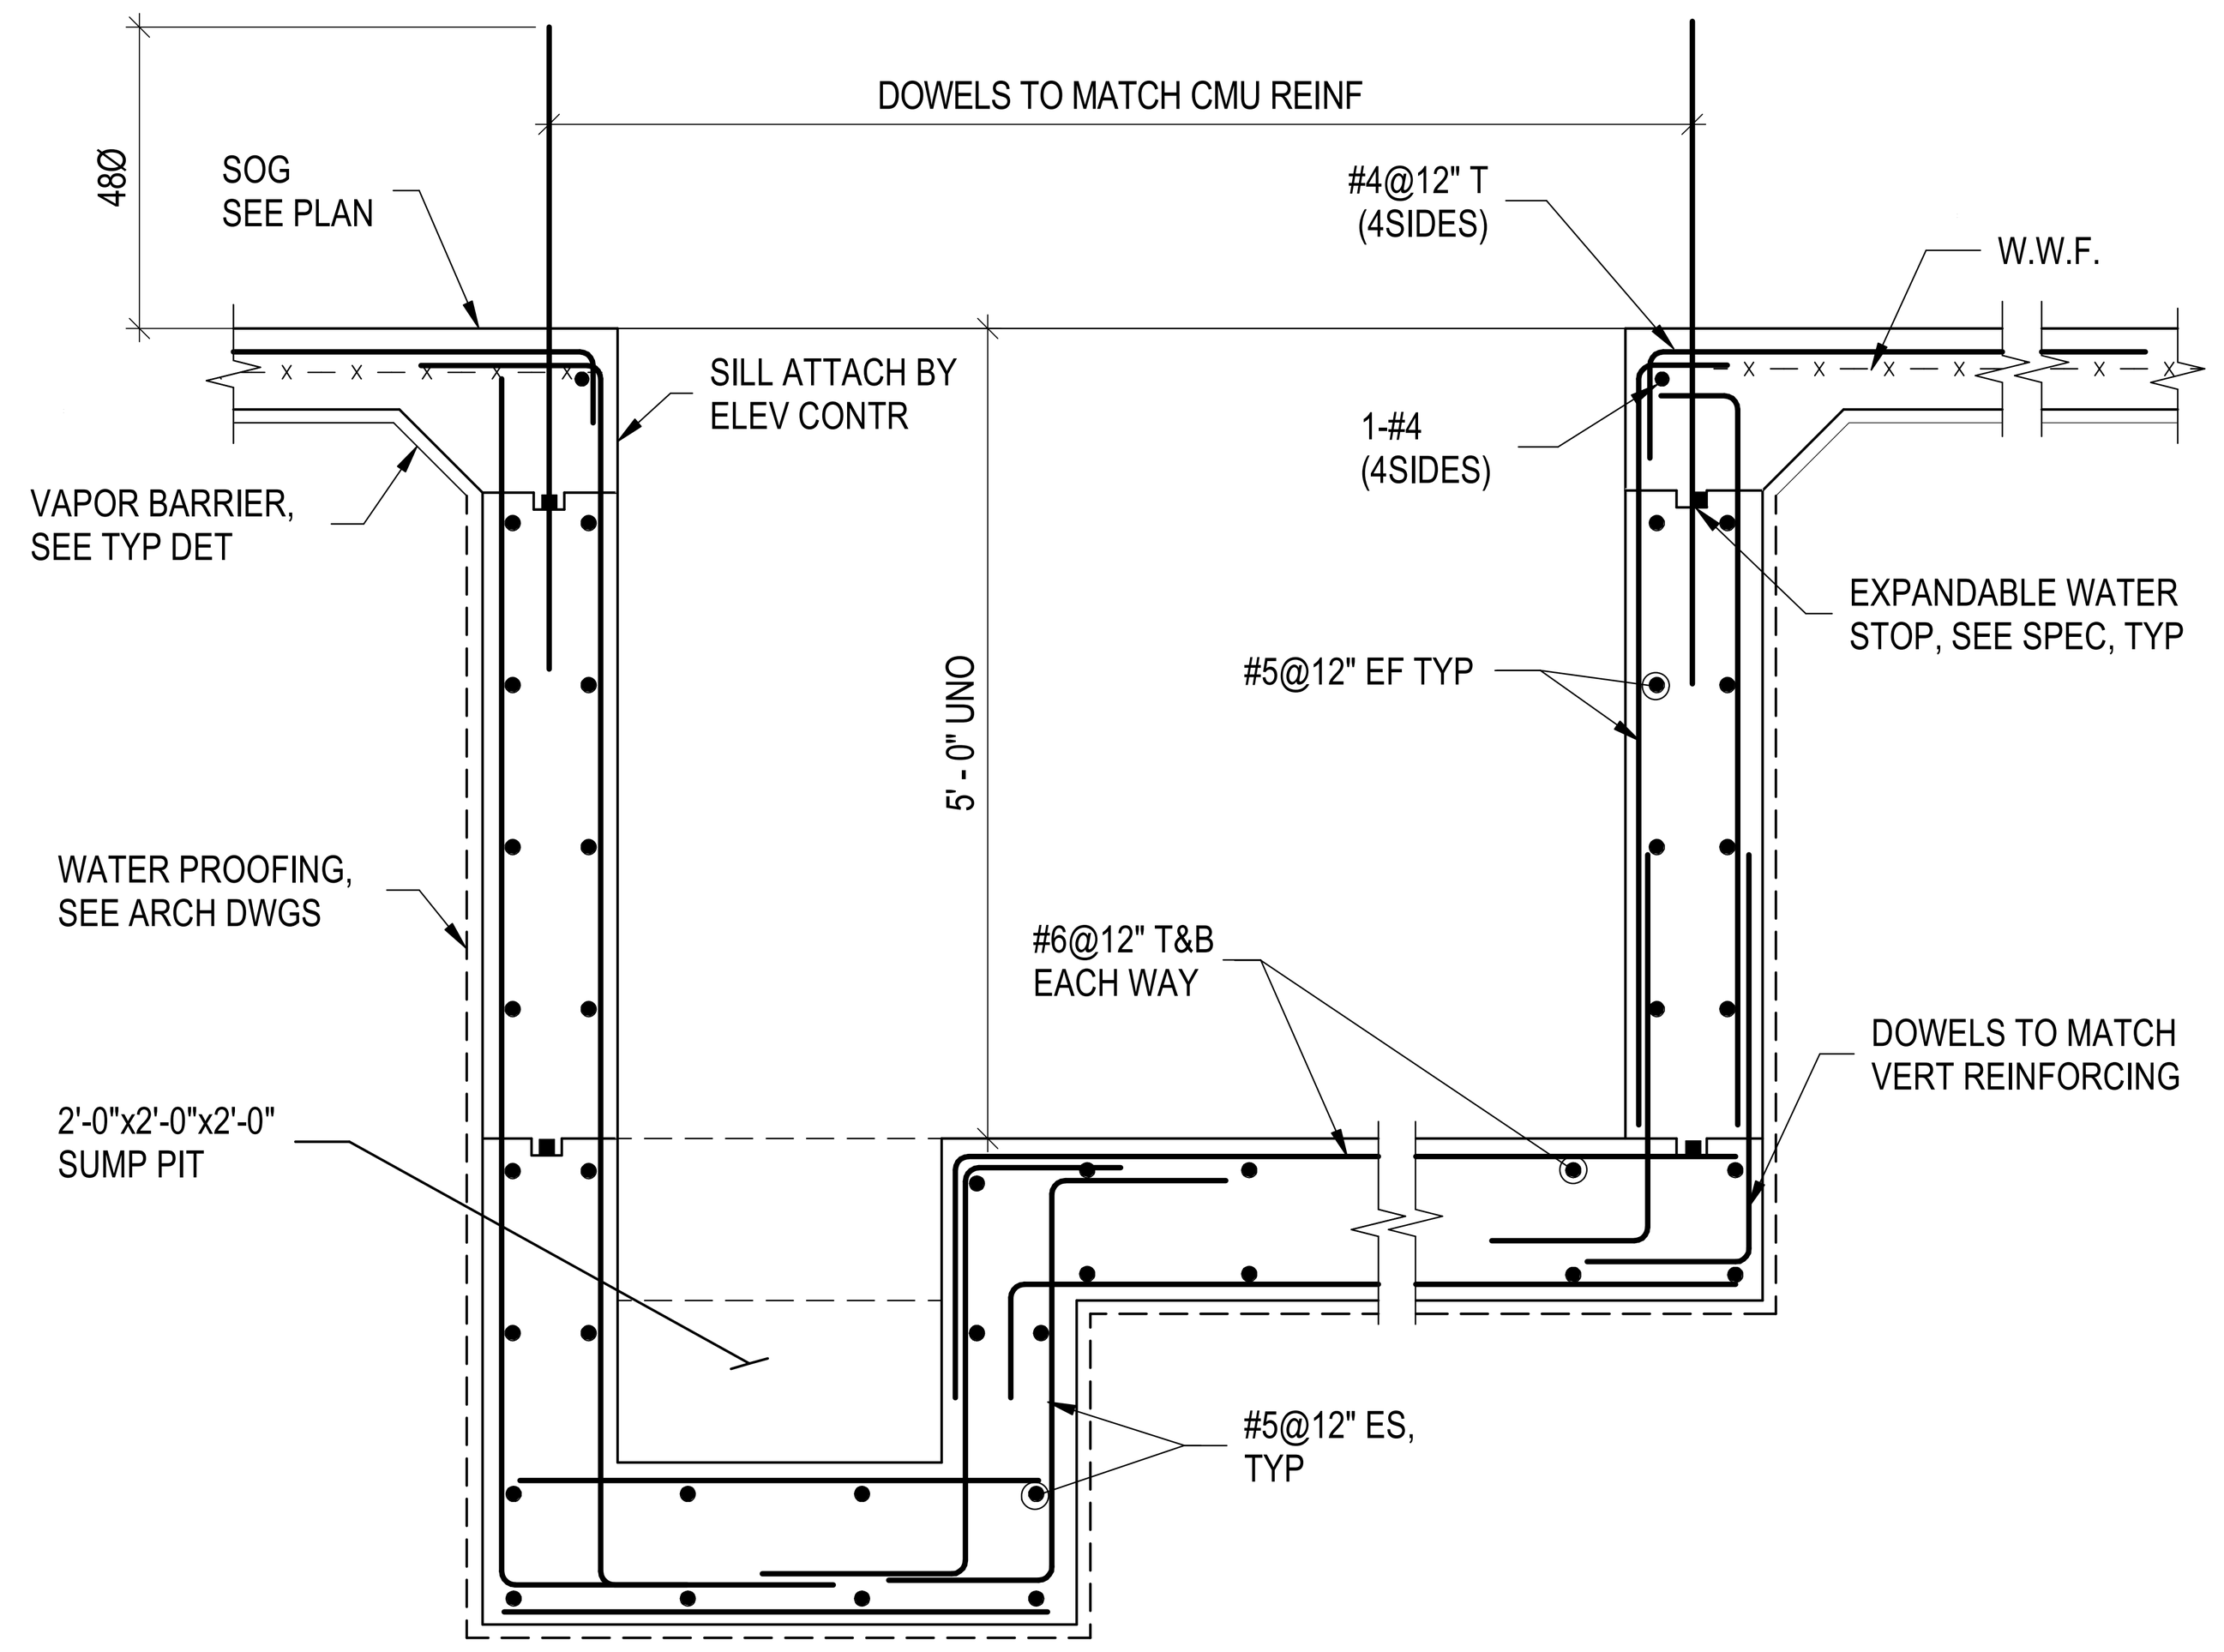

TYPICAL ELEVATOR PIT DETAIL

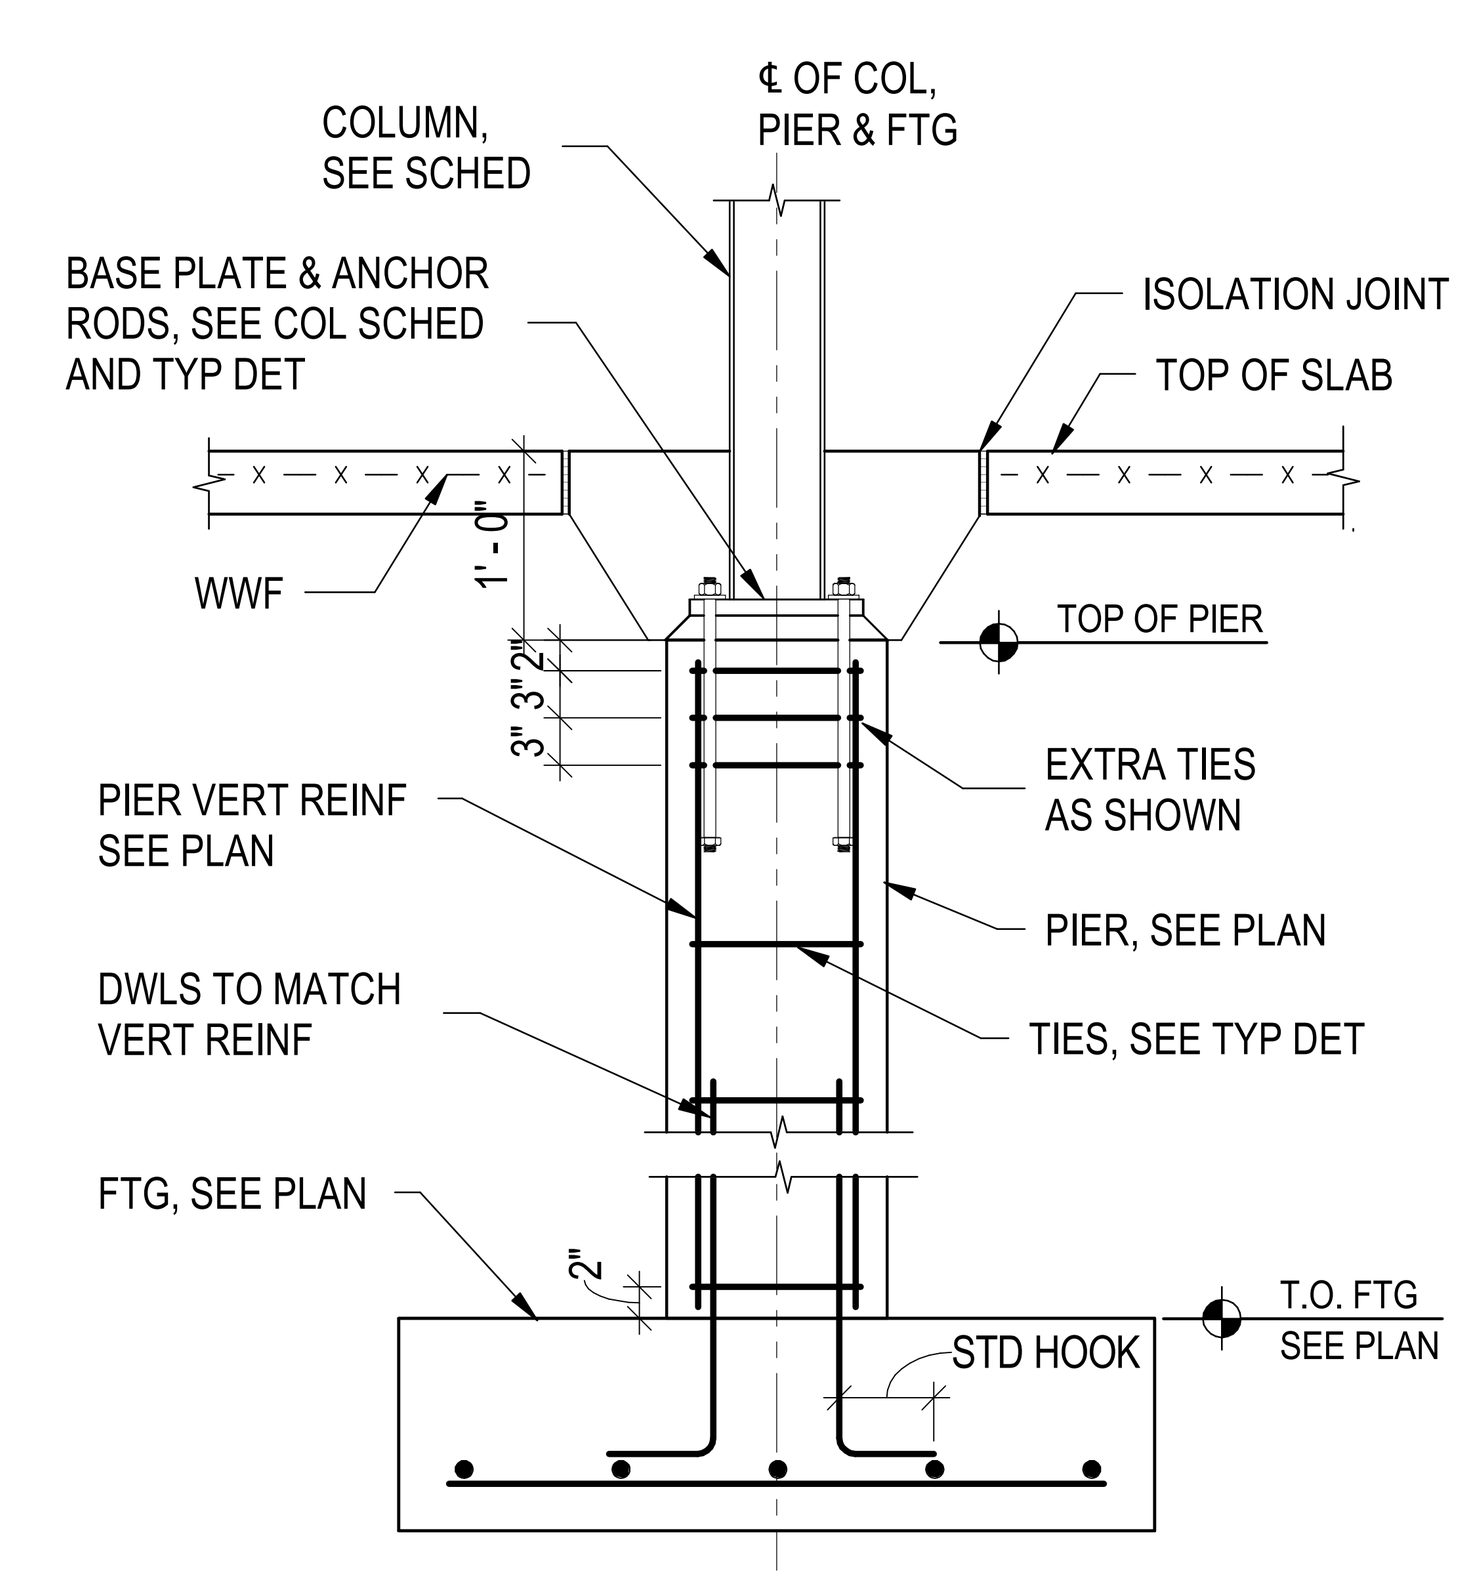

TYPICAL COLUMN ON PIER & FOOTING DETAIL

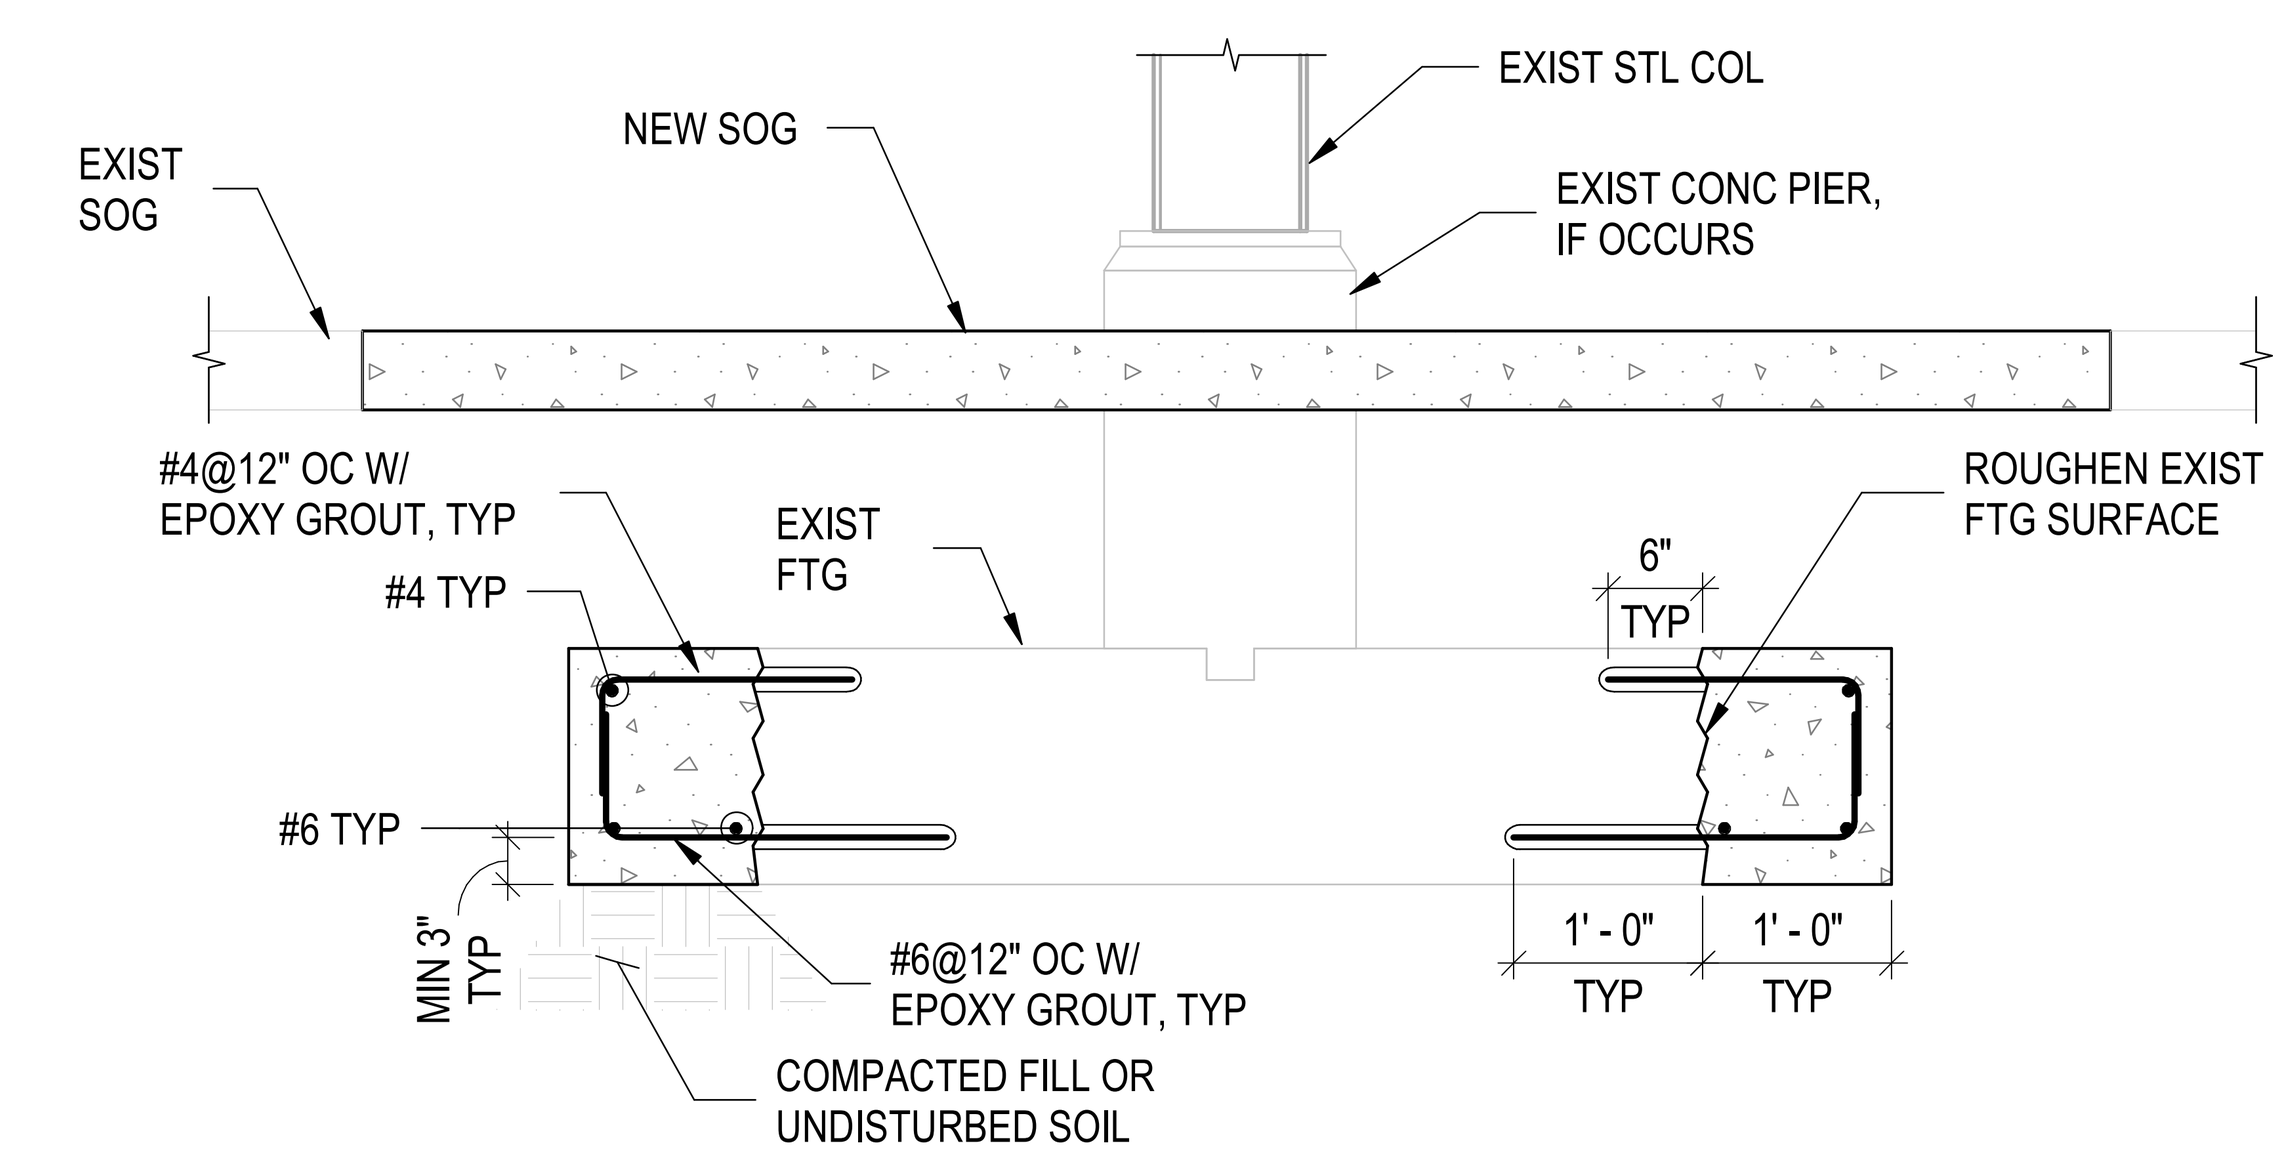

TYPICAL EXISTING FOOTING ENLARGEMENT DETAIL

NO.	DATE	ISSUE
A	09/30/2025	Permit
	10/29/2025	BID SET

SEAL

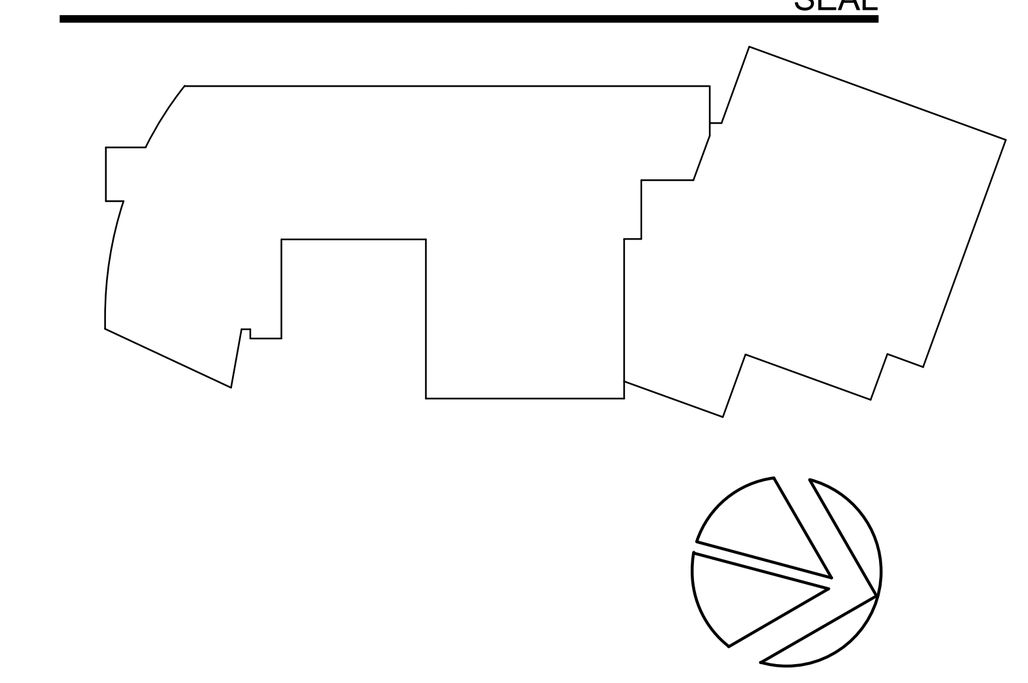

KEY PLAN

PERKINS — EASTMAN
One Thomas Circle NW, Suite 200
Washington, DC 20005
T. +1 202 861 1325
F. +1 202 861 1326

Owner:
Sidwell Friends School
3825 Wisconsin Ave NW, Washington DC 20016

Construction Manager:
Advanced Project Management, Inc (APM)
4530 Walney Rd, Ste 202, Chantilly, VA 20151

Civil / Site:
Bowman Consulting Group, Ltd
888 17th St NW, Suite 510, Washington, DC 20006

Landscape:
Natural Resources Design, Inc (NRD)
1009 Shepherd Street NE, Washington, DC 20017

Structural:
Yun Associates LLC
1050 Connecticut Ave NW, Suite 500, Washington, DC 20036

MEP / FP / Lighting:
CMTA Inc
220 Lexington Green Circle, Suite 600, Lexington, KY 40503

AV / IT / Telecom / Security:
Educational Systems Planning (ESP)
2448 Holly Avenue, Suite 302, Annapolis, MD 21401

Food Service
Nyikos-Garcia Foodservice Design, Inc
7146 Starmount Way, New Market, MD 21774

Accessibility Consultant:
Galbo Wolf LLC
4410 Massachusetts Ave NW, #240, Washington, DC 20016

Acoustics:
Polysonics Corp
555 Hospital Drive, Warrenton, VA 20186

Building Envelope Consultant:
Sustainable Building Partners LLC
2701 Prosperity Ave, Suite 105, Fairfax, VA 22031

Code Consultant:
Campbell Code Consulting LLC
7834 Taggart Ct, Elkridge, MD 21075

Specifications:

PROJECT TITLE:

SIDWELL FRIENDS NEW LOWER SCHOOL AT DC CAMPUS

3825 WISCONSIN AVE NW
WASHINGTON, DC 20016

PROJECT No: 2025008

DRAWING TITLE:

TYPICAL DETAILS

SCALE: 3/4" = 1'-0"

S-202

BID SET
10/29/2025

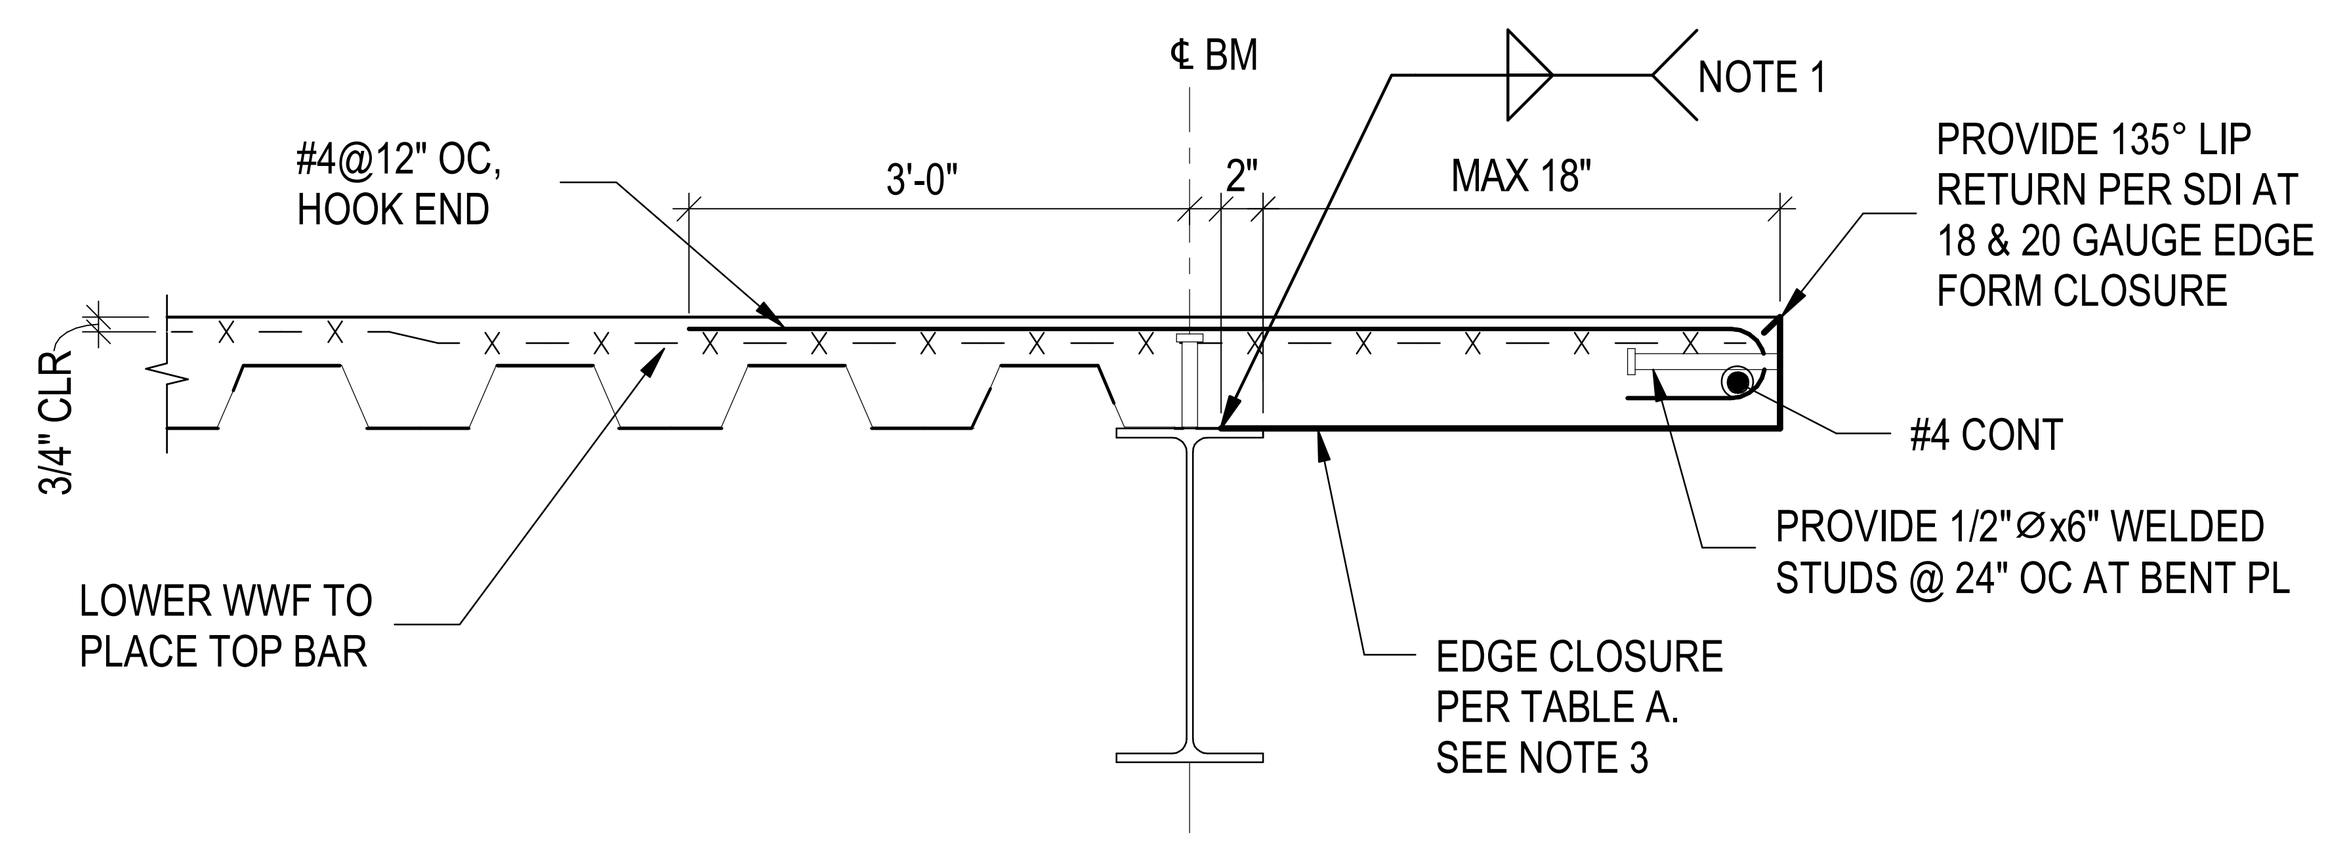

DECK SPANNING PARALLEL TO BEAM

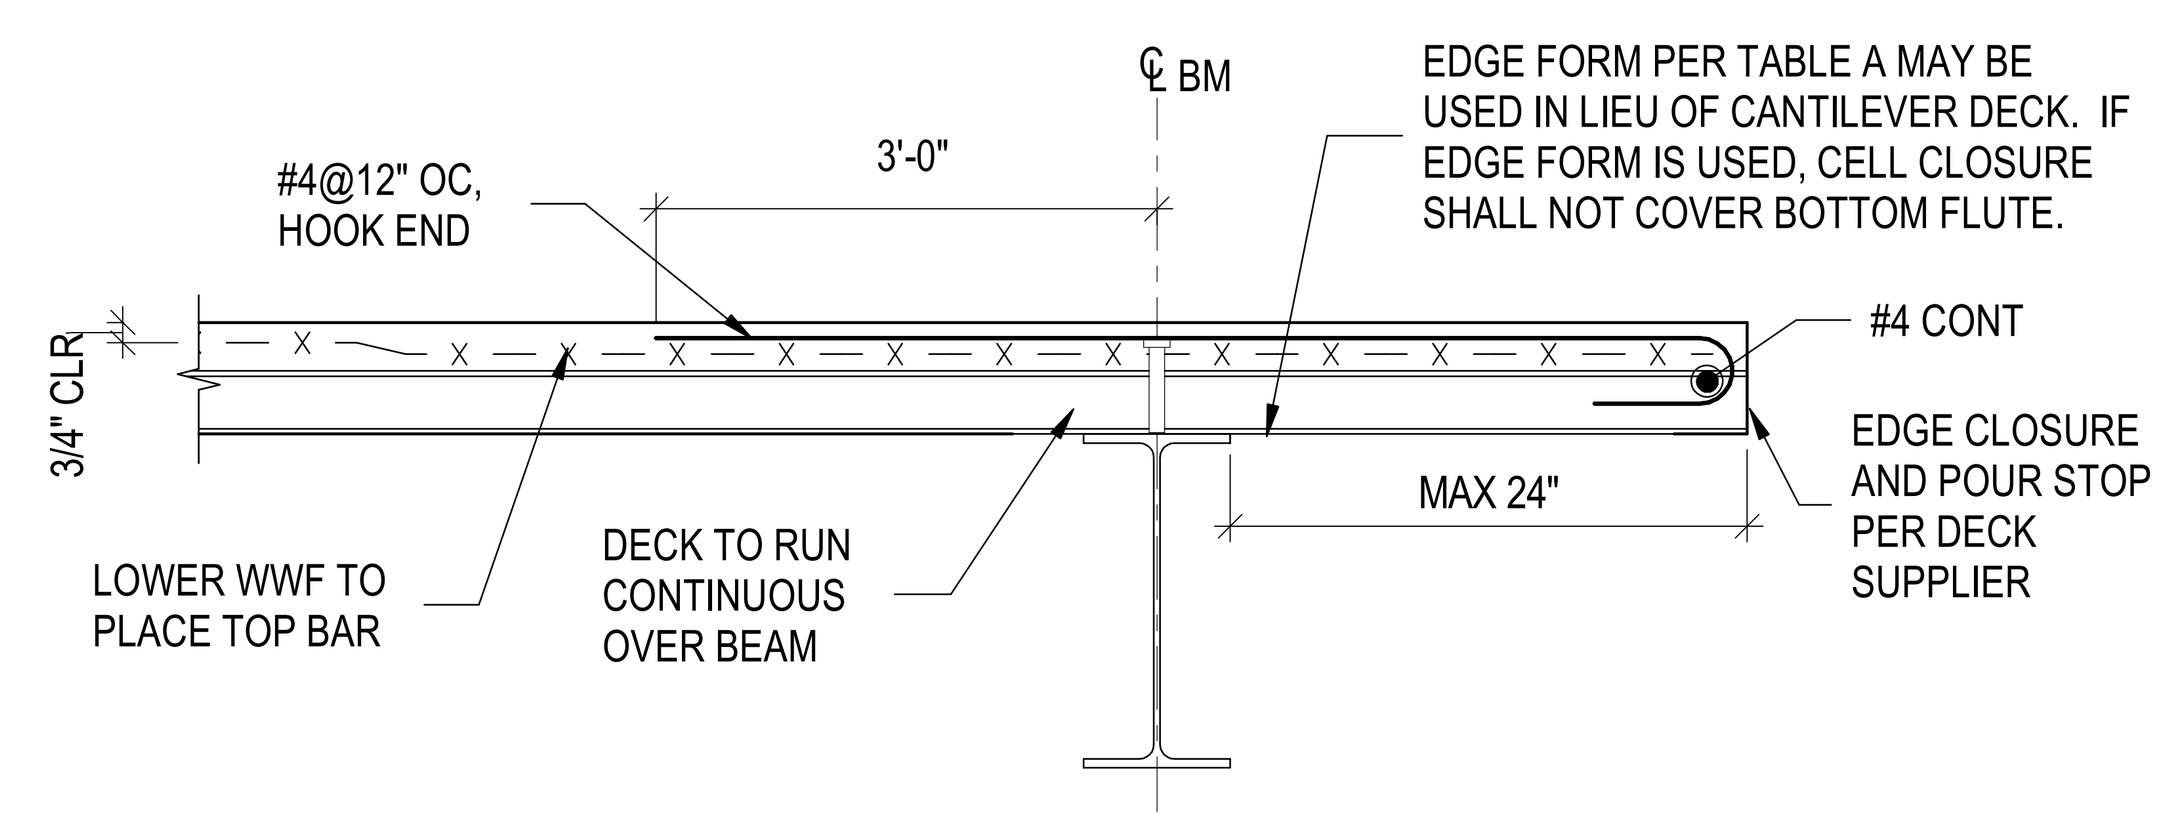

DECK SPANNING PERPENDICULAR TO BEAM

TABLE A																
SLAB THICKNESS (IN)	SLAB EDGE CLOSURE PLATE GAUGE / THICKNESS AT DECK PARALLEL TO BEAM															
	OVERHANG (IN)															
	0	1	2	3	4	5	6	7	8	9	10	11	12	14	16	18
4	20	20	20	20	18	18	16	14	12	12	12	10	10	3/16	1/4	5/16
4.5	20	20	20	18	16	16	16	14	12	12	12	10	10	3/16	1/4	5/16
5	20	20	18	16	16	16	14	14	12	12	10	10	3/16	1/4	1/4	5/16
5.5	20	18	18	16	14	14	14	14	12	12	10	10	3/16	1/4	1/4	5/16
6	18	18	16	14	14	14	12	12	12	10	10	10	3/16	1/4	1/4	5/16
6.5	18	16	16	14	12	12	12	12	12	10	10	3/16	1/4	1/4	5/16	5/16
7	16	16	14	12	12	12	12	12	10	10	10	3/16	1/4	1/4	5/16	3/8
7.5	16	14	14	12	12	12	12	10	10	10	3/16	1/4	1/4	5/16	5/16	3/8
8	14	14	12	12	12	12	10	10	10	3/16	3/16	1/4	1/4	5/16	5/16	3/8

NOTES:

1. WELDING SHALL BE AS FOLLOWS:

MATERIAL	WELD SIZE x LENGTH AT SPACING
18 GA & 20 GA	1/8 "x 1" @ 12" OC
16 GA & 14 GA	1/8 "x 2" @ 12" OC
12 GA & 10 GA	1/8 "x 2" @ 8" OC
3/16 " & 1/4 "	3/16 "x 3" @ 12" OC
5/16 " & 3/8 "	3/16 "x 3" @ 9" OC

2. MATERIALS ARE TO BE AS FOLLOWS:
   COMPOSITE DECK - ASTM A653 -Fy = 40 KSI MINIMUM.
   PLATE MATERIAL SHALL HAVE Fy = 50 KSI MINIMUM.
3. FOR CONDITIONS WHERE SLAB EDGE EXCEEDS 18 INCH OVERHANG , PROVIDE 1/4 INCH PLATE EDGE FORM AND SHORE THE EDGE UNTIL CONCRETE REACHES COMPRESSIVE STRENGTH OF 3,000 PSI.
4. THE SLAB EDGE CLOSURE PLATE IS ONLY DESIGNED TO SUPPORT WET CONCRETE AND MAXIMUM CONSTRUCTION LOAD OF 20 PSF. DO NOT USE THE PLATE TO DIRECTLY SUPPORT CLADDING LOADS UNLESS DETAILED EXPLICITEDLY ON STRUCTURAL DRAWINGS. .
5. AT BLOCKOUTS FOR CLADDING CONNECTIONS, EDGE REINFORCING IS TO BE CONTINUOUS.
6. AT RECESS CONDITIONS, EDGE PLATE HEIGHT SHALL MATCH THE SLAB HEIGHT AT RECESS.
7. COORDINATE EDGE INSERTS FOR CLADDING SUPPORT WITH ARCHITECTURAL DRAWINGS.

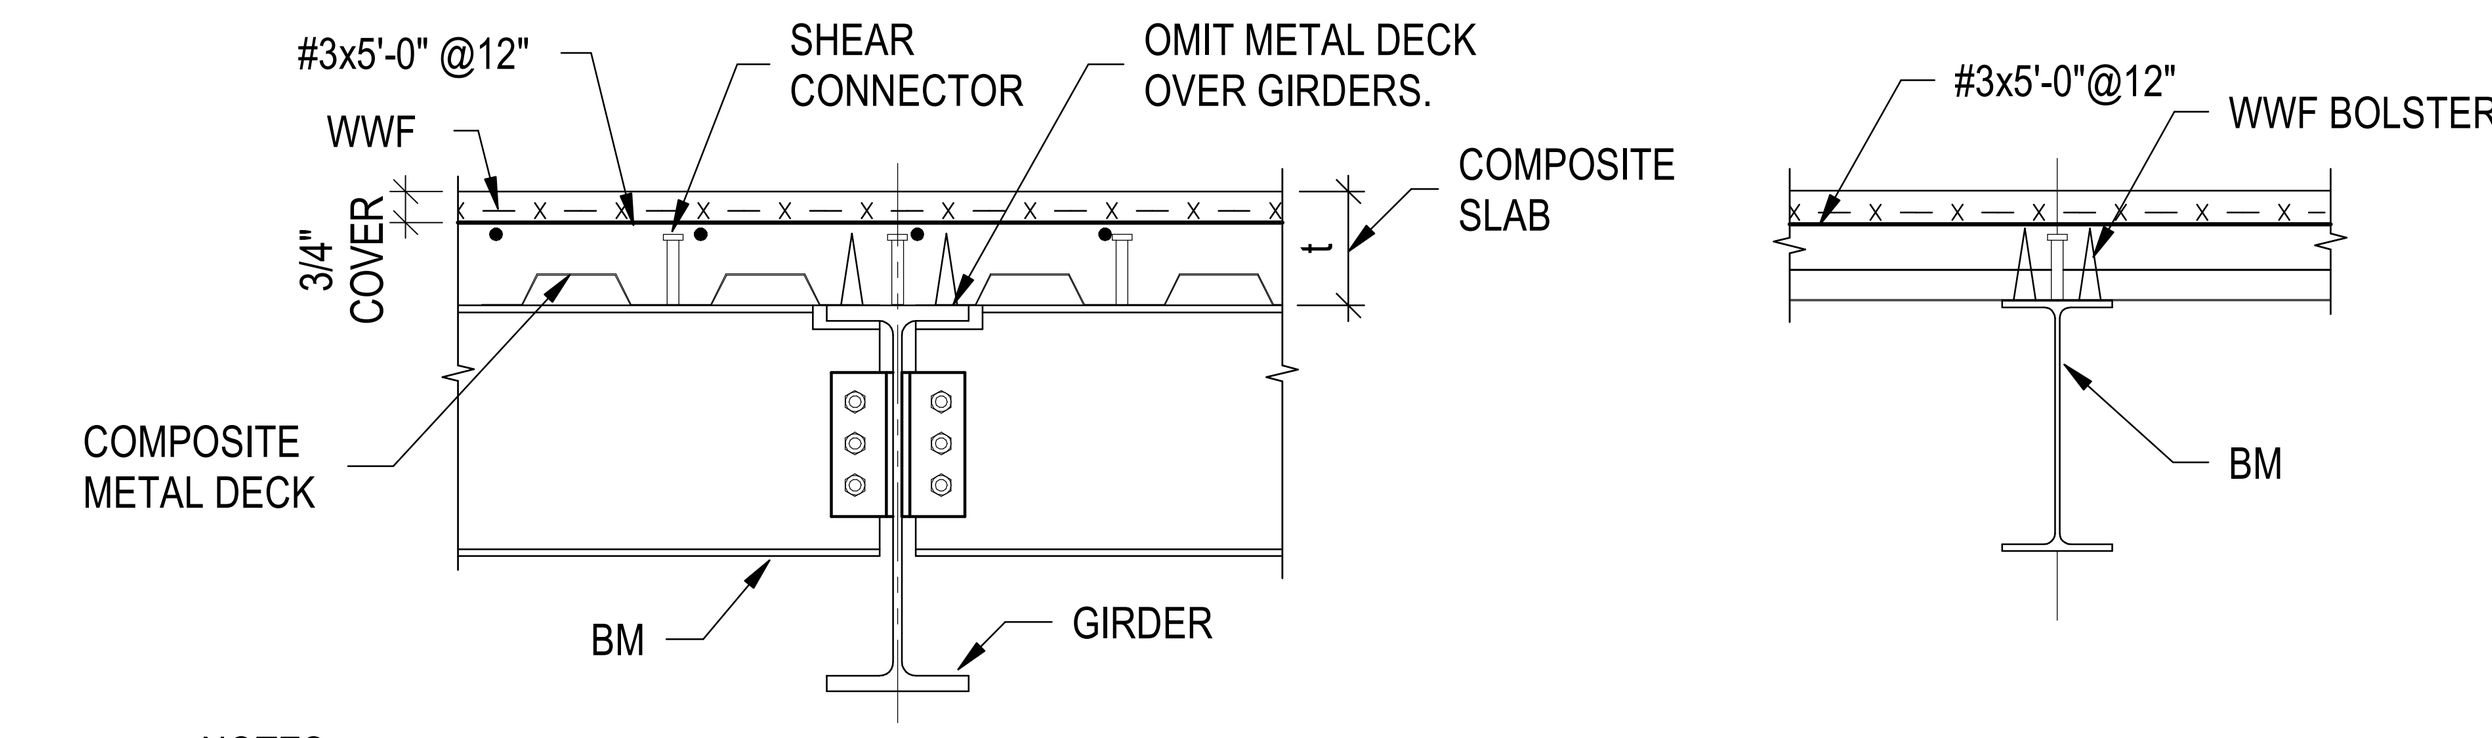

NOTES:

1. SHEAR CONNECTORS SHALL BE 3/4"Ø HEADED STEEL STUD FIELD WELDED, 1-1/2" TALLER THAN TOP OF THE METAL DECK, SPACED EQUALLY ON BEAM FLANGE UNLESS OTHERWISE SHOWN ON PLANS.
2. PROVIDE ADDITIONAL STUDS AS NEEDED ON BEAMS AND GIRDERS SO THAT STUDS ARE SPACED NO MORE THAN 12" ON CENTER UNLESS "NO STUD" IS SPECIFICALLY CALLED OUT ON PLANS OR SECTIONS FOR BEAMS AND GIRDERS.
3. EACH SHEAR CONNECTOR SHALL BE CAPABLE OF SUPPORTING A MINIMUM HORIZONTAL SHEAR LOAD OF 21.9 KIPS ULTIMATE IN LIGHT WEIGHT CONCRETE AND 26.1 KIPS ULTIMATE IN NORMAL WEIGHT CONCRETE.
4. CONTRACTOR SHALL ALLOW ADDITIONAL CONCRETE IN SLAB DUE TO BEAM DEFLECTION DURING POURING OF SLAB TO BRING THE FLOOR ELEVATION TO WITHIN 1/8" FROM TRUE SLAB ELEVATION.
5. WWF SHALL BE SPLICED BY OVERLAPPING ONE FULL PANEL +2", AND WIRE TIED 4 TIMES PER SHEET.
6. SEE ARCHITECTURAL DRAWINGS FOR FIRE PROOFING REQUIREMENTS.

TYPICAL BEAM AND GIRDER DETAIL

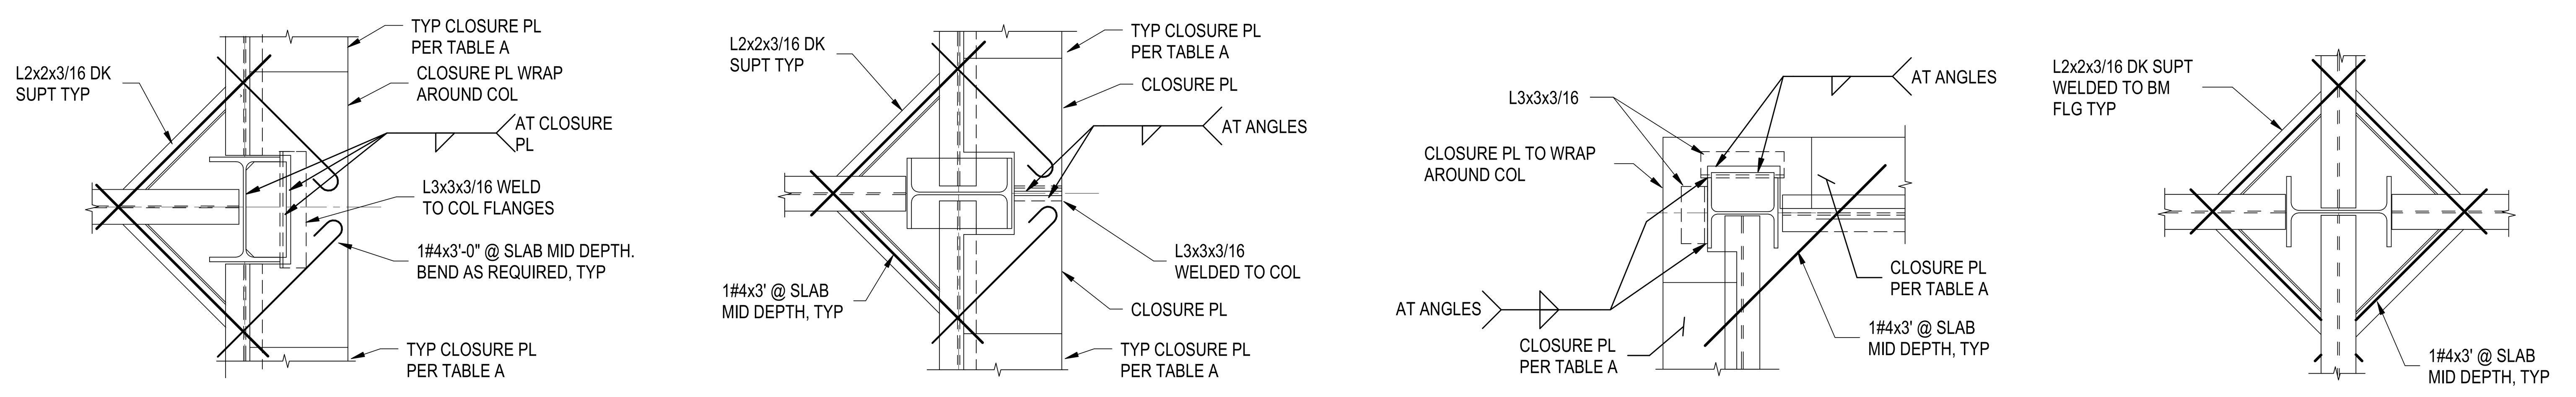

COLUMN WITH WEB PARALLEL TO SLAB EDGE

COLUMN WITH WEB PERPENDICULAR TO SLAB EDGE

DECK SUPPORT AT SPANDREL

DECK SUPPORT AT CORNER COLUMN

DECK SUPPORT AT INTERIOR COLUMN

TYPICAL EDGE OF SLAB ON METAL DECK DETAIL

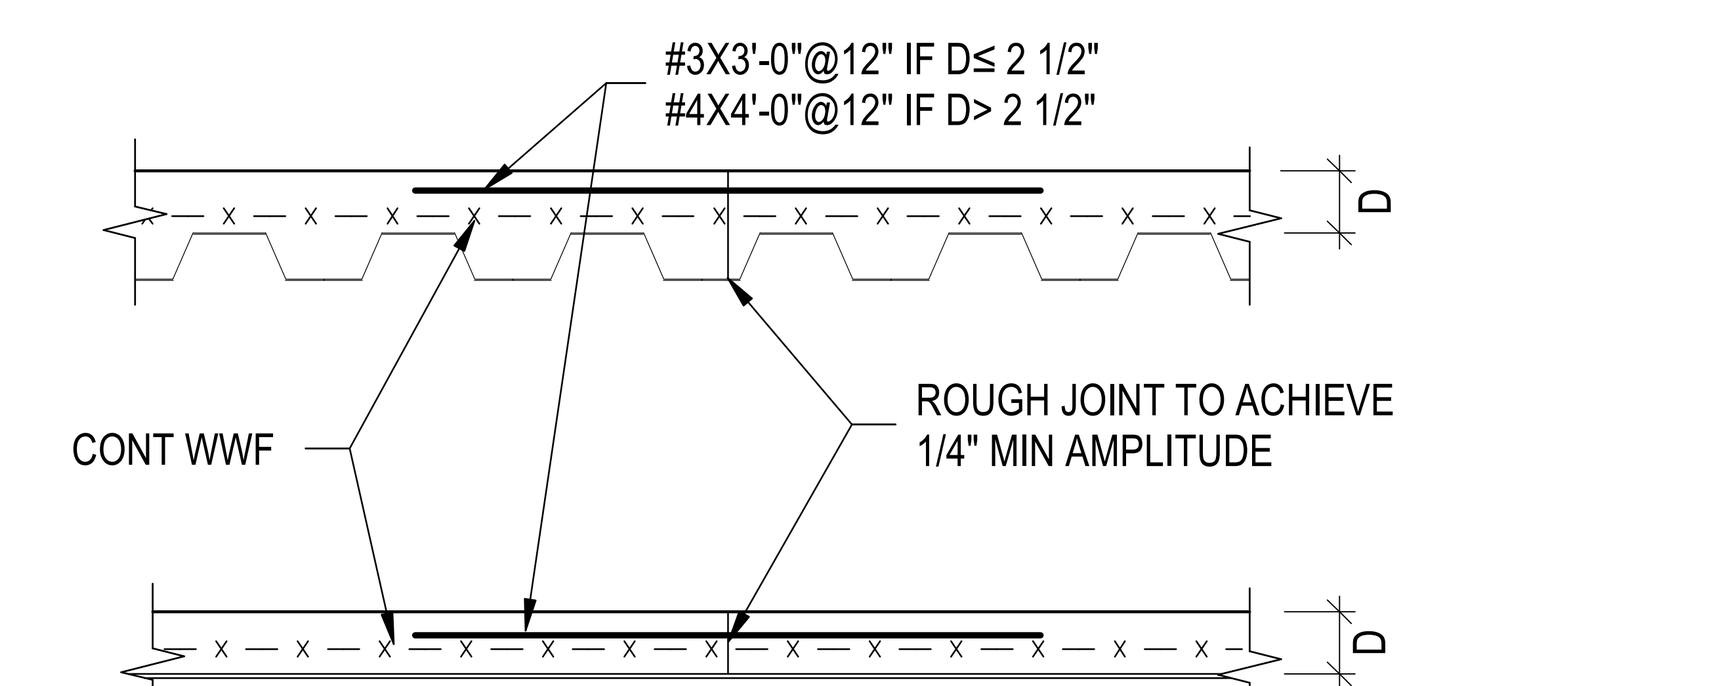

NOTES:

1. LOCATE CONSTRUCTION JOINTS ALWAYS PERPENDICULAR OR PARALLEL TO DECK FLUTES.
2. LOCATE CONSTRUCTION JOINTS IN THE MIDDLE THIRD OF BEAM/GIRDER AND IN THE MIDDLE THIRD OF DECK SPAN.
3. DO NOT LOCATE CONSTRUCTION JOINT WITHIN 10'-0" OF BRACING.

TYPICAL SLAB ON DECK CONSTRUCTION JOINT DETAIL

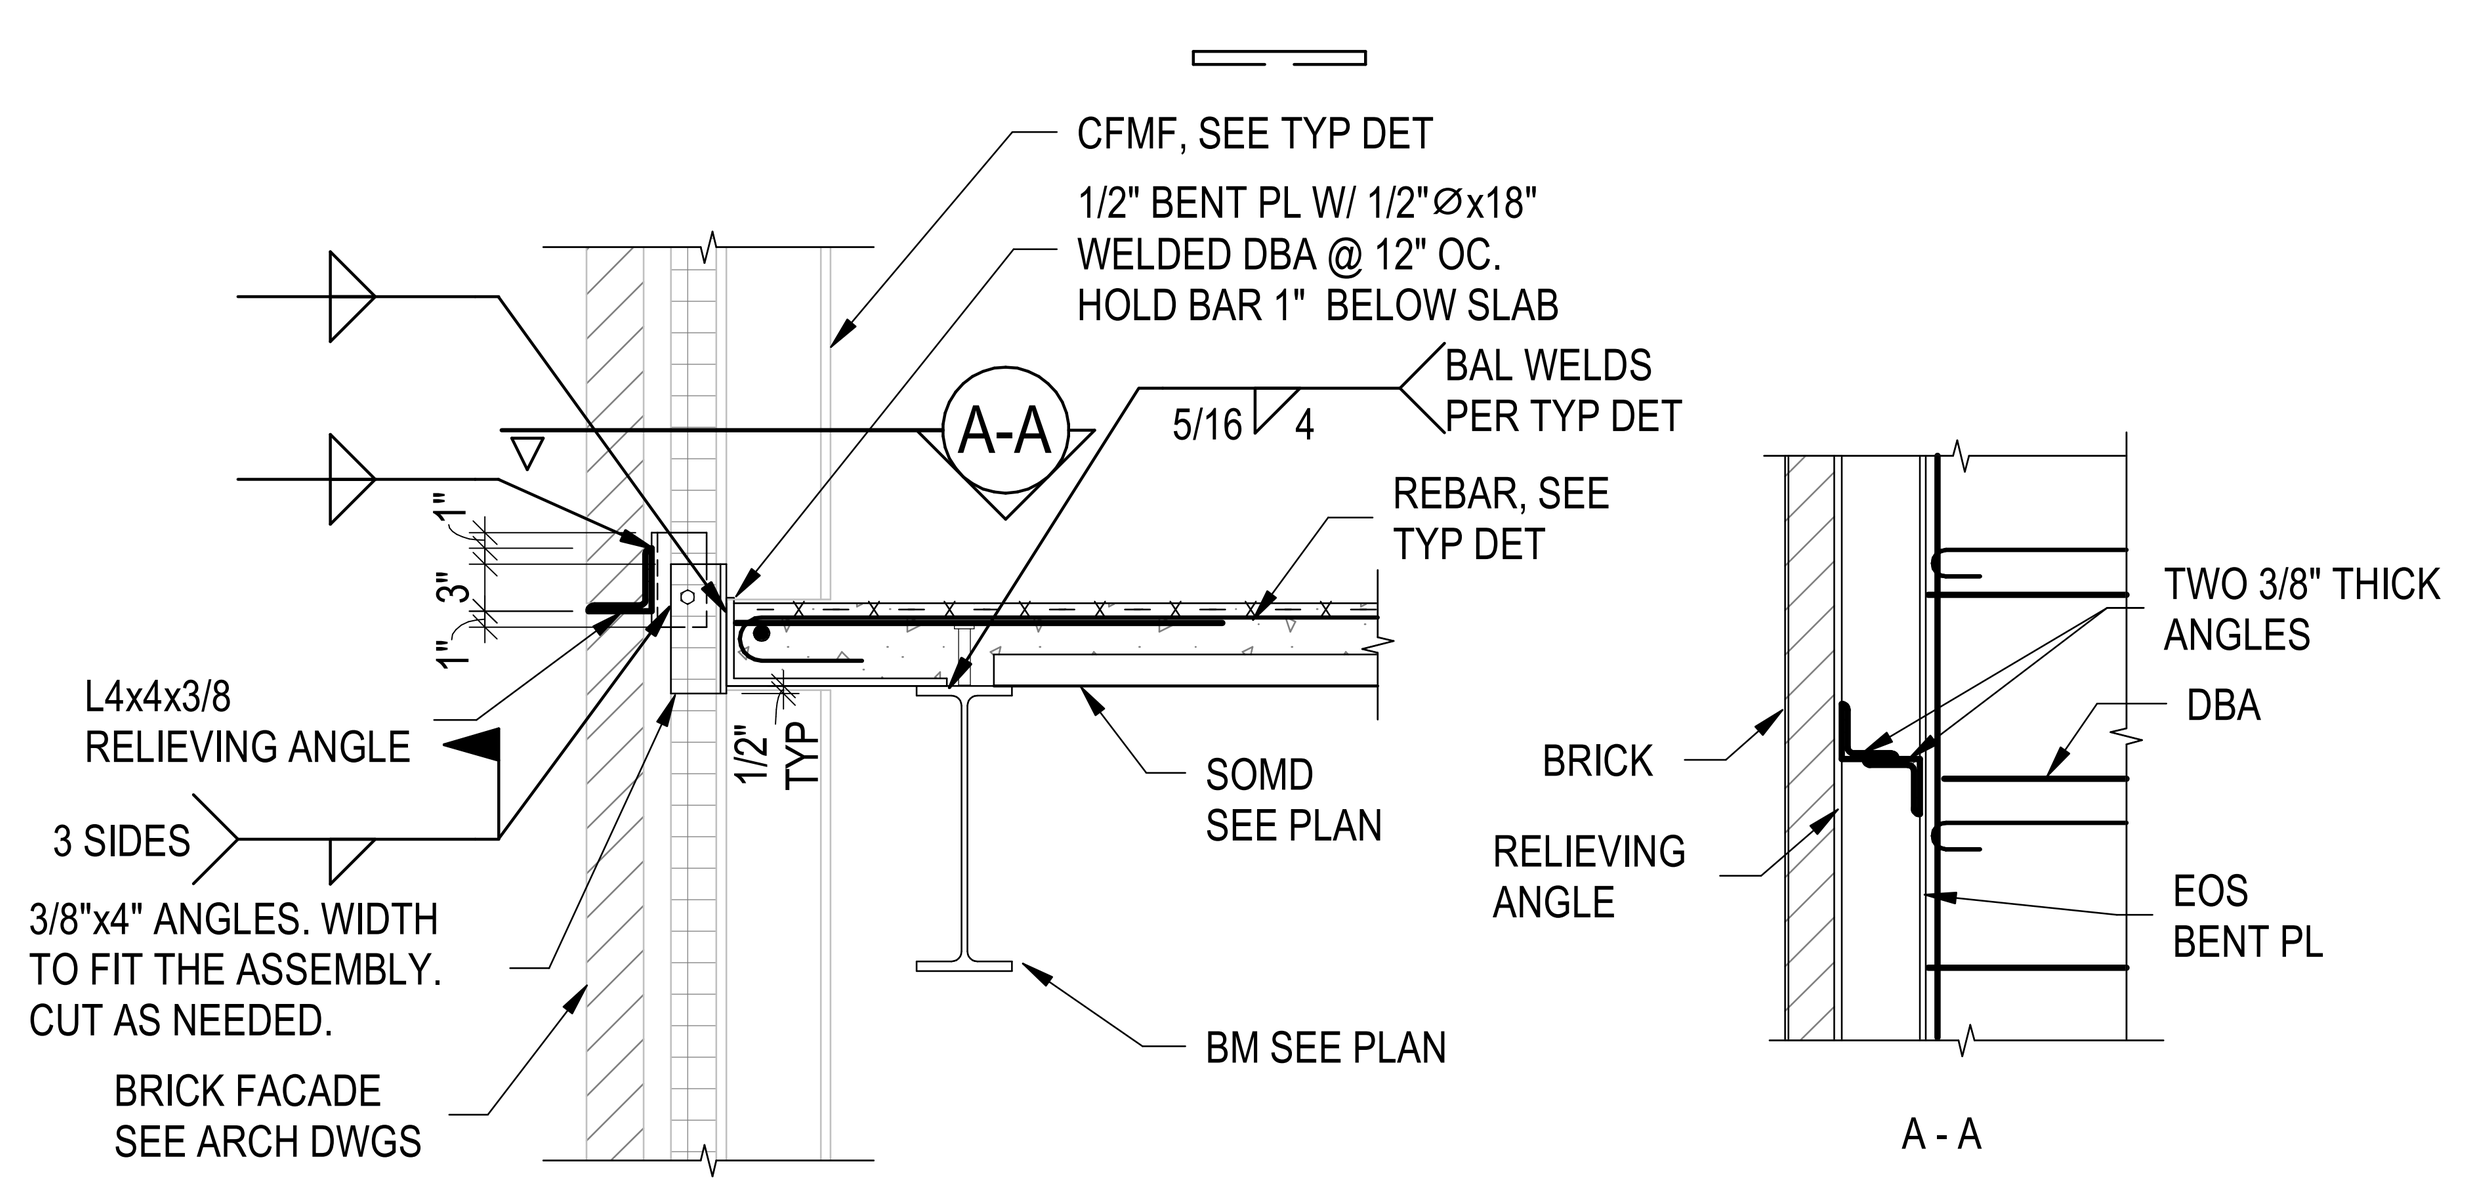

TYPICAL RELIEVING ANGLE TO SLAB CONNETION DETAIL

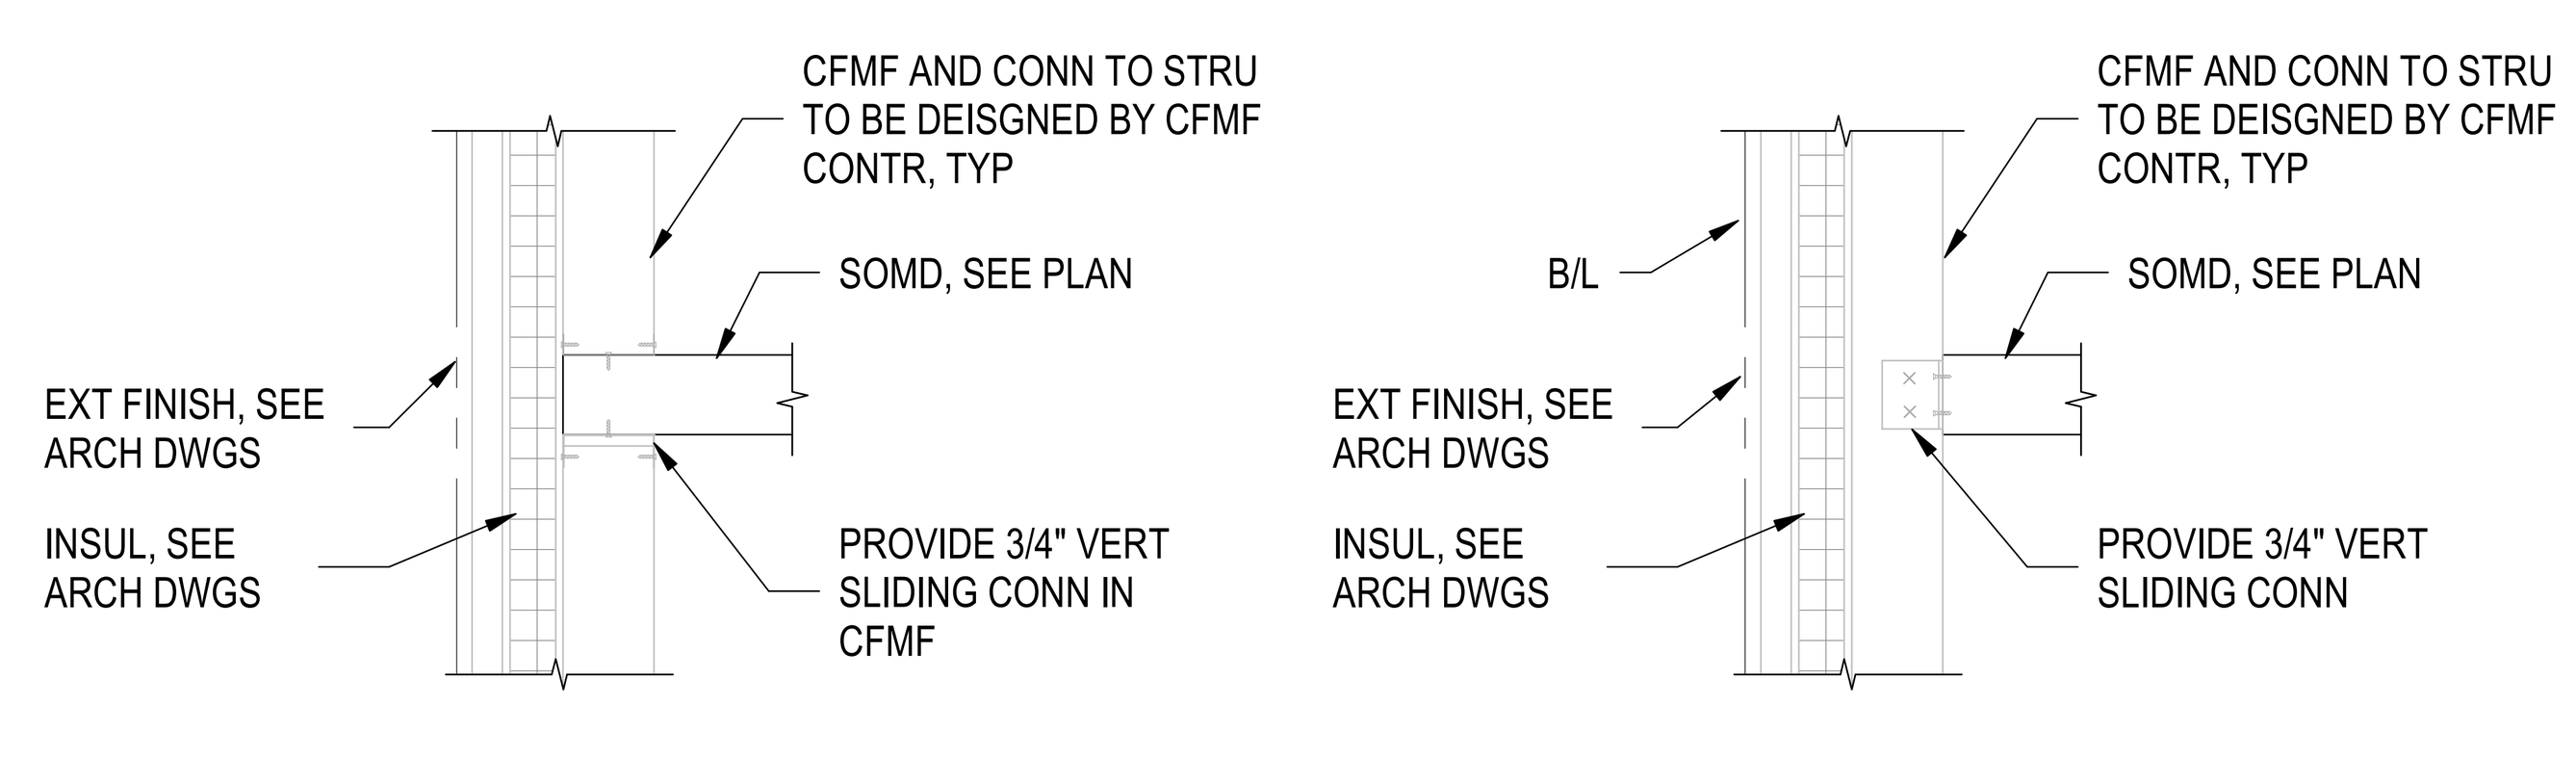

CASE 1: CFMF BEAR ON SLAB

CASE 2: CFMF BYPASS SLAB

TYPICAL CFMF TO SLAB CONNECTION DETAIL

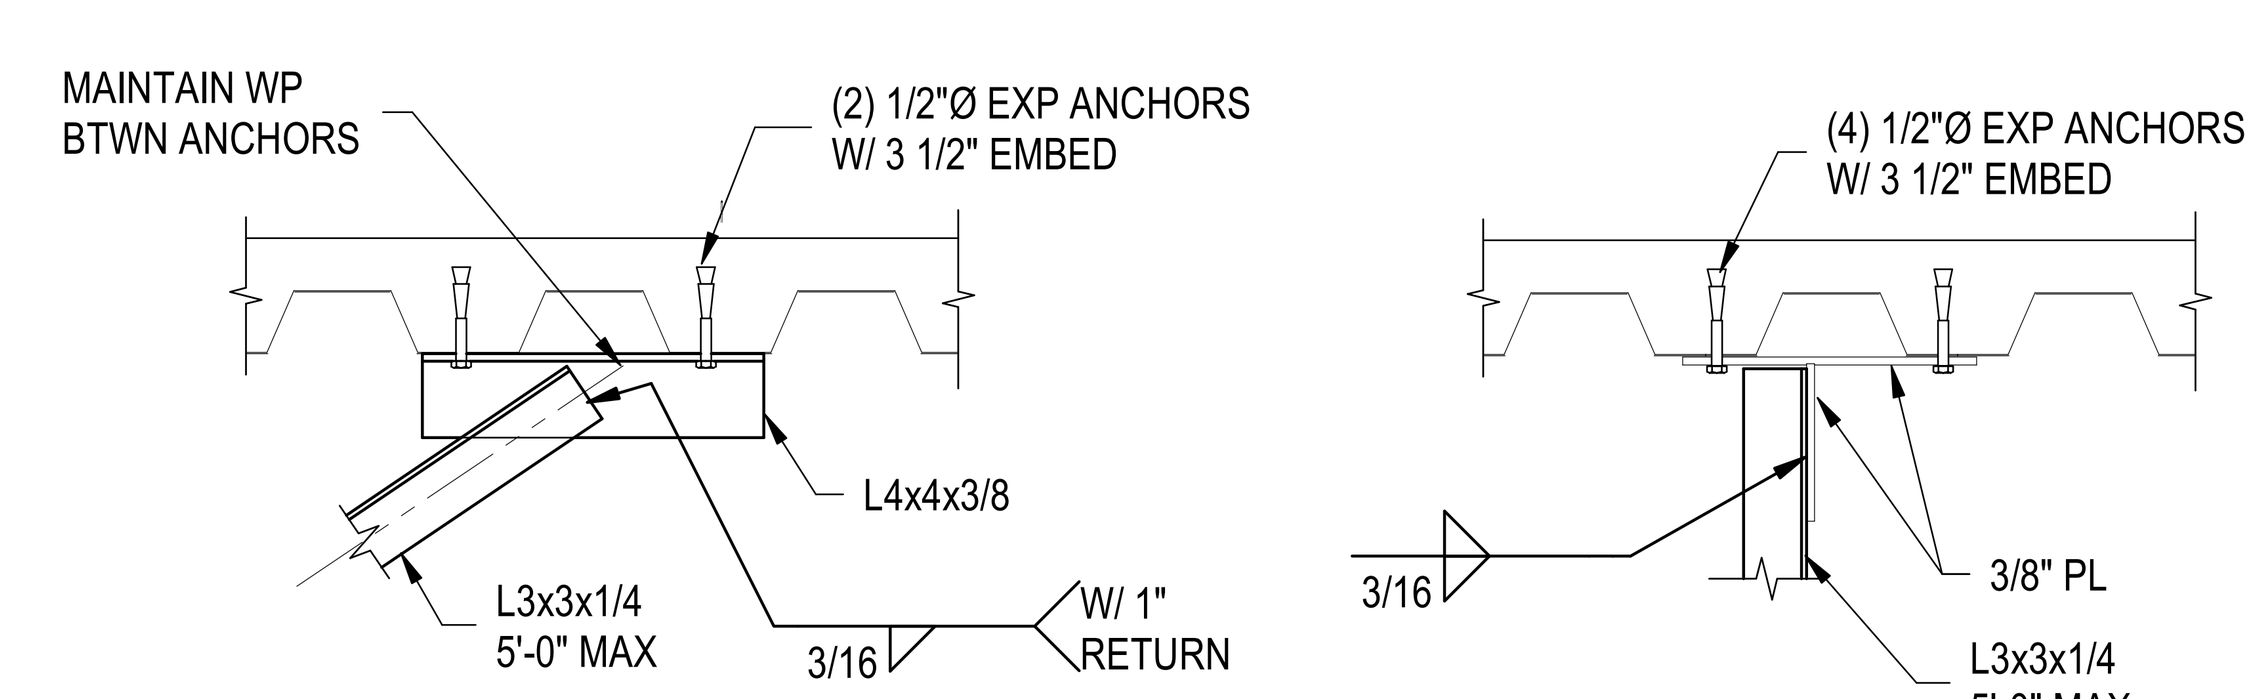

BRACING PERPENDICULAR TO DECKING

BRACING PARALLEL TO DECKING

TYPICAL BRACE TO SOMD CONNECTION DETAIL

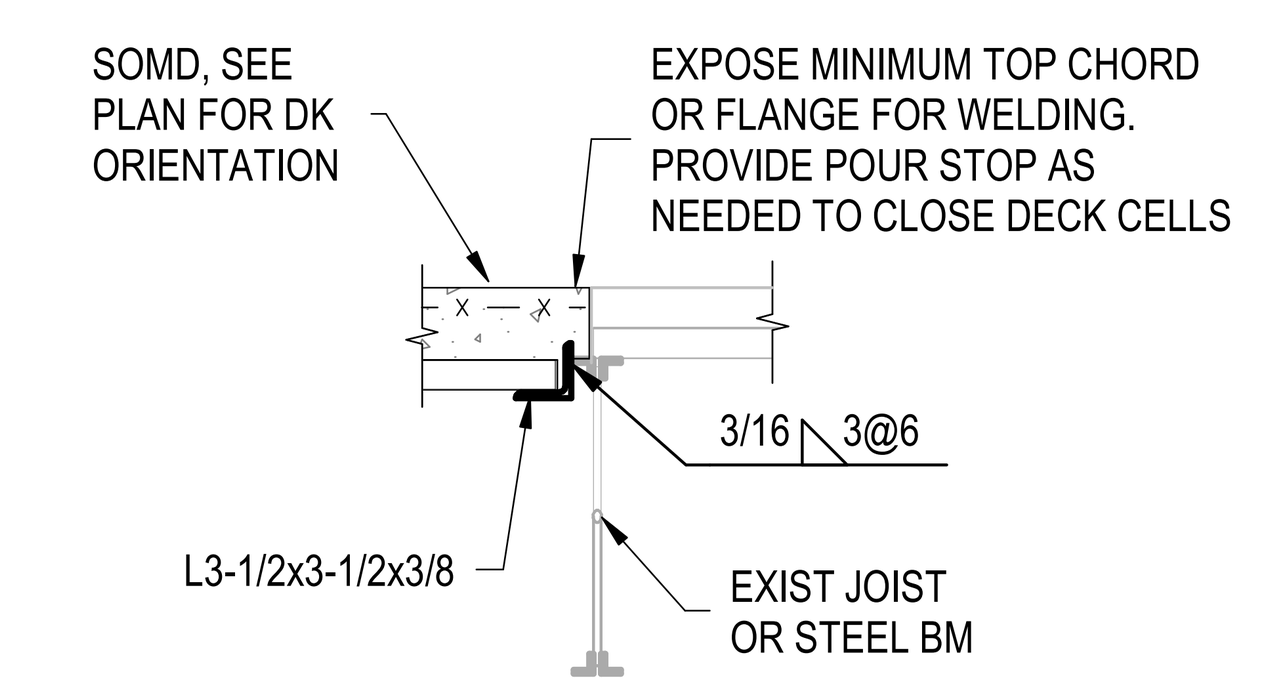

TYPICAL SOMD TO EXIST FRAMING DETAIL

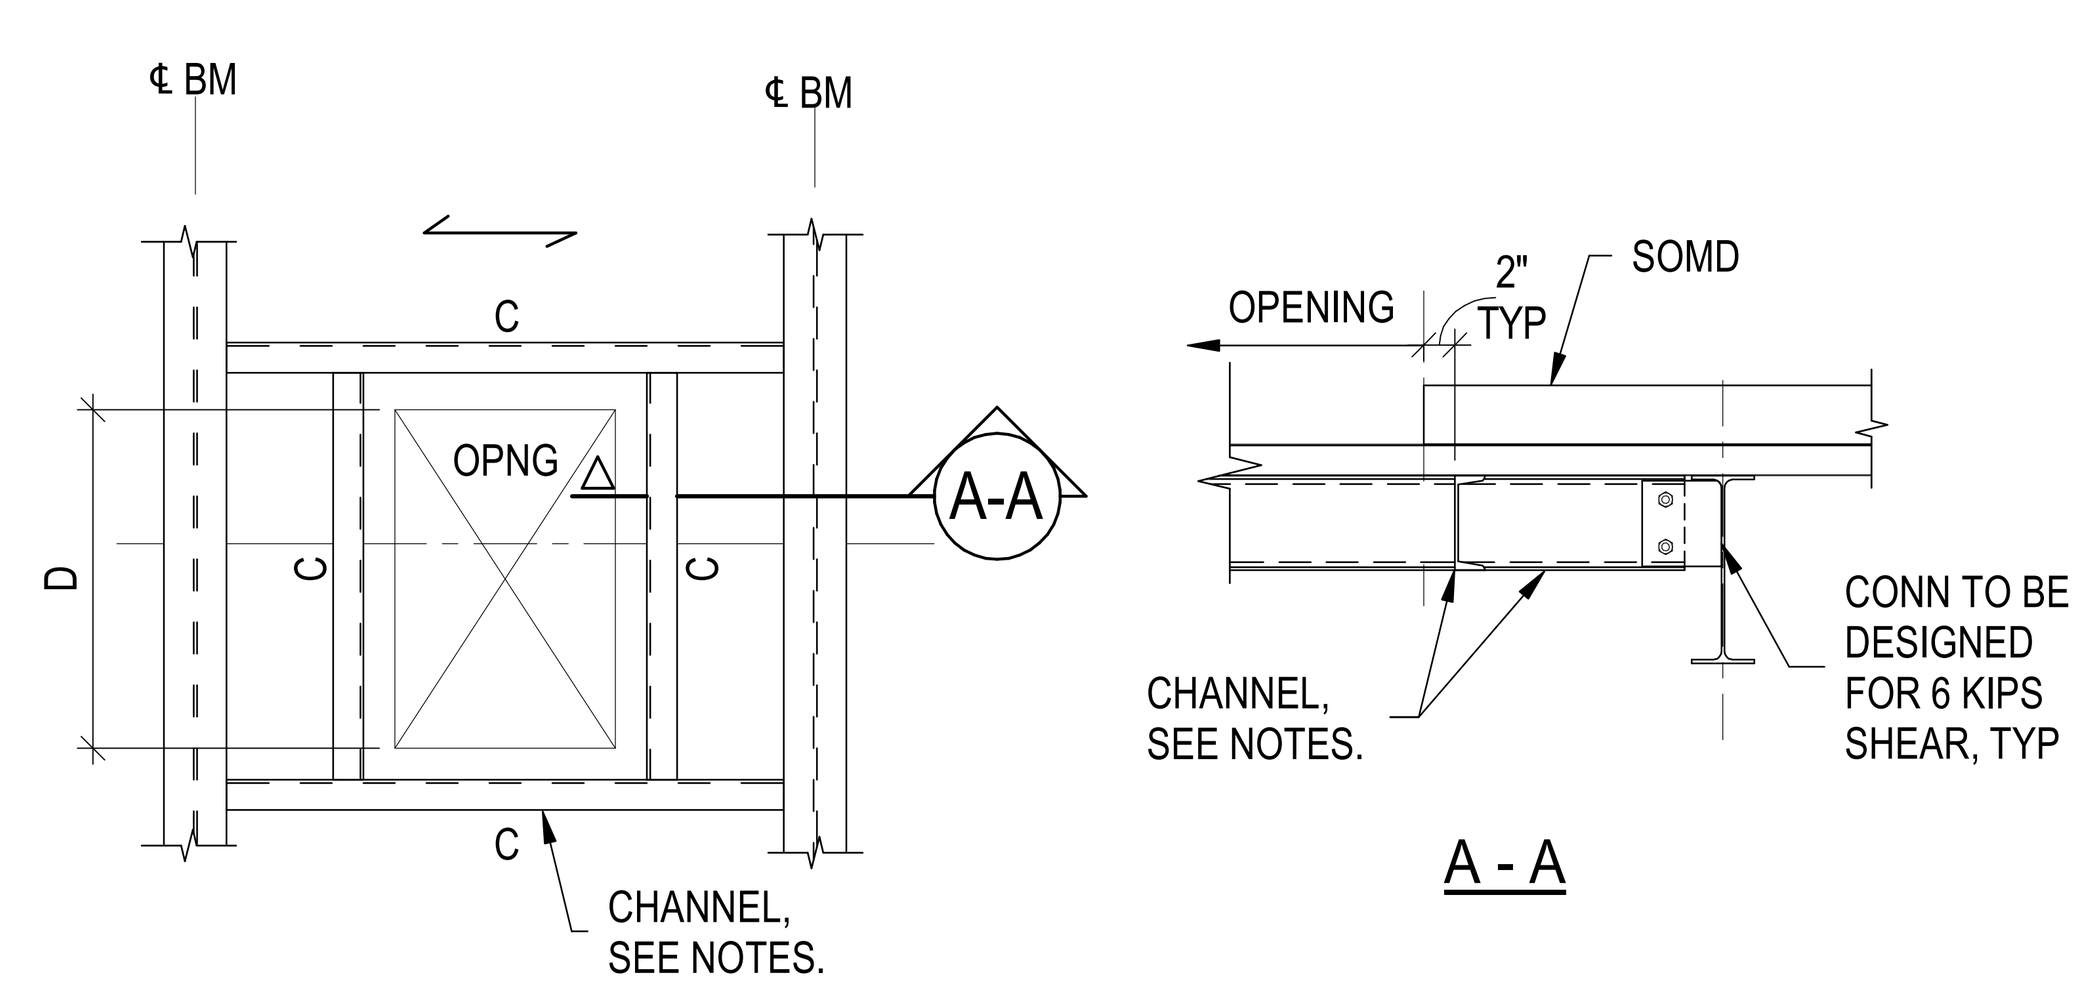

NOTES:

1. C STANDS FOR C8x11.5.
2. CHANNELS MUST BE PROVIDED IF "D" IS 12" OR LARGER. CONTRACTOR SHALL COORDINATE OPENING DIMENSIONS AND LOCATION WITH OTHER TRADES.

TYPICAL SLAB ON METAL DECK OPENING DETAIL

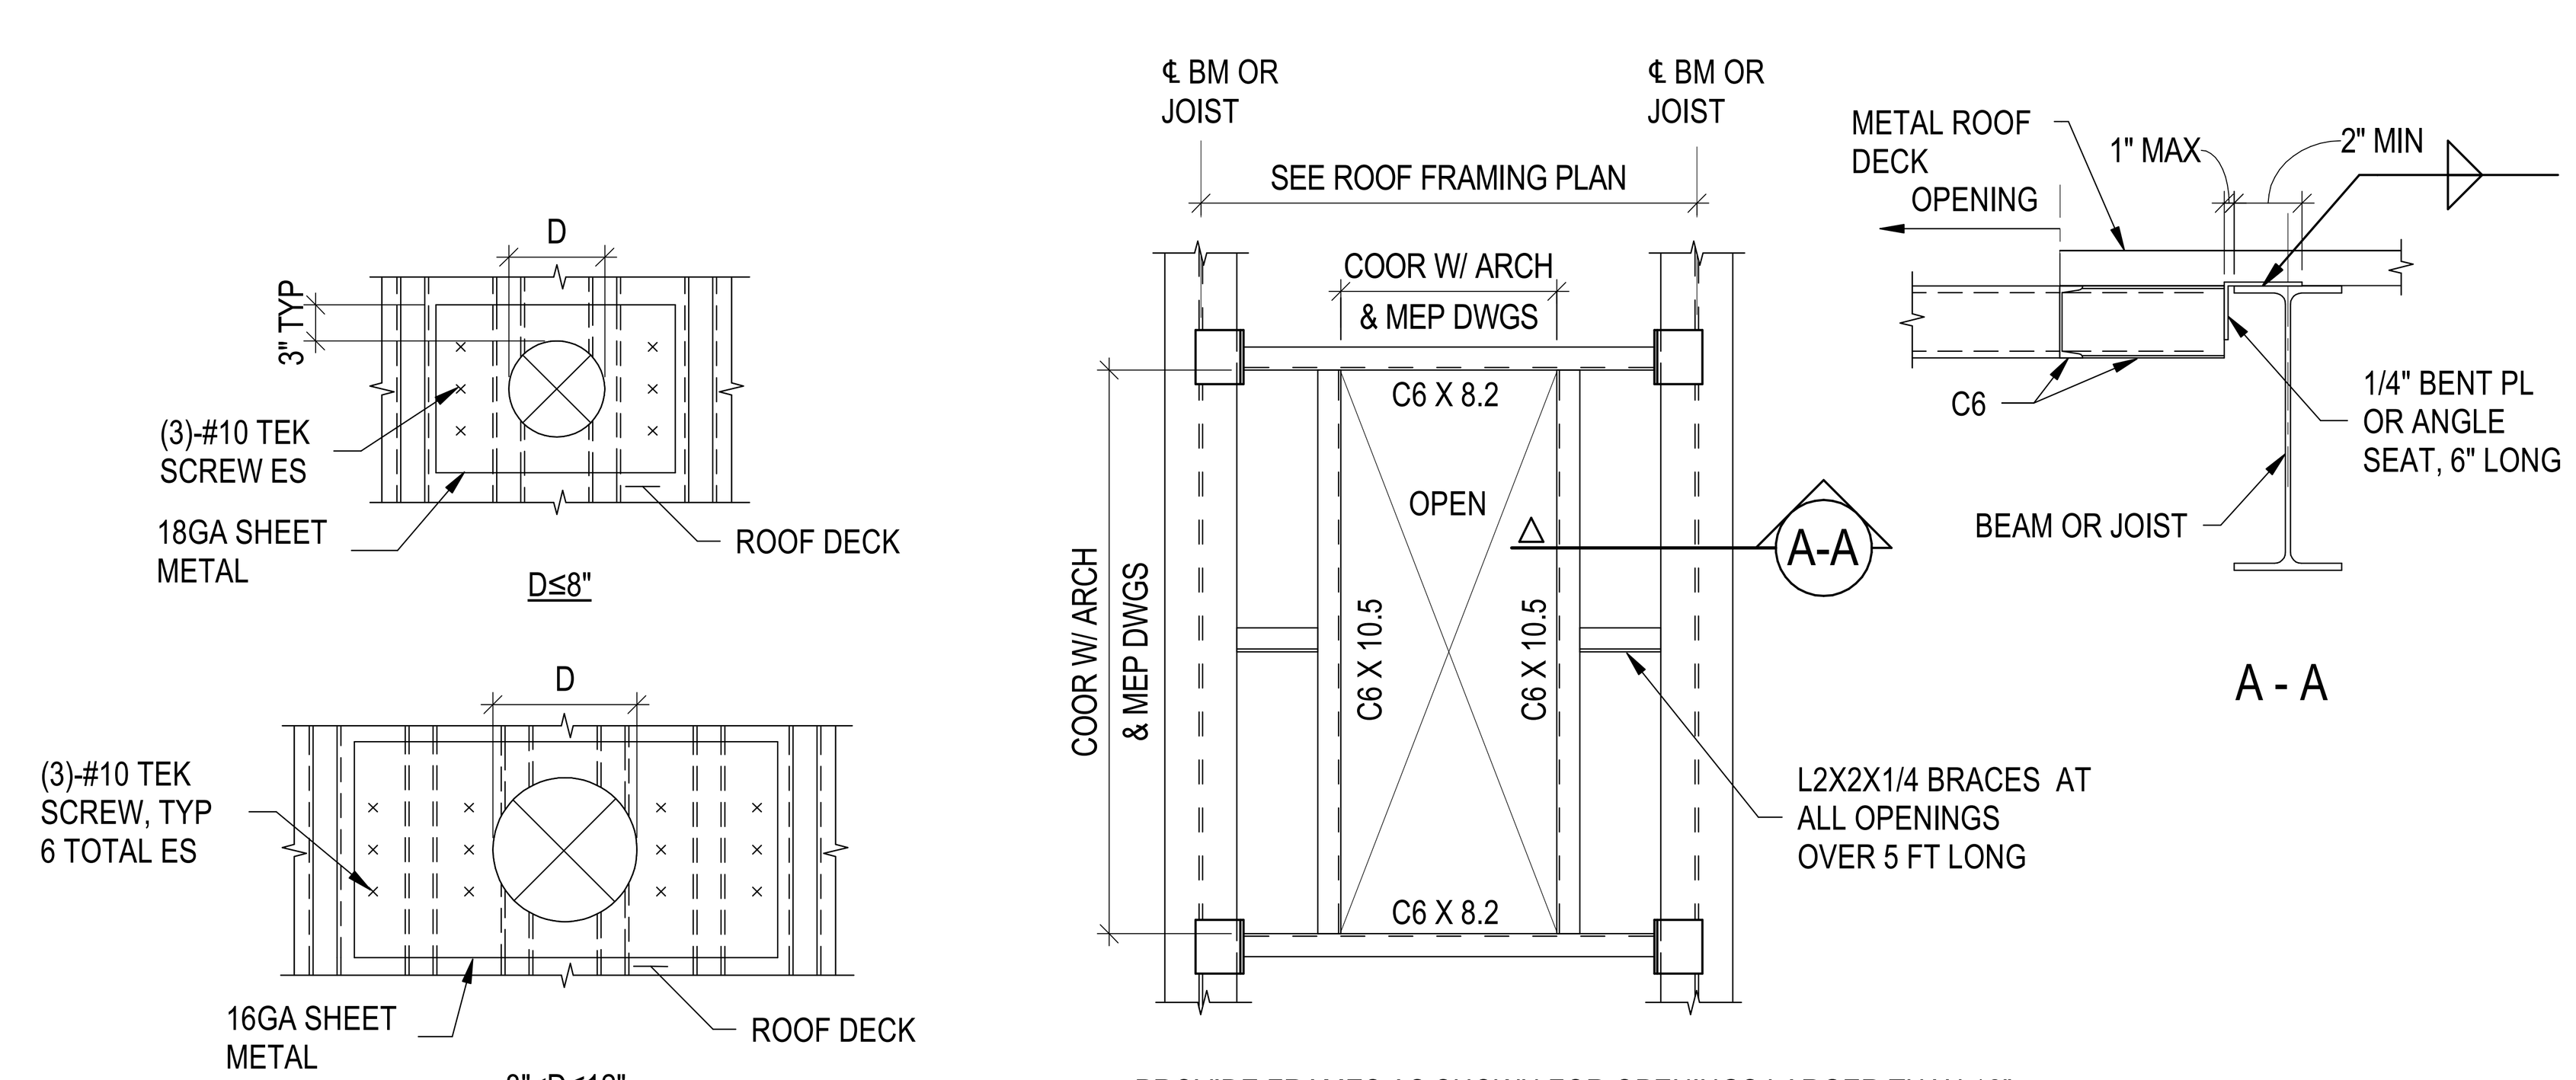

TYPICAL ROOF OPENING REINFORCING DETAIL

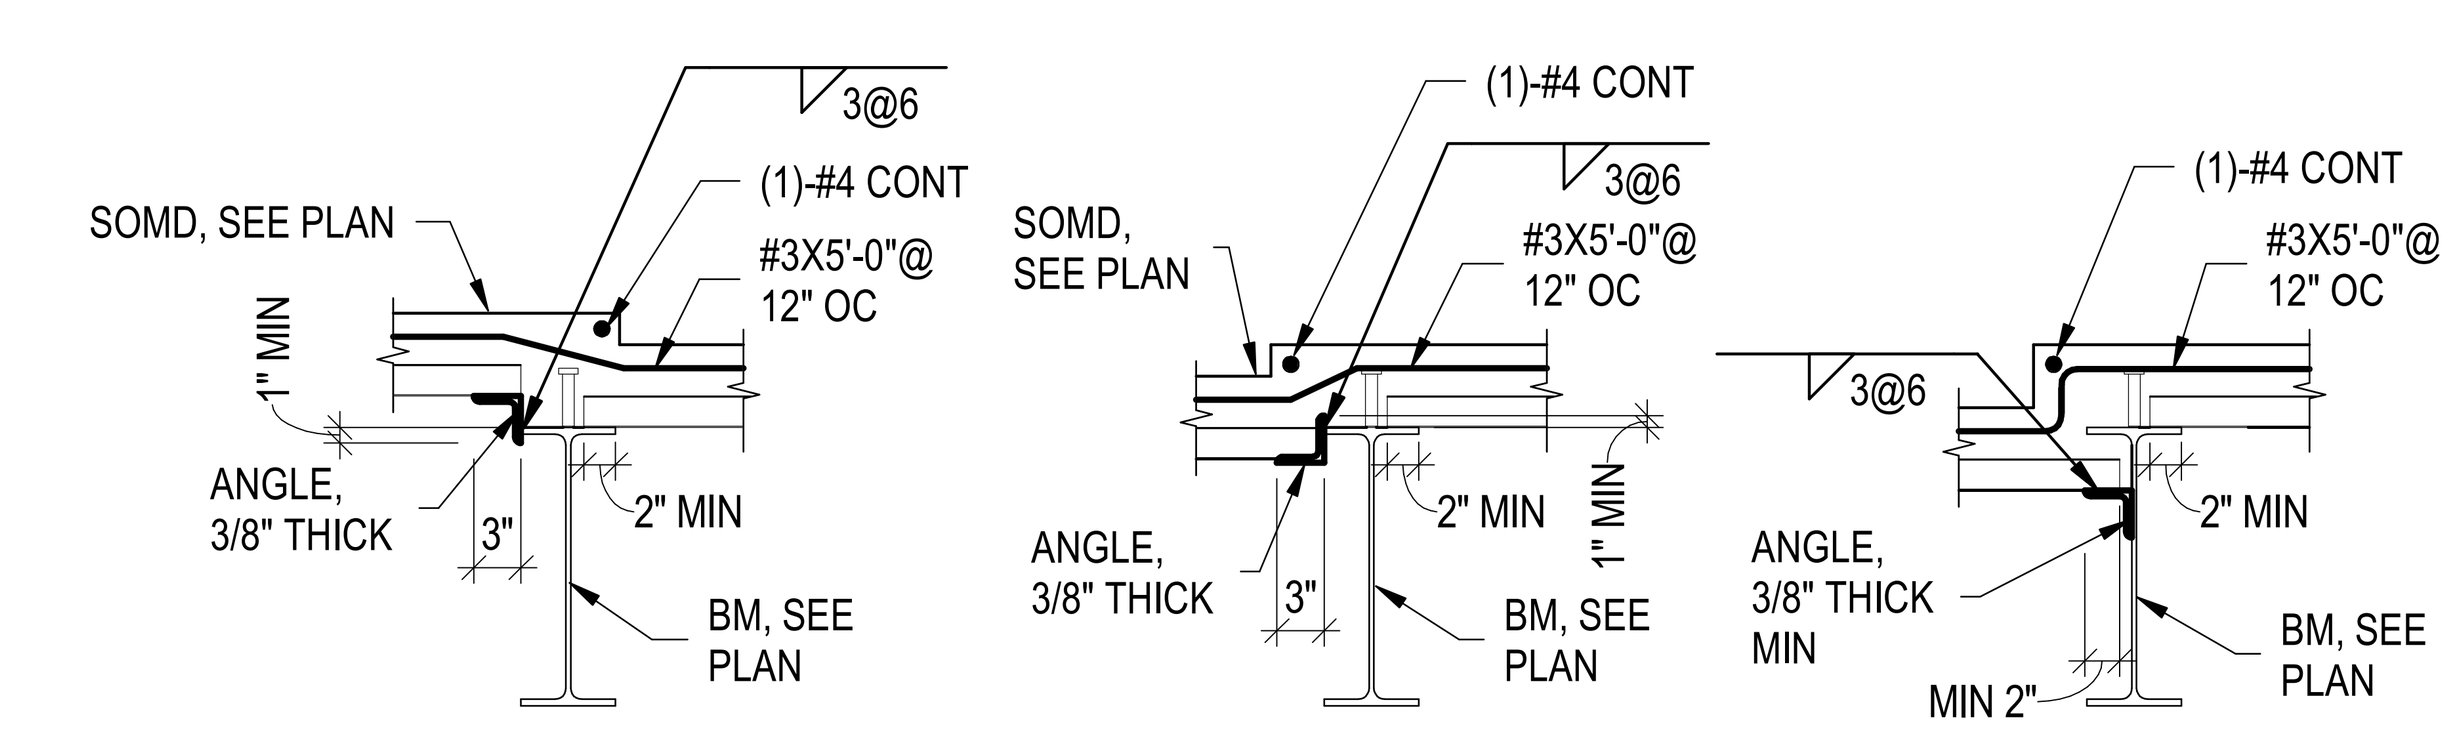

NOTE: DECK ORIENTATION CAN BE IN ANY ANGLE RELATIVE TO BEAMS.

TYPICAL SOMD AT DIFFERENT ELEVATION DETAIL

NO.	DATE	ISSUE
A	09/30/2025	Permit
	10/29/2025	BID SET

SEAL

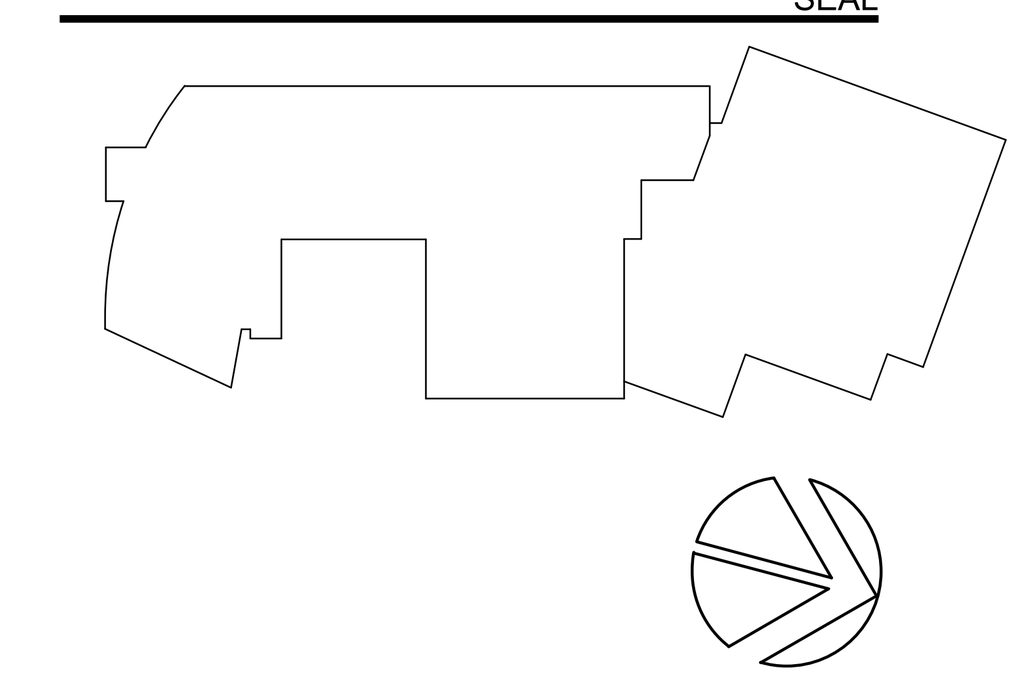

KEY PLAN

PERKINS EASTMAN
One Thomas Circle NW, Suite 200
Washington, DC 20005
T. +1 202 861 1325
F. +1 202 861 1326

Owner:
Sidwell Friends School
3825 Wisconsin Ave NW, Washington DC 20016

Construction Manager:
Advanced Project Management, Inc (APM)
4530 Walney Rd, Ste 202, Chantilly, VA 20151

Civil / Site:
Bowman Consulting Group, Ltd
888 17th St NW, Suite 510, Washington, DC 20006

Landscape:
Natural Resources Design, Inc (NRD)
1009 Shepherd Street NE, Washington, DC 20017

Structural:
Yun Associates LLC
1050 Connecticut Ave NW, Suite 500, Washington, DC 20036

MEP / FP / Lighting:
CMTA Inc
220 Lexington Green Circle, Suite 600, Lexington, KY 40503

AV / IT / Telecom / Security:
Educational Systems Planning (ESP)
2448 Holly Avenue, Suite 302, Annapolis, MD 21401

Food Service
Nyikos-Garcia Foodservice Design, Inc
7146 Starmount Way, New Market, MD 21774

Accessibility Consultant:
Galbo Wolf LLC
4410 Massachusetts Ave NW, #240, Washington, DC 20016

Acoustics:
Polysonics Corp
555 Hospital Drive, Warrenton, VA 20186

Building Envelope Consultant:
Sustainable Building Partners LLC
2701 Prosperity Ave, Suite 105, Fairfax, VA 22031

Code Consultant:
Campbell Code Consulting LLC
7834 Taggart Ct, Elkridge, MD 21075

Specifications:

PROJECT TITLE:

SIDWELL FRIENDS NEW LOWER SCHOOL AT DC CAMPUS

3825 WISCONSIN AVE NW
WASHINGTON, DC 20016

PROJECT No: 2025008

DRAWING TITLE:

TYPICAL DETAILS

SCALE: As indicated

S-203

BID SET
10/29/2025

NOTES:

THESE NOTES APPLY TO ALL CONNECTIONS UNLESS NOTED OTHERWISE

1. REFER TO "GENERAL NOTES" SHEETS FOR ADDITIONAL STEEL CONNECTION REQUIREMENTS.
2. THE TYPICAL DETAILS AS SHOWN ON THE STRUCTURAL DRAWINGS ARE CONCEPTUAL. THE CONTRACTOR SHALL DESIGN AND DETAIL THE CONNECTIONS IN ACCORDANCE WITH THE REQUIREMENTS SHOWN ON THE DESIGN DRAWINGS AND SPECIFICATIONS.
3. CONNECTIONS SHALL BE DESIGNED FOR FACTORED LOADS AS SHOWN ON THE STRUCTURAL DRAWINGS. WHERE REACTIONS ARE NOT SHOWN, CONNECTION SHALL BE DESIGNED FOR A MINIMUM FACTORED LOAD REACTION OF 16 KIPS AND TO MEET THE REQUIREMENT IN "TABLE A".
4. DESIGN CONNECTIONS AS STANDARD AISC SIMPLE SHEAR CONNECTIONS UNLESS OTHER LOADS ARE PRESENT AS INDICATED ON PLANS.
5. BOLTS SHALL BE SNUG TIGHT UNLESS SPECIFICALLY CALLED OUT AS SLIP CRITICAL (SC).
6. STANDARD ROUND HOLES SHALL BE PROVIDED. IF SLOTTED HOLES ARE PROVIDED IN THE DIRECTION OF LOAD, SLIP CRITICAL CONNECTION SHALL BE PROVIDED.
7. WHERE MOMENT CONNECTIONS ARE INDICATED, PROVIDE A LOAD PATH THROUGH THE SUPPORT MEMBER TO TRANSFER THE DESIGN MOMENT.
8. WHERE BEAMS ARE COPED FOR CONNECTIONS, THE REMAINING BEAM SECTION SHALL BE CHECKED FOR BENDING AND SHEAR CAPACITY.

TABLE A

WIDE-FLANGE BEAM DEPTH	BUILT-UP BEAM DEPTHS (INCH)	MINIMUM NUMBER OF BOLTS REQUIRED
W8, W10, W12	8 TO 13	2
W14, W16, W18	TO 19	3
W21, W24, W27	TO 25	4
W30, W33	TO 31	5
W36, W40	TO 38	6

GENERAL NOTES FOR STEEL CONNECTIONS

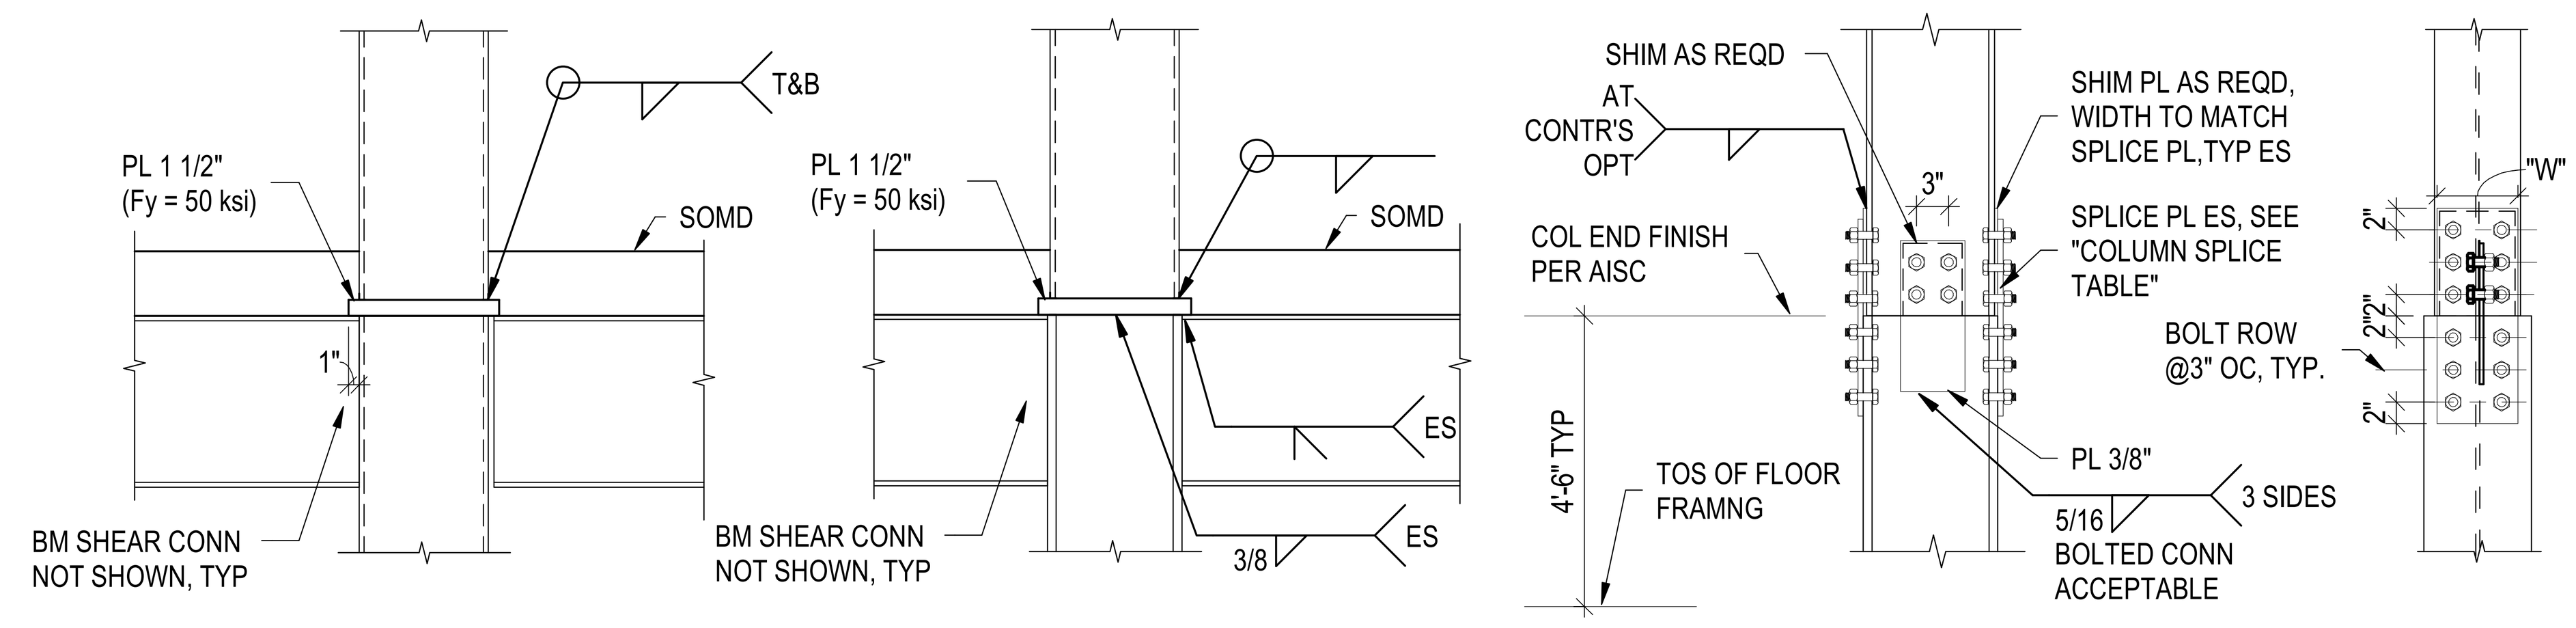

HSS OR PIPE

HSS/PIPE ON WIDE FLANGE

WIDE FLANGE ON WIDE FLANGE

NOTES:
1. CONTRACTOR SHALL PROVIDE ALL ERECTION AND STABILITY AIDS.
2. SPLICE REQUIREMENTS SHALL BE BASED ON THE UPPER COLUMN SECTION.
3. SPLICE PLATES SHALL BE Fy=50 KSI
4. PROVIDE 4 ROWS AT TENSION COLUMNS IDENTIFIED IN COLUMN SCHEDULE.

STEEL COLUMN SPLICE TABLE

COLUMN SIZE	SPLICE PLATES		BOLTS			REMARKS
	T (IN)	W (IN)	SIZE (IN)	GRADE	NO. OF ROWS	
W10X33 TO W10X112	1/2	8	7/8	A325	2	SEE NOTE 4
W12X40 TO W12X106	5/8	8	7/8	A325	2	SEE NOTE 4
W12X120 TO W12X230	3/4	8	7/8	A325	2	SEE NOTE 4
W12X252 TO W12X336	1	8	7/8	A325	2	SEE NOTE 4
W14X43 TO W14X61	1/2	8	7/8	A325	2	SEE NOTE 4
W14X68 TO W14X82	5/8	8	7/8	A325	2	SEE NOTE 4
W14X90 TO W14X132	3/4	12	7/8	A325	3	SEE NOTE 4
W14X145 TO W14X198	7/8	14	7/8	A325	3	SEE NOTE 4

TYPICAL COLUMN SPLICE DETAIL

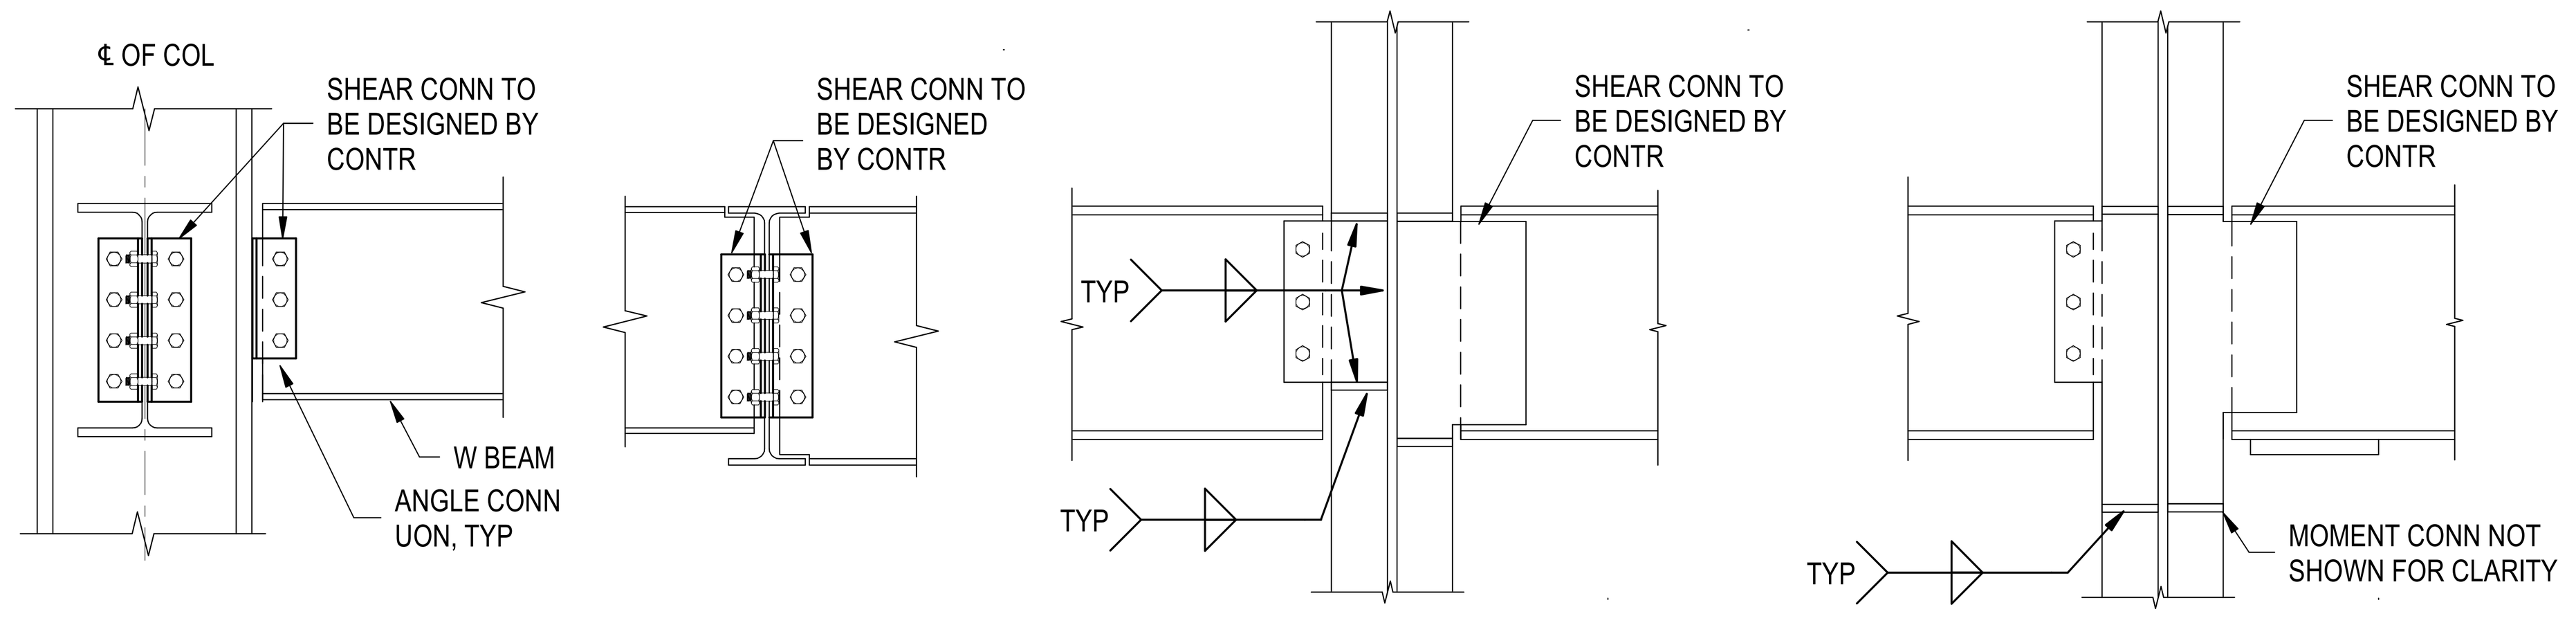

BEAM TO COLUMN

BEAM TO BEAM

NO MOMENT CONN TO COL FLANGES

WITH MOMENT CONN TO COL FLANGES

TYPICAL SHEAR CONNECTION DETAIL

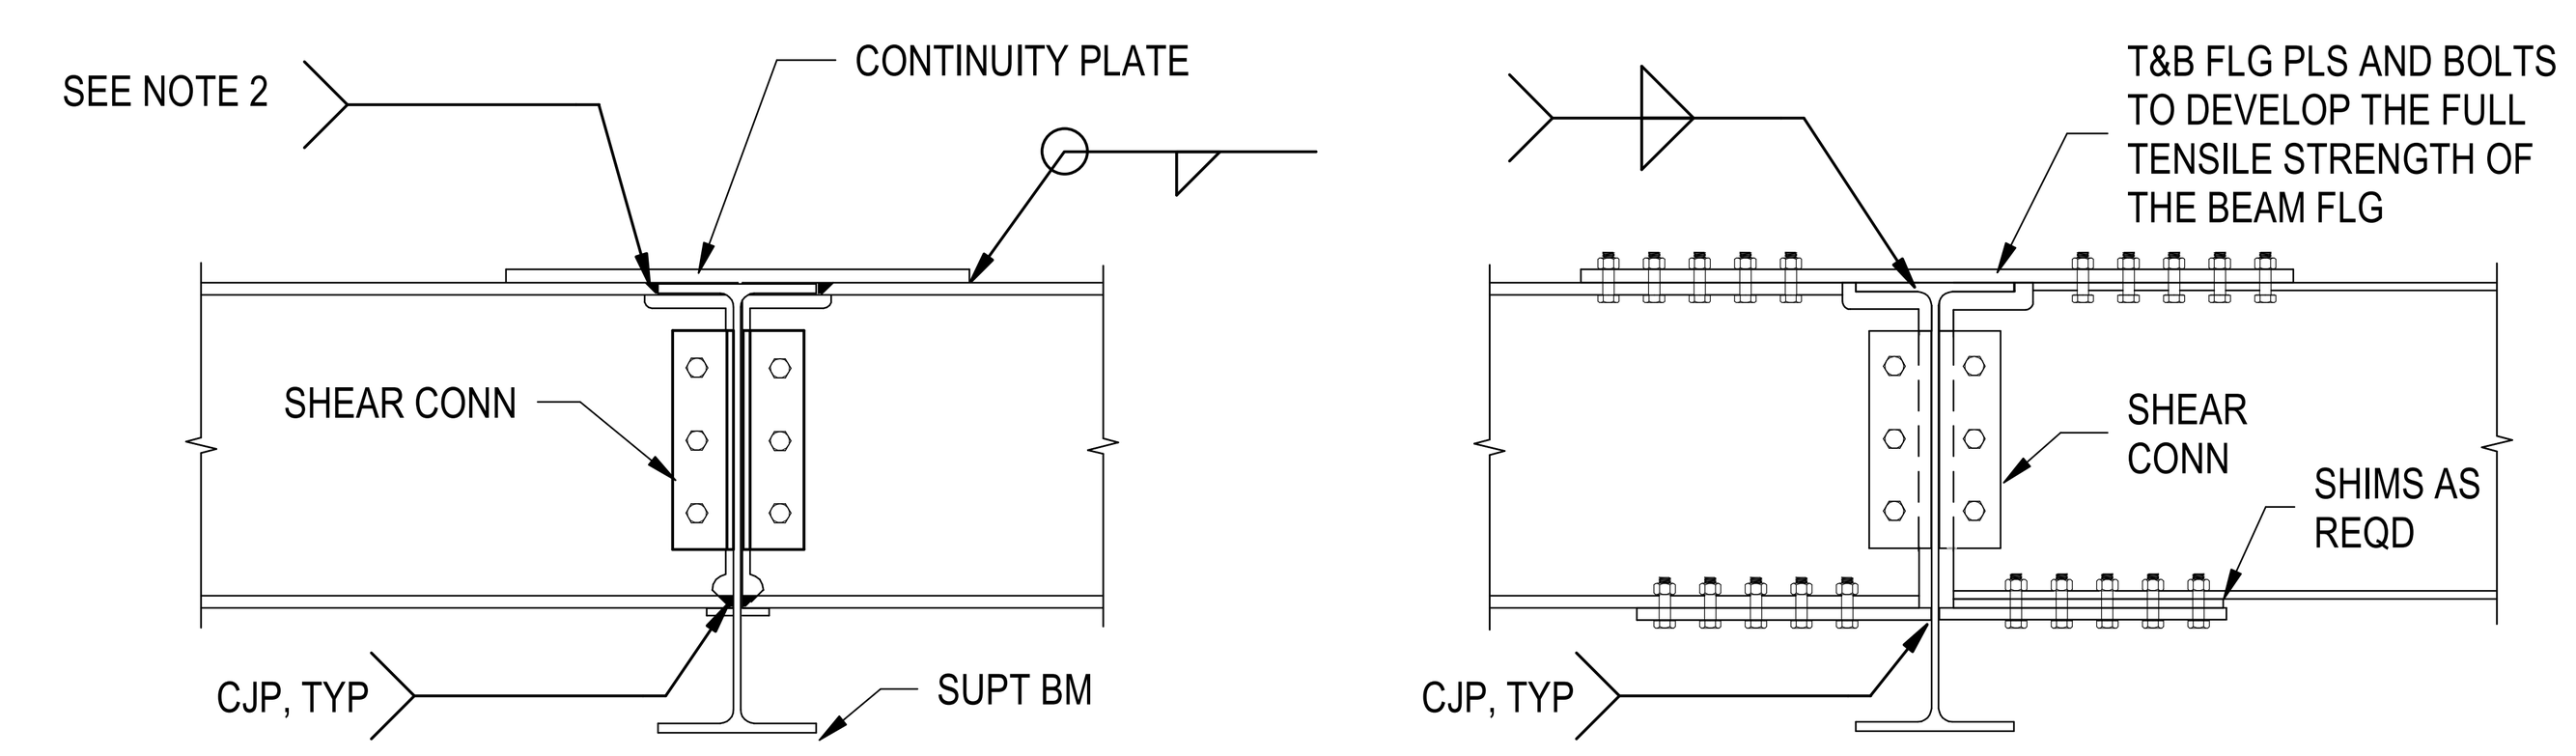

NOTES:
1. CONTINUITY PLATE AND WELDS SHALL BE SIZED BY CONTR TO DEVELOP THE FULL TENSILE CAPACITY OF THE BEAM FLANGE.
2. IN LIEU OF CONTINUITY PLATE, CONTR HAS THE OPTION TO WELD BEAM FLANGES WITH CJP.

BEAM TO BEAM WELDED CONNECTION

BEAM TO BEAM BOLTED CONNECTION

TYPICAL BEAM TO BEAM MOMENT CONNECTION DETAIL

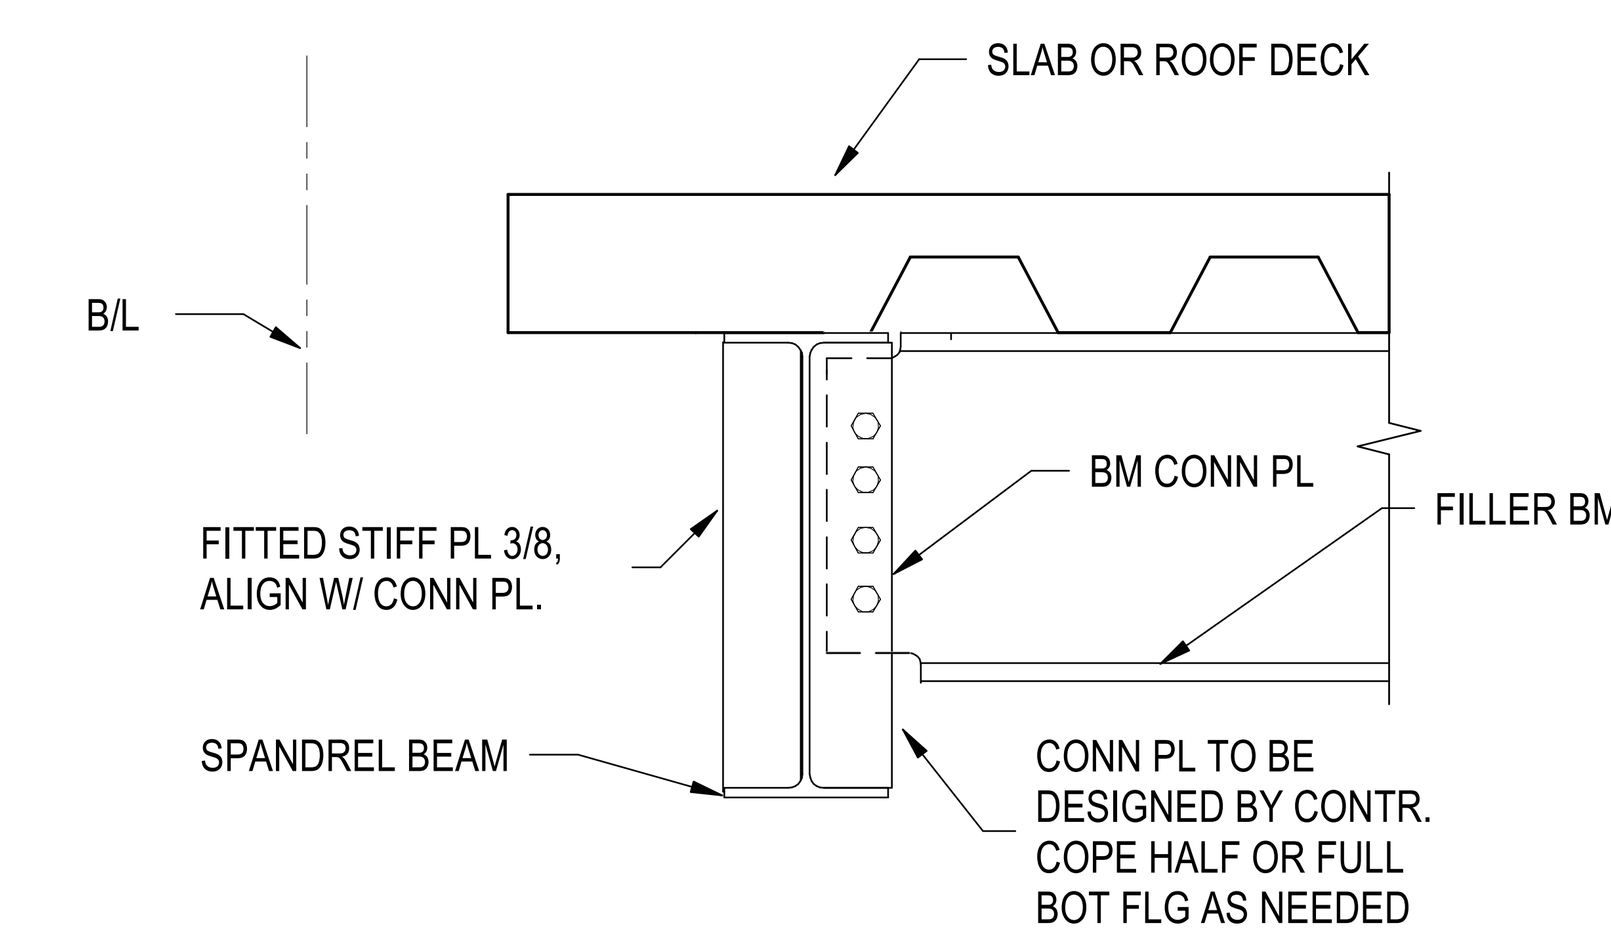

TYPICAL BEAM TO SPANDREL CONNECTION DETAIL

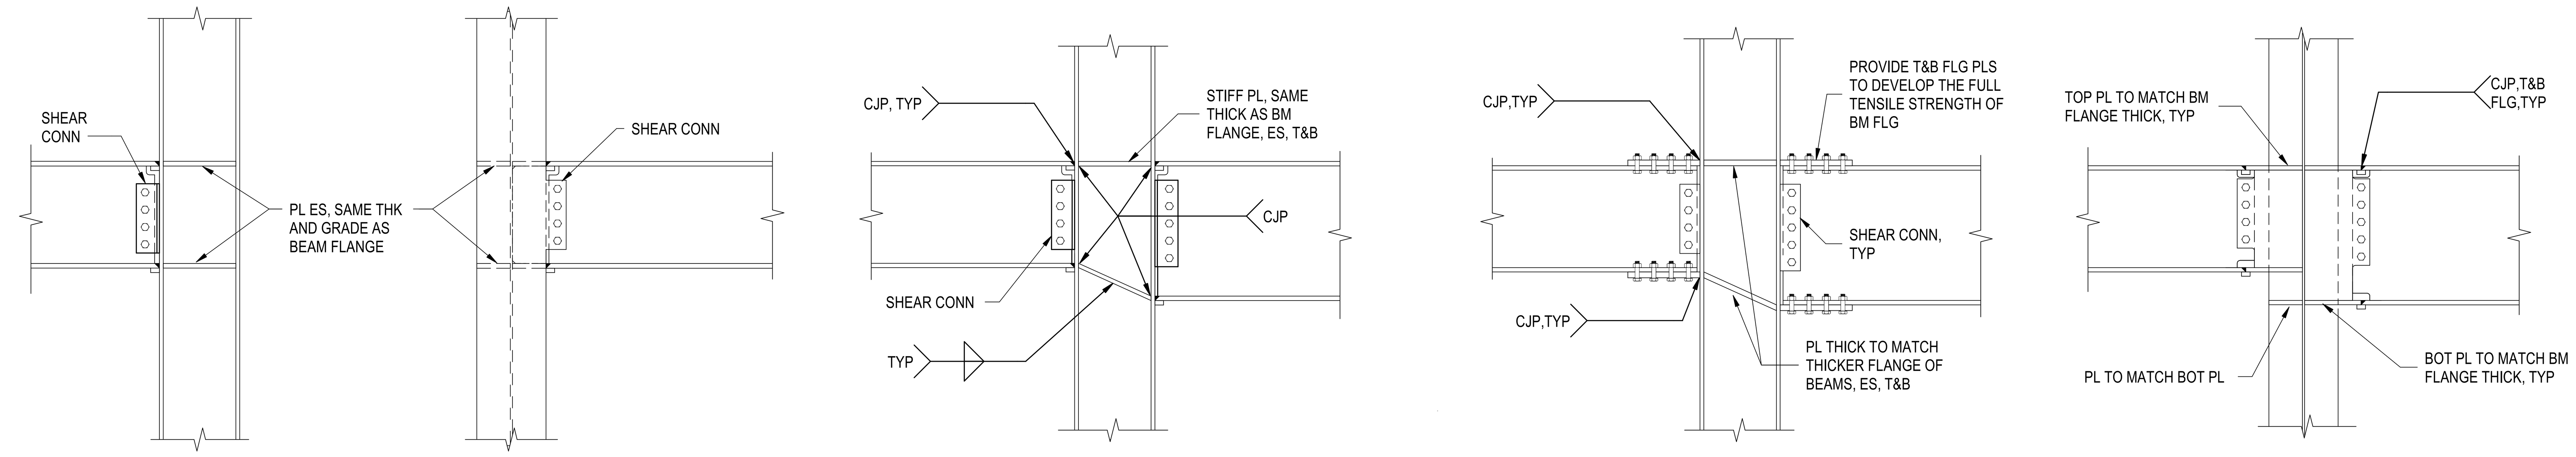

BEAM PARALLEL TO COLUMN WEB

BEAM PERPENDICULAR TO COLUMN WEB

WELDED MOMENT CONNECTION TO COLUMN FLANGES

BOLTED MOMENT CONNECTION TO COLUMN FLANGES

WELDED MOMENT CONNECTION TO COLUMN WEB

TYPICAL BEAM TO COLUMN MOMENT CONNECTION DETAIL

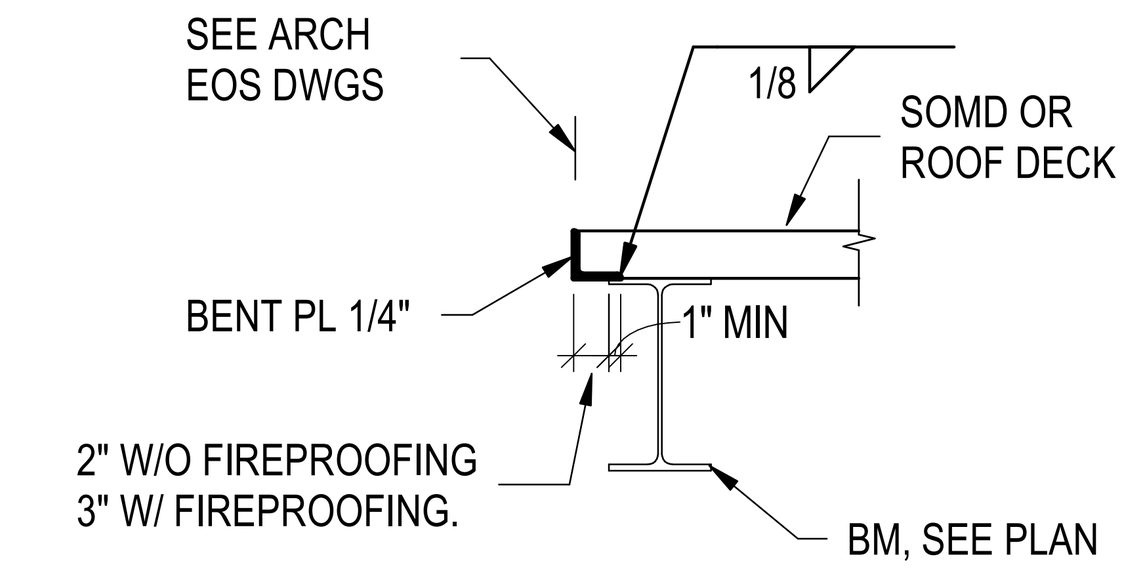

TYPICAL BEAM AT OPENING DETAIL

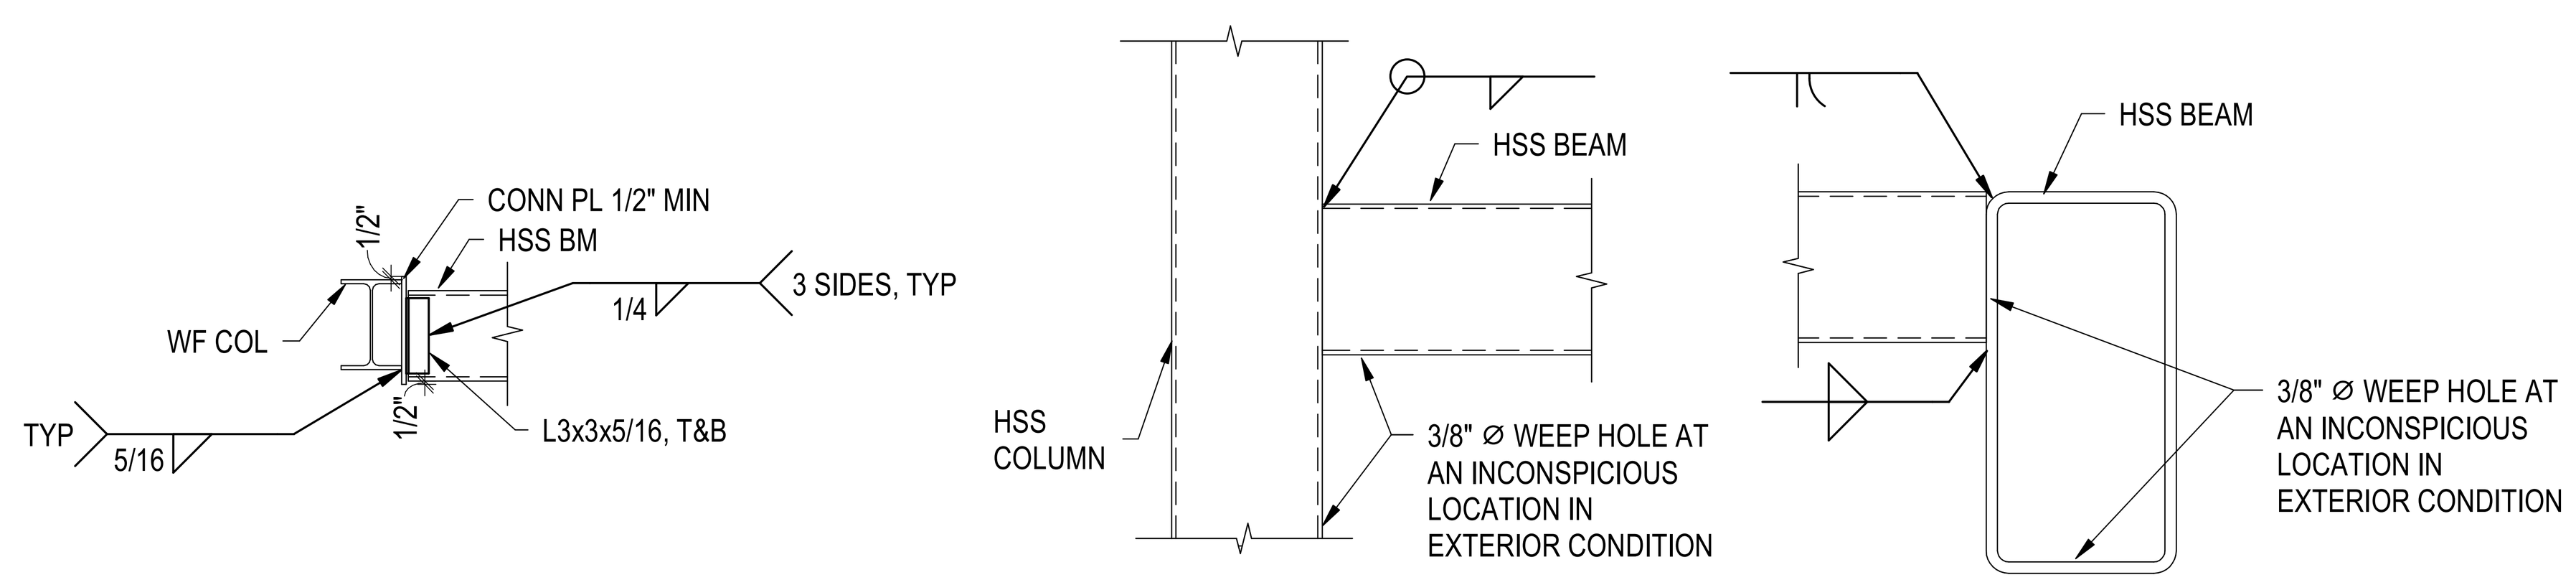

TYPICAL HSS GIRT TO WF COLUMN CONNECTION

TYPICAL HSS BEAM TO HSS BEAM CONNECTION

TYPICAL HSS CONNECTION DETAIL

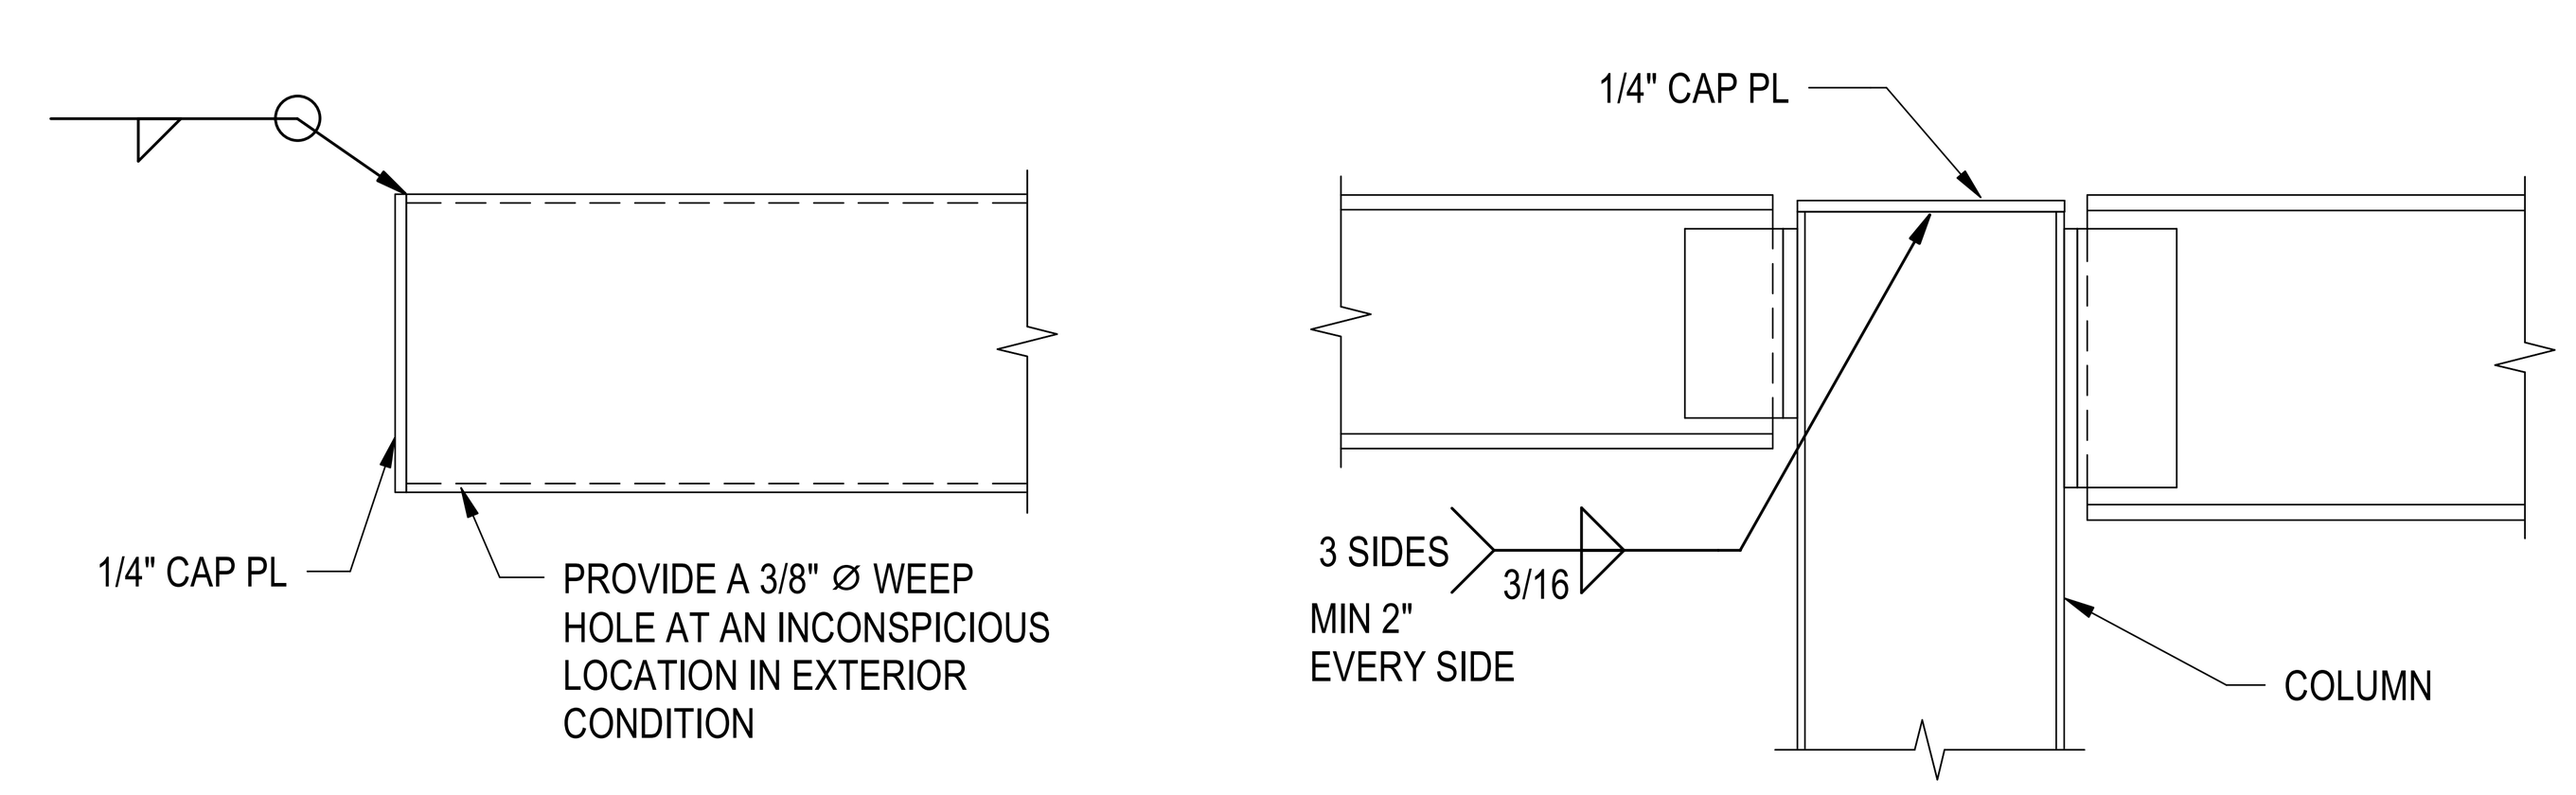

AT OPEN END OF HSS (BEAM OR COLUMN)

AT TOP OF WF COLUMN

TYPICAL END OF MEMBER DETAIL

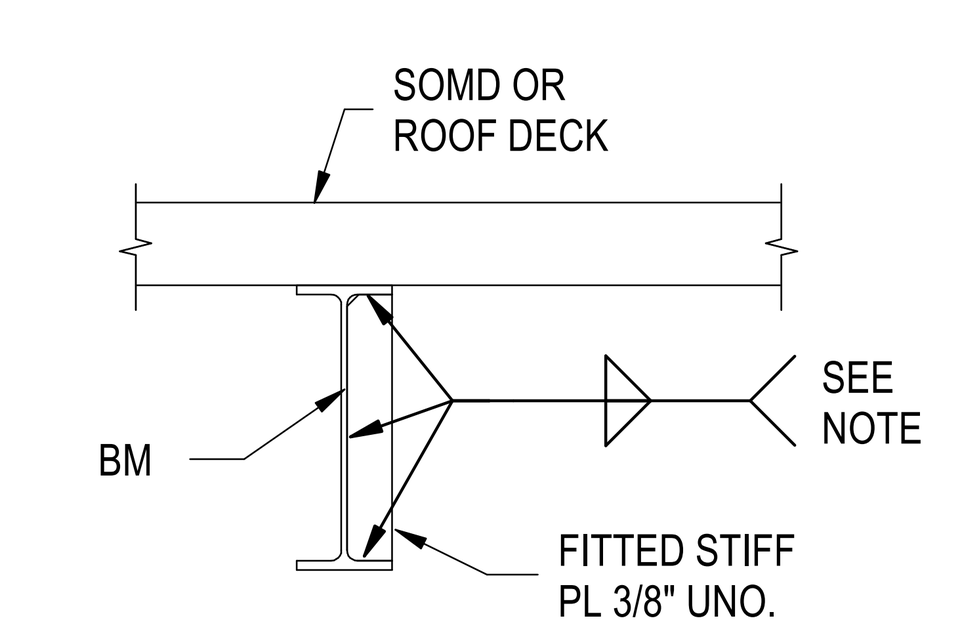

NOTE: ONE SIDE WELD ACCEPTABLE WHERE SPECIFICALLY DETAILED

TYPICAL STIFF PL CONNECTION DETAIL

NO.	DATE	ISSUE
A	09/30/2025	Permit
	10/29/2025	BID SET

SEAL

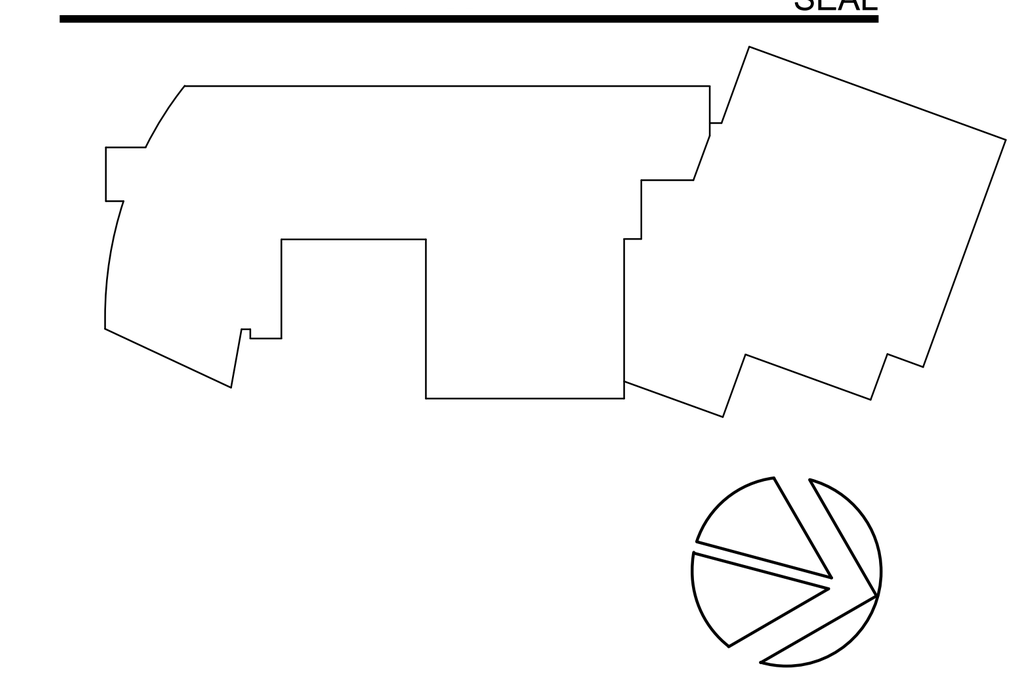

KEY PLAN

PERKINS EASTMAN
One Thomas Circle NW, Suite 200
Washington, DC 20005
T. +1 202 861 1325
F. +1 202 861 1326

Owner:
Sidwell Friends School
3825 Wisconsin Ave NW, Washington DC 20016

Construction Manager:
Advanced Project Management, Inc (APM)
4530 Walney Rd, Ste 202, Chantilly, VA 20151

Civil / Site:
Bowman Consulting Group, Ltd
888 17th St NW, Suite 510, Washington, DC 20006

Landscape:
Natural Resources Design, Inc (NRD)
1009 Shepherd Street NE, Washington, DC 20017

Structural:
Yun Associates LLC
1050 Connecticut Ave NW, Suite 500, Washington, DC 20036

MEP / FP / Lighting:
CMTA Inc
220 Lexington Green Circle, Suite 600, Lexington, KY 40503

AV / IT / Telecom / Security:
Educational Systems Planning (ESP)
2448 Holly Avenue, Suite 302, Annapolis, MD 21401

Food Service
Nyikos-Garcia Foodservice Design, Inc
7146 Starmount Way, New Market, MD 21774

Accessibility Consultant:
Galbo Wolf LLC
4410 Massachusetts Ave NW, #240, Washington, DC 20016

Acoustics:
Polysonics Corp
555 Hospital Drive, Warrenton, VA 20186

Building Envelope Consultant:
Sustainable Building Partners LLC
2701 Prosperity Ave, Suite 105, Fairfax, VA 22031

Code Consultant:
Campbell Code Consulting LLC
7834 Taggart Ct, Elkridge, MD 21075

Specifications:

PROJECT TITLE:

SIDWELL FRIENDS NEW LOWER SCHOOL AT DC CAMPUS

3825 WISCONSIN AVE NW
WASHINGTON, DC 20016

PROJECT No: 2025008

DRAWING TITLE:

TYPICAL DETAILS

SCALE: As indicated

S-204

BID SET
10/29/2025

Autodesk Docs://Sidwell Lower School/Sidwell Lower School_ST_R24.rvt
10/28/2025 10:14:58 AM

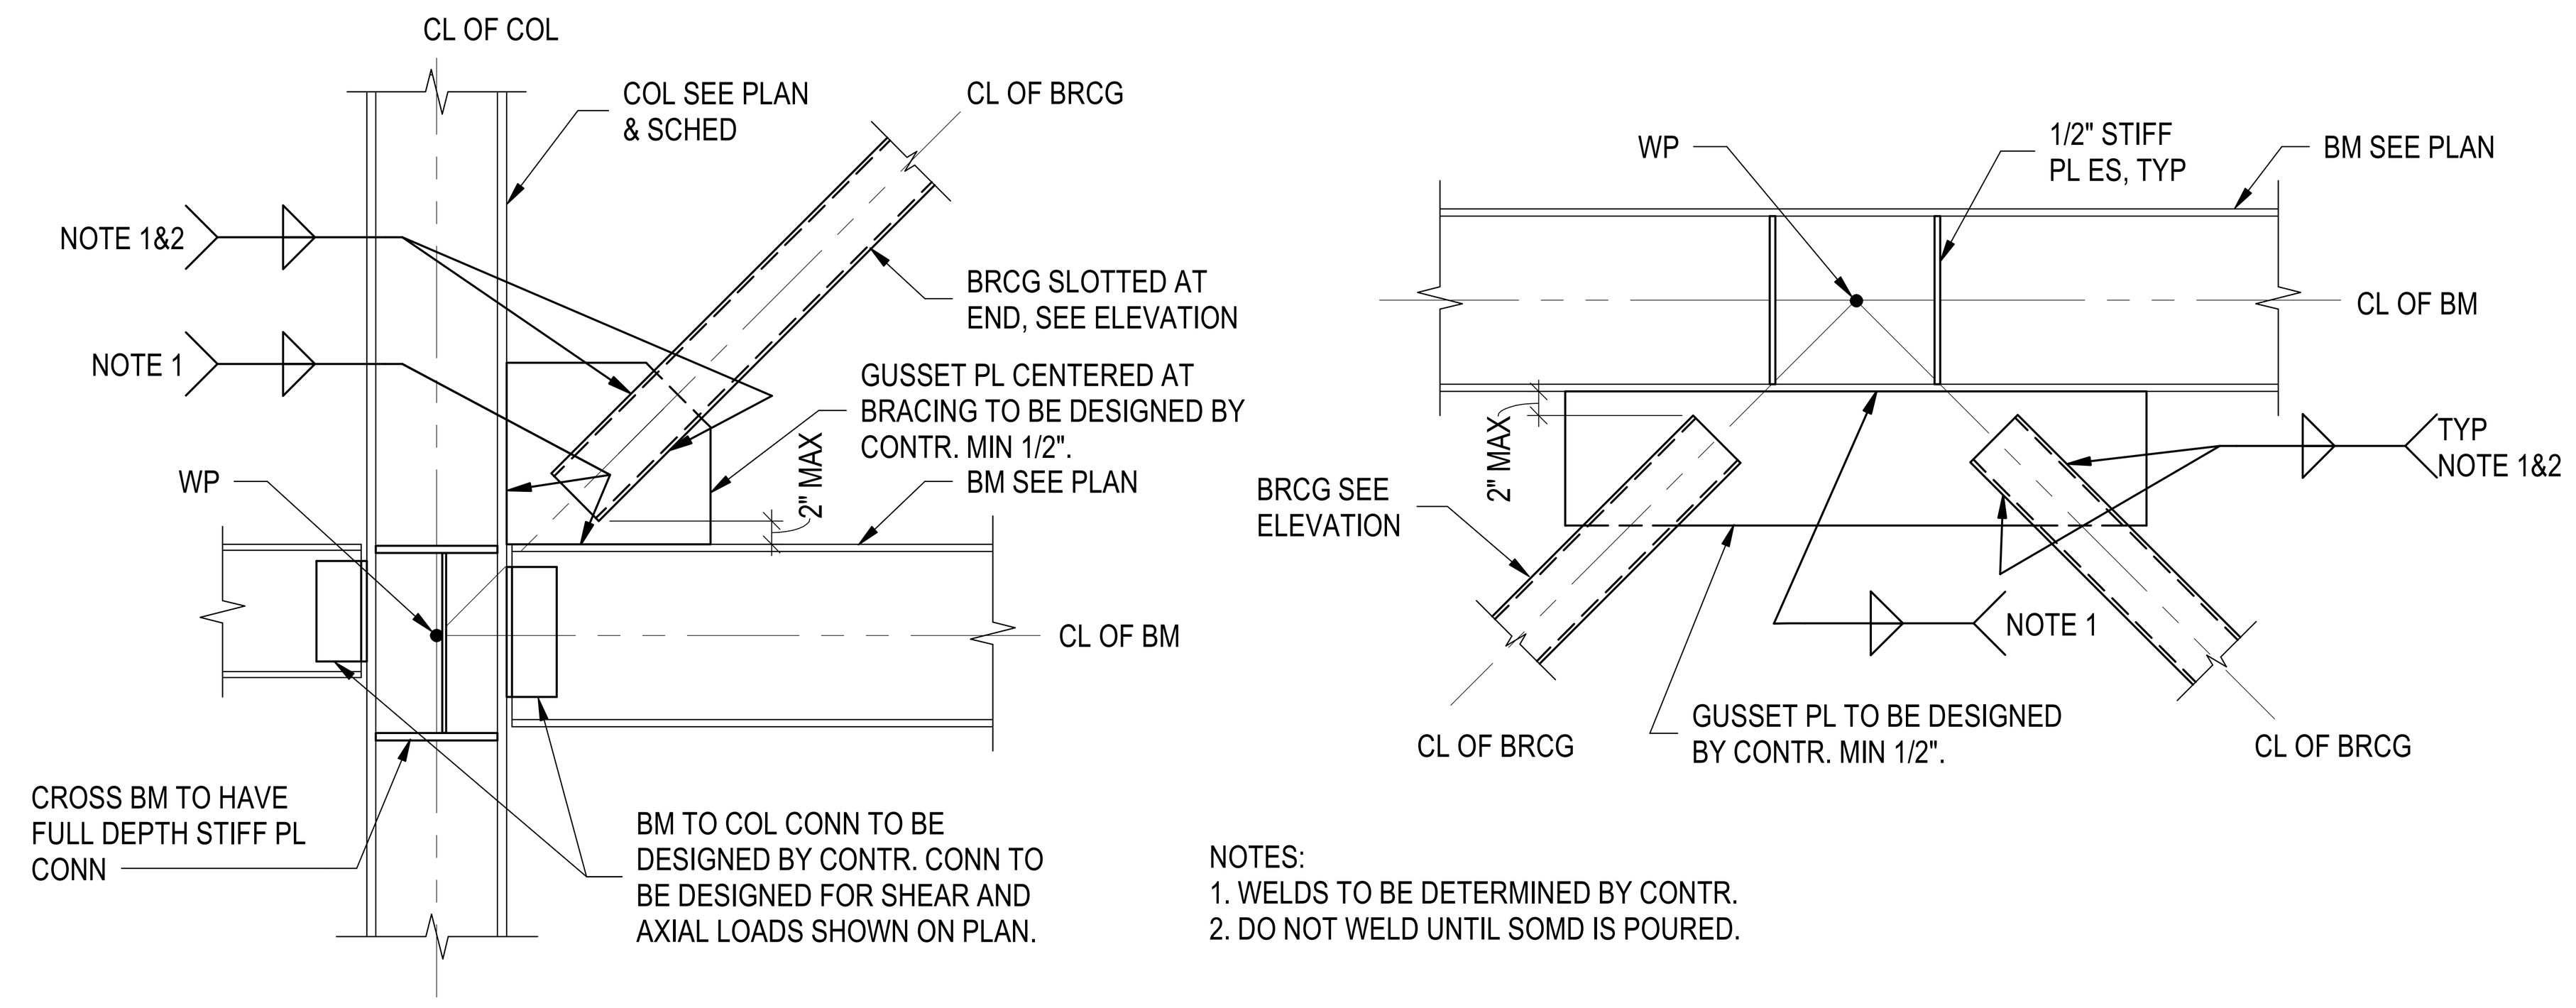

NOTES:
1. WELDS TO BE DETERMINED BY CONTR.
2. DO NOT WELD UNTIL SOMD IS POURED.

TYPICAL BRACING CONNECTION DETAIL

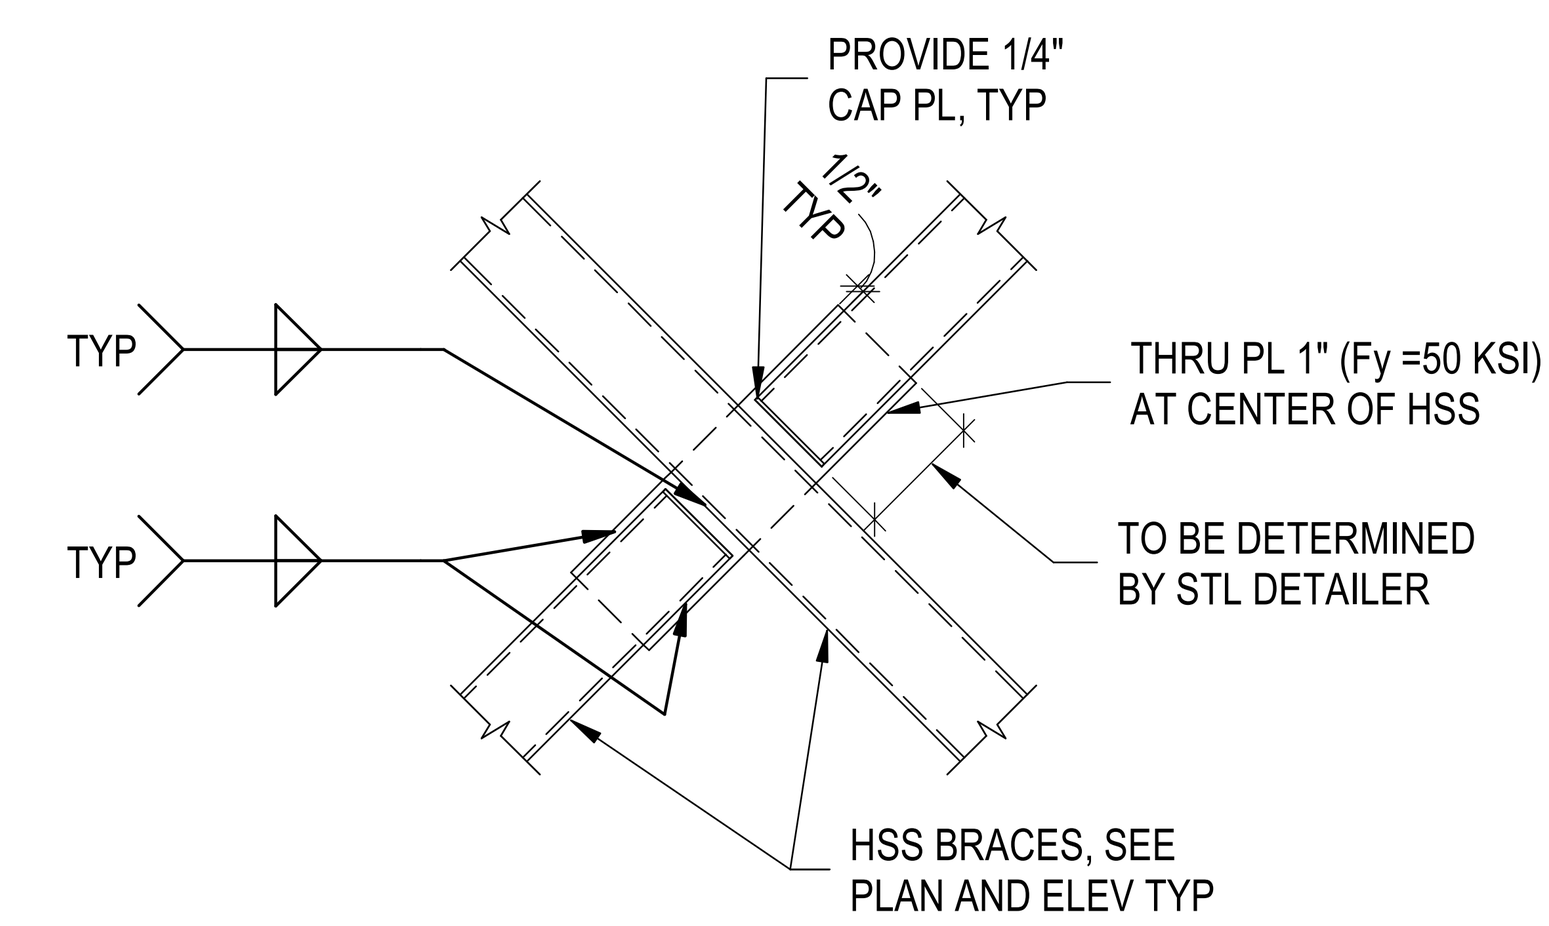

TYPICAL BRACING CROSSING DETAIL

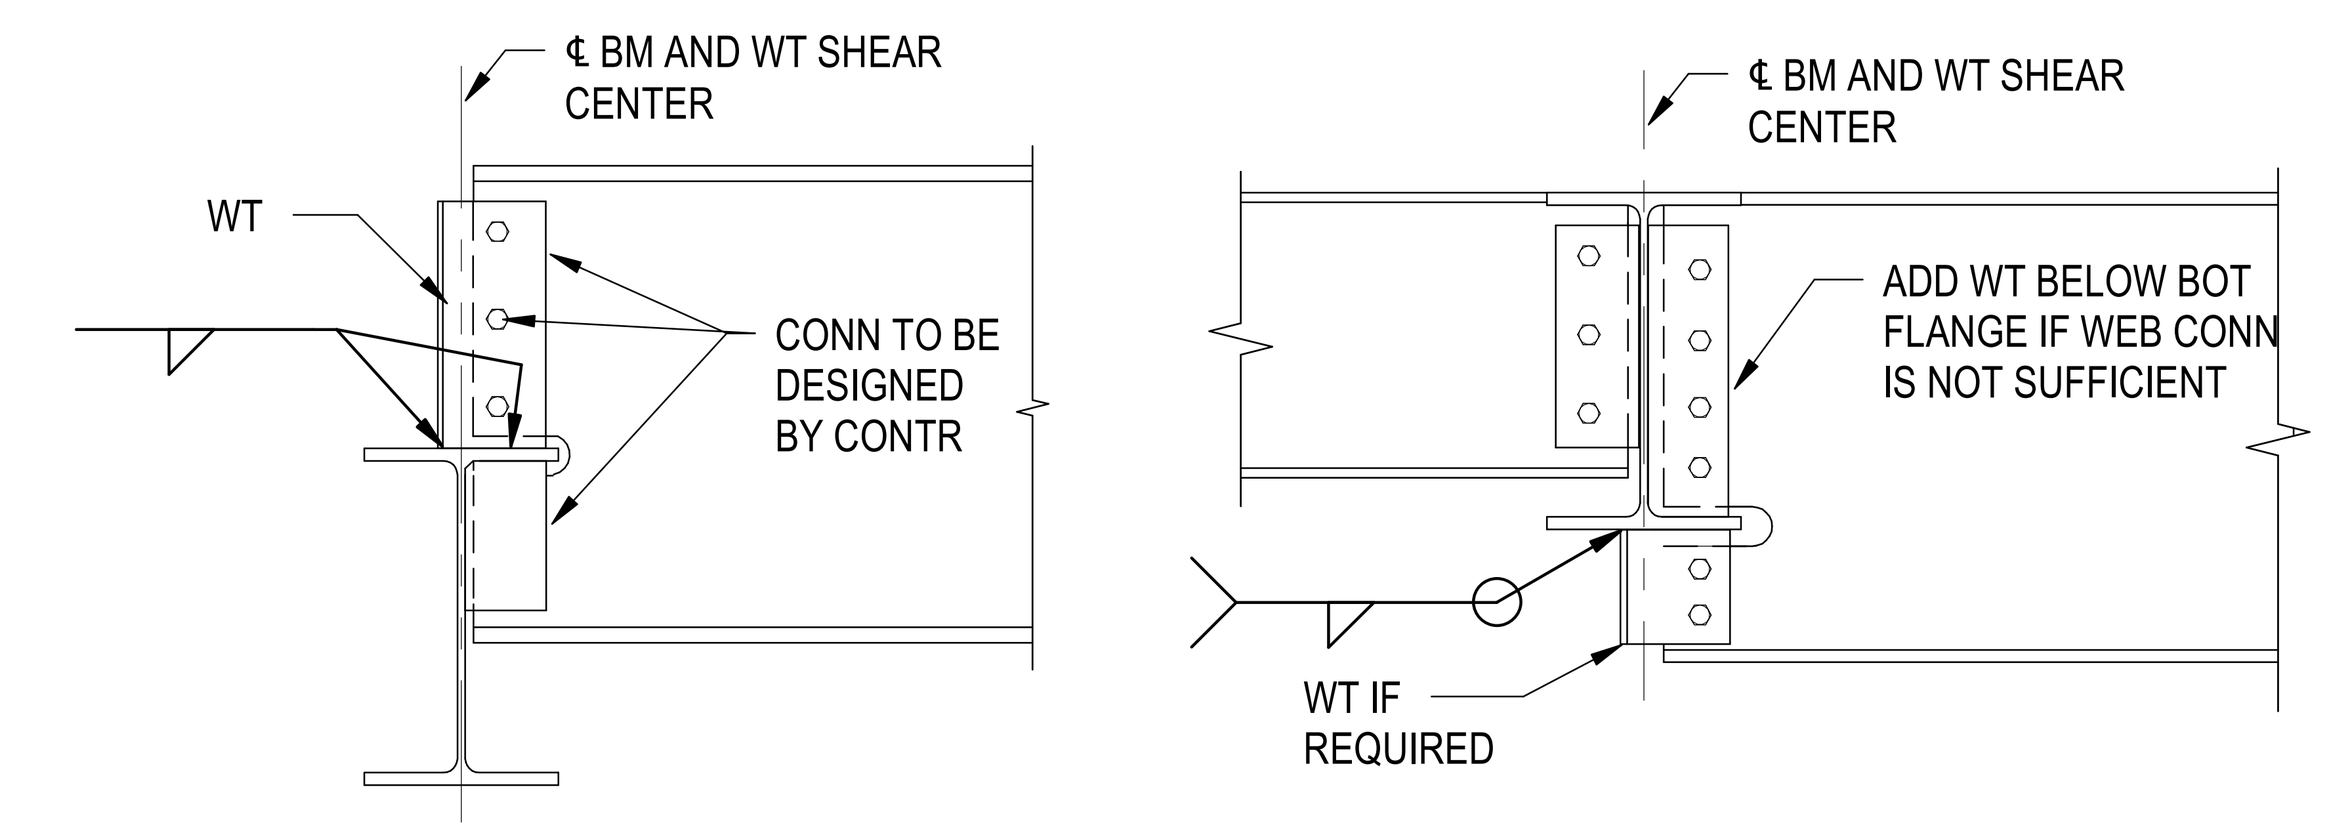

TYPICAL BEAM AT DIFFERENT ELEVATION CONNECTION DETAIL

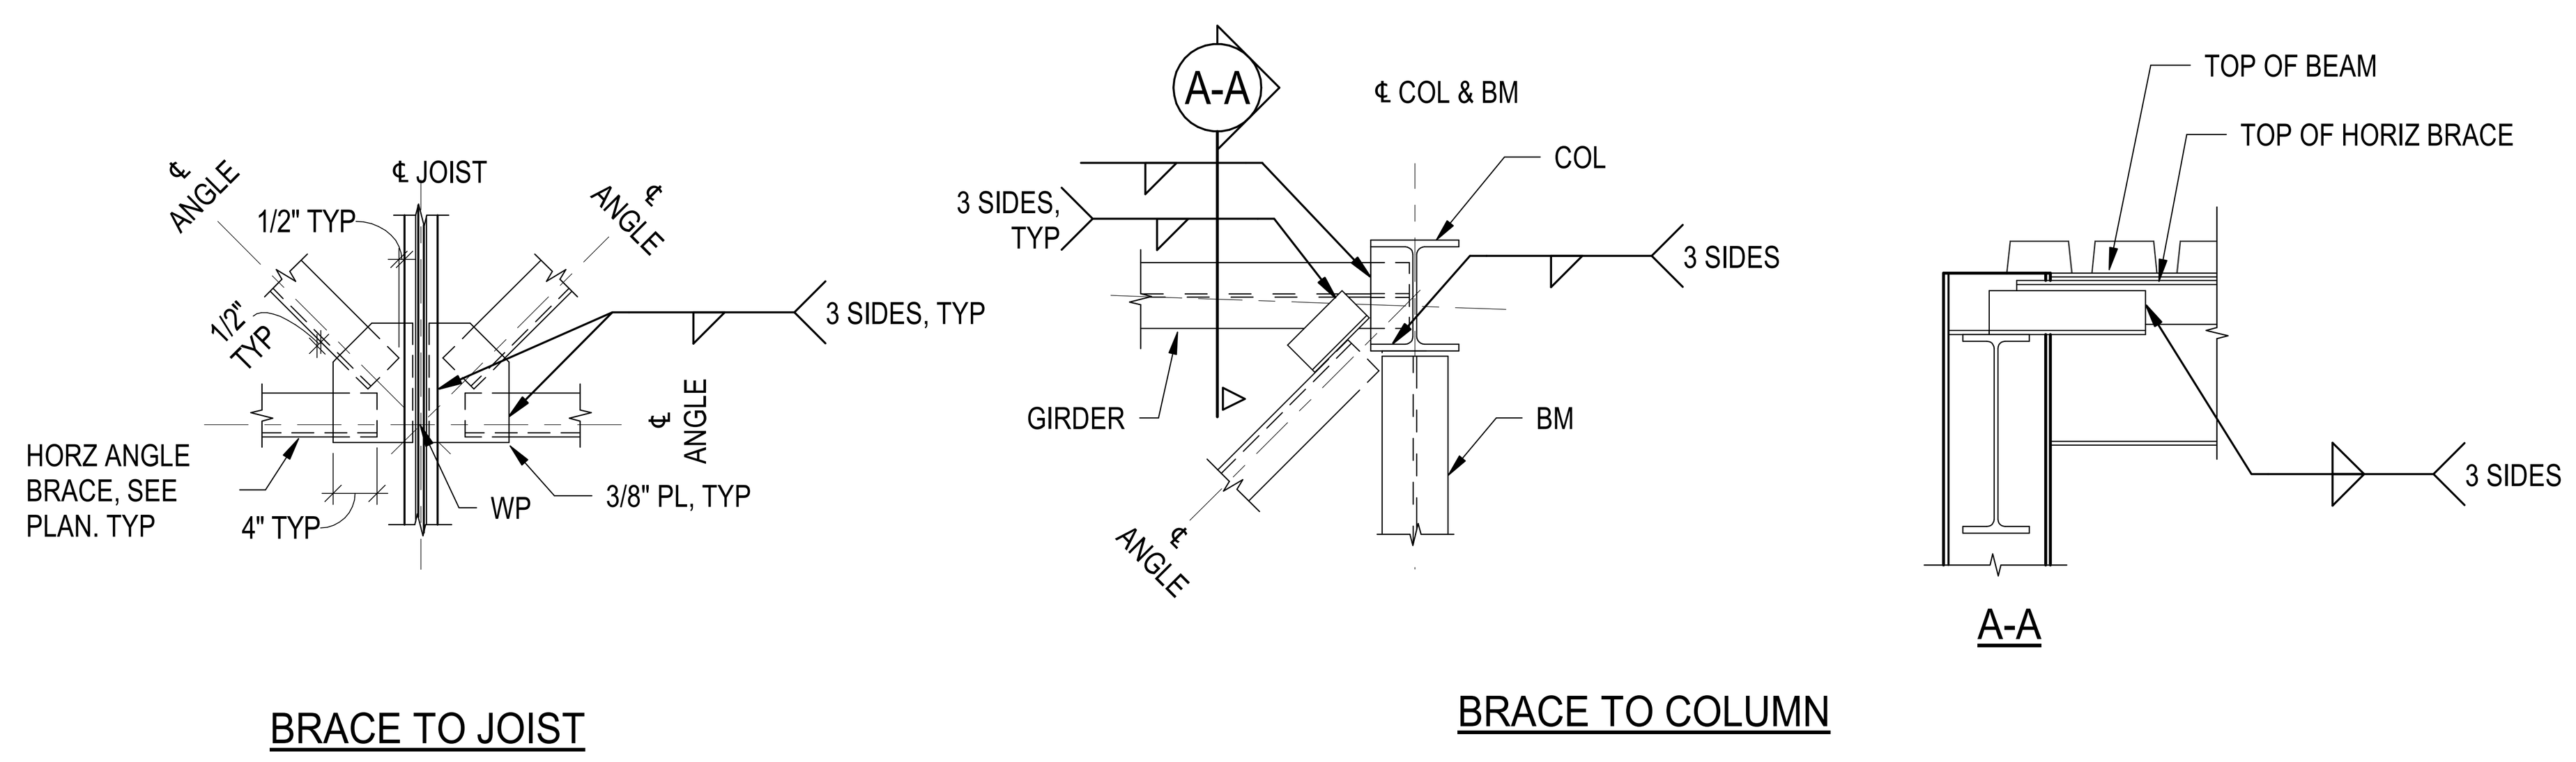

TYPICAL HORIZONTAL BRACING CONNECTION DETAIL

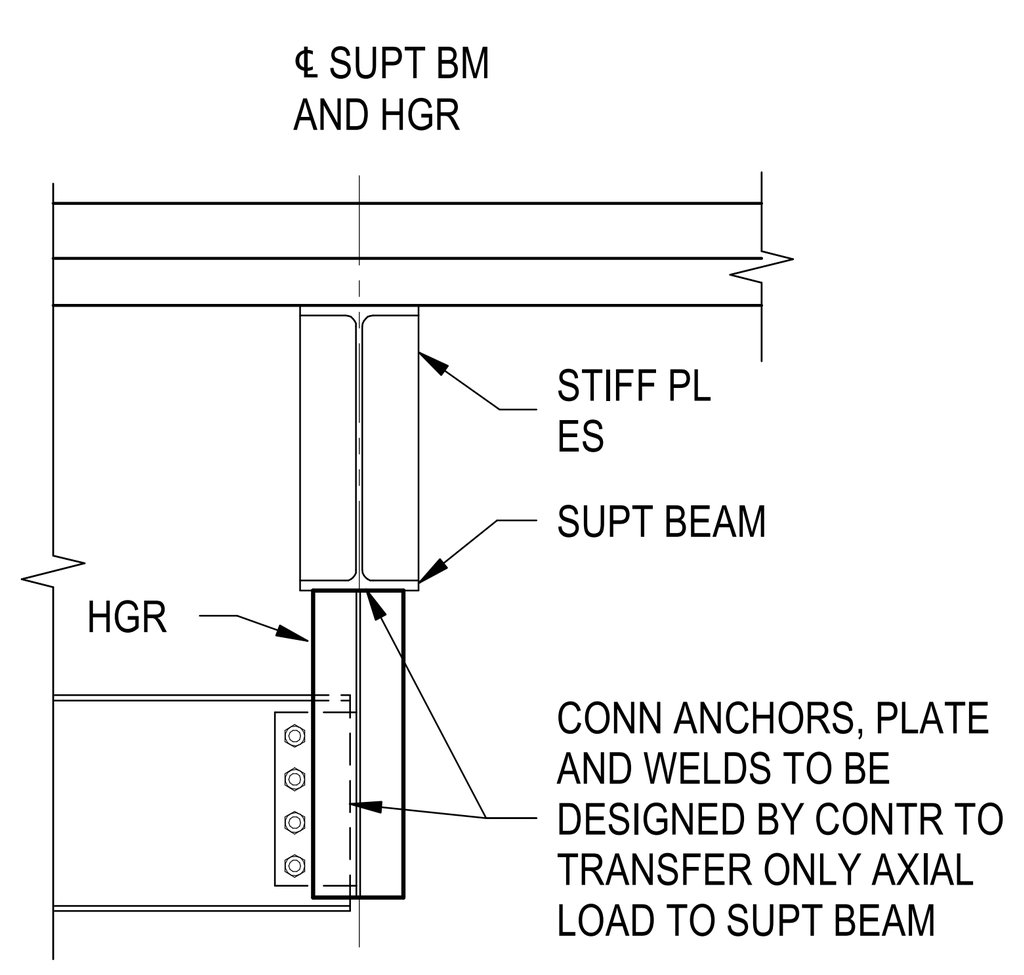

TYPICAL STEEL HANGER DETAIL

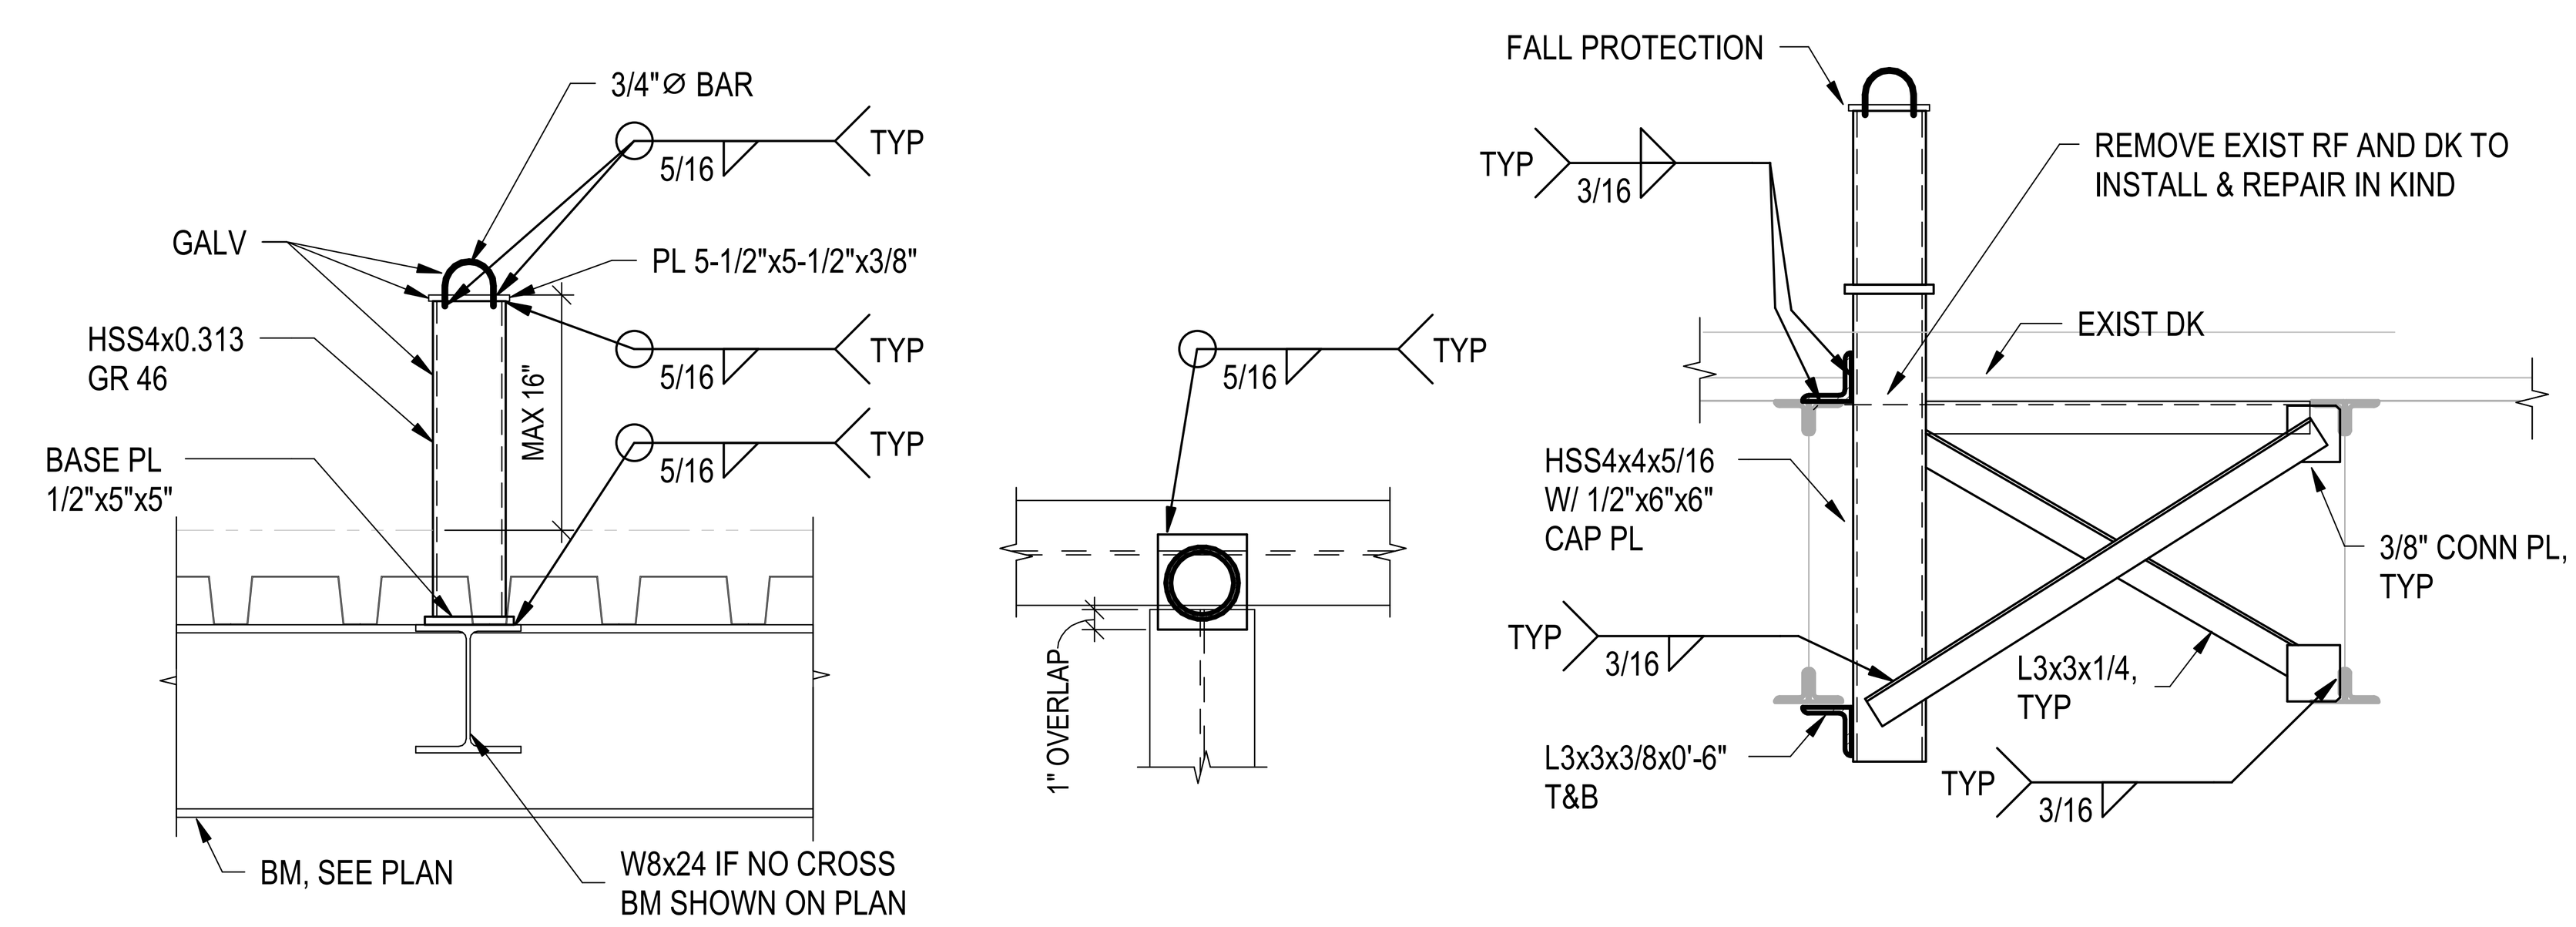

TYPICAL FALL PROTECTION DETAIL

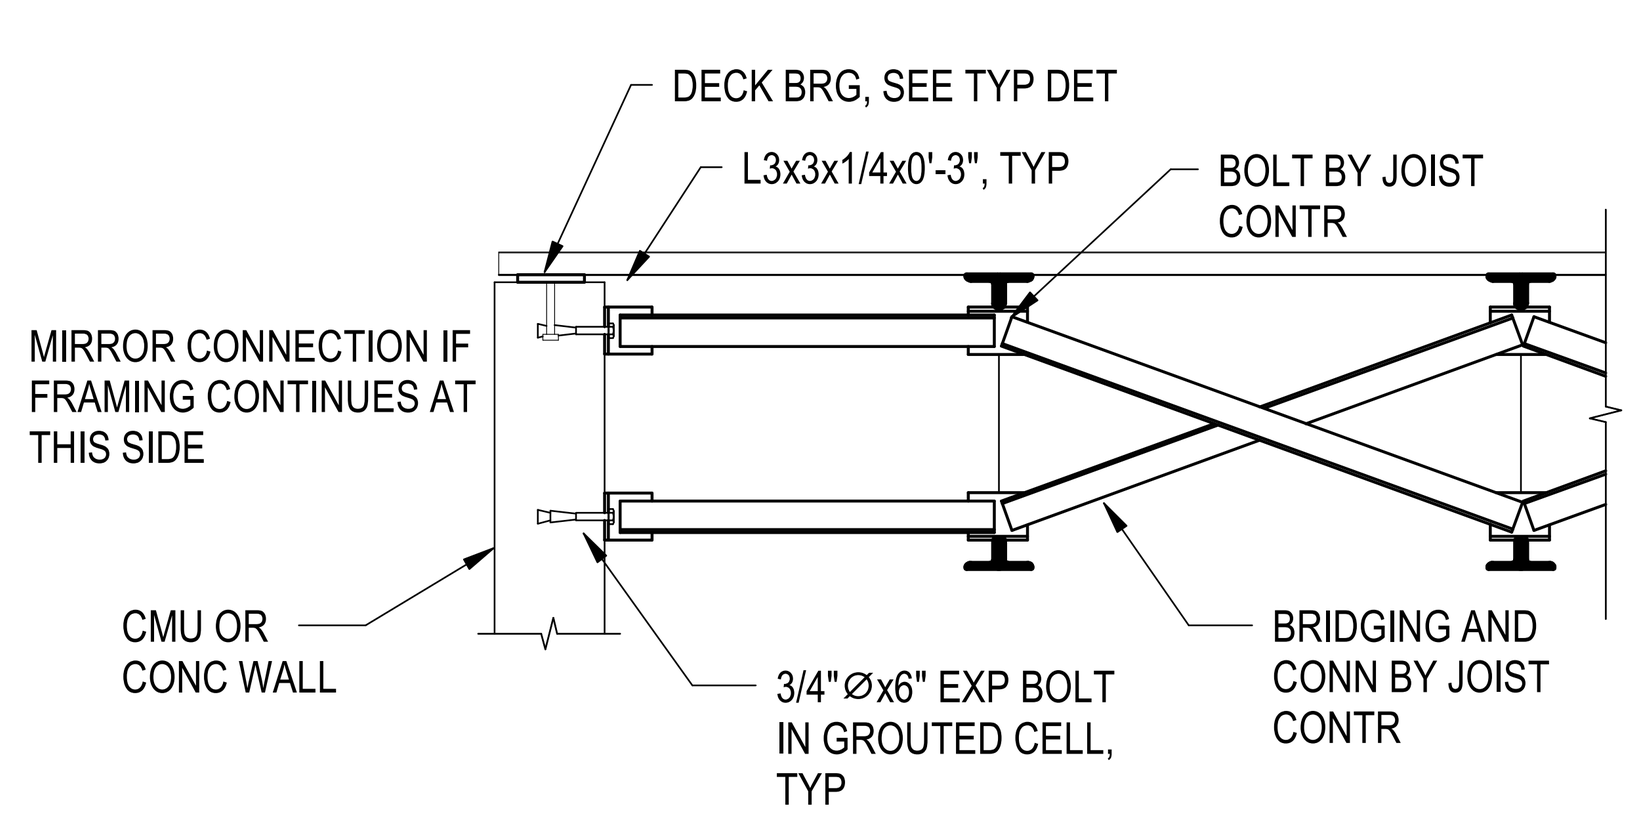

TYPICAL CROSS BRIDGING DETAIL

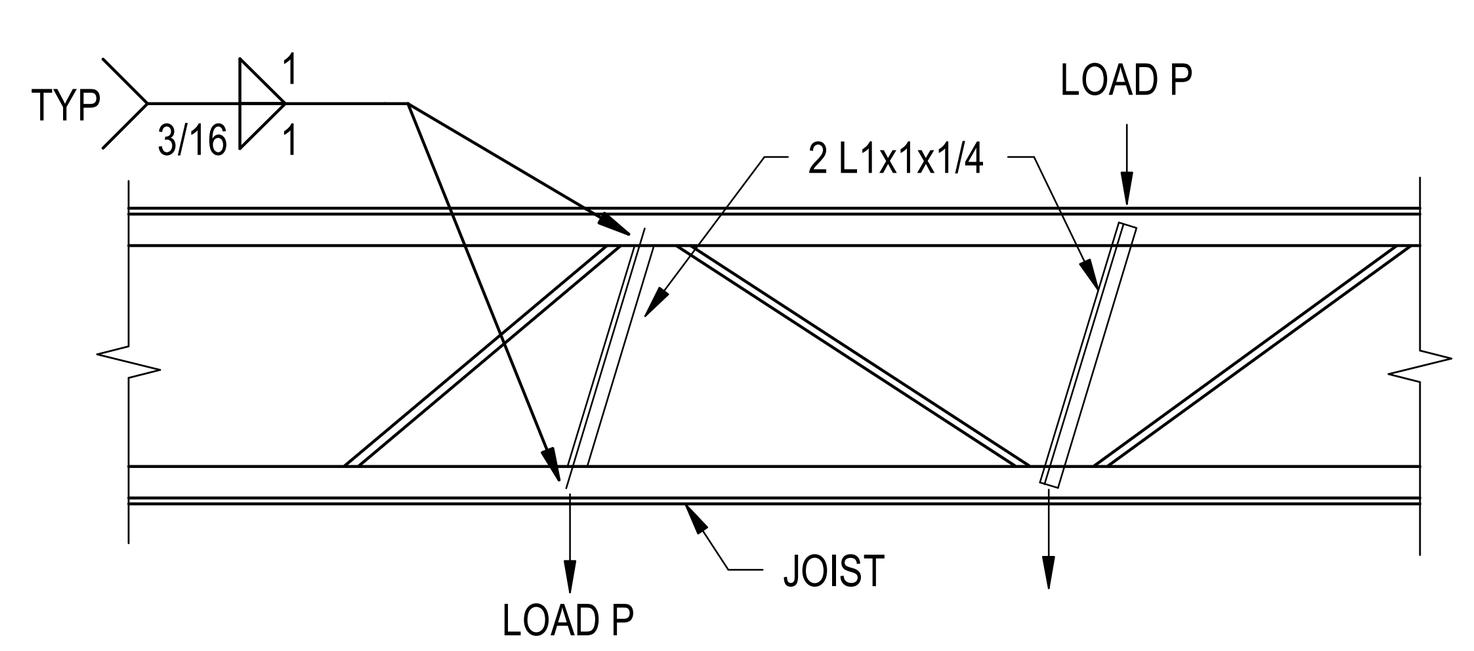

PROVIDE REINFORCING WHEN P IS ABOVE 100 LBS.
P SHALL NOT EXCEED 200 LBS

TYPICAL JOIST REINFORCEMENT DETAIL

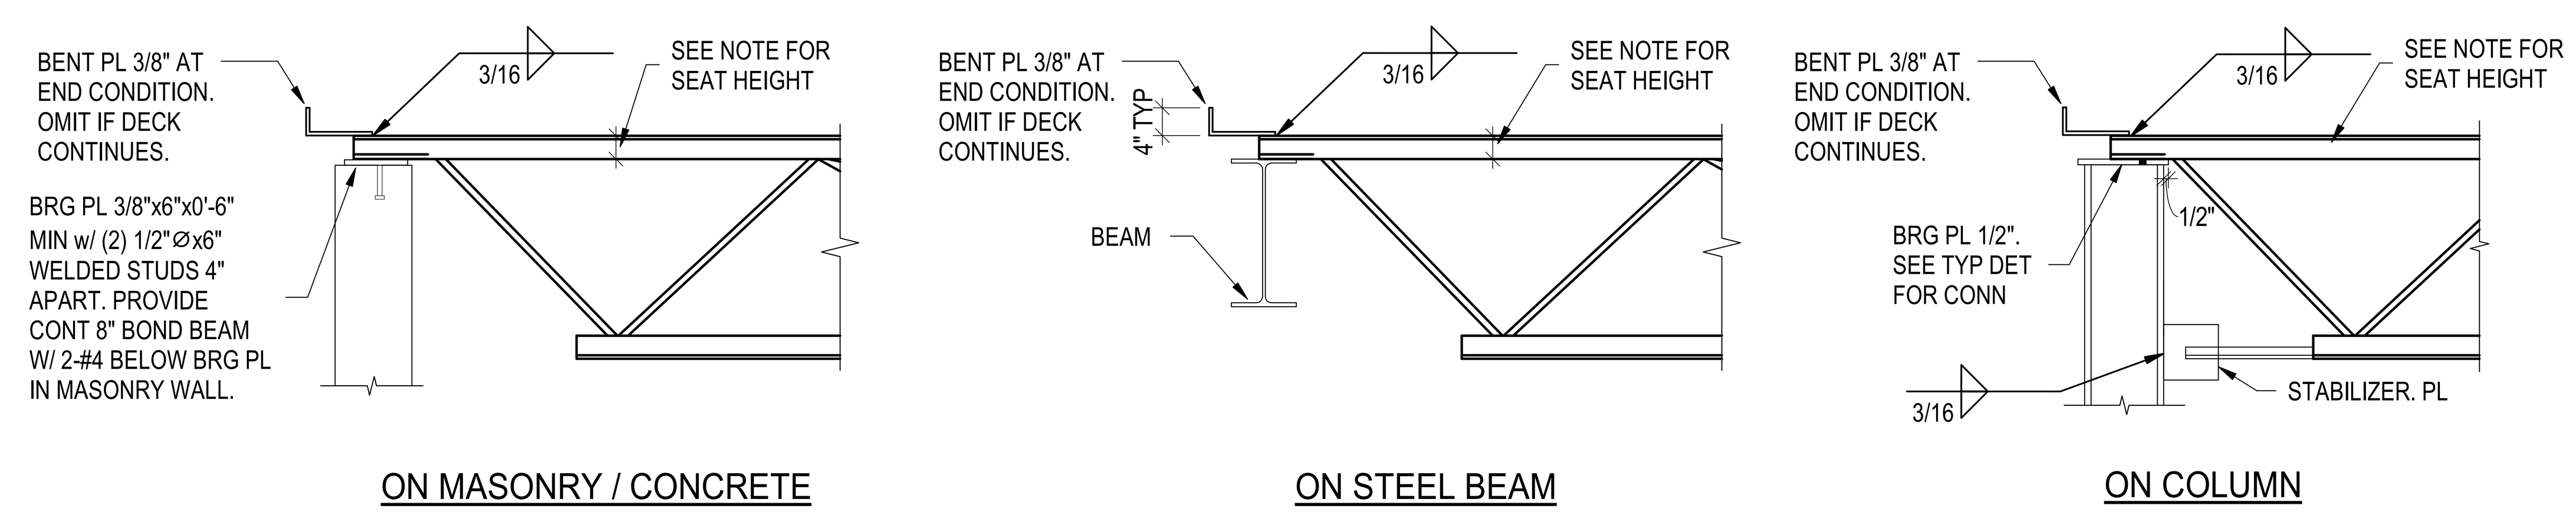

NOTES:
1. HEIGHT OF JOIST SEATS SHALL BE 2 1/2" FOR K-SERIES, 5" FOR LH-SERIES AND DLH-SERIES SECTIONS 10 THRU 17 AND 7 1/2" FOR DLH-SERIES SECTIONS 18 THRU 25
2. CONNECTION OF JOIST SEATS TO BEARING PLATES SHALL BE BY JOIST CONTRACTOR.
3. IF DRAWINGS CALL OUT THE BOTTOM CHORD EXTENSION CONNECTED WITH STABILIZER PLATE, DO NOT CONNECT UNTIL DEAD LOADS ARE IN PLACE.
4. PROVIDE TOP CHORD EXTENSION IF SHOWN ON PLAN. BENT PLATE SHALL BE WELDED AT THE TIP OF THE EXTENSION.

TYPICAL JOIST BEARING DETAIL

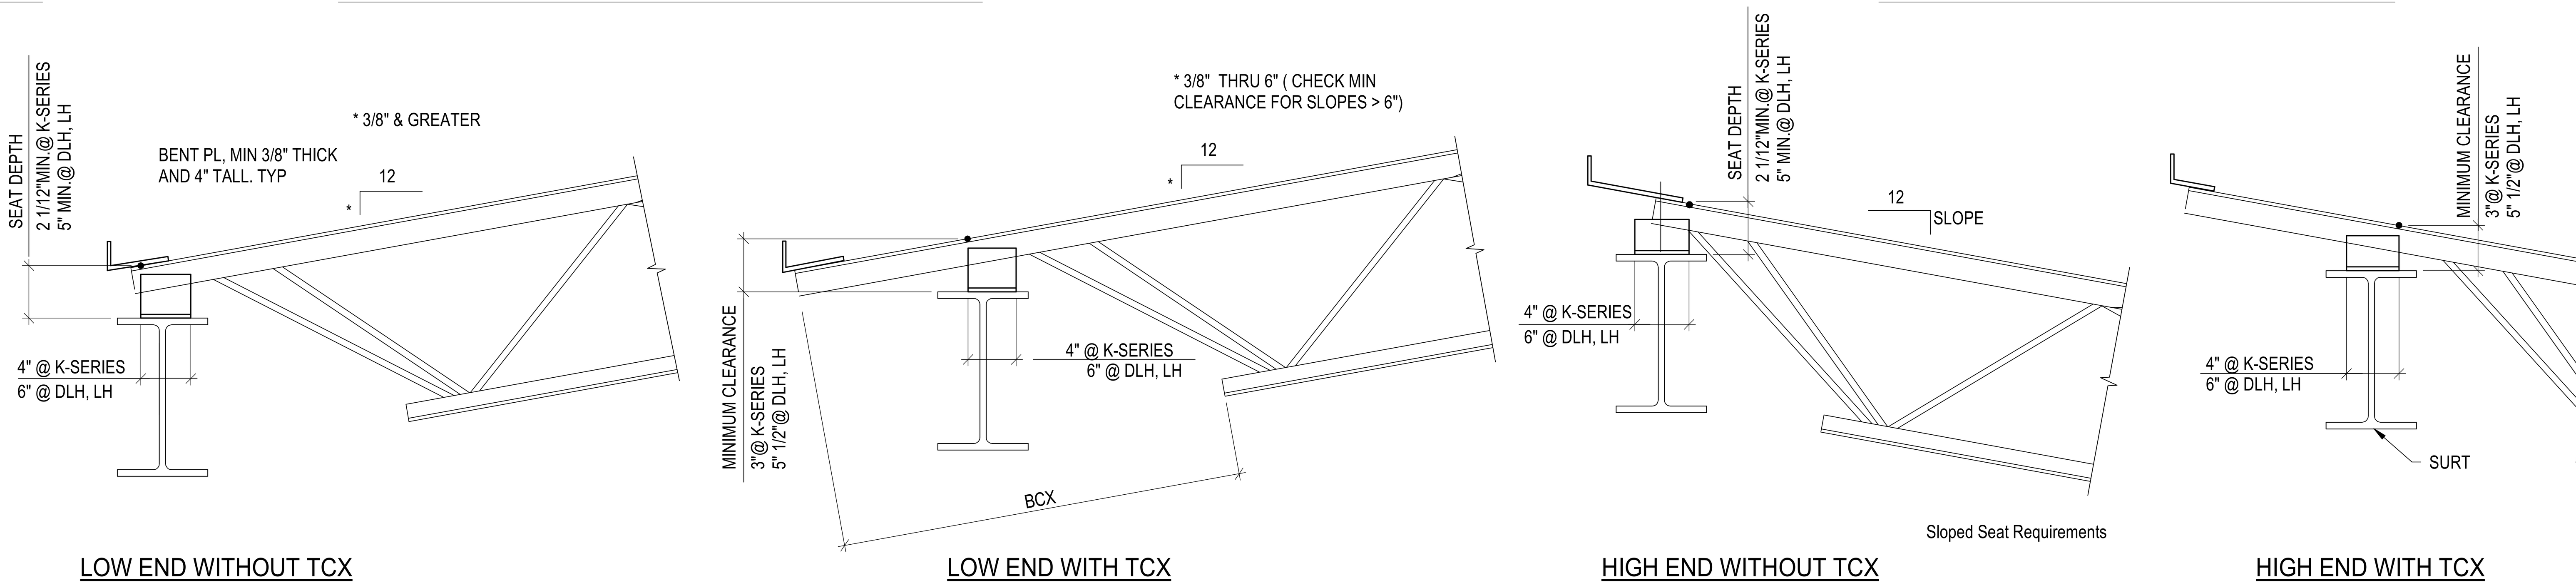

NOTES:
1. TCX STANDS FOR "TOP CHORD EXTENSION".
2. USE STANDARD LENGTH SEATS FOR SLOPES LESS THAN 3/8:12.
3. MAXIMUM SLOPE SHALL NOT EXCEED 6:12.
4. MINIMUM SEAT DEPTHS INDICATED ARE BASED ON TCX DEPTH OF 2 1/2" FOR K-SERIES AND 5" FOR LH-SERIES. DEEPER TCX REQUIRES DEEPER SEAT DEPTH.
5. SEE CHART BELOW FOR MINIMUM SEAT DEPTH FOR HIGH END BEARING CONDITIONS.

SLOPE: 12"		3/8"	1/2"	1"	1 1/2"	2"	2 1/2"	3"	3 1/2"	4"	4 1/2"	5"	5 1/2"	6"
MIN. SEAT DEPTH	K-SERIES	3"	3 1/4"	3 1/4"	3 1/2"	3 3/4"	4"	4 1/4"	4 1/4"	4 1/2"	4 3/4"	5"	5 1/4"	5 1/2"
	LH-SERIES	5 3/4"	5 3/4"	6"	6 1/4"	6 1/2"	6 3/4"	7 1/4"	7 1/2"	7 3/4"	8 1/4"	8 1/2"	8 3/4"	9 1/4"

TYPICAL SLOPING JOIST SUPPORT DETAIL

Autodesk Docs://Sidwell Lower School/Sidwell Lower School_ST_R24.rvt
10/28/2025 10:15:02 AM

NO.	DATE	ISSUE
A	09/30/2025	Permit
	10/29/2025	BID SET

SEAL

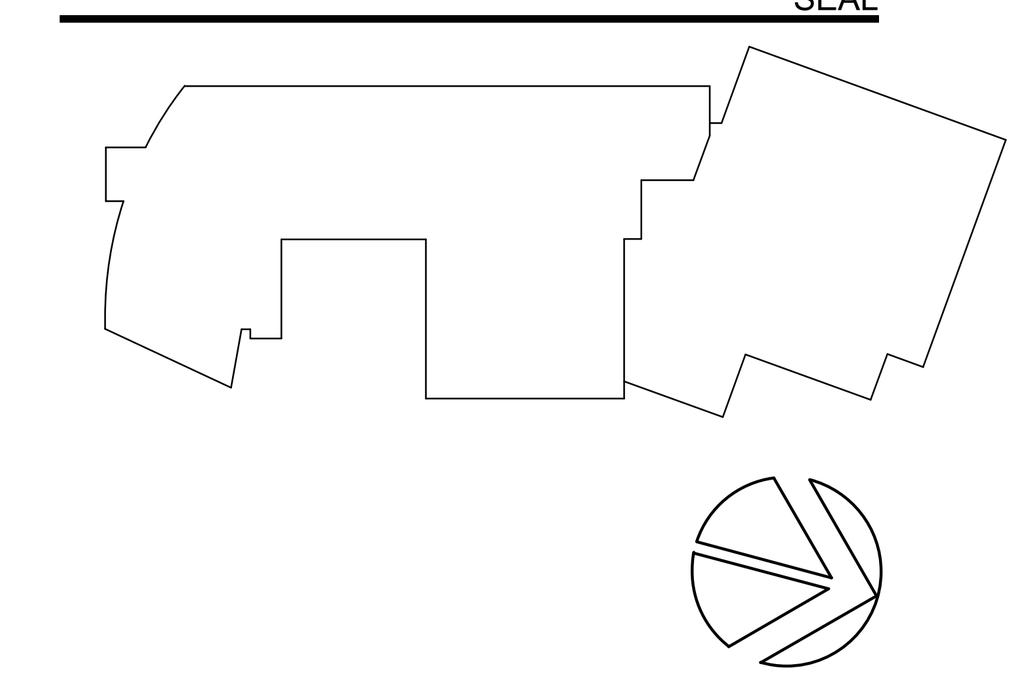

KEY PLAN

PERKINS EASTMAN
One Thomas Circle NW, Suite 200
Washington, DC 20005
T: +1 202 861 1325
F: +1 202 861 1326

Owner:
Sidwell Friends School
3825 Wisconsin Ave NW, Washington DC 20016

Construction Manager:
Advanced Project Management, Inc (APM)
4530 Walney Rd, Ste 202, Chantilly, VA 20151

Civil / Site:
Bowman Consulting Group, Ltd
888 17th St NW, Suite 510, Washington, DC 20006

Landscape:
Natural Resources Design, Inc (NRD)
1009 Shepherd Street NE, Washington, DC 20017

Structural:
Yun Associates LLC
1050 Connecticut Ave NW, Suite 500, Washington, DC 20036

MEP / FP / Lighting:
CMTA Inc
220 Lexington Green Circle, Suite 600, Lexington, KY 40503

AV / IT / Telecom / Security:
Educational Systems Planning (ESP)
2448 Holly Avenue, Suite 302, Annapolis, MD 21401

Food Service
Nyikos-Garcia Foodservice Design, Inc
7146 Starmount Way, New Market, MD 21774

Accessibility Consultant:
Galbo Wolf LLC
4410 Massachusetts Ave NW, #240, Washington, DC 20016

Acoustics:
Polysonics Corp
555 Hospital Drive, Warrenton, VA 20186

Building Envelope Consultant:
Sustainable Building Partners LLC
2701 Prosperity Ave, Suite 105, Fairfax, VA 22031

Code Consultant:
Campbell Code Consulting LLC
7834 Taggart Ct, Elkridge, MD 21075

Specifications:

PROJECT TITLE:

SIDWELL FRIENDS NEW LOWER SCHOOL AT DC CAMPUS

3825 WISCONSIN AVE NW
WASHINGTON, DC 20016

PROJECT No: 2025008

DRAWING TITLE:

TYPICAL DETAILS

SCALE: As indicated

S-205

BID SET
10/29/2025

NON-LOAD BEARING CMU PARTITIONS		
WALL THICKNESS	MAX UNBRACED HEIGHT	REINFORCEMENT AND SPACING
6"	20'-0"	#4 @ 48" OC
8"	24'-0"	#4 @ 48" OC
10"	27'-0"	#4 @ 48" OC
12"	30'-0"	#4 @ 48" OC

TYPICAL INTERIOR CMU WALL REBAR SCHEDULE

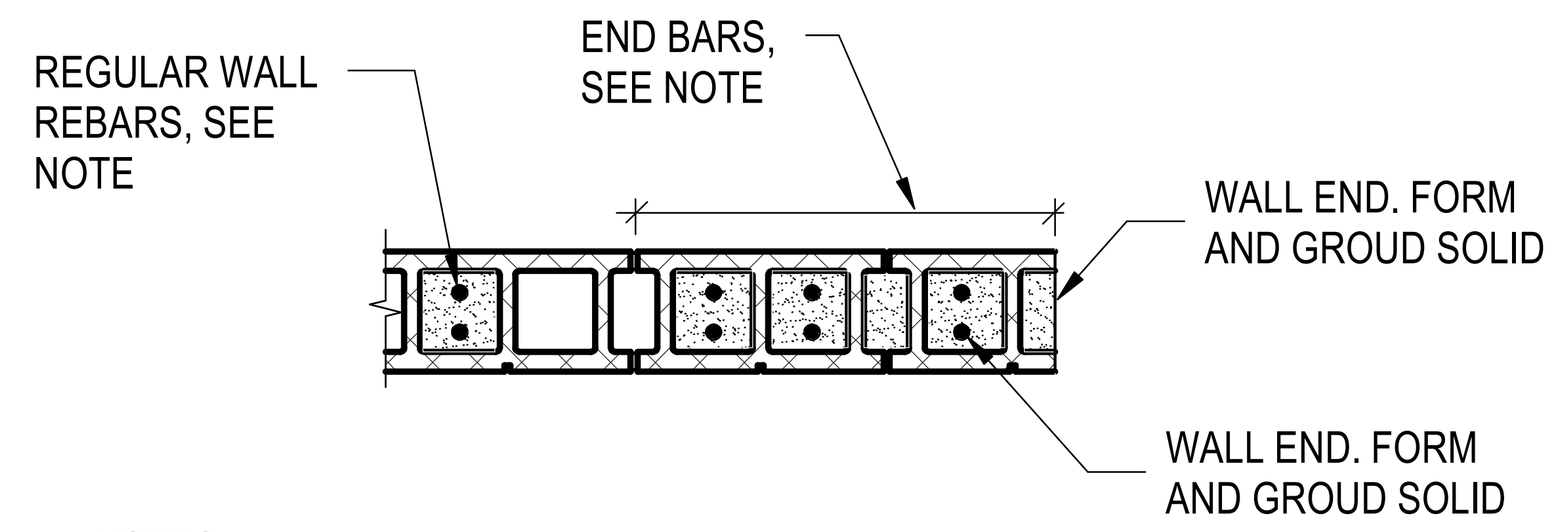

NOTES:
8" CMU: MAX 2 EACH CELL FOR #5 AND SMALLER, OR 1 FOR #6 AND LARGER
10" CMU: MAX 2 EACH CELL FOR #6 AND SMALLER, OR 1 FOR #7 AND LARGER

TYPICAL CMU WALL REINFORCING DETAIL

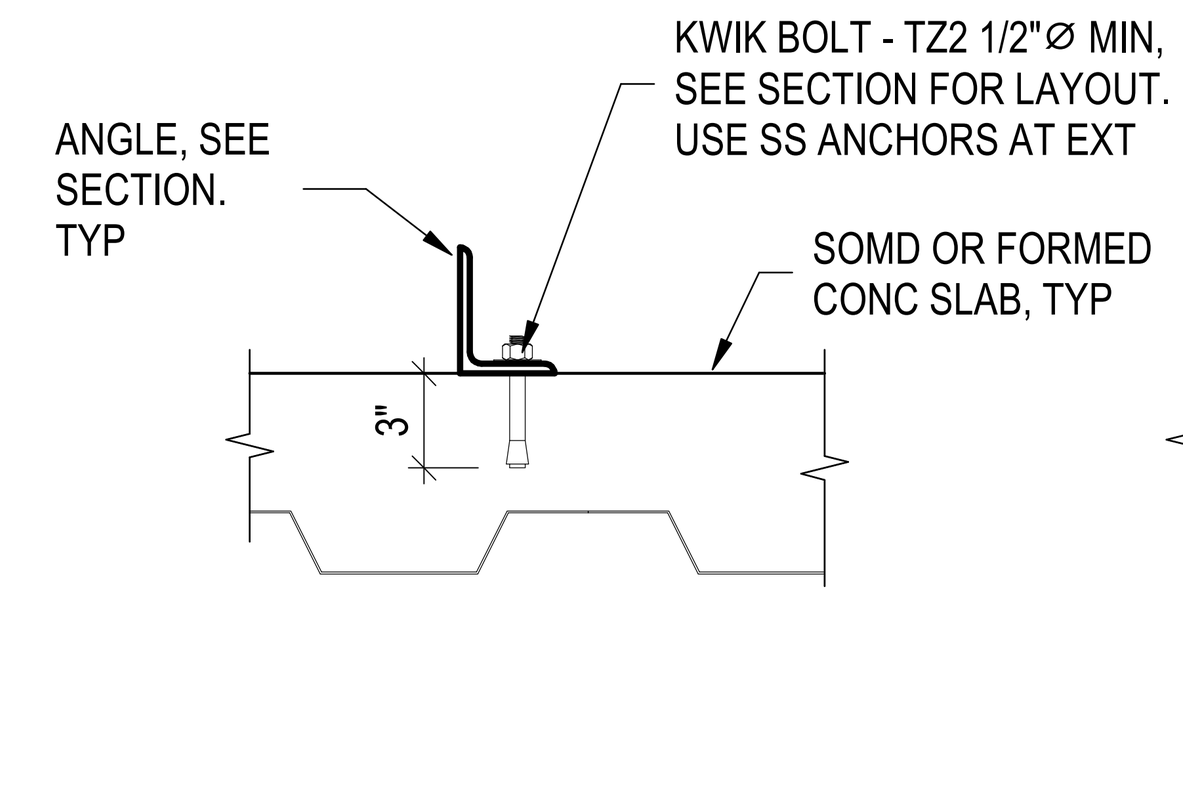

EXPANSION ANCHORS

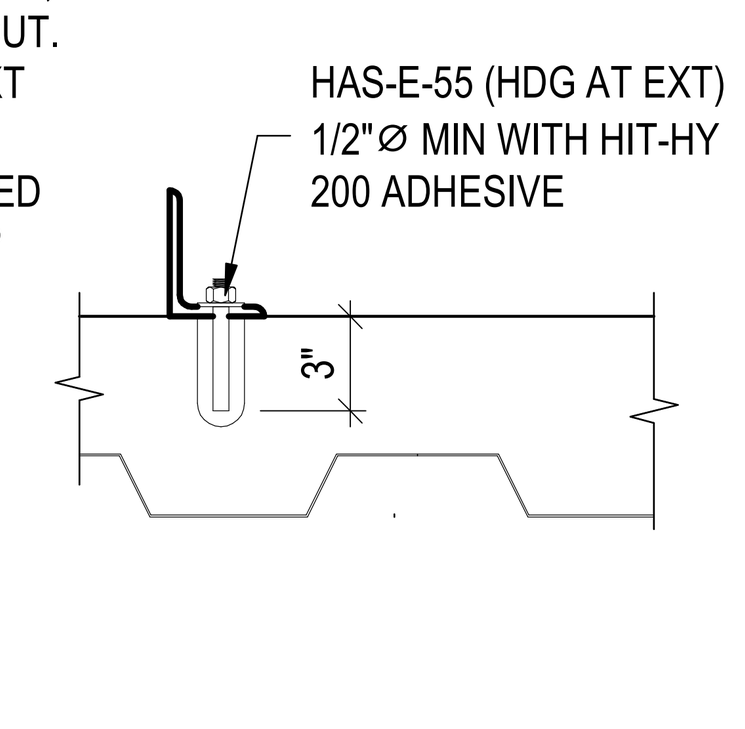

EPOXY ANCHORS

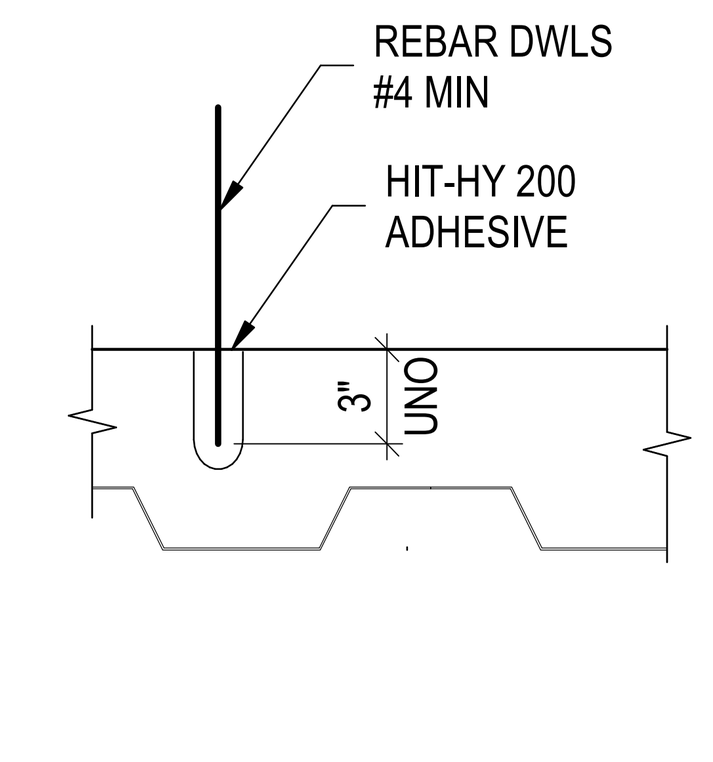

EPOXY REBARS

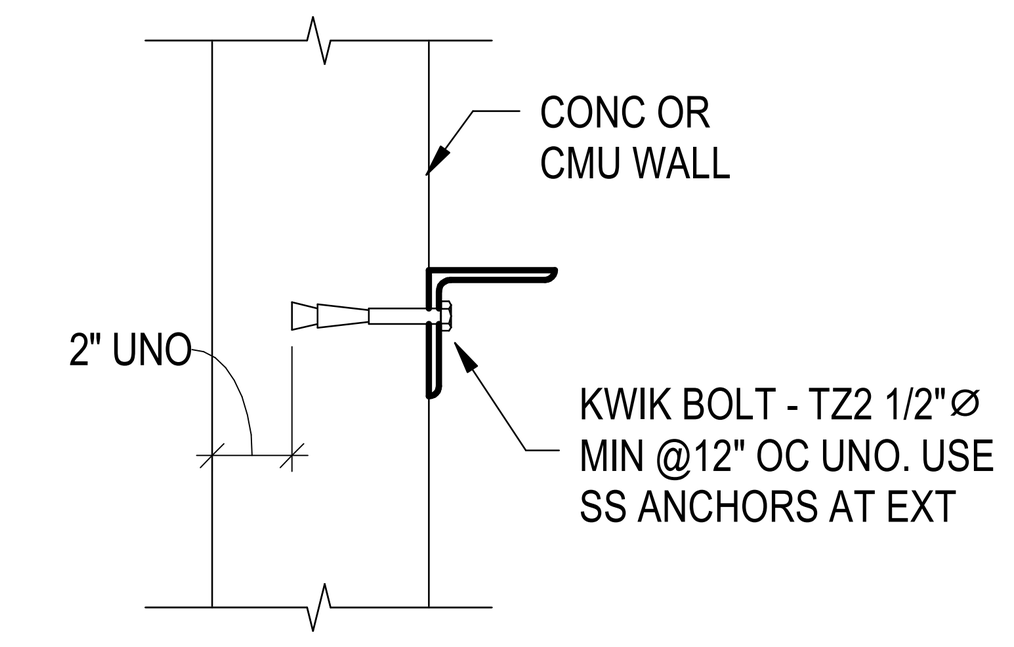

EXPANSION ANCHORS

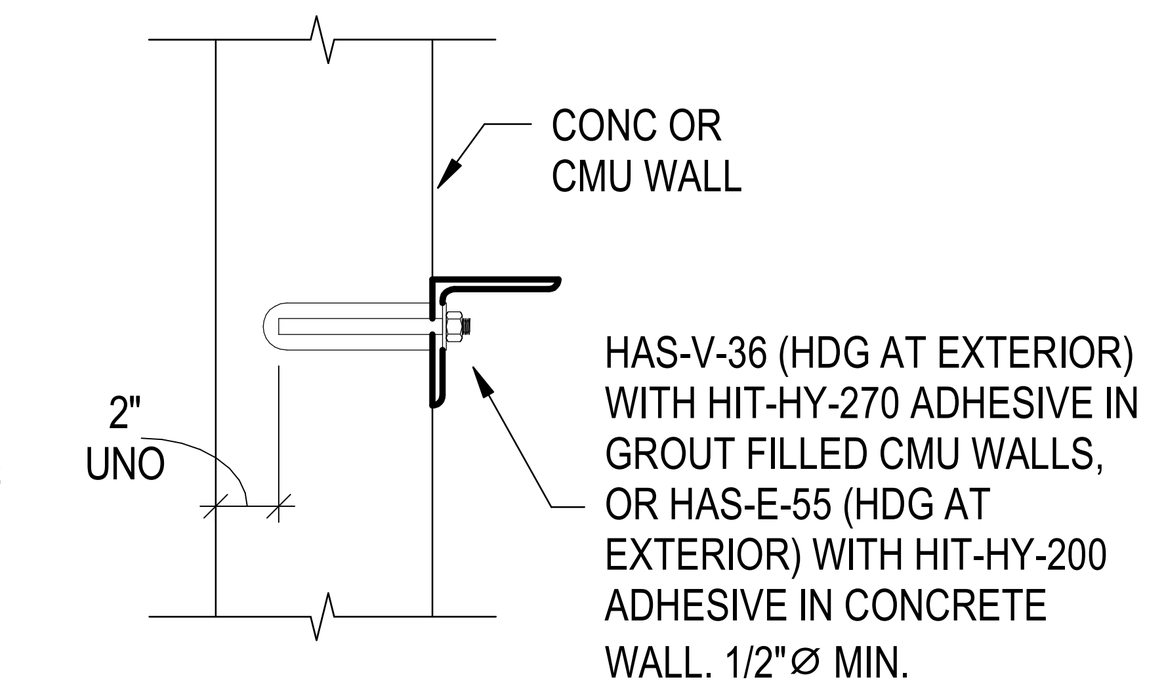

EPOXY ANCHORS

TYPICAL POST INSTALLED ANCHOR DETAIL

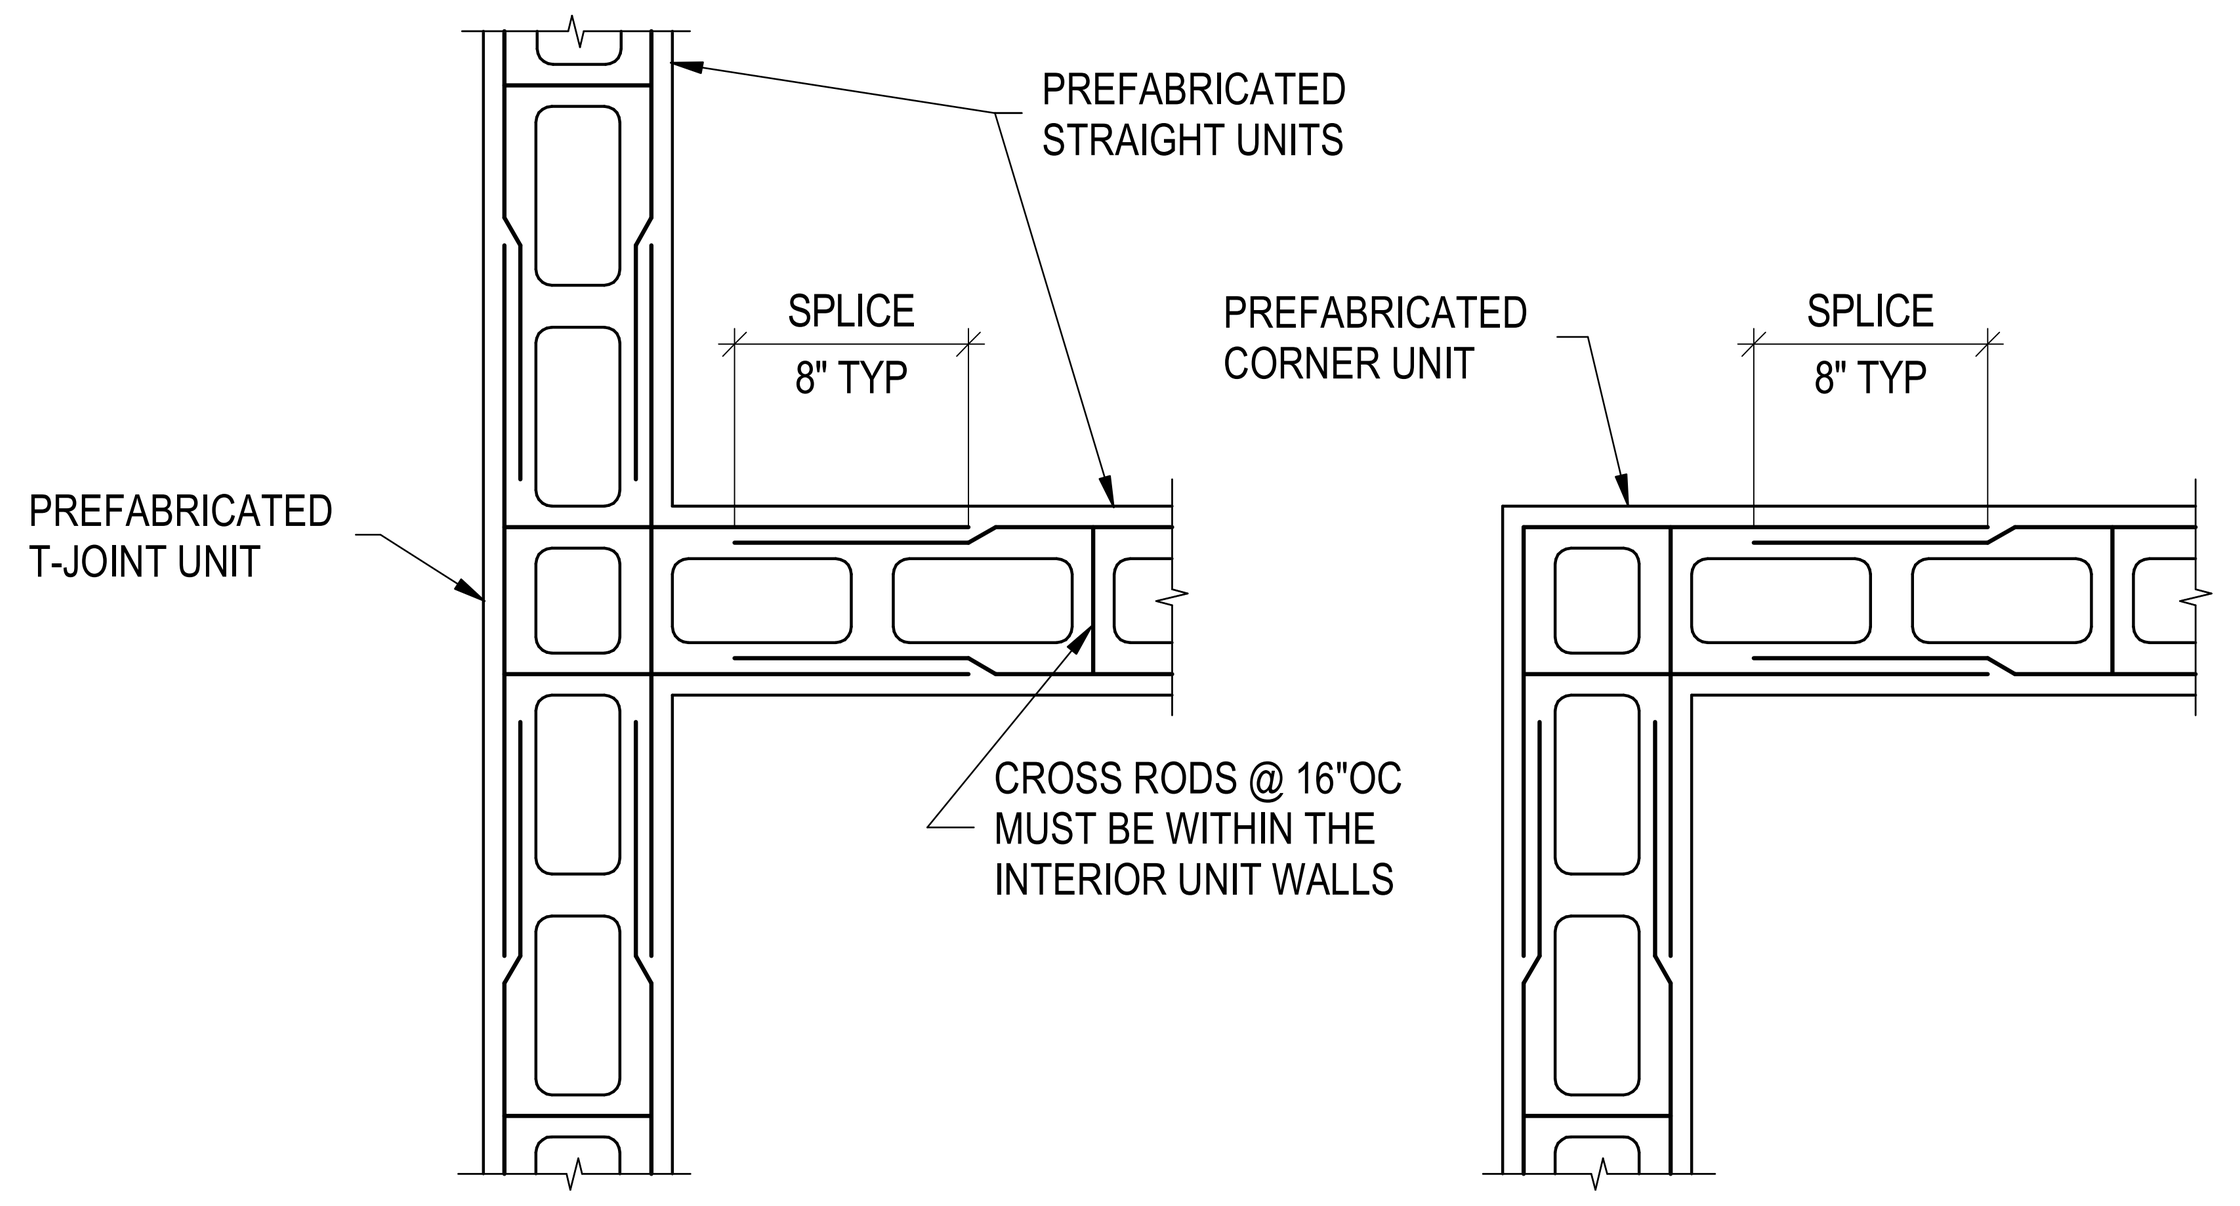

@ T-JOINTS

@ CORNERS

NOTES:
1. VERTICAL REINFORCING NOT SHOWN FOR CLARITY.
2. SEE SPECIFICATIONS FOR ADDITIONAL INFORMATION.

TYPICAL HORIZONTAL CMU JOINT REINFORCEMENT DETAIL

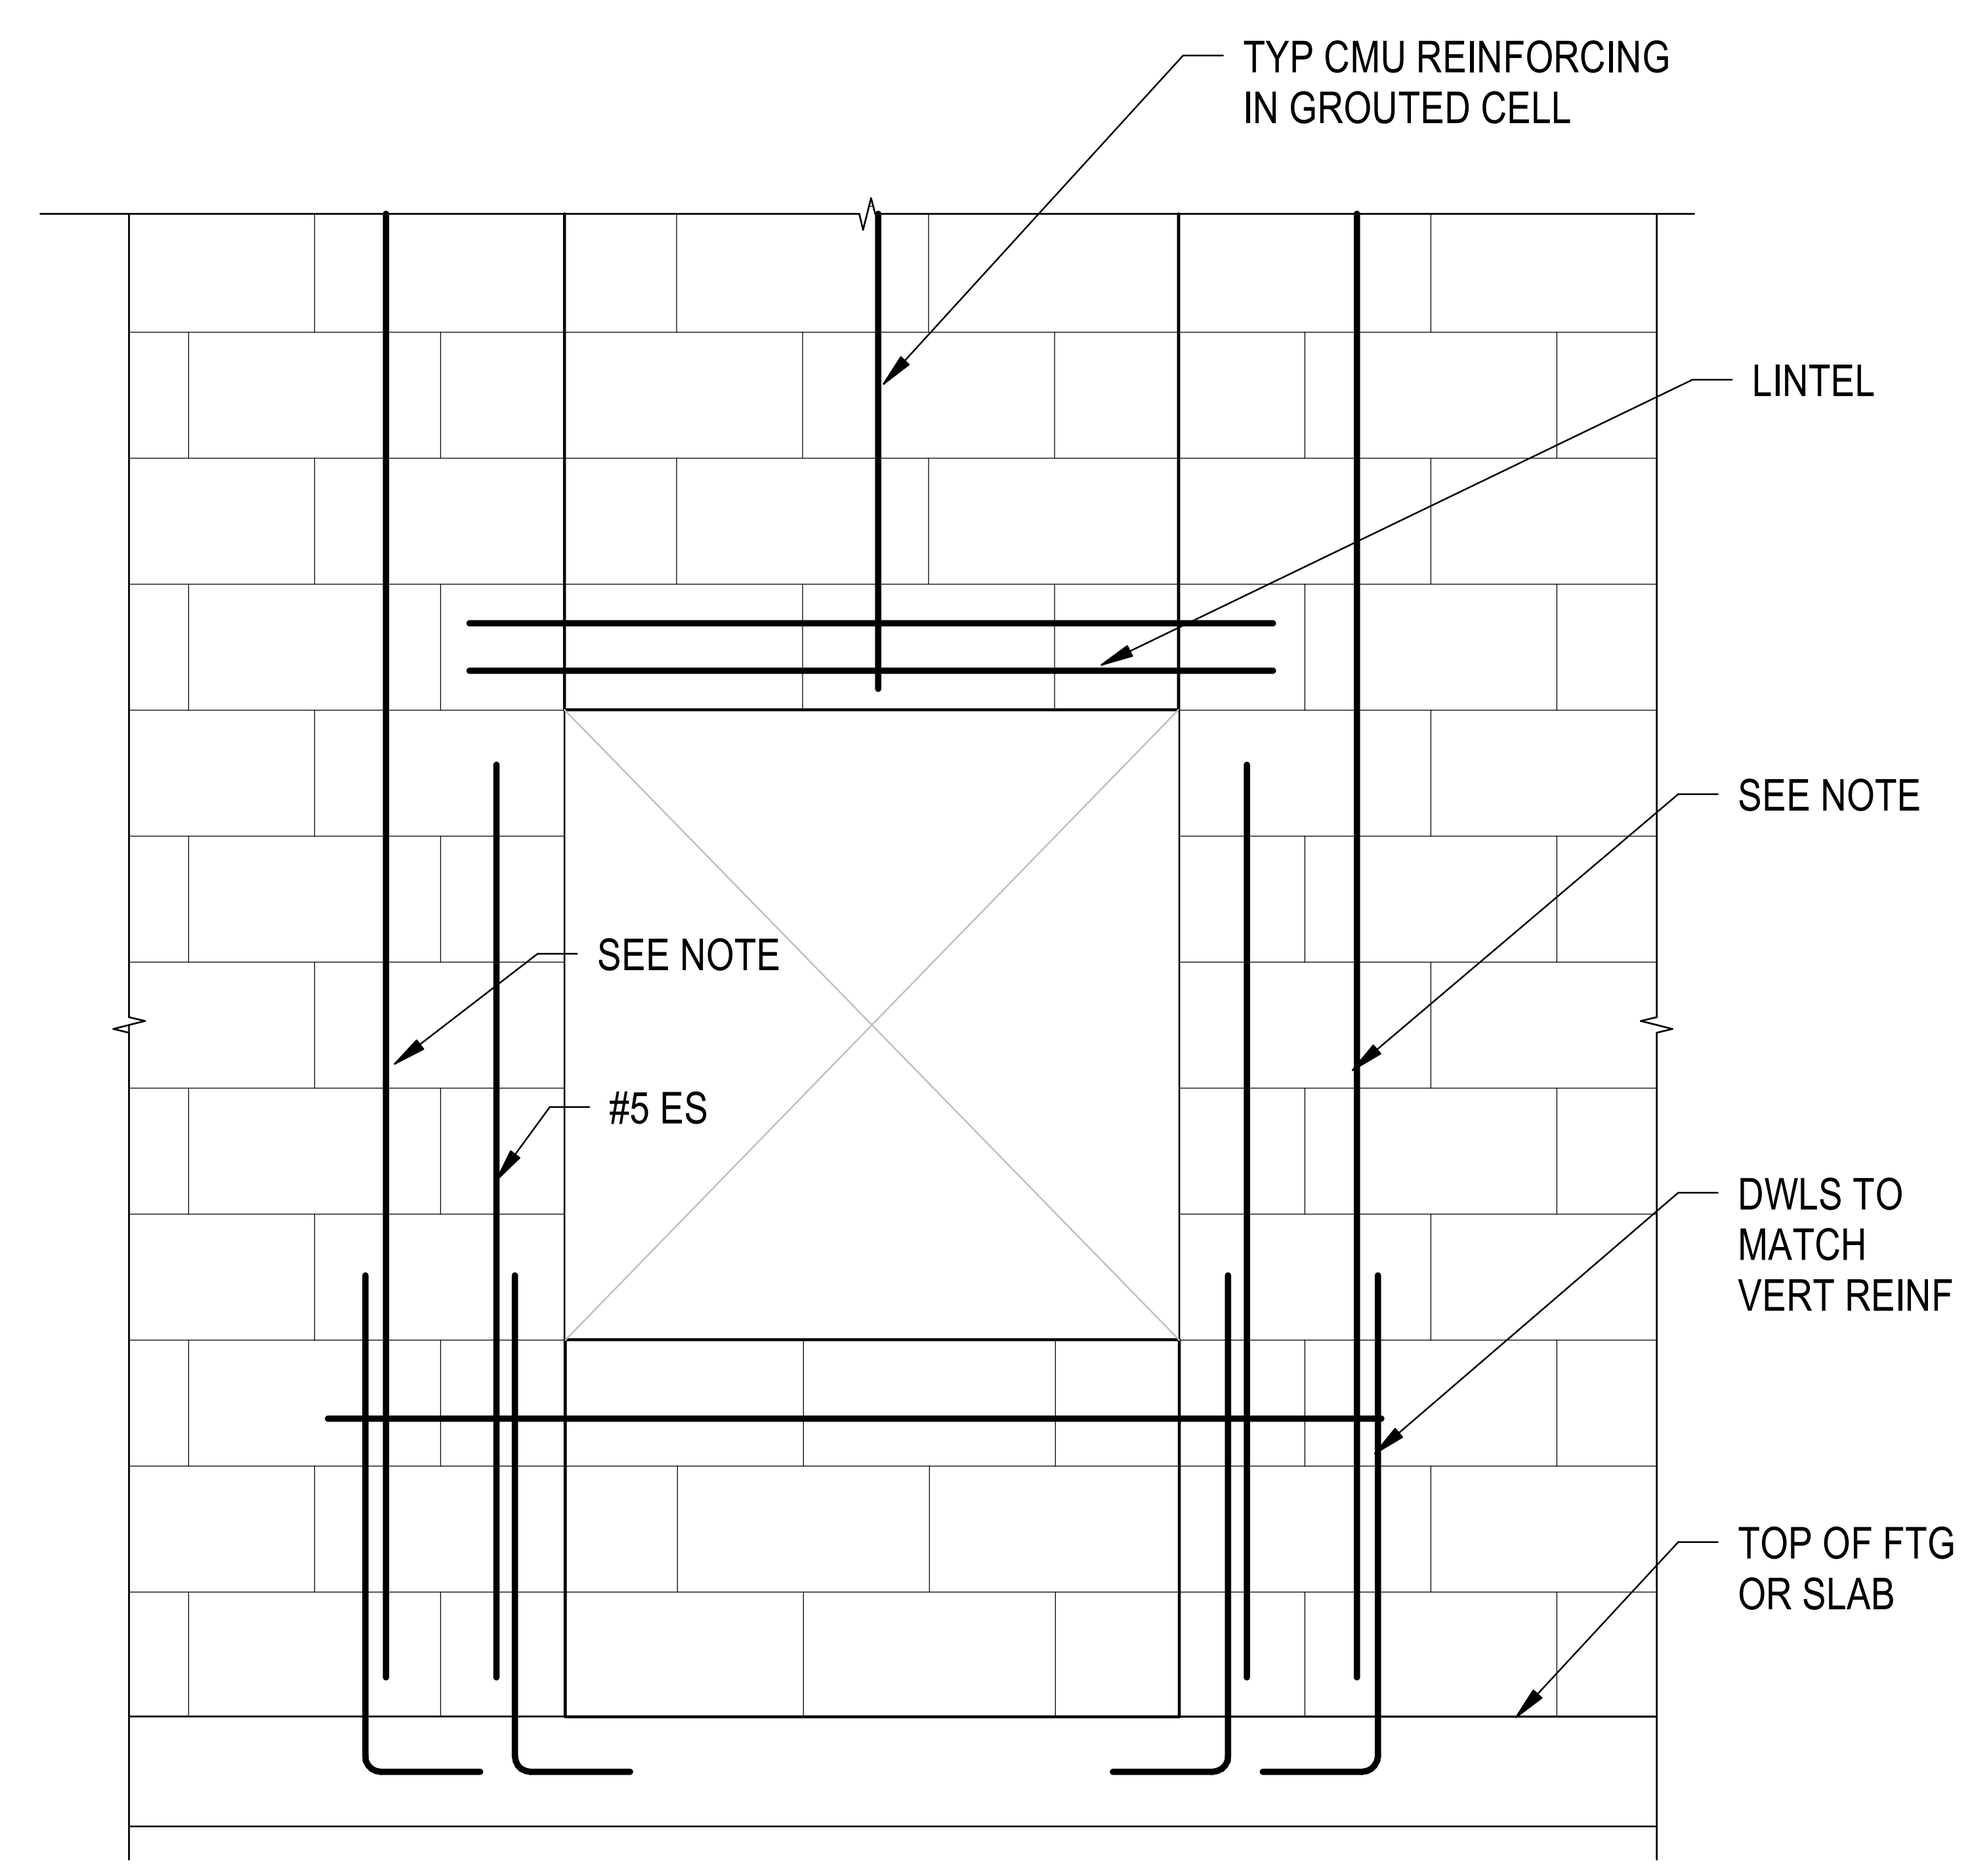

NOTE: #5 FOR OPENING UP TO 5' WIDE. 2#5 FOR OVER 5' WIDE.

TYPICAL WALL REINFORCING AT CMU WALL OPENING DETAIL

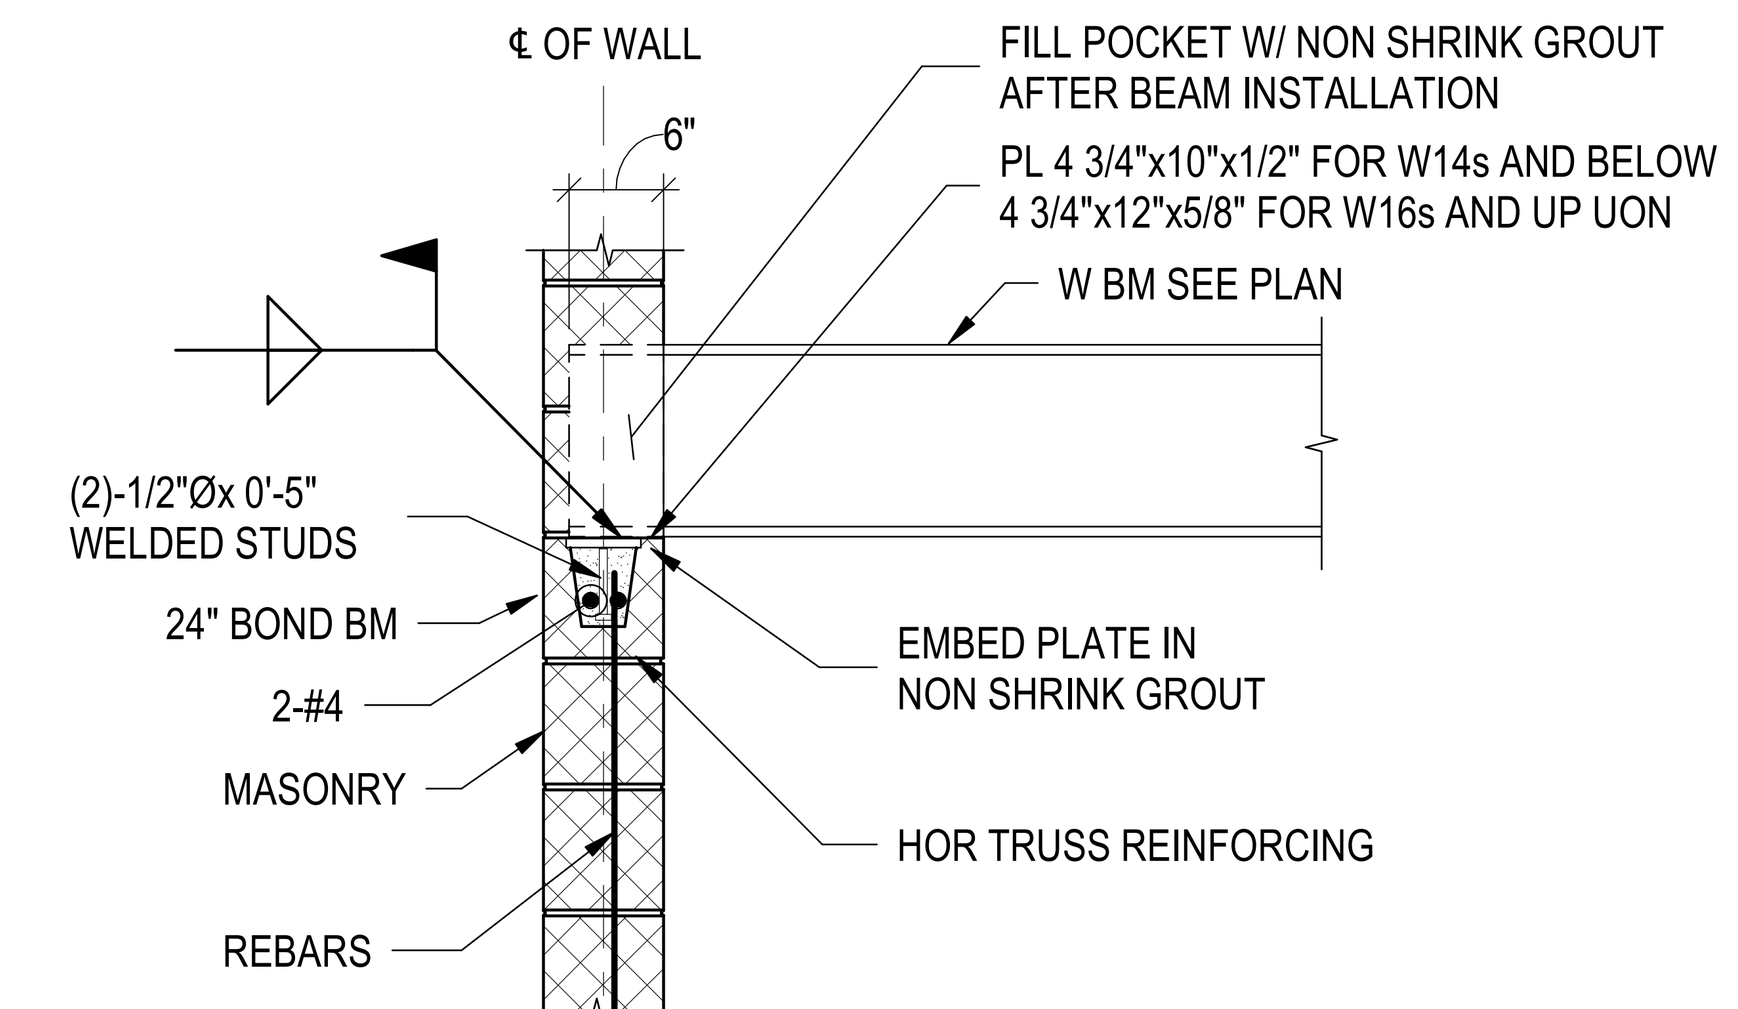

TYPICAL STEEL BEARING ON MASONRY

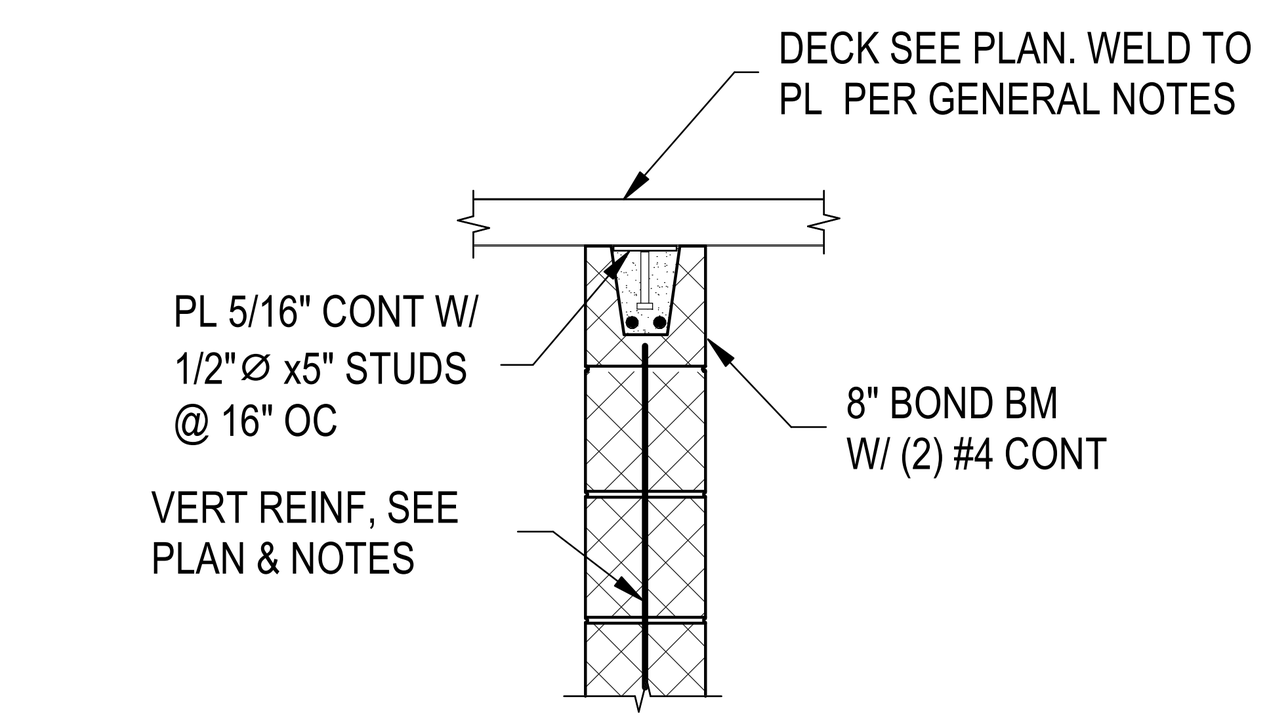

TYPICAL DECK BEARING ON CMU DETAIL

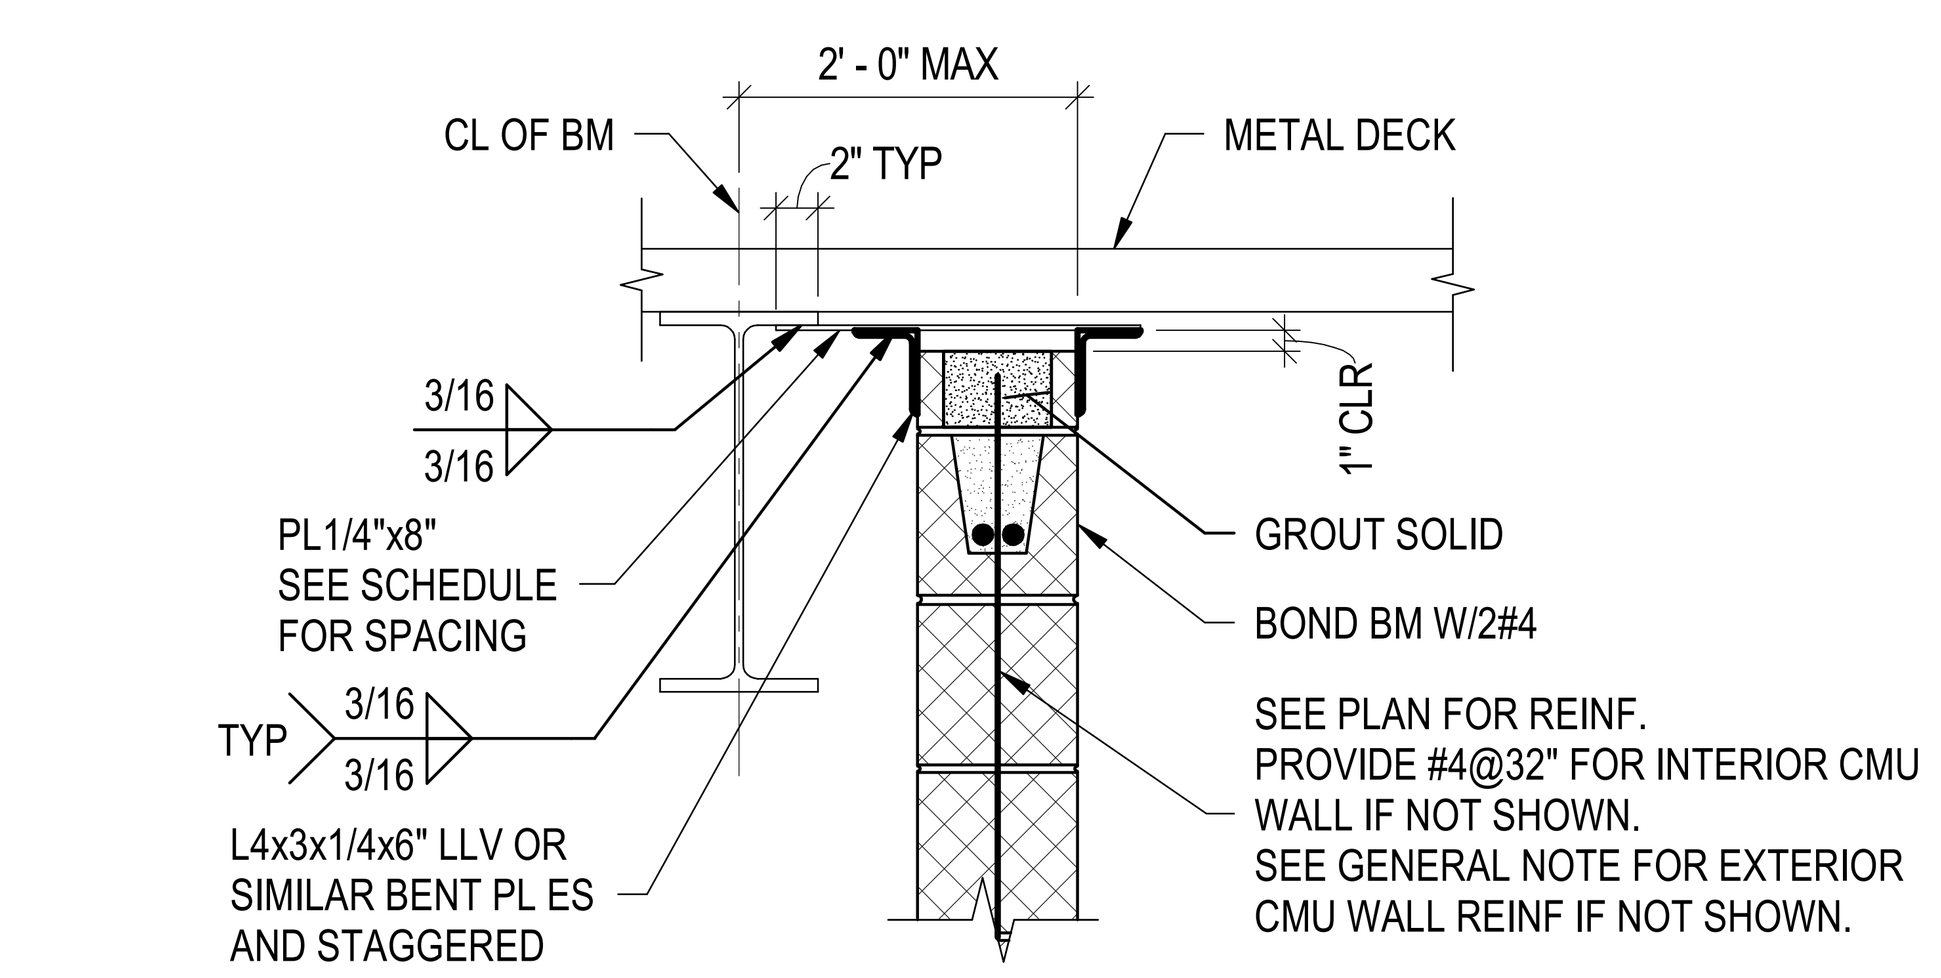

WALL BYPASS STEEL BEAM

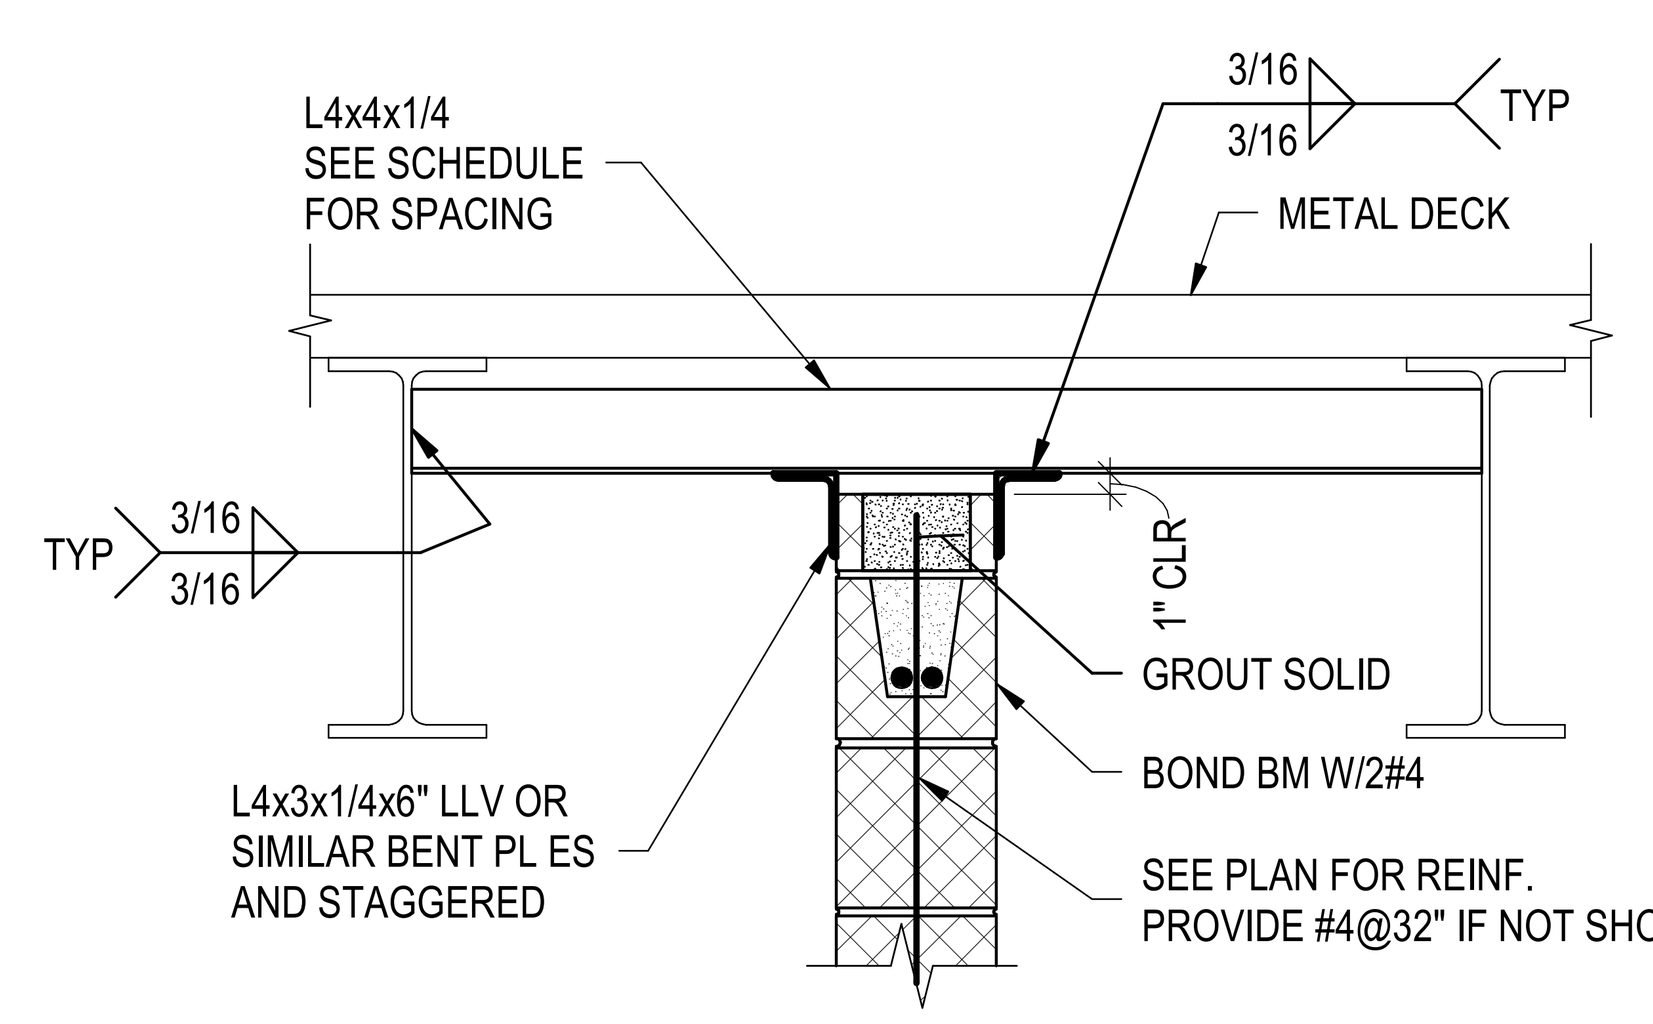

INTERIOR WALL BETWEEN STEEL BEAMS

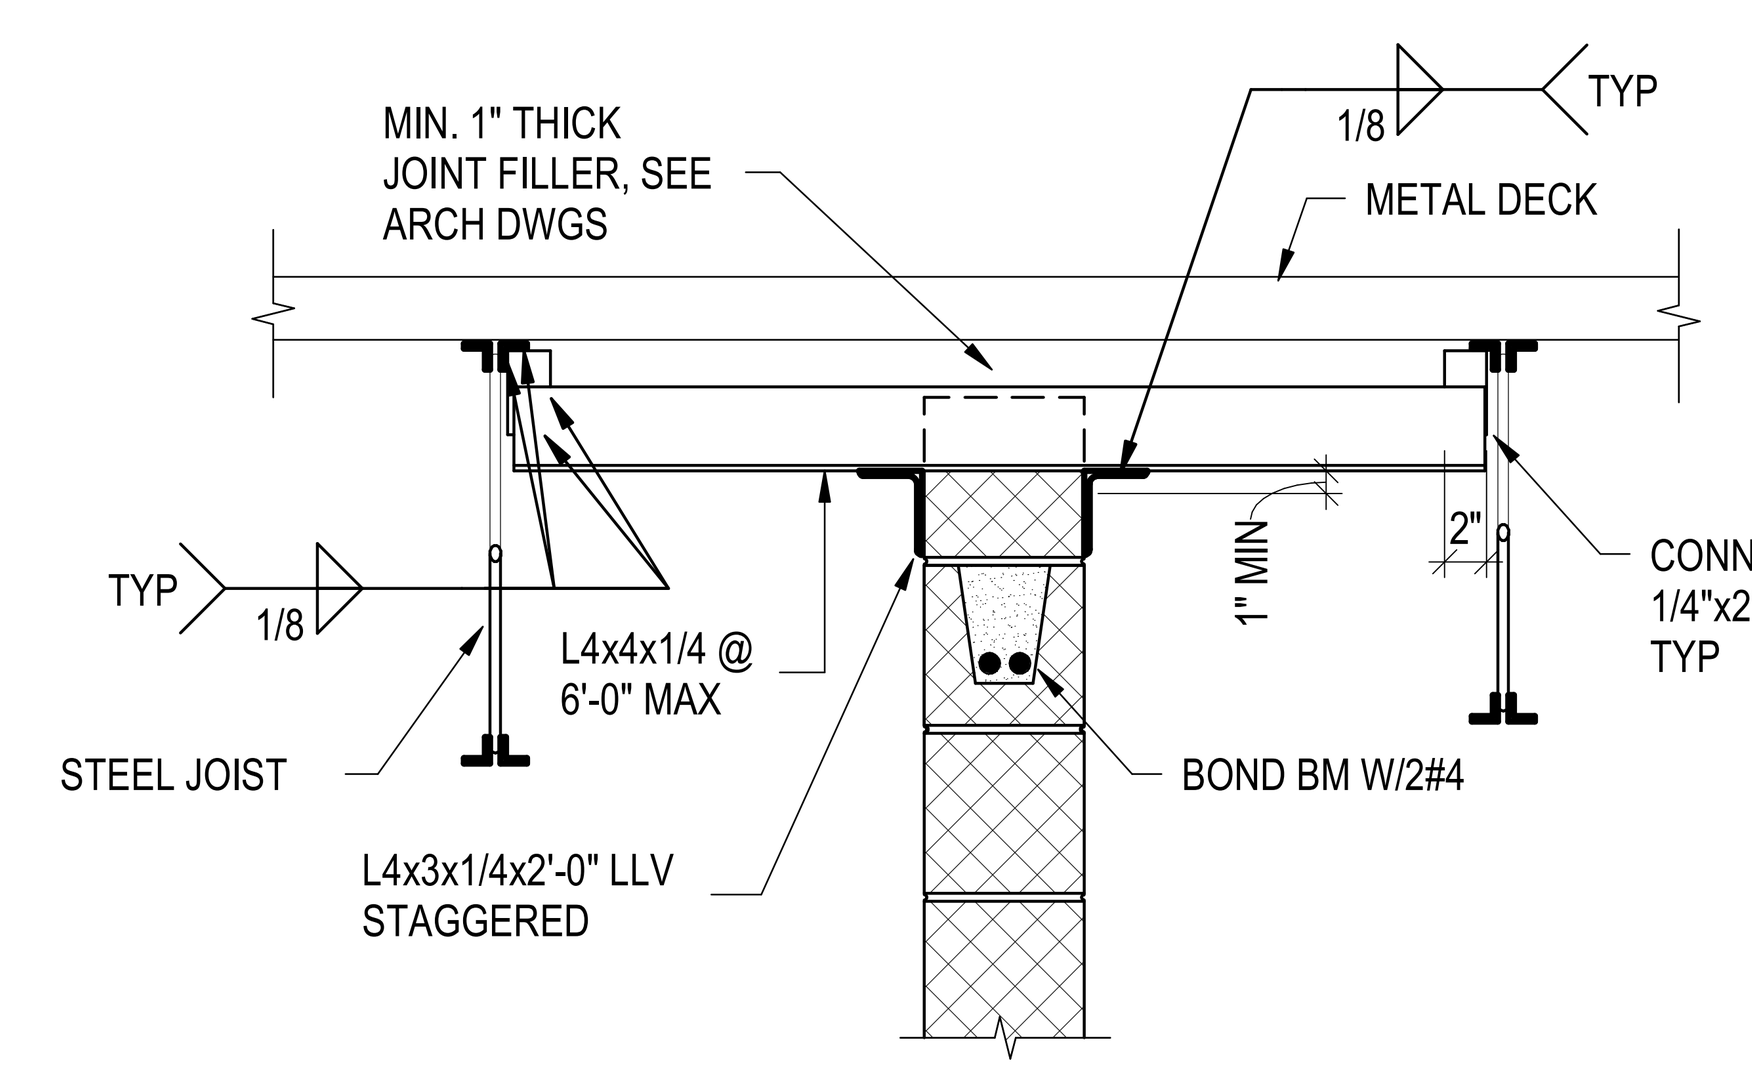

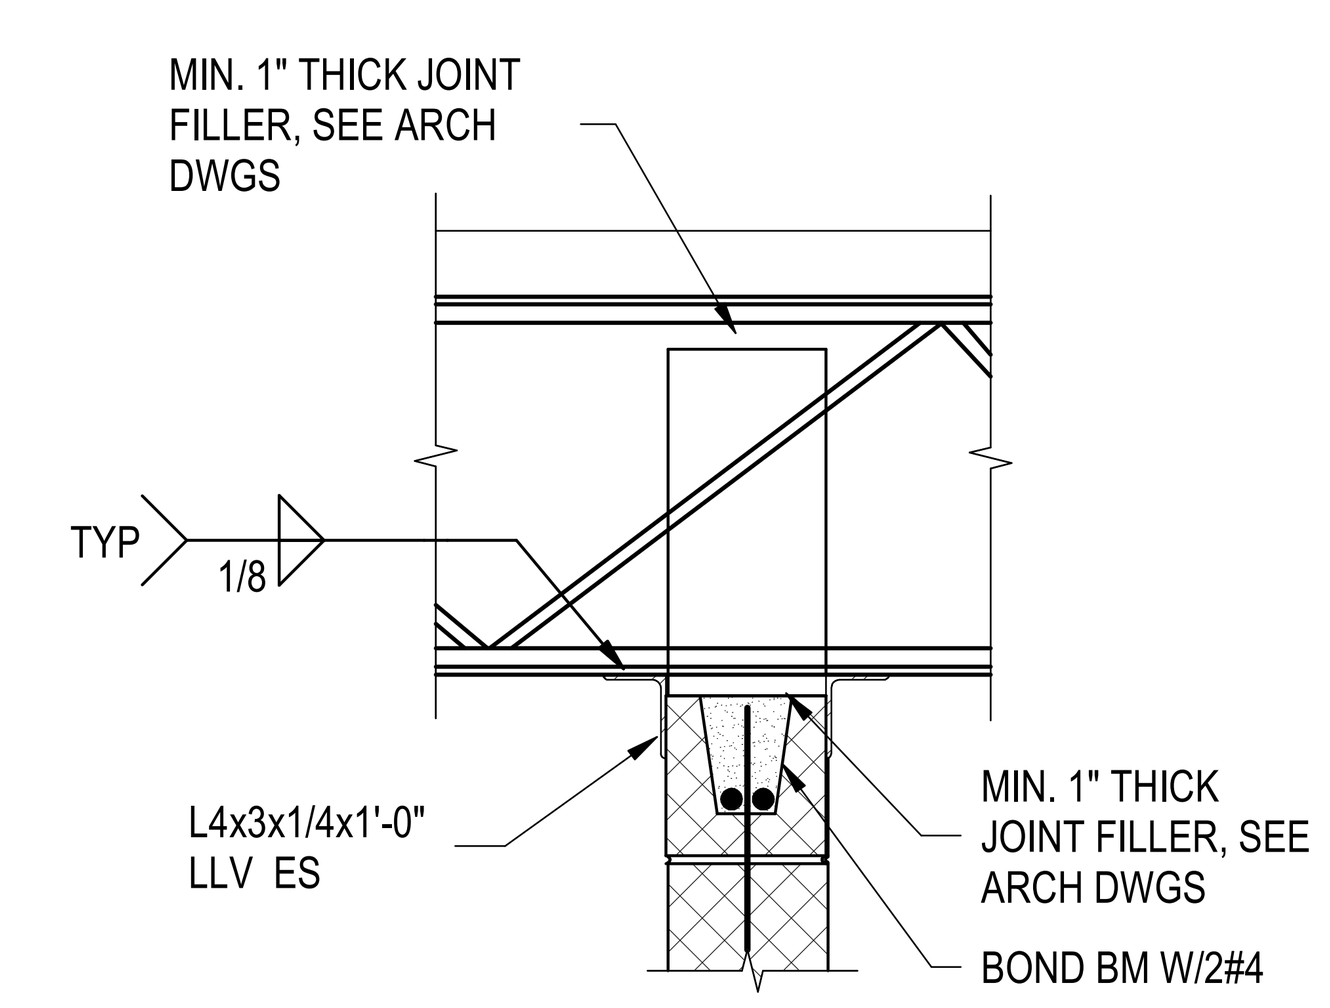

INTERIOR WALL IN STEEL JOIST FRAMING

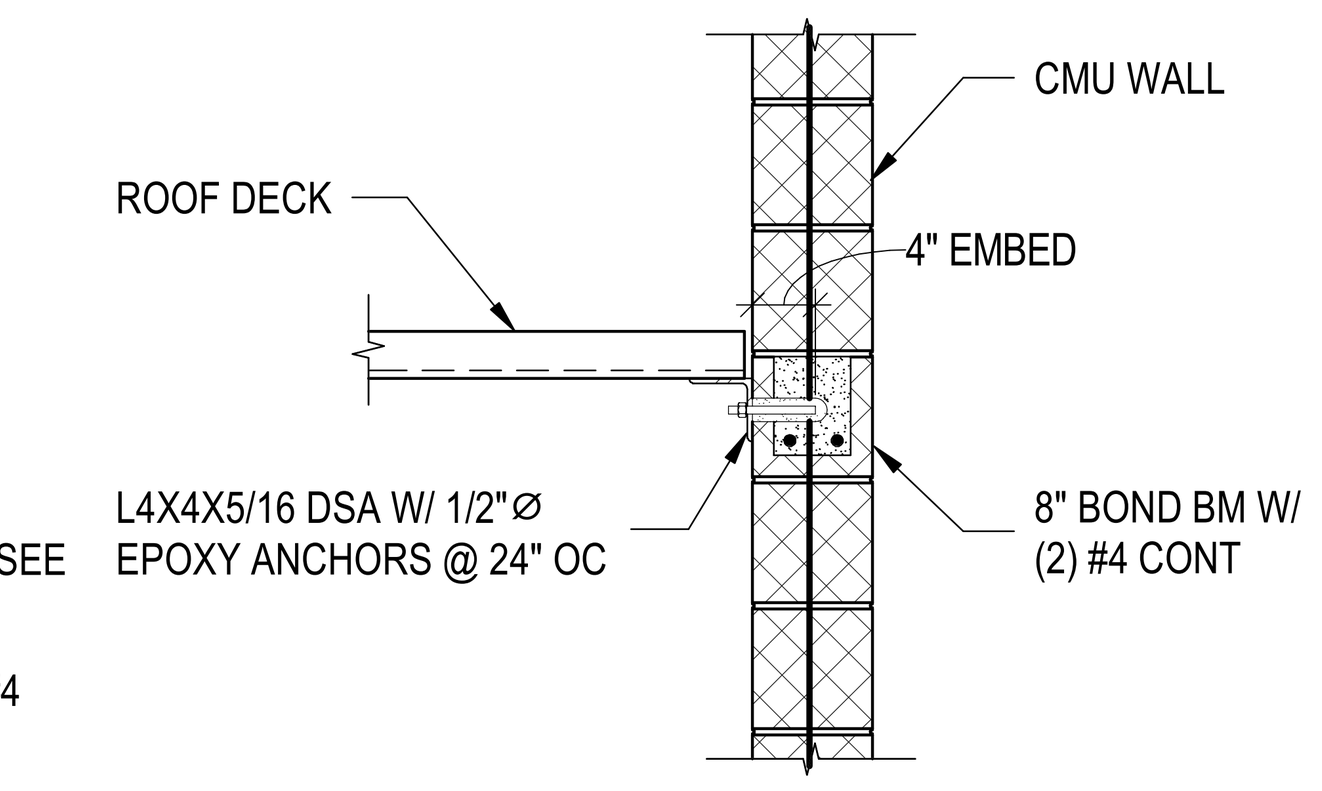

TYPICAL DSA TO CMU WALL DETAIL

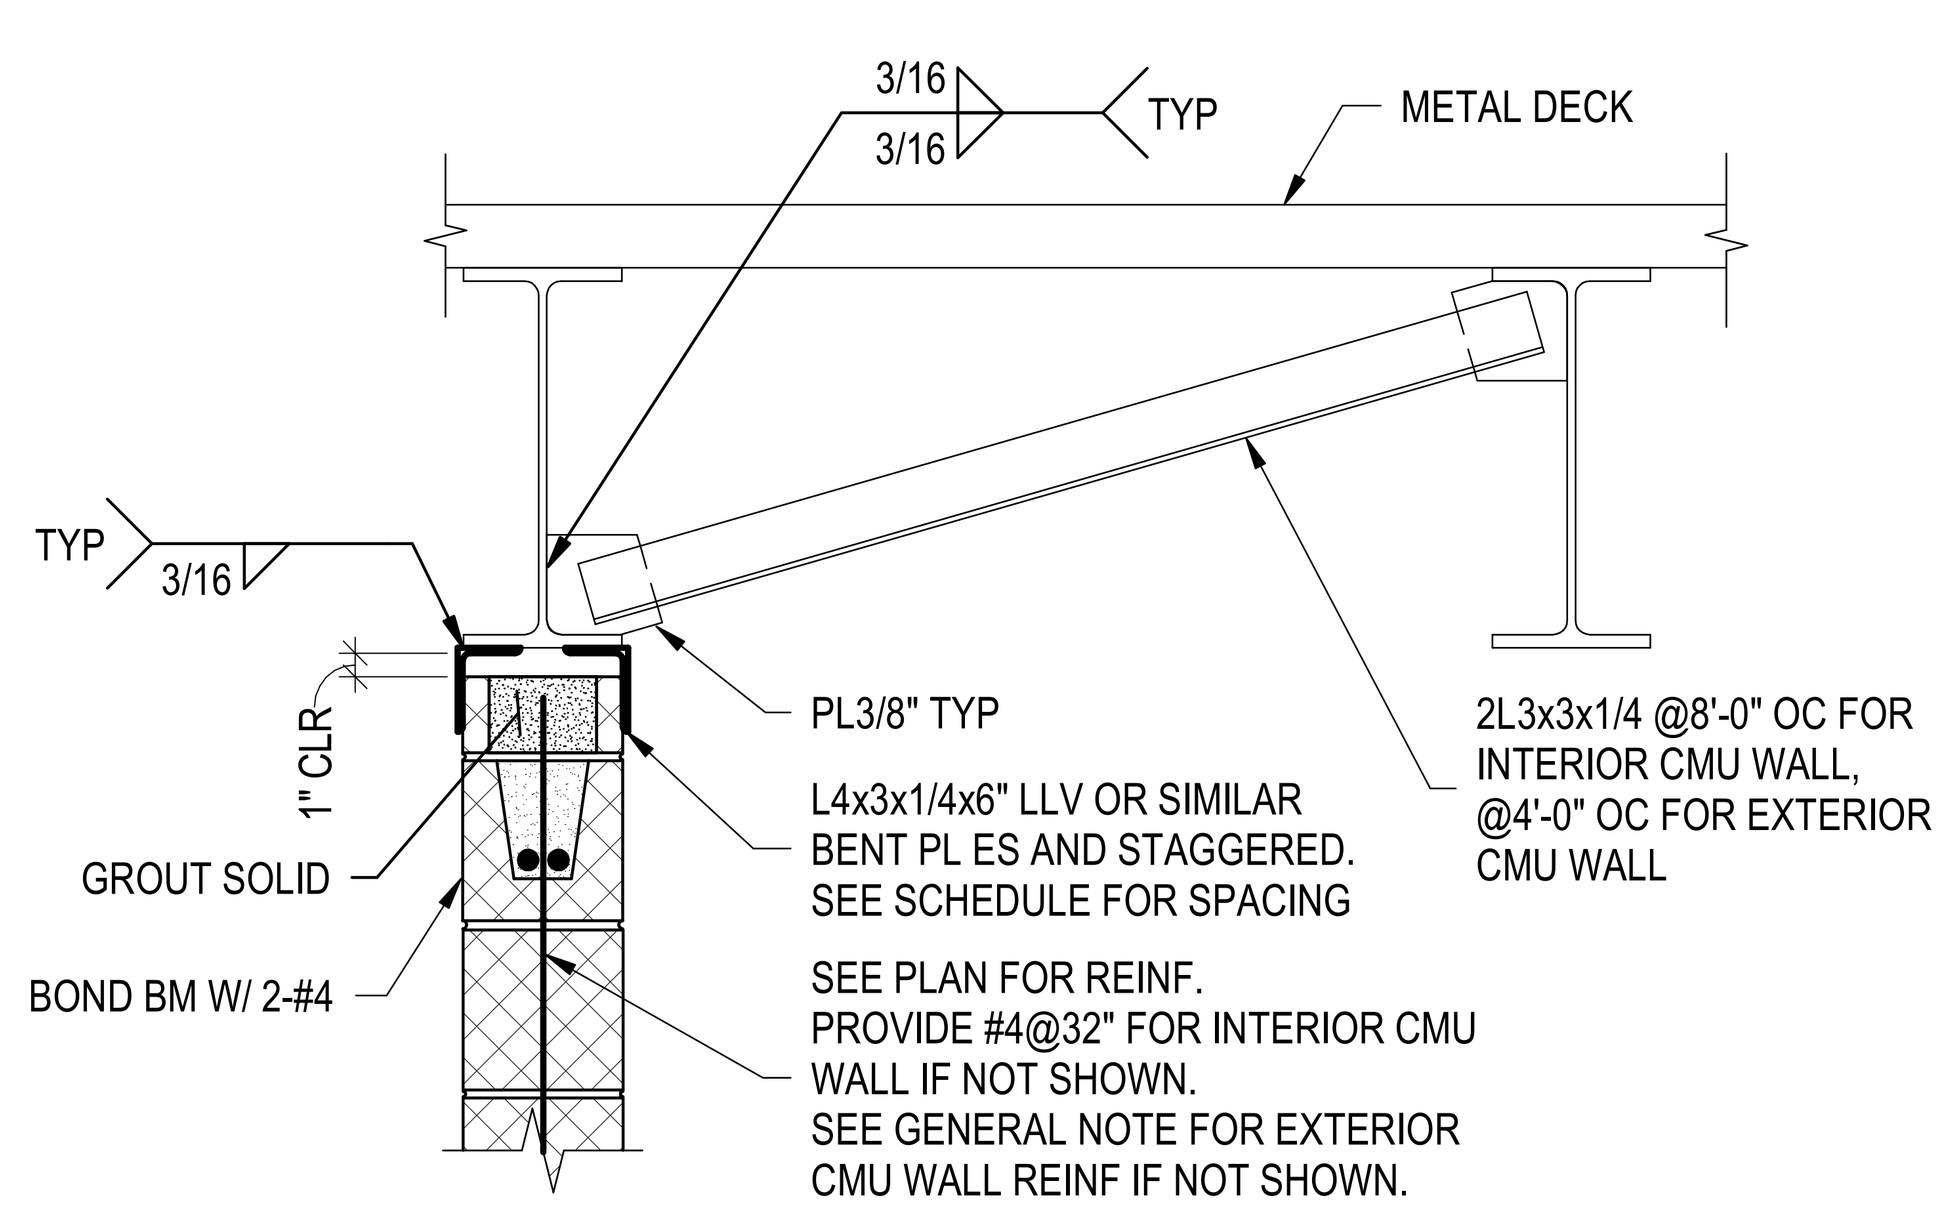

WALL CENTERED ON STEEL BEAM

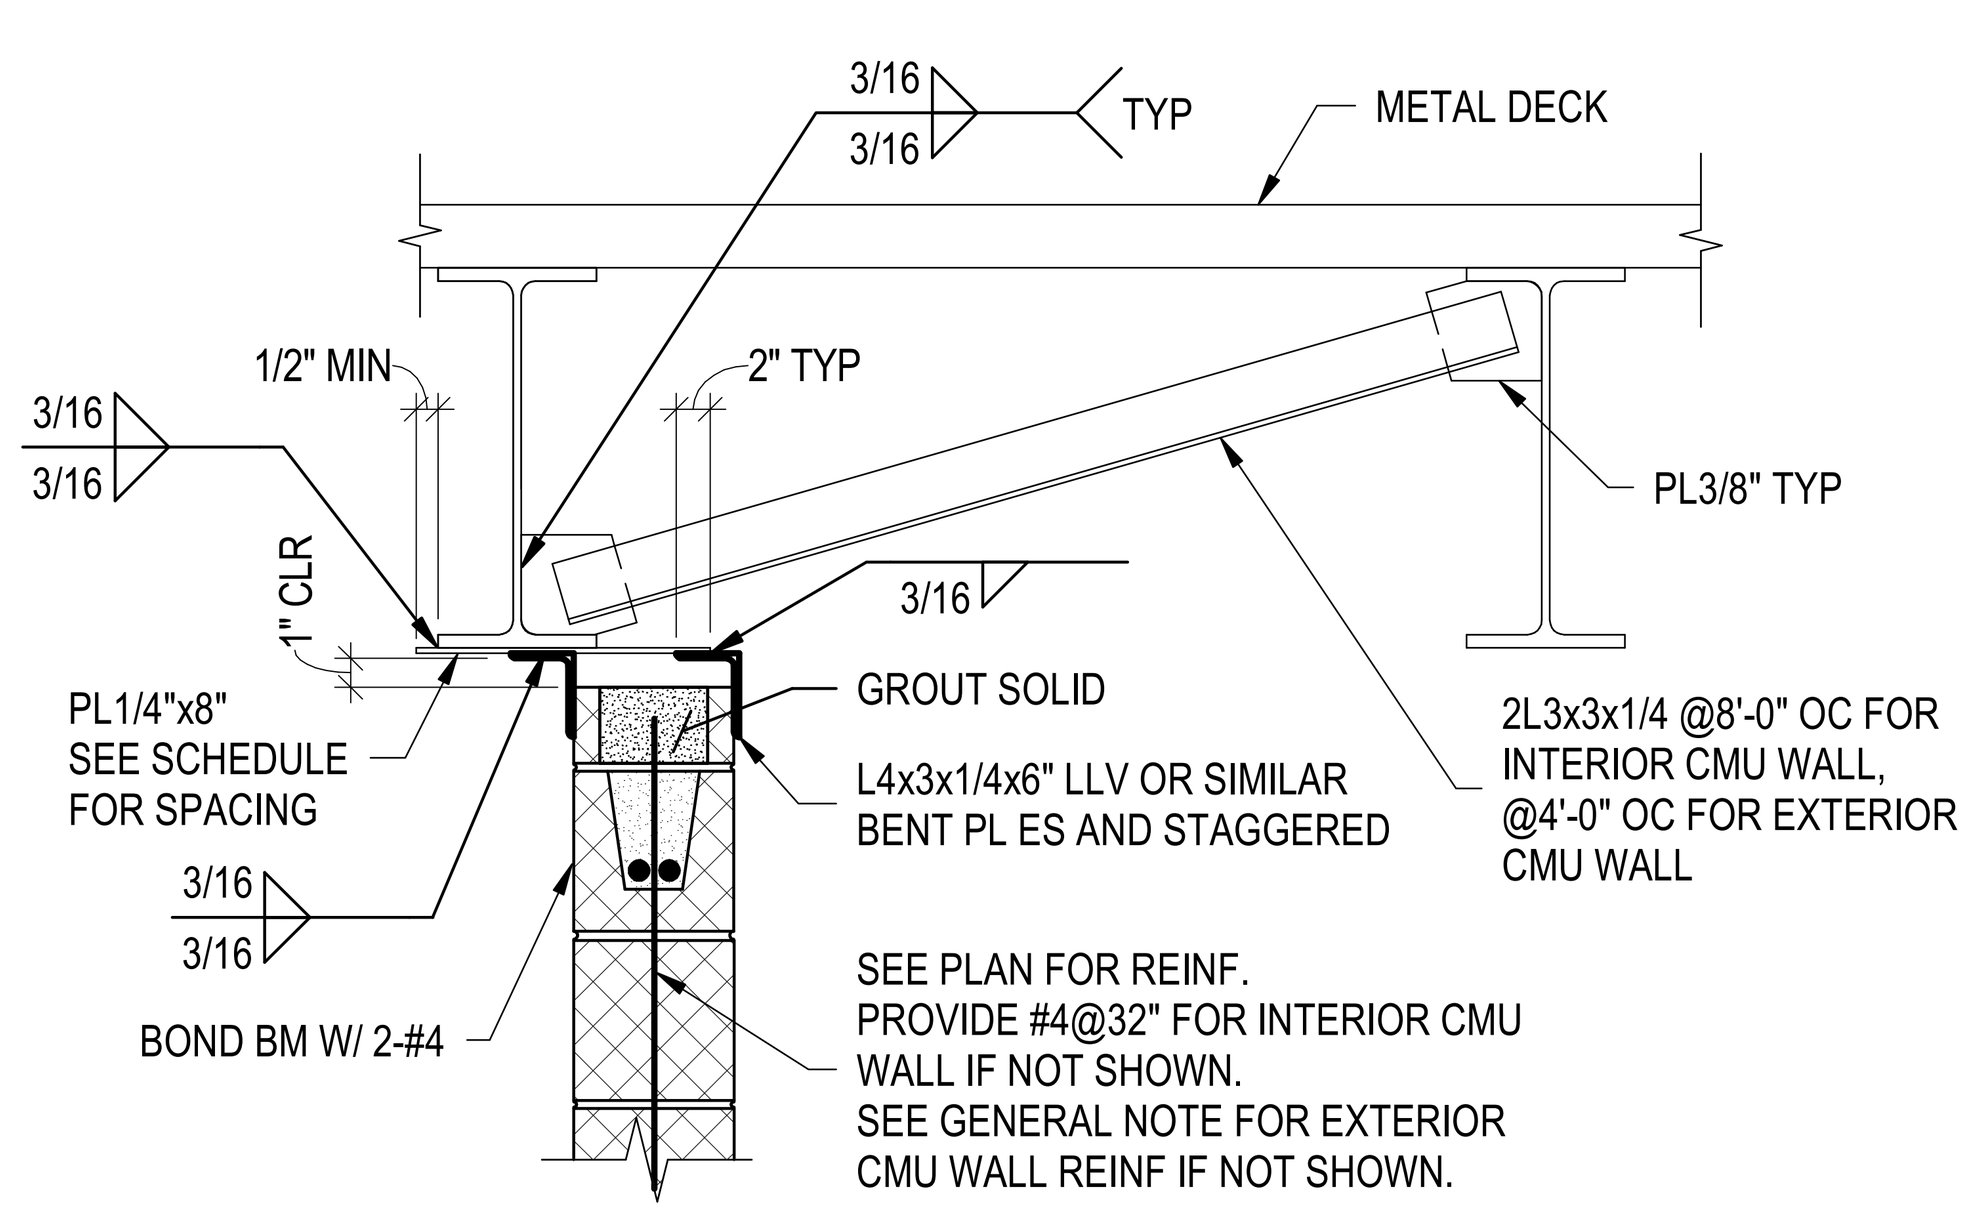

WALL OFFSET FROM STEEL BEAM

TYPICAL CMU WALL BRACING UNDER ROOF DECK DETAIL

TOP OF WALL CONNECTION SPACING SCHEDULE				
MAXIMUM WALL THICKNESS	INTERIOR CMU MAXIMUM WALL HEIGHT	EXTERIOR CMU MAXIMUM WALL HEIGHT	INTERIOR CMU TOP CONNECTION SPACING	EXTERIOR CMU TOP CONNECTION SPACING
6"	12'-0"	-	4'-0"	-
8"	15'-0"	12'-0"	4'-0"	3'-0"
10"	18'-0"	15'-0"	4'-0"	2'-6"
12"	21'-0"	18'-0"	4'-0"	2'-0"

NOTES:
1. WHERE FILLER IS REQUIRED PER ARCHITECTURAL REQUIREMENTS, PROVIDE 1" FILLER WITH MINIMUM 50 PERCENT COMPRESSIBILITY.
2. FIREPROOFING (IF REQUIRED) REMOVED OR DAMAGED BY INSTALLATION OF TOP OF WALL CONNECTIONS SHALL BE REPLACED.

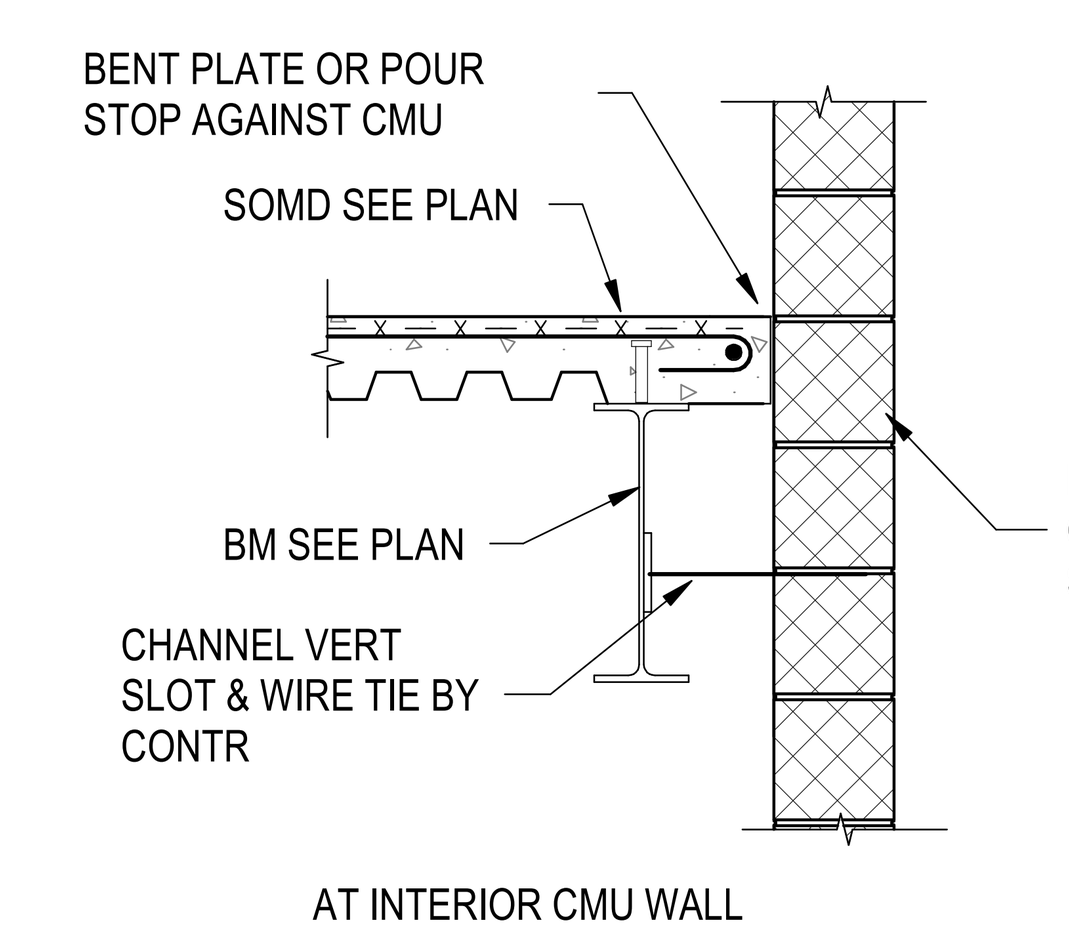

AT INTERIOR CMU WALL

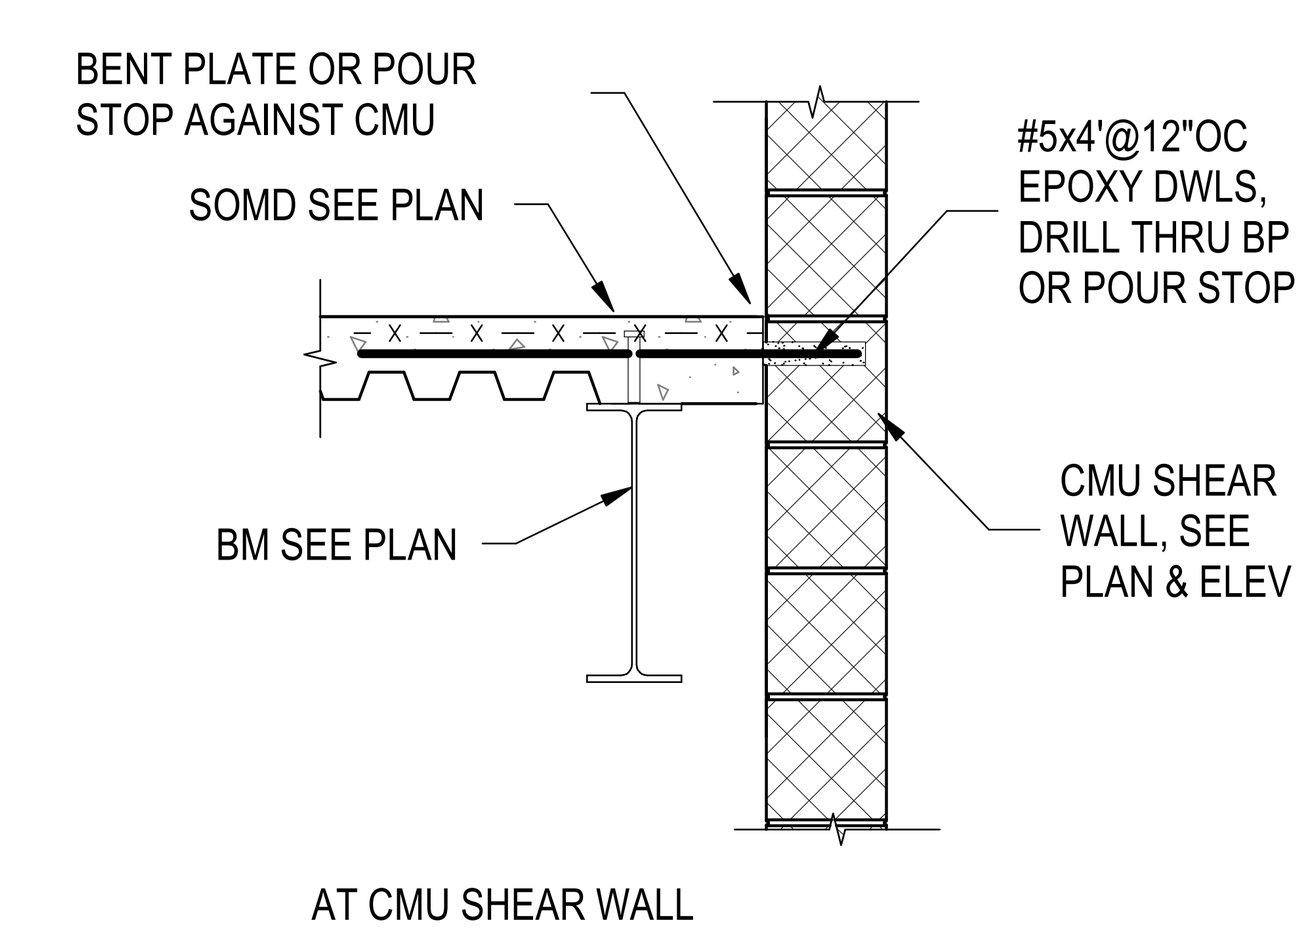

AT CMU SHEAR WALL

TYPICAL CMU WALL BYPASS SLAB DETAIL

NO.	DATE	ISSUE
A	09/30/2025	Permit
	10/29/2025	BID SET

SEAL

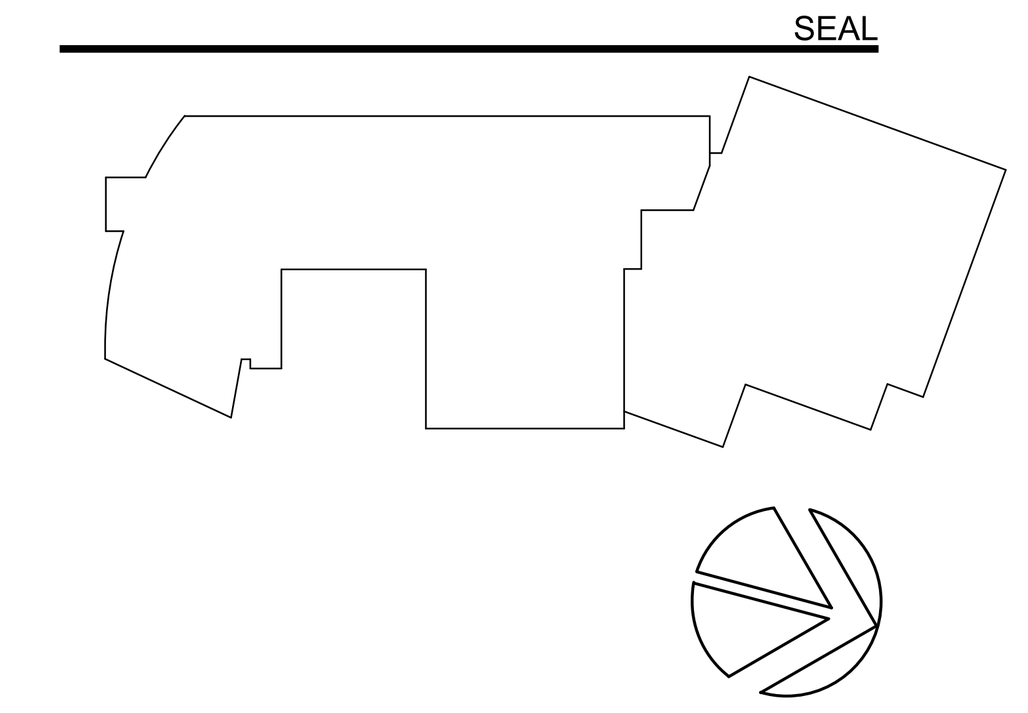

KEY PLAN

PERKINS EASTMAN
One Thomas Circle NW, Suite 200
Washington, DC 20005
T: +1 202 861 1325
F: +1 202 861 1326

Owner:
Sidwell Friends School
3825 Wisconsin Ave NW, Washington DC 20016

Construction Manager:
Advanced Project Management, Inc (APM)
4530 Walney Rd, Ste 202, Chantilly, VA 20151

Civil / Site:
Bowman Consulting Group, Ltd
888 17th St NW, Suite 510, Washington, DC 20006

Landscape:
Natural Resources Design, Inc (NRD)
1009 Shepherd Street NE, Washington, DC 20017

Structural:
Yun Associates LLC
1050 Connecticut Ave NW, Suite 500, Washington, DC 20036

MEP / FP / Lighting:
CMTA Inc
220 Lexington Green Circle, Suite 600, Lexington, KY 40503

AV / IT / Telecom / Security:
Educational Systems Planning (ESP)
2448 Holly Avenue, Suite 302, Annapolis, MD 21401

Food Service
Nyikos-Garcia Foodservice Design, Inc
7146 Starmount Way, New Market, MD 21774

Accessibility Consultant:
Galbo Wolf LLC
4410 Massachusetts Ave NW, #240, Washington, DC 20016

Acoustics:
Polysonics Corp
555 Hospital Drive, Warrenton, VA 20186

Building Envelope Consultant:
Sustainable Building Partners LLC
2701 Prosperity Ave, Suite 105, Fairfax, VA 22031

Code Consultant:
Campbell Code Consulting LLC
7834 Taggart Ct, Elkridge, MD 21075

Specifications:

PROJECT TITLE:
SIDWELL FRIENDS NEW LOWER SCHOOL AT DC CAMPUS

3825 WISCONSIN AVE NW
WASHINGTON, DC 20016

PROJECT No: 2025008

DRAWING TITLE:
TYPICAL DETAILS

SCALE: As indicated

S-206

BID SET
10/29/2025

Autodesk Docs://Sidwell Lower School/Sidwell Lower School_ST_R24.rvt
10/28/2025 10:15:06 AM

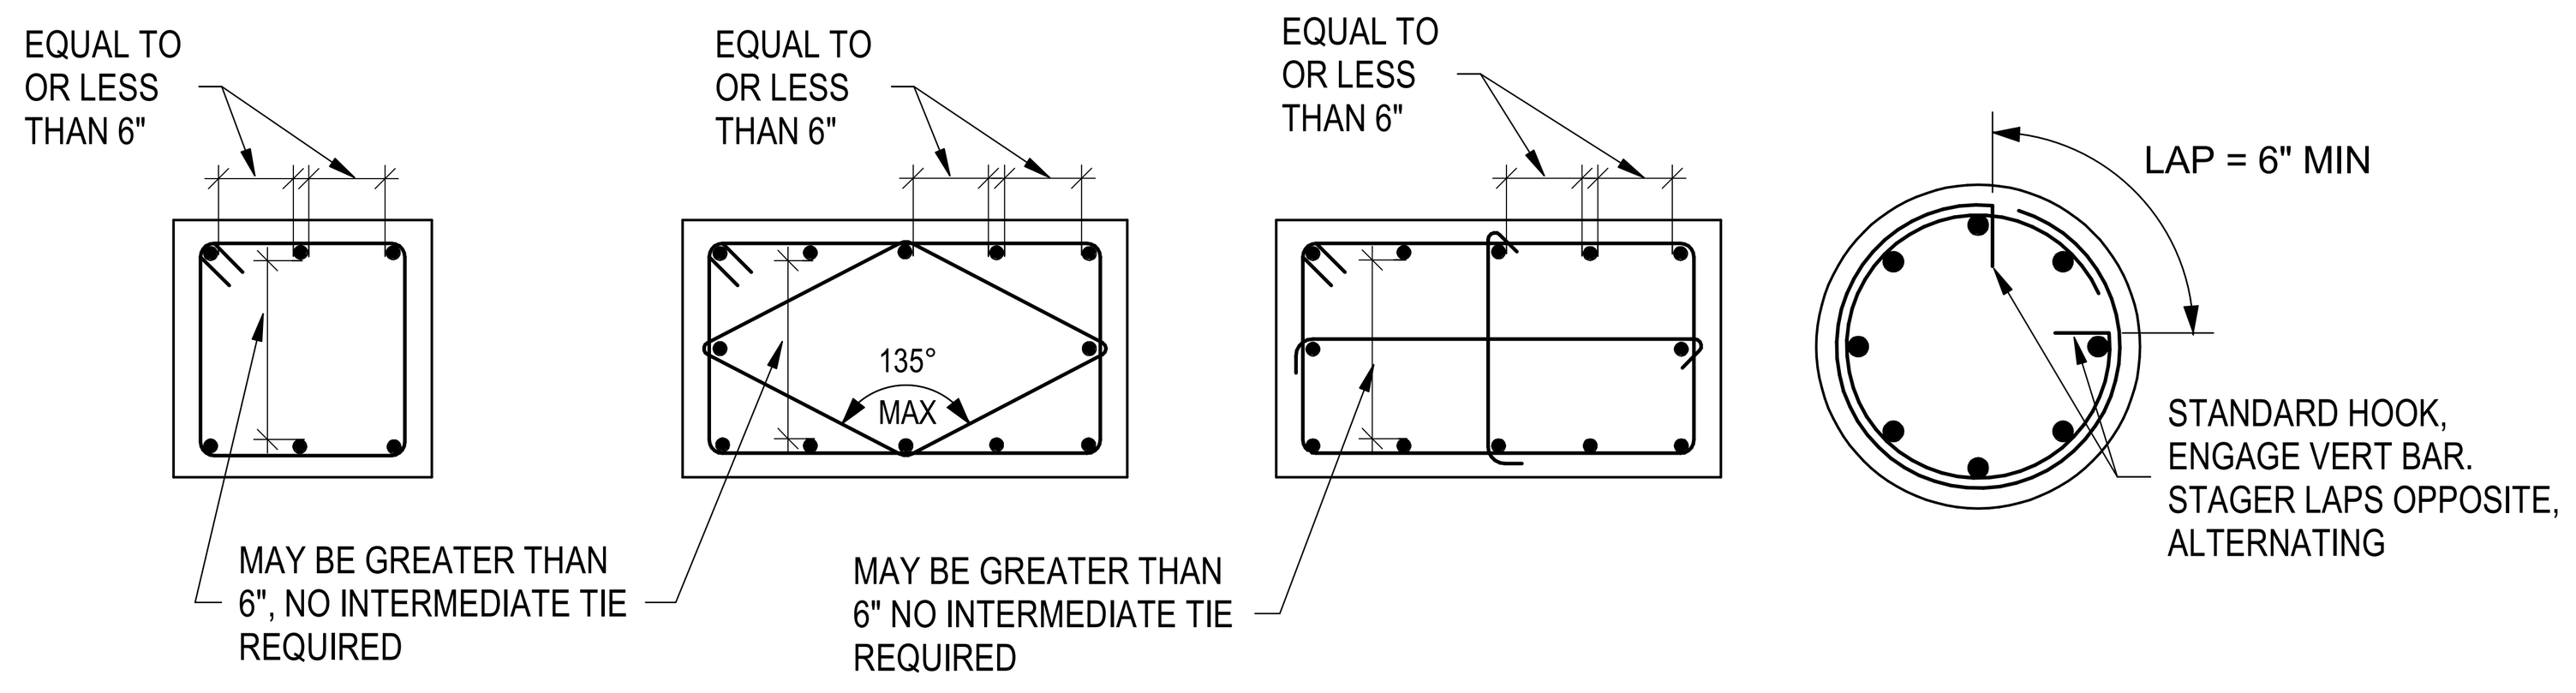

TIE SIZE AND SPACING		
LONGITUDINAL BAR SIZE	TIE BAR SIZE	TIE SPACING *
#7	#3	14"
#8	#3	16"
#9	#3	18"
#10	#3	18"
#11 OR LARGER	#4	22"

* TIE SPACING SHALL NOT EXCEED THE LEAST DIMENSION OF COLUMN/PIER/PEDESTAL

TYPICAL CONCRETE COLUMN/PEDESTAL TIE DETAIL

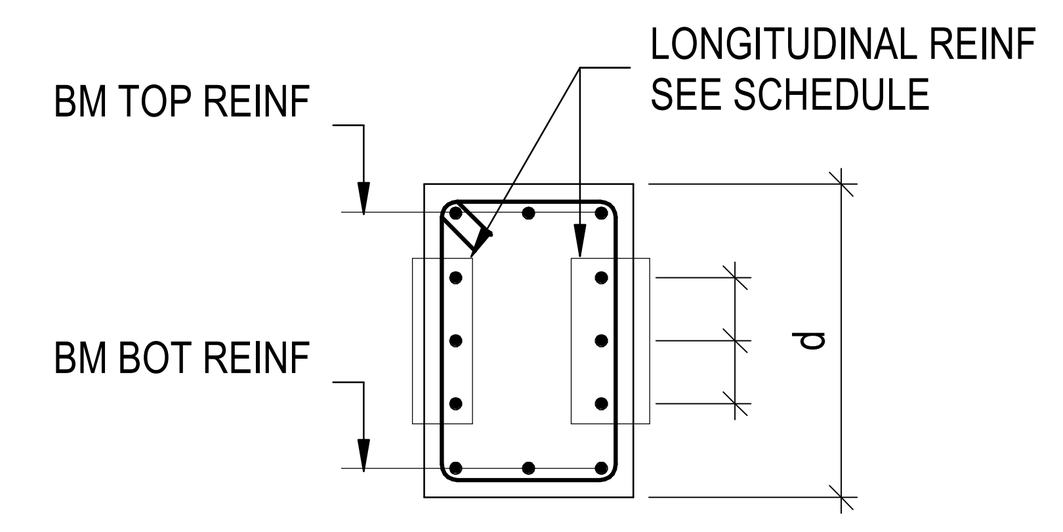

LONGITUDINAL REINFORCEMENT SCHEDULE	
d (INCH)	SIZE & SPACING EF
30 < d <36	#3 5" C/C
36 < d < 42	#3 6" C/C
42 < d < 48	#4 7" C/C
48 < d < 54	#4 8" C/C
54 < d < 60	#5 9" C/C
60 < d < 72	#6 10" C/C

TYPICAL BEAM LONGITUDINAL REINFORCING DETAIL

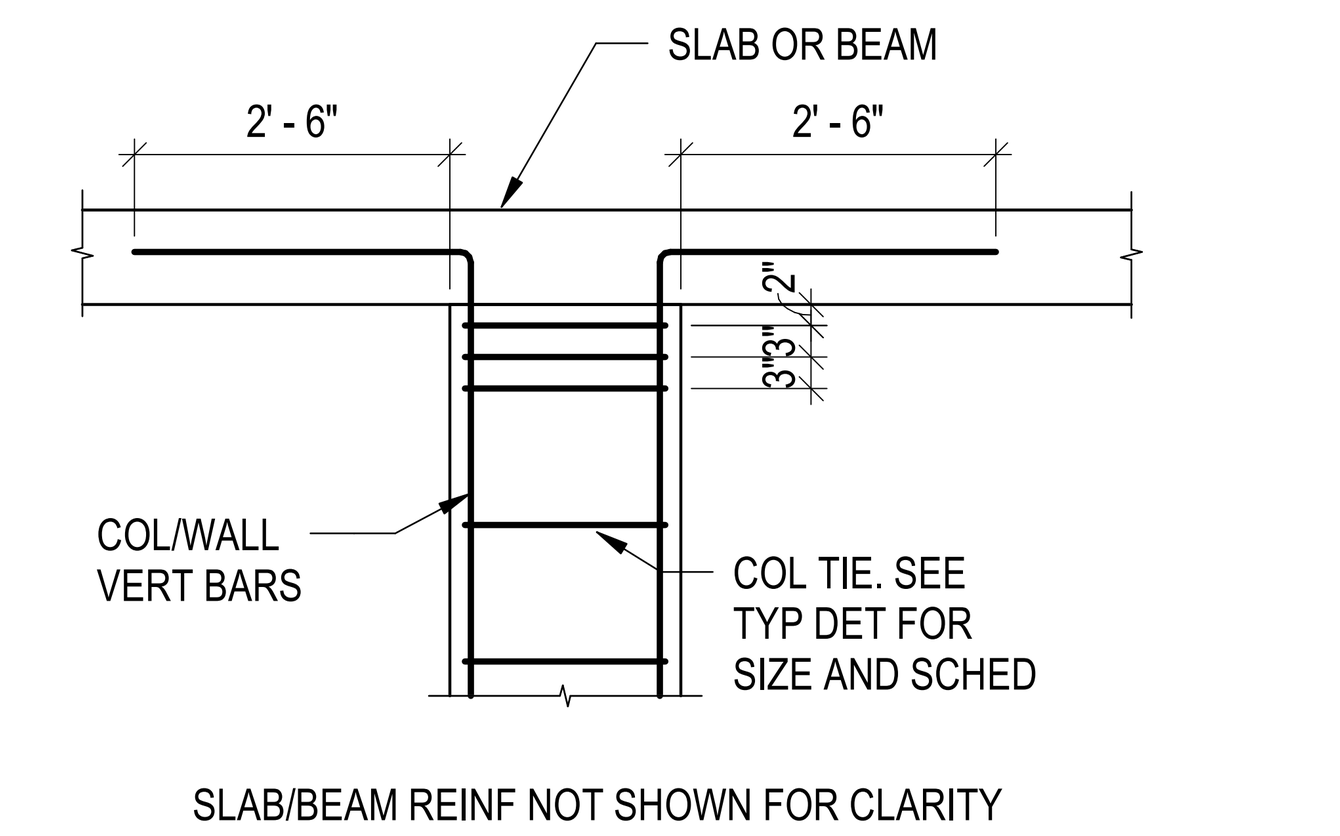

TYPICAL COLUMN / WALL TOP DETAIL

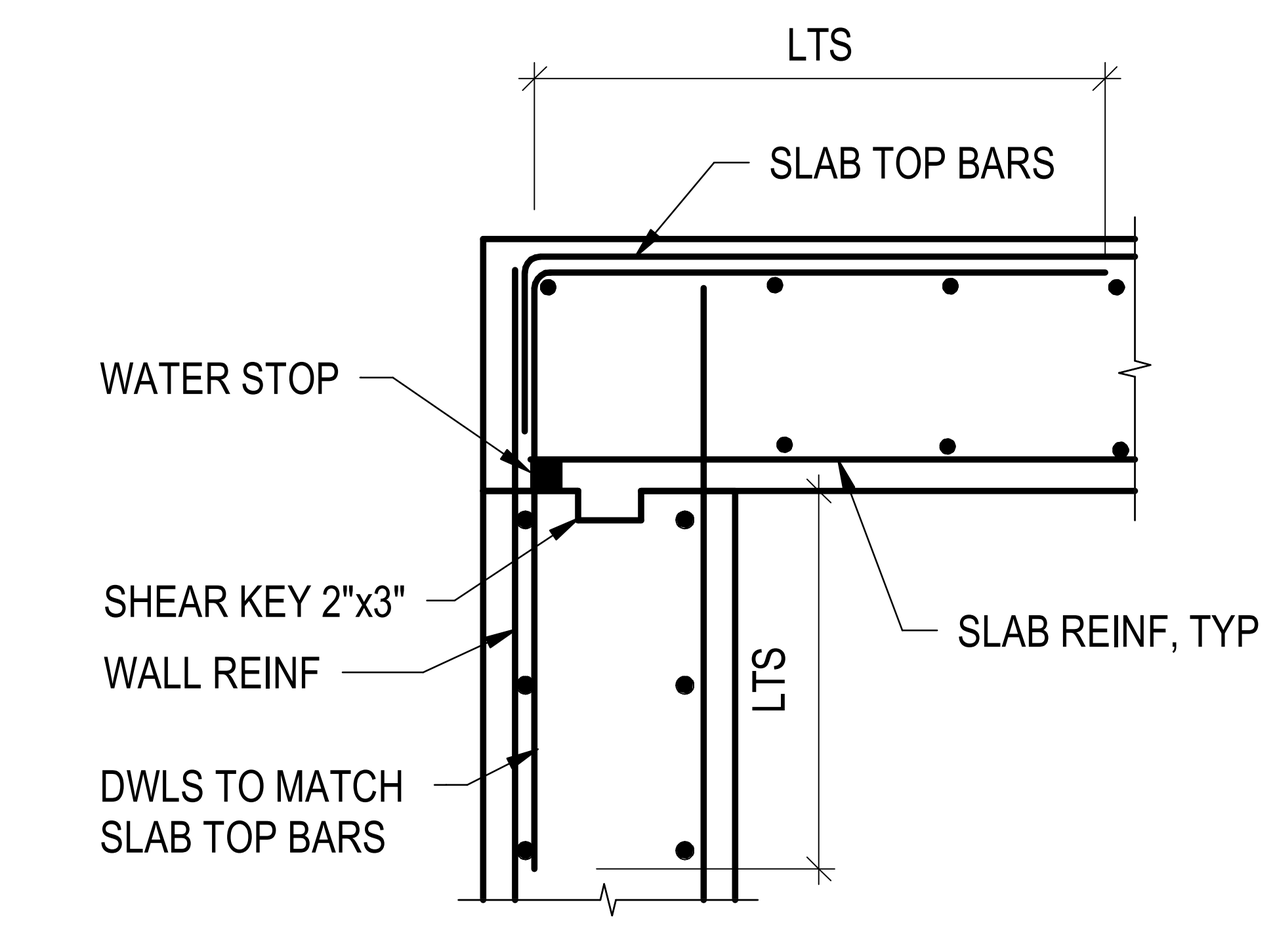

TYPICAL TOP OF FDN WALL DETAIL

NO.	DATE	ISSUE
A	09/30/2025	Permit
	10/29/2025	BID SET

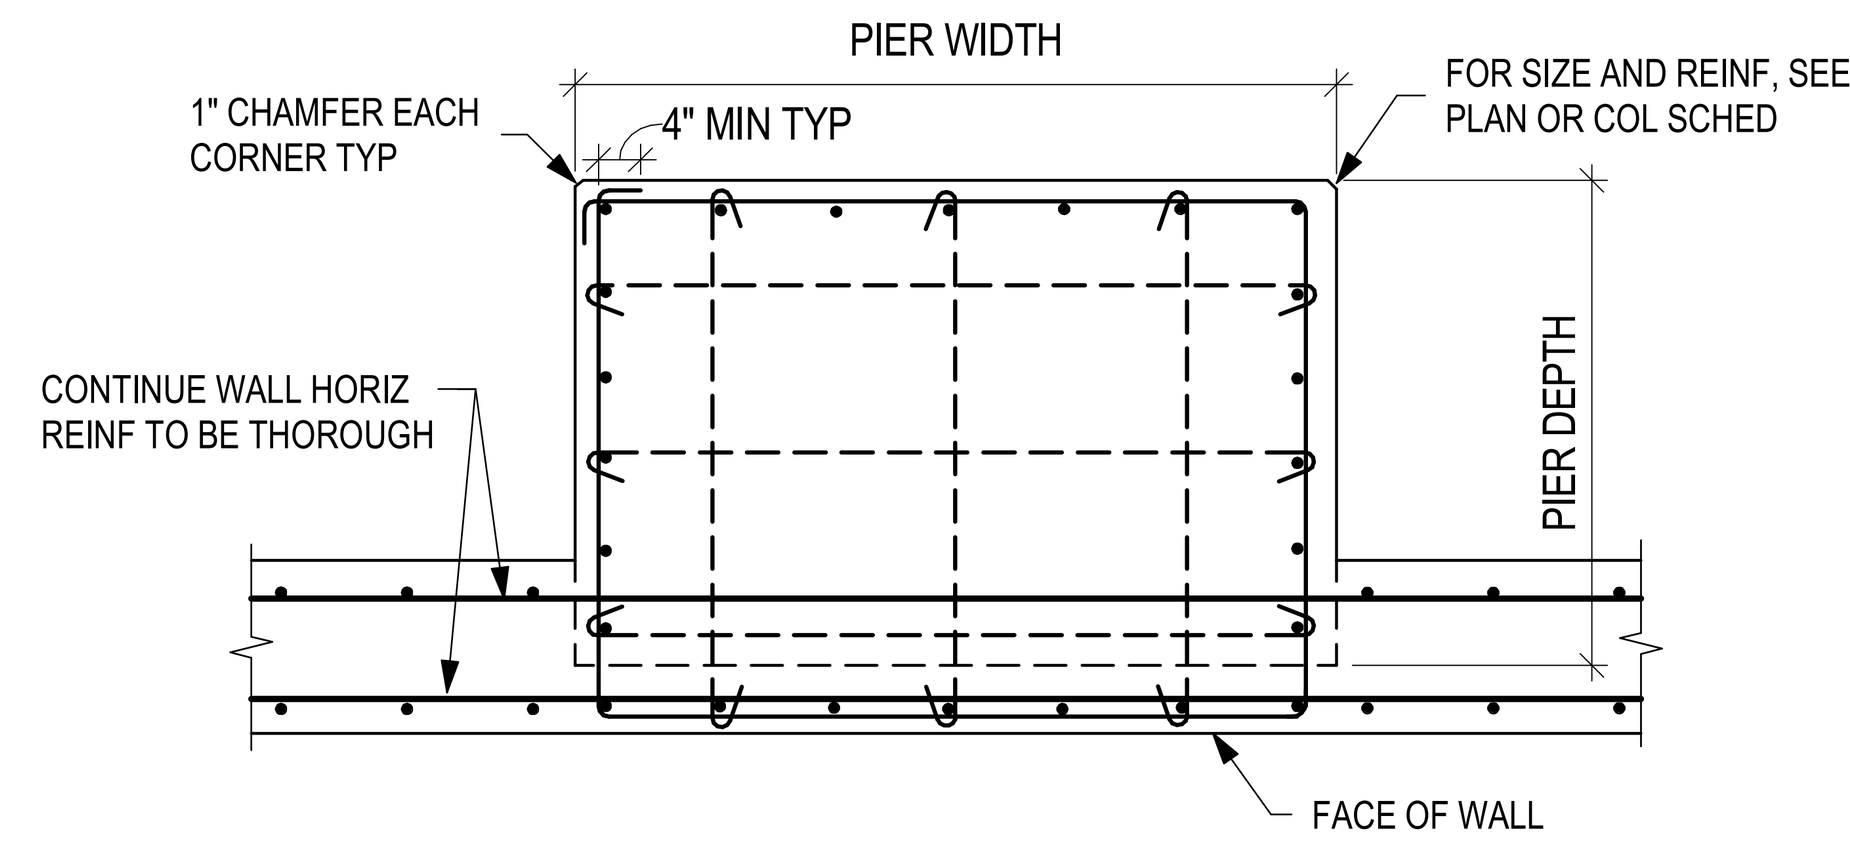

NOTE:

FACE OF PIER MAY NOT ALIGN WITH FACE OF WALL. ADJUST PIER REINFORCING AS SHOWN

TYPICAL PIER IN WALL DETAIL

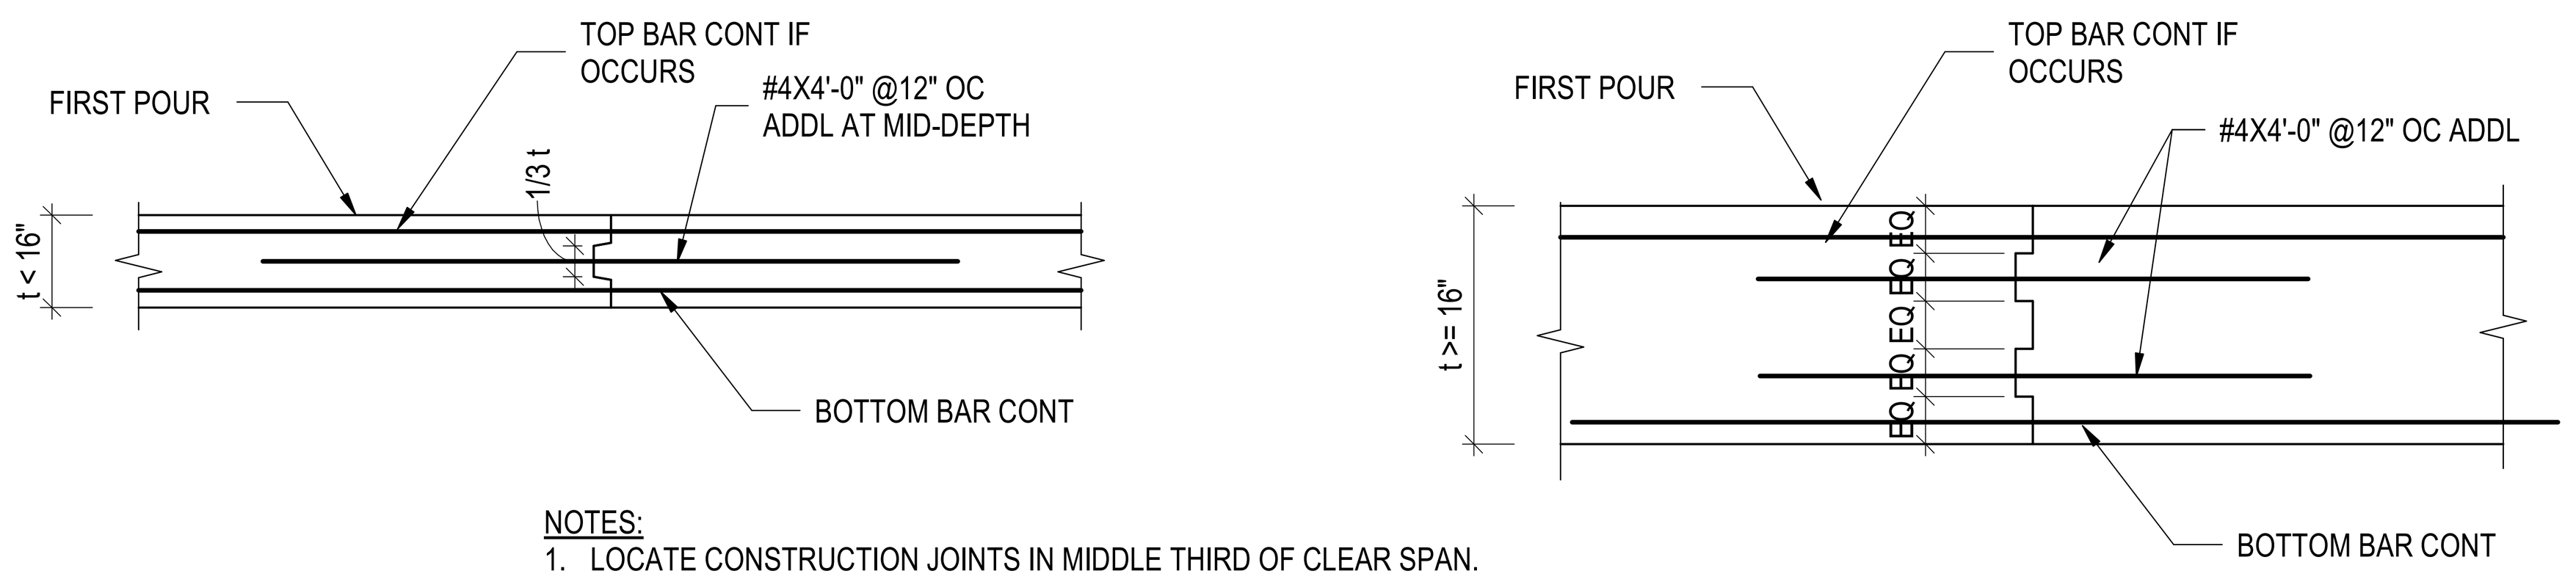

NOTES:

1. LOCATE CONSTRUCTION JOINTS IN MIDDLE THIRD OF CLEAR SPAN.
2. JOINTS ARE NOT PERMITTED WITHIN 4'-0" OF OPENINGS.
3. WHERE SLAB THICKNESS IS 6" OR LESS, DELETE SHEAR KEY AND PROVIDE A ROUGHENED CONTACT SURFACE W/ MINIMUM 1/4" AMPLITUDE BETWEEN OLD AND NEW CONCRETE. APPLY BONDING AGENT.
4. THOROUGHLY CLEAN CONTACT SURFACES, REMOVE ALL LAITANCE MATERIAL AND FLUSH WITH GROUT PRIOR TO PLACING FRESH CONCRETE AGAINST CONCRETE IN PLACE.
5. SUBMIT DIMENSIONED PLAN OF PROPOSED CONSTRUCTION JOINT LOCATIONS FOR REVIEW AND APPROVAL.

TYPICAL CONCRETE FRAMED SLAB CONSTRUCTION JOINT DETAIL

TENSION DEVELOPMENT AND LAP SPLICE LENGTHS FOR UNCOATED BARS													
		LENGTHS (IN.) PER CONCRETE STRENGTH (PSI)											
BAR SIZE	LAP CLASS	3000 PSI				4000 PSI				5000 PSI			
		TOP BARS		OTHER BARS		TOP BARS		OTHER BARS		TOP BARS		OTHER BARS	
		CASE 1	CASE 2	CASE 1	CASE 2	CASE 1	CASE 2	CASE 1	CASE 2	CASE 1	CASE 2	CASE 1	CASE 2
#3	A	22	32	17	25	19	28	15	22	17	25	13	19
	B	28	42	22	32	24	36	19	28	22	33	17	25
#4	A	29	43	22	33	25	37	19	29	22	33	17	26
	B	37	56	29	43	32	48	25	37	29	43	22	33
#5	A	36	54	28	41	31	47	24	36	28	42	22	32
	B	47	70	36	54	40	60	31	47	36	54	28	42
#6	A	43	64	33	50	37	56	29	43	33	50	26	38
	B	56	84	43	64	48	72	37	56	43	65	33	50
#7	A	63	94	48	72	54	81	42	63	49	73	37	56
	B	81	122	63	94	70	106	54	81	63	94	49	73
#8	A	72	107	55	82	62	93	48	71	55	83	43	64
	B	93	139	72	107	80	121	62	93	72	108	55	83
#9	A	81	121	62	93	70	105	54	81	63	94	48	72
	B	105	157	81	121	91	136	70	105	81	122	63	94
#10	A	91	136	70	105	79	118	61	91	70	105	54	81
	B	118	177	91	136	102	153	79	118	91	137	70	105
#11	A	101	151	78	116	87	131	67	101	78	117	60	90
	B	131	196	101	151	113	170	87	131	101	152	78	117
#14	N/A	121	181	93	139	105	157	81	121	94	140	72	108
#18	N/A	161	241	124	186	139	209	107	161	125	187	96	144

NOTES:

1. TABULATED VALUES BASED ON NORMAL WEIGHT CONCRETE AND GRADE 60 REINFORCMENT.
   FOR LIGTHWIEGHT AGGREAGTE CONCRETE, MULTIPLY THE TABULATED BALUES BY 1.3.
   FOR GRADE 75 REINFORCING BARS, MULTIPLY TABULATED VALUES BY 1.25.
2. TABULATED BALUES ARE BASED ON THE FOLLOWING CODE REQUIREMENTS:
   BEAM OR COLUMNS:
   CASE 1: COVER AT LEAST 1.0 db AND c-c SPACING AT LEAST 2.0 db.
   CASE 2: COVER LESS THEN 1.0db OR c-c SPACING LESS THEN 2.0 db.
   ALL OTHERS:
   CASE 1: COVER AT LEAST 1.0 db AND c-c SPACING AT LEAST 3.0 db.
   CASE 2: COVER LESS THEN 1.0 db OR c-c SPACING LESS THEN 3.0 db.
3. LAP SPLICE LENGTHS ARE MULTIPLES OF DEVELOPMENT LENGTHS:
   CLASS A = 1.0 ld.
   CLASS B = 1.3 ld.
4. TOP BARS ARE HORIZONTAL BARS WITH MORE THAN 12 INCH OF CONCRETE CAST BELOW THE BARS.
5. FOR EPOXY-COATED BARS:
   A. WHERE CONCRETE COVER IS LESS THAN 3X BAR DIAMETER, OR CLEAR SPACING IS LESS THAN 6X BAR DIAMETER, TENSION DEVELOPMENT LENGTH/ TENSION LAP SPLICE LENGTH SHALL BE 1.5X THE VALUES GIVEN.
   B. WHERE CONCRETE COVER IS EQUAL TO OR GREATER THAN 3X BAR DIAMETER AND CLEAR SPACING IS GREATER THAN 6X BAR DIAMETER, TENSION DEVELOPMENT LENGTH/ TENSION LAP SPLICE LENGTH SHALL BE 1.2X THE VALUES GIVEN.

LAP SPLICE SCHEDULE FOR REINFORCING BARS

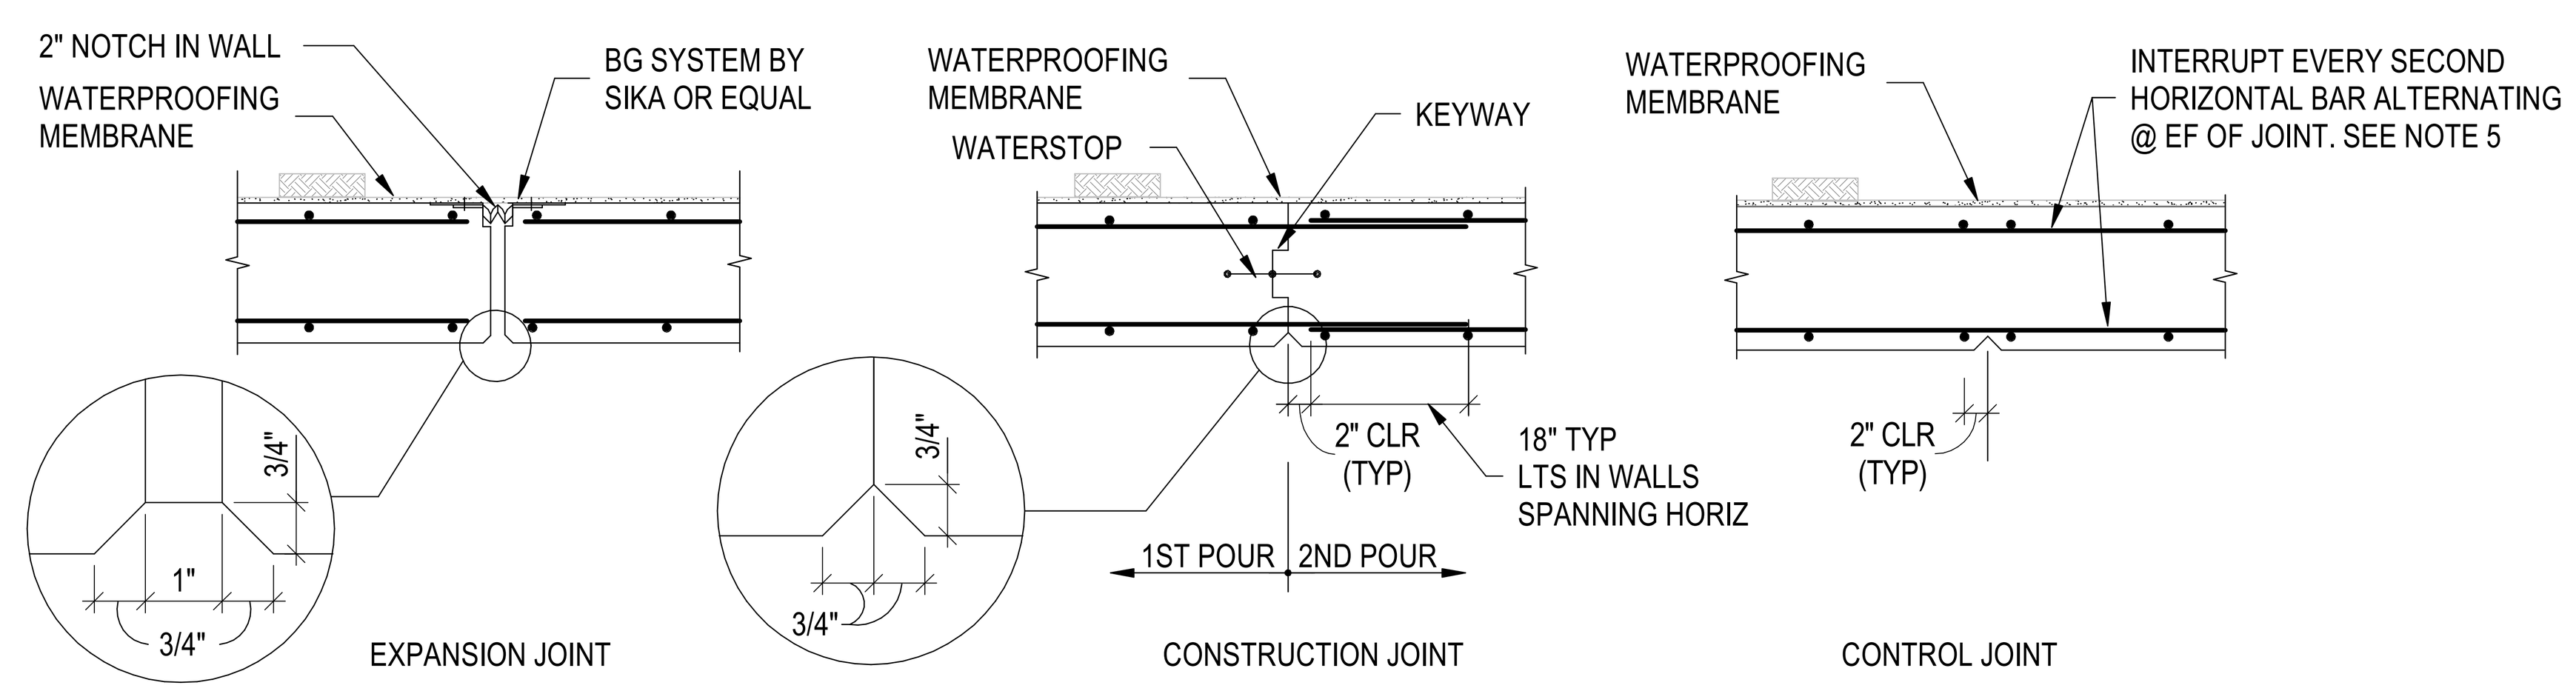

NOTES:

1. KEYS TO BEGIN 6" FROM TOP AND SHALL CONTINUE TO TOP OF FOOTING/MAT SLAB.
2. CONTROL JOINT SPACING TO BE EQUAL(±) TO CLEAR WALL HEIGHT BETWEEN FLOORS BUT NOT MORE THAN 25'-0".
3. CONSTRUCTION JOINTS SHALL OCCUR AT CONTROL JOINT LOCATION.
4. WATERPROOFING & WATERSTOPS SHOWN ARE MINIMUM REQUIREMENTS. REFER TO ARCH DWGS & SPECIFICATIONS FOR MORE DETAILS.
5. DO NOT INTERRUPT WALL REINFORCEMENT AT WALLS SPANNING HORIZONTALLY AND AT WALL BEAMS.

TYPICAL CONCRETE WALL JOINTS DETAIL

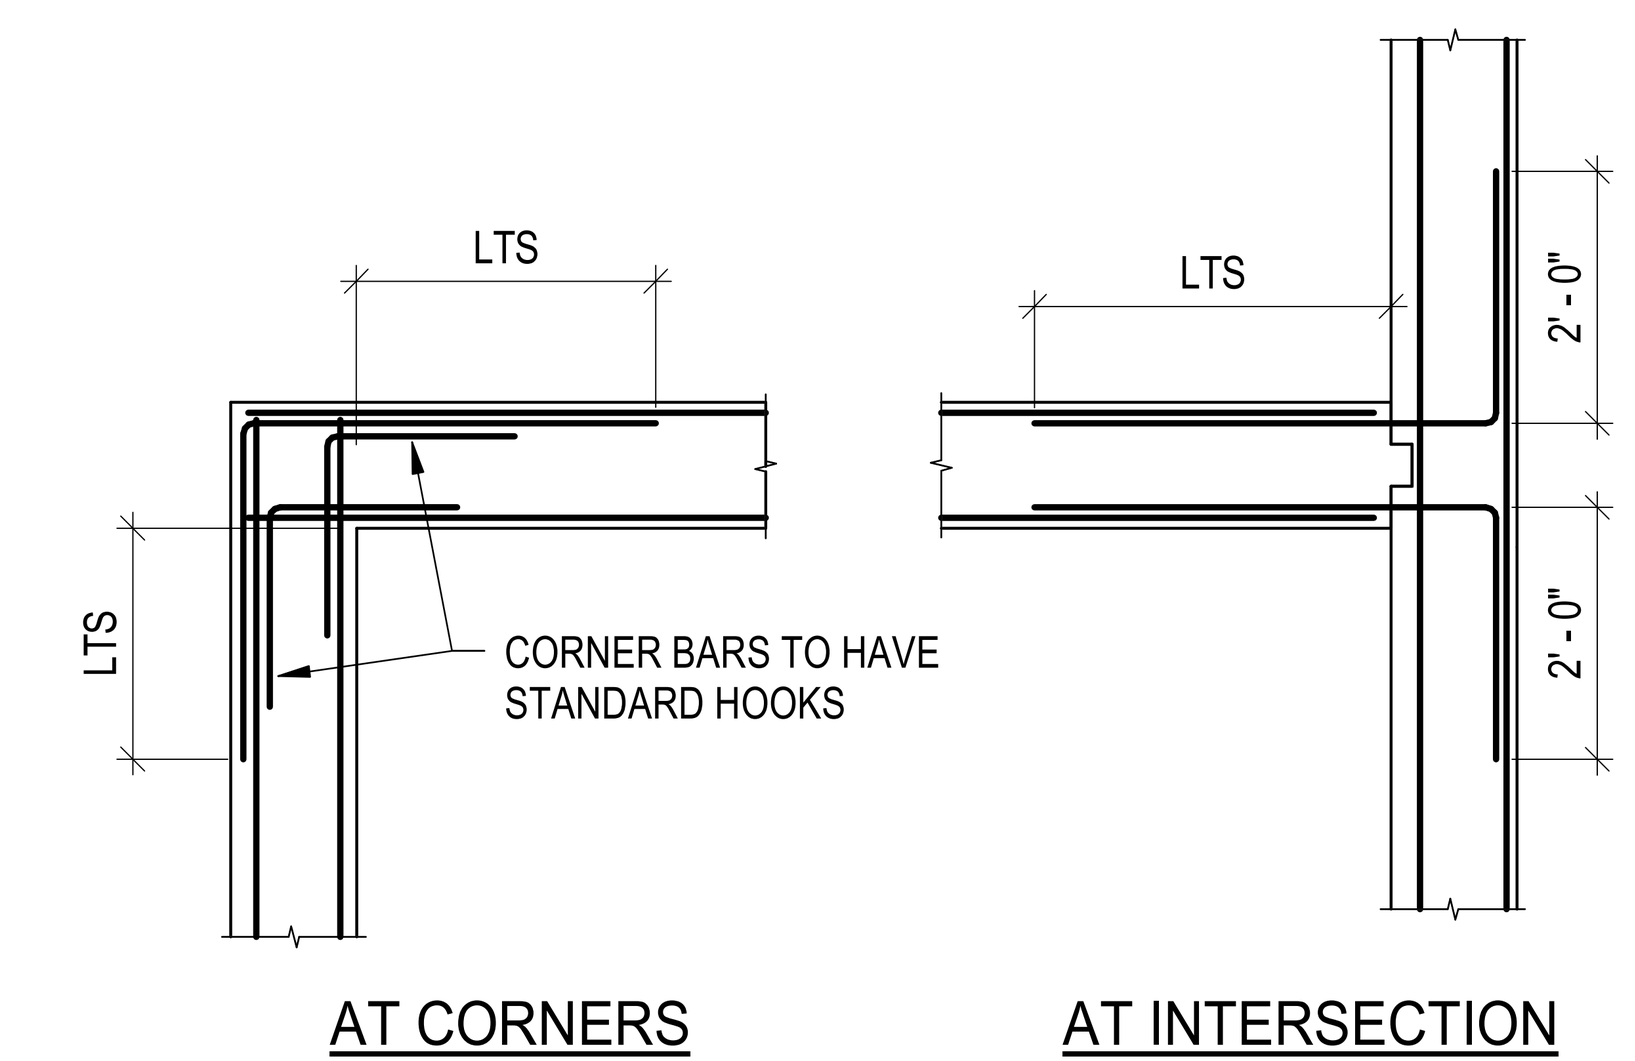

TYPICAL HORIZONTAL WALL REINF DETAIL

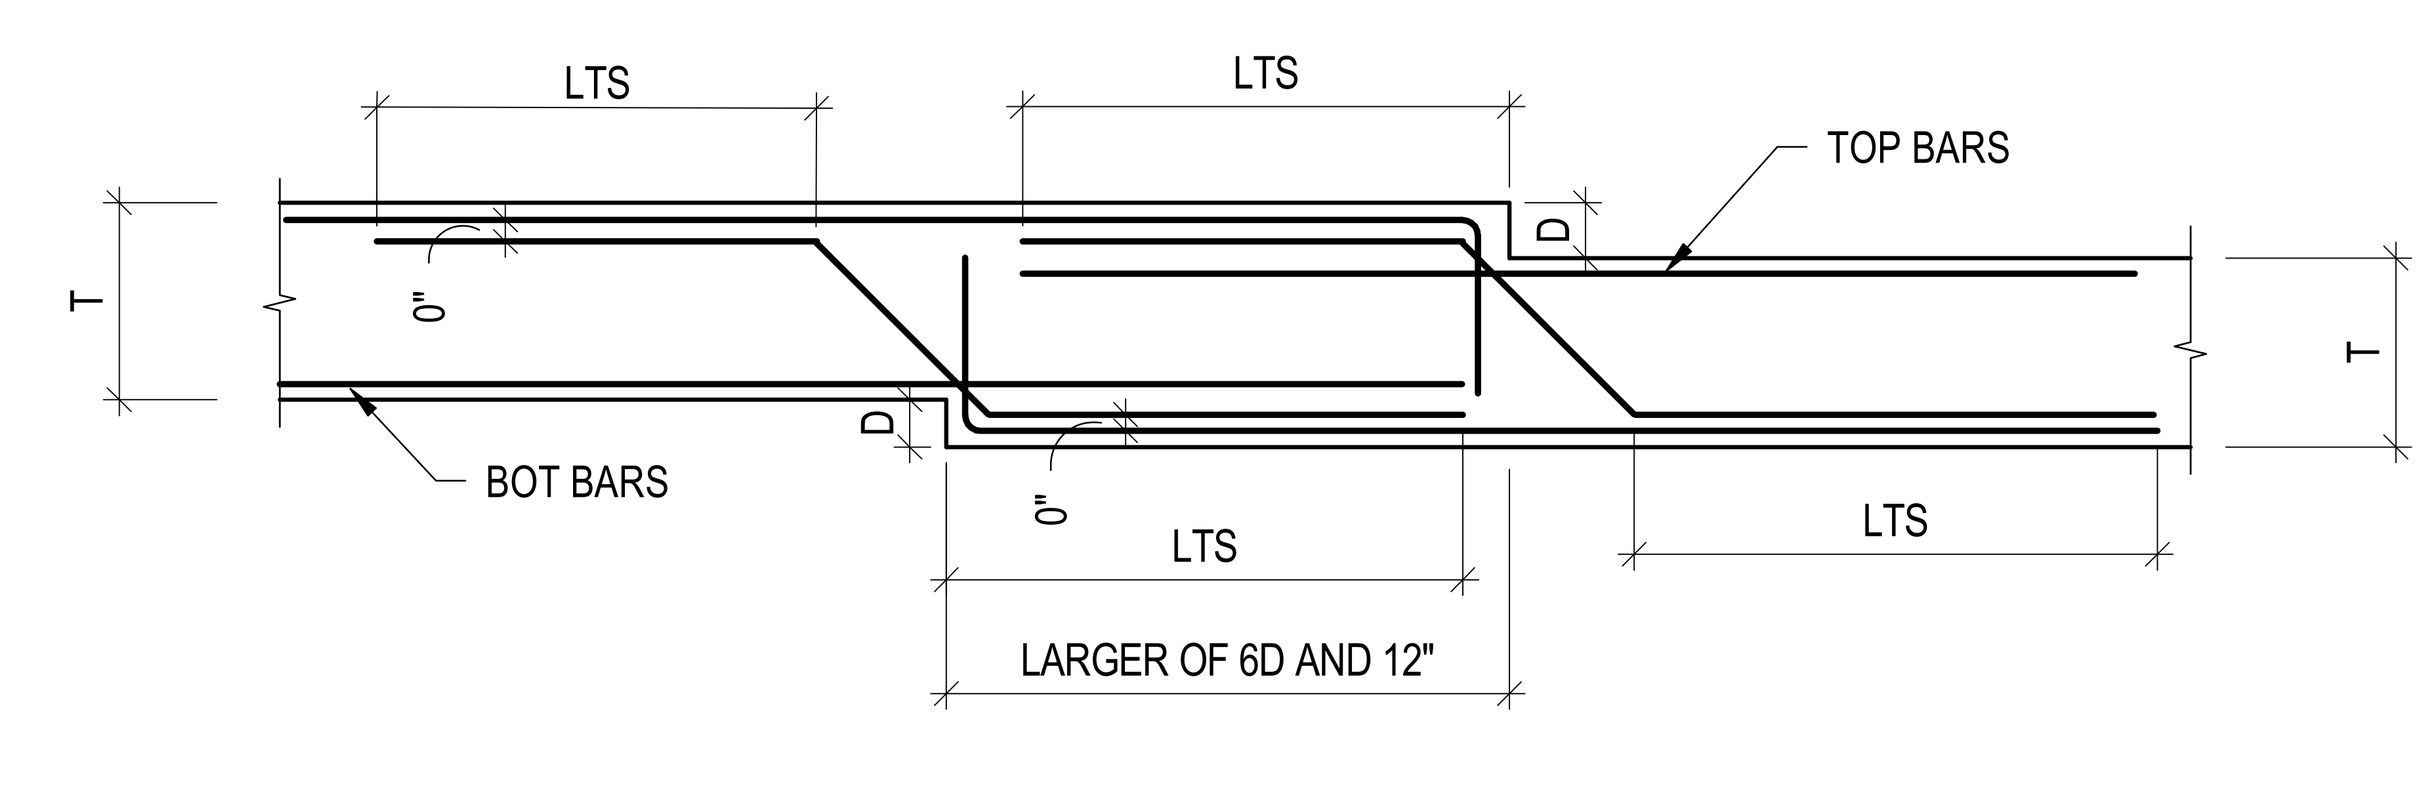

NOTE: TRANSVERSE BARS NOT SHOWN FOR CLARITY

FOR "D" NO GREATER THAN "T"

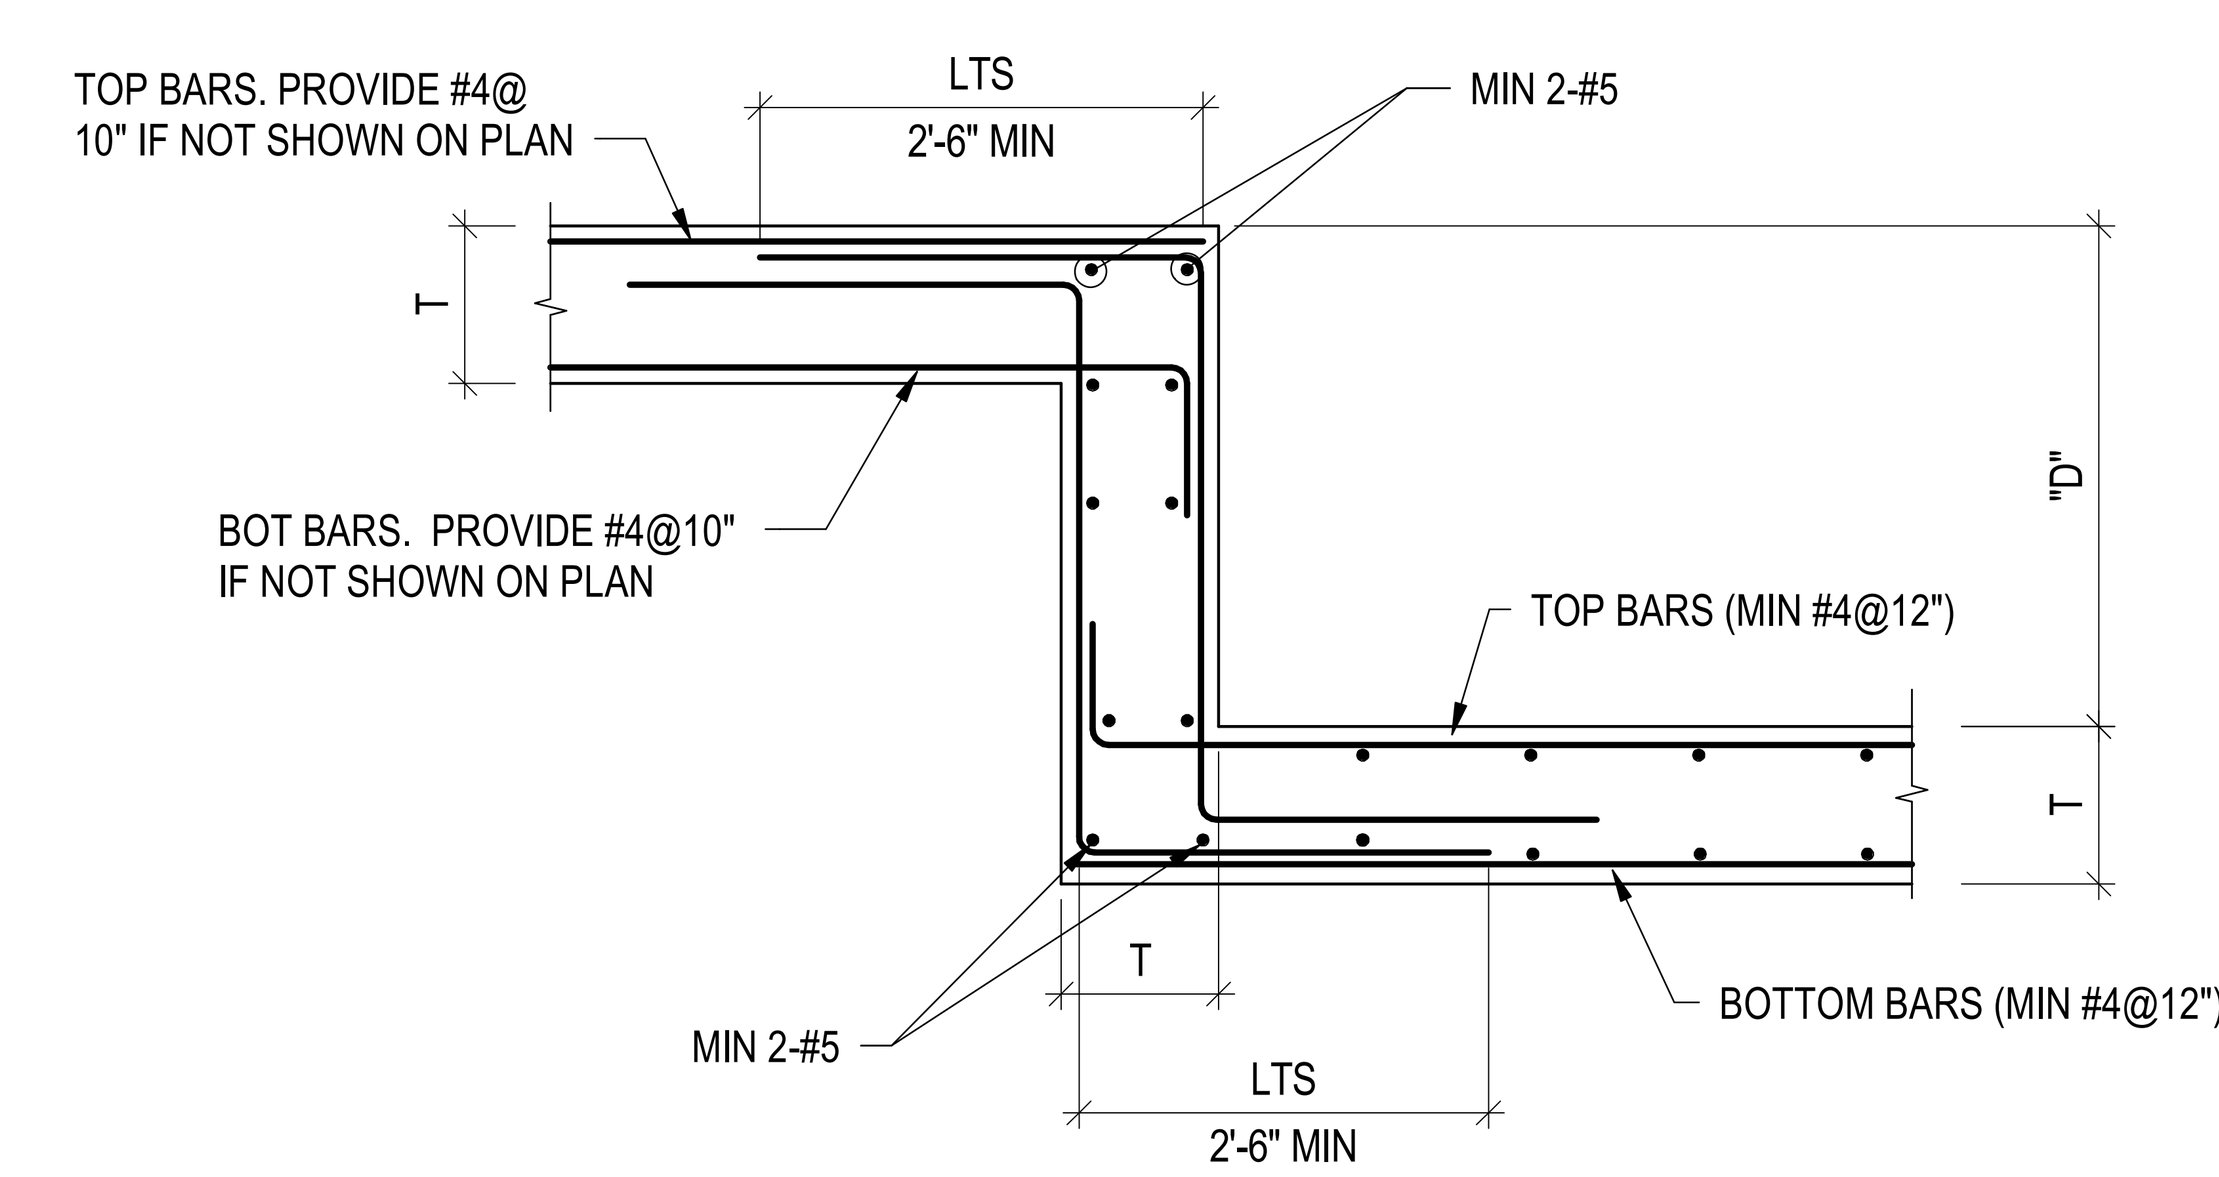

FOR "D" GREATER THAN "T"

TYPICAL STEP IN SLAB REINFORCING DETAIL

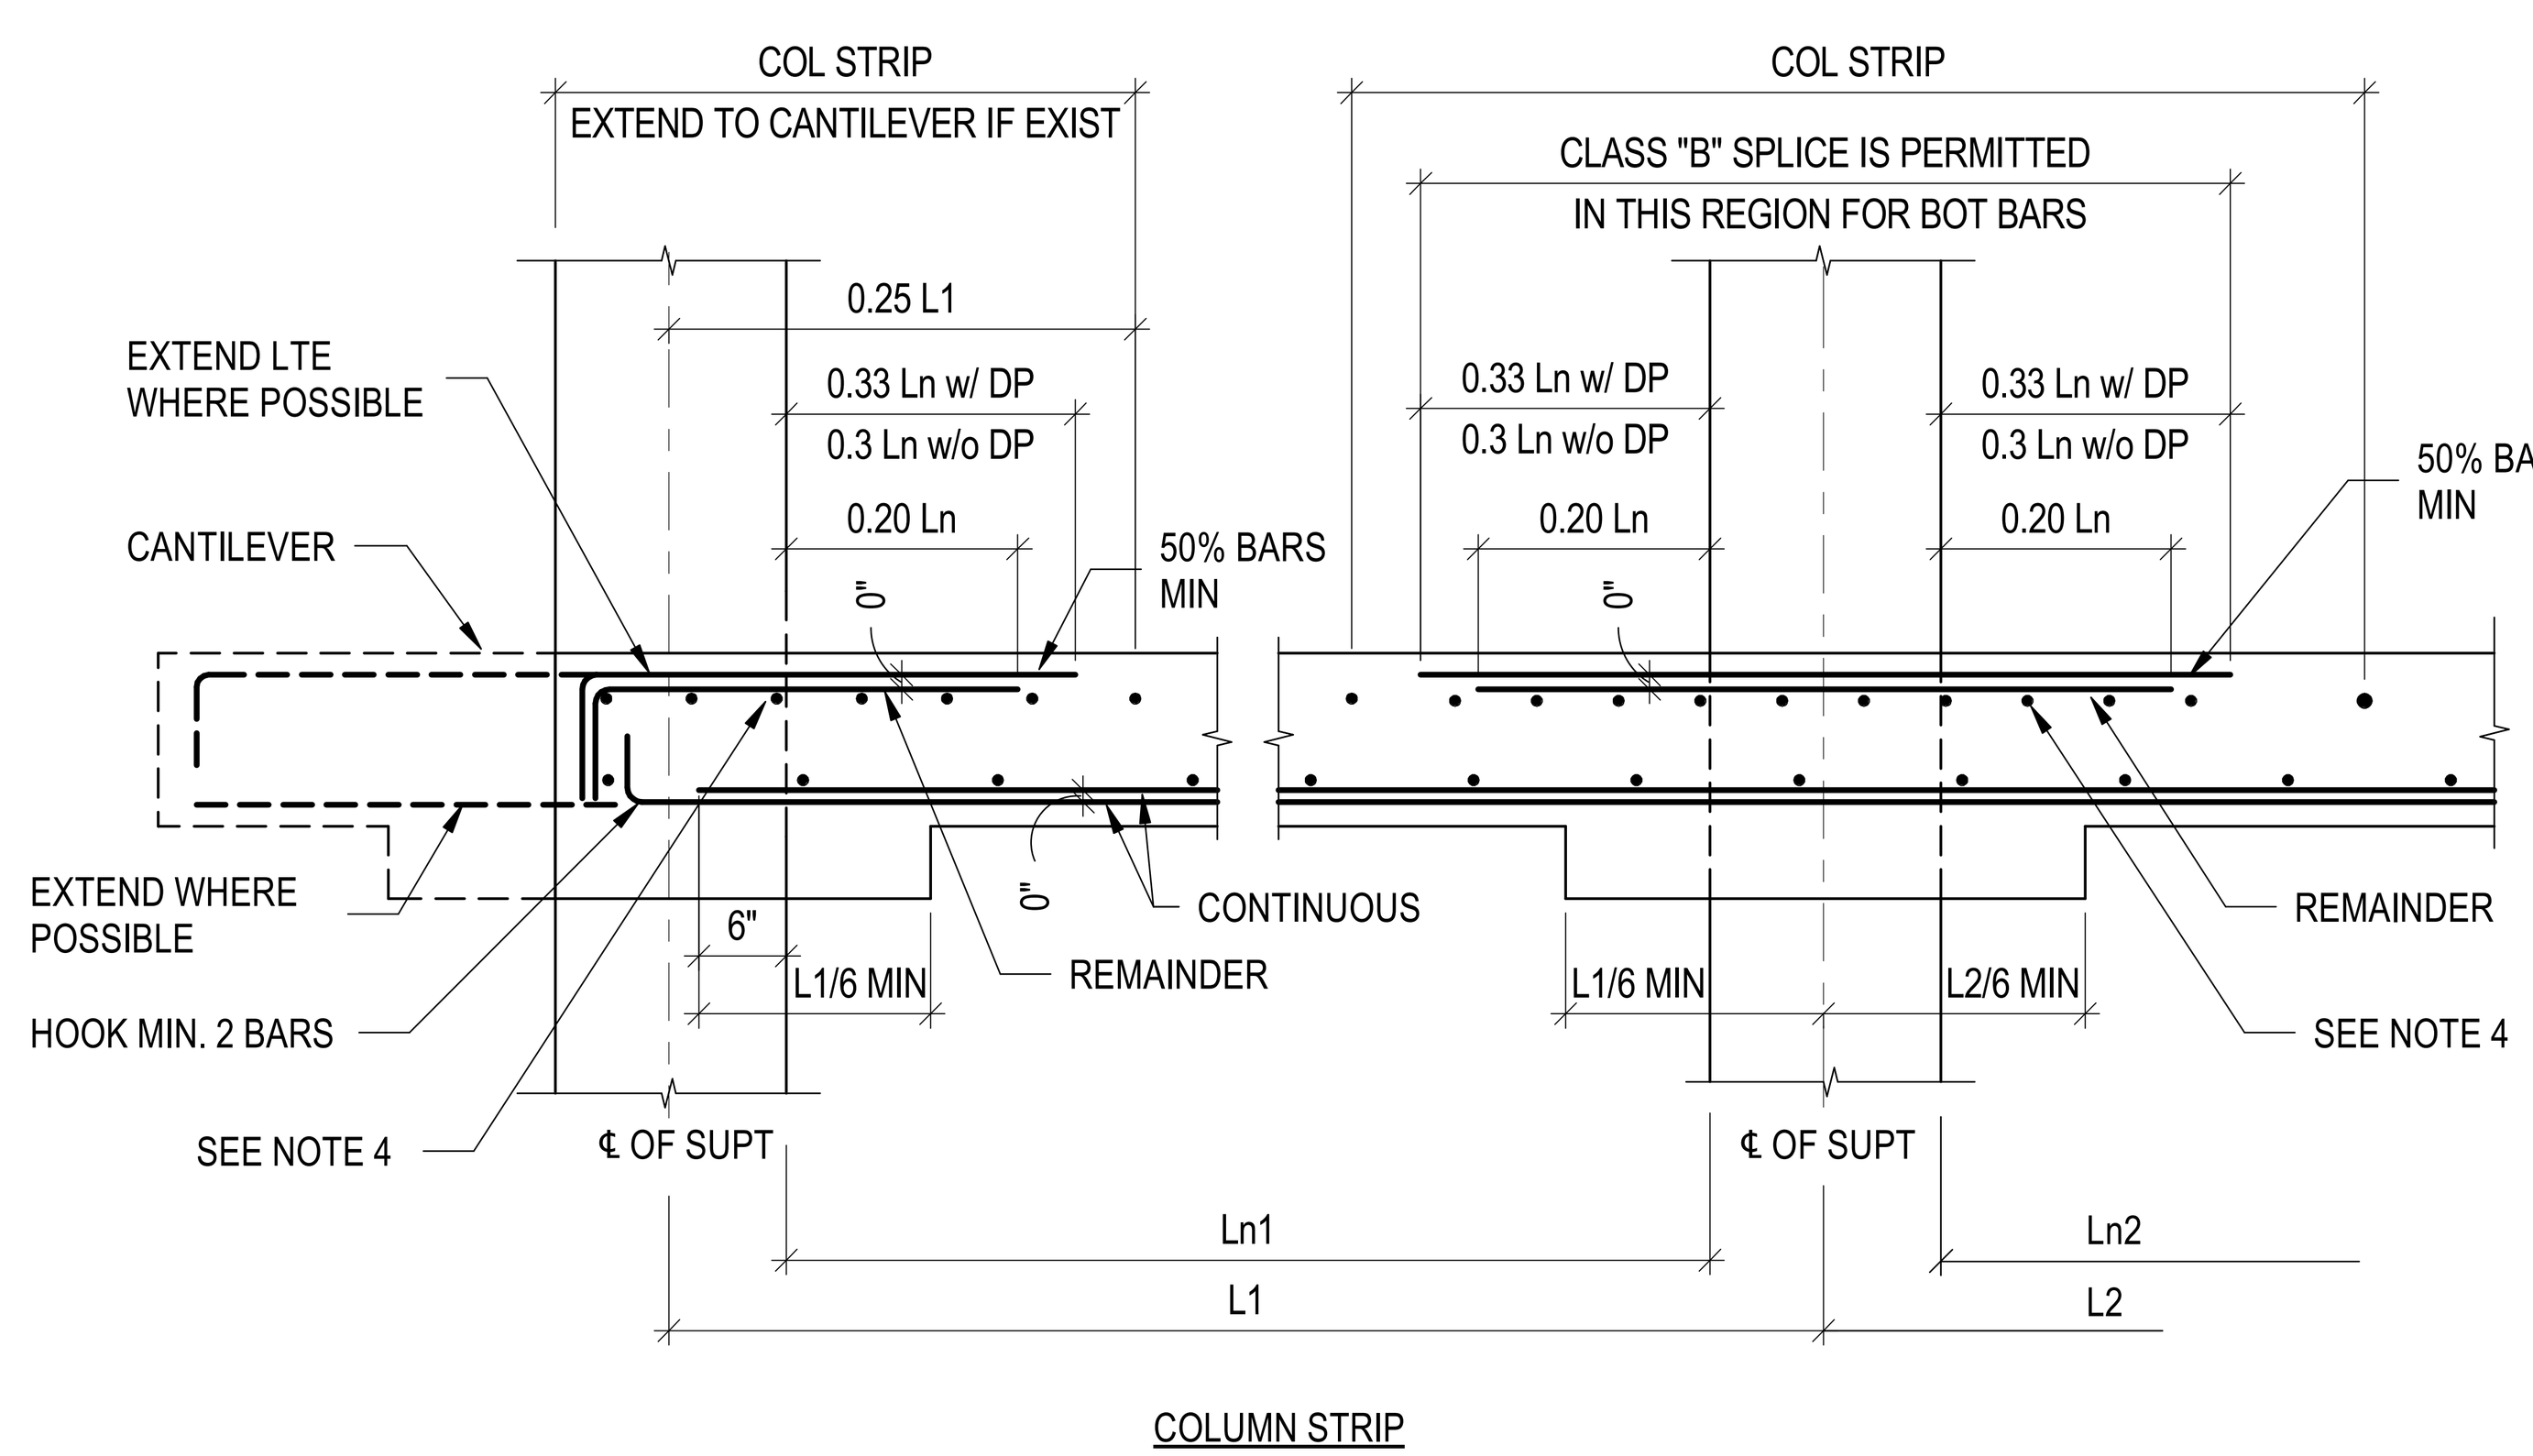

COLUMN STRIP

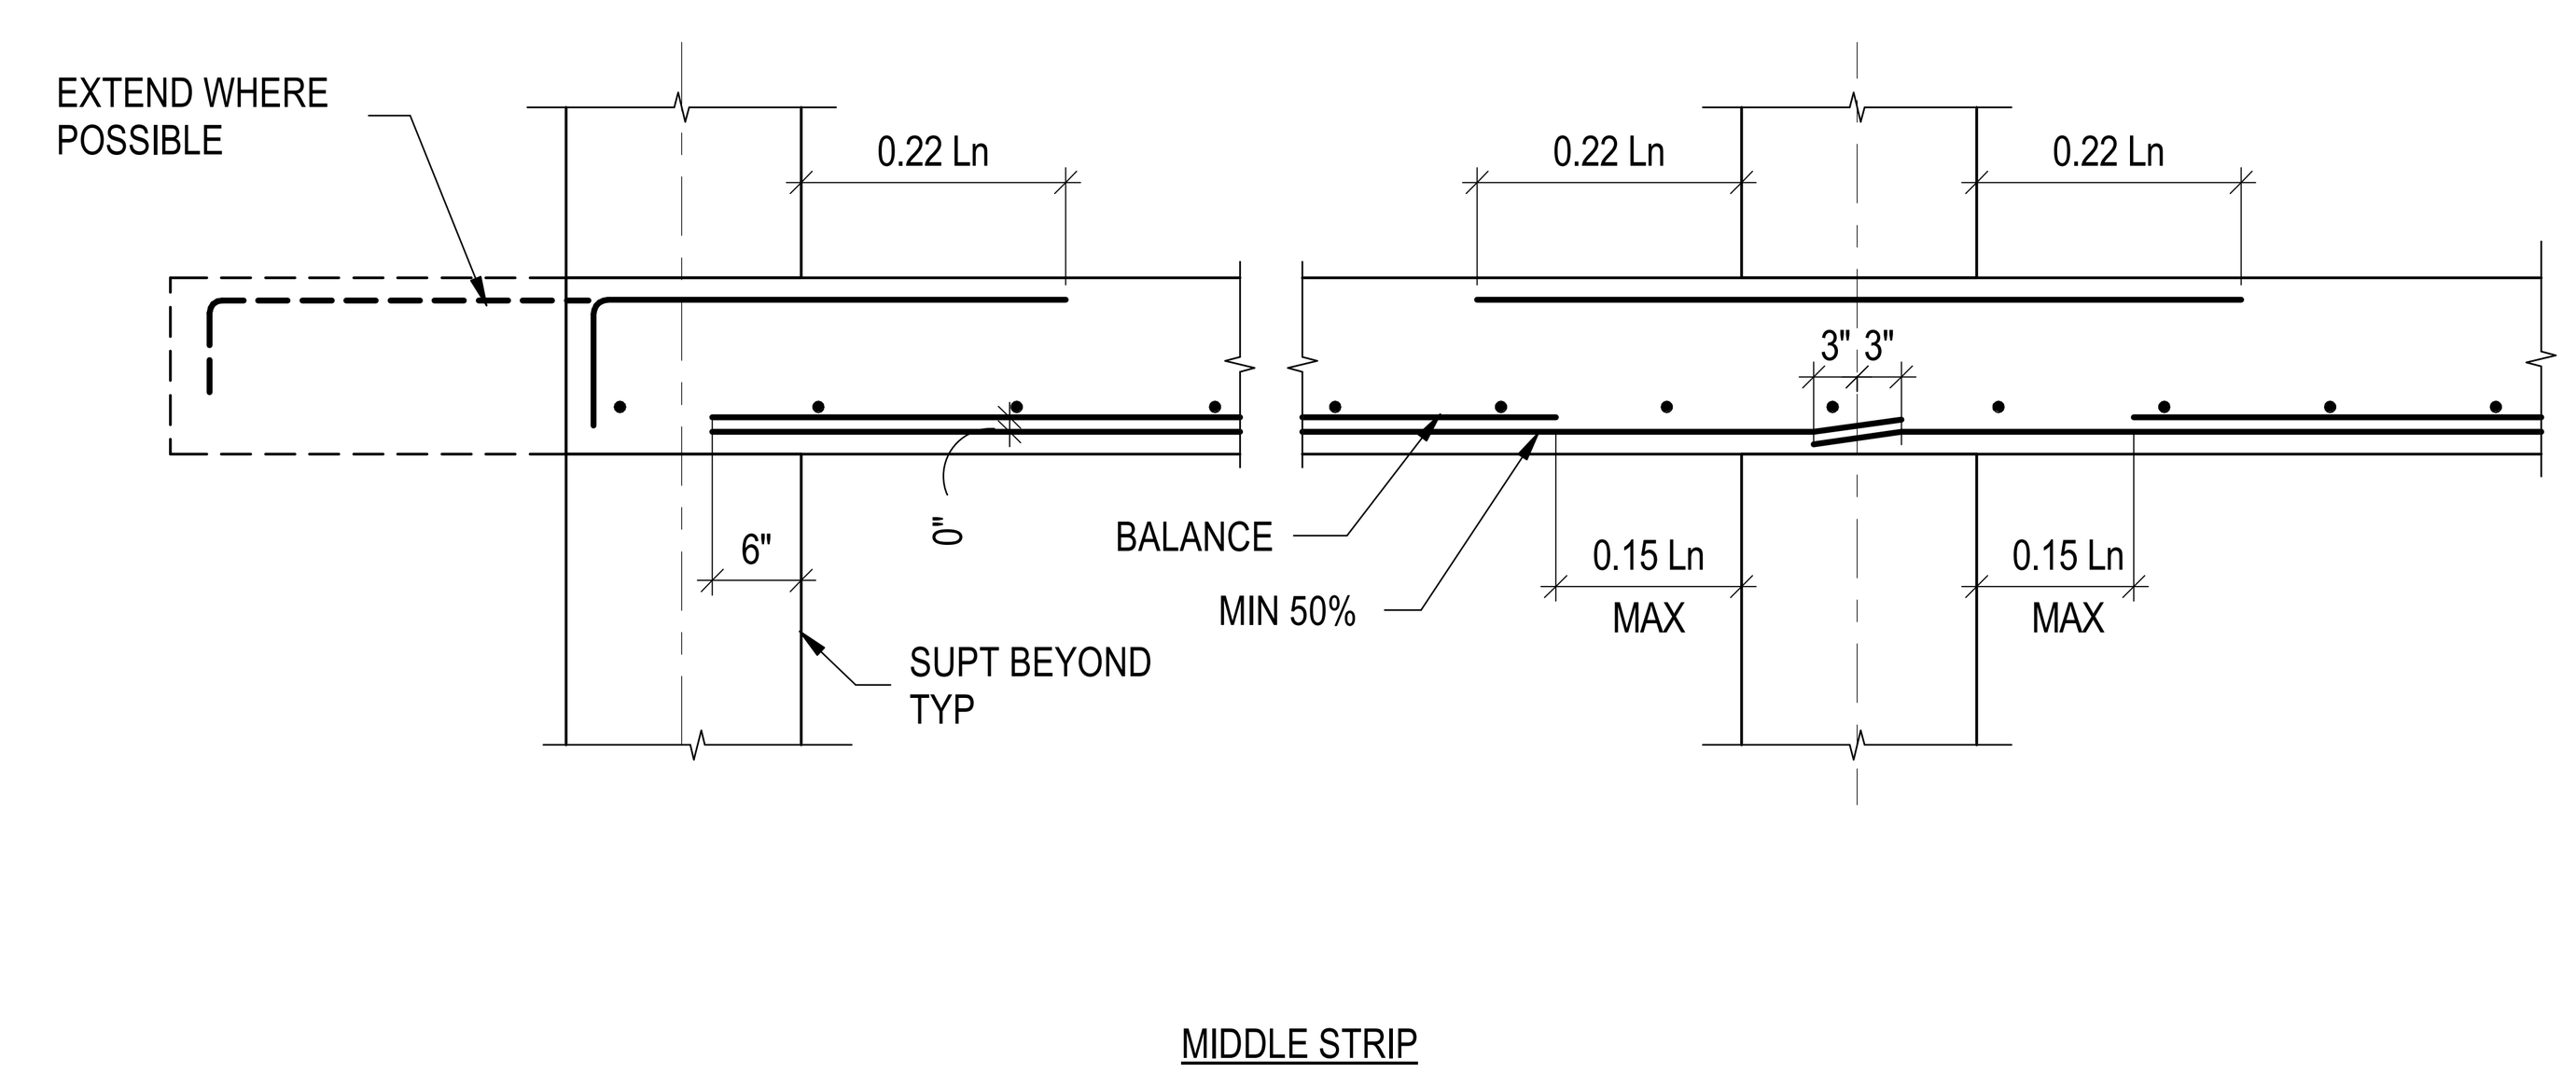

MIDDLE STRIP

NOTES:

1. Ln IS THE LONGER SPAN ON EACH SIDE OF SUPPORT.
2. DP STANDS FOR DROP PANEL.
3. TYPICAL REINFORCEMENT SHALL BE UNIFORMLY SPACED IN BOTH COLUMN STRIPS AND MIDDLE STRIPS.
4. AT LEAST 50% OF ADD'L COLUMN STRIP TOP BARS SHOWN ON PLANS SHALL BE PLACED WITHIN A WIDTH EQUAL TO COLUMN WIDTH + 3 x SLAB THICKNESS. THE BALANCE SHALL BE DISTRIBUTED WITHIN THE COLUMN STRIP AND ALTERNATE WITH TYPICAL TOP REINFORCEMENT.
5. DROP PANELS SHALL BE PROVIDED ONLY WHEN INDICATED ON FRAMING PLANS.

TYPICAL TWO WAY SLAB DETAIL

SEAL

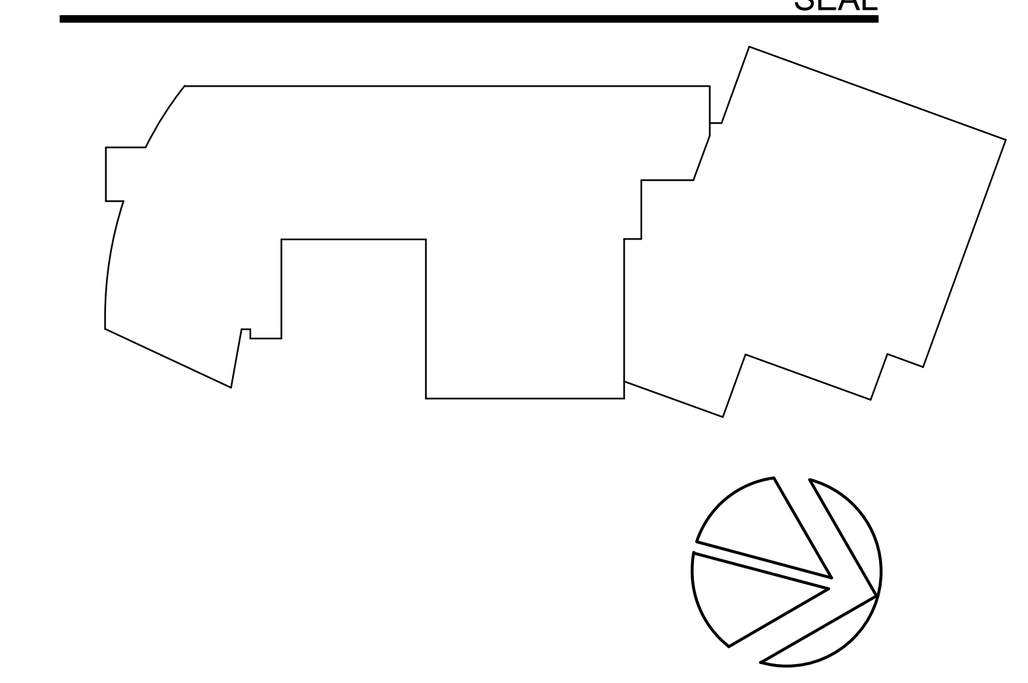

KEY PLAN

PERKINS EASTMAN
One Thomas Circle NW, Suite 200
Washington, DC 20005
T. +1 202 861 1325
F. +1 202 861 1326

Owner:
Sidwell Friends School
3825 Wisconsin Ave NW, Washington DC 20016

Construction Manager:
Advanced Project Management, Inc (APM)
4530 Walney Rd, Ste 202, Chantilly, VA 20151

Civil / Site:
Bowman Consulting Group, Ltd
888 17th St NW, Suite 510, Washington, DC 20006

Landscape:
Natural Resources Design, Inc (NRD)
1009 Shepherd Street NE, Washington, DC 20017

Structural:
Yun Associates LLC
1050 Connecticut Ave NW, Suite 500, Washington, DC 20036

MEP / FP / Lighting:
CMTA Inc
220 Lexington Green Circle, Suite 600, Lexington, KY 40503

AV / IT / Telecom / Security:
Educational Systems Planning (ESP)
2448 Holly Avenue, Suite 302, Annapolis, MD 21401

Food Service
Nyikos-Garcia Foodservice Design, Inc
7146 Starmount Way, New Market, MD 21774

Accessibility Consultant:
Galbo Wolf LLC
4410 Massachusetts Ave NW, #240, Washington, DC 20016

Acoustics:
Polysonics Corp
555 Hospital Drive, Warrenton, VA 20186

Building Envelope Consultant:
Sustainable Building Partners LLC
2701 Prosperity Ave, Suite 105, Fairfax, VA 22031

Code Consultant:
Campbell Code Consulting LLC
7834 Taggart Ct, Elkridge, MD 21075

Specifications:

PROJECT TITLE:

SIDWELL FRIENDS NEW LOWER SCHOOL AT DC CAMPUS

3825 WISCONSIN AVE NW
WASHINGTON, DC 20016

PROJECT No: 2025008

DRAWING TITLE:

TYPICAL DETAILS

SCALE: As indicated

S-207

BID SET
10/29/2025

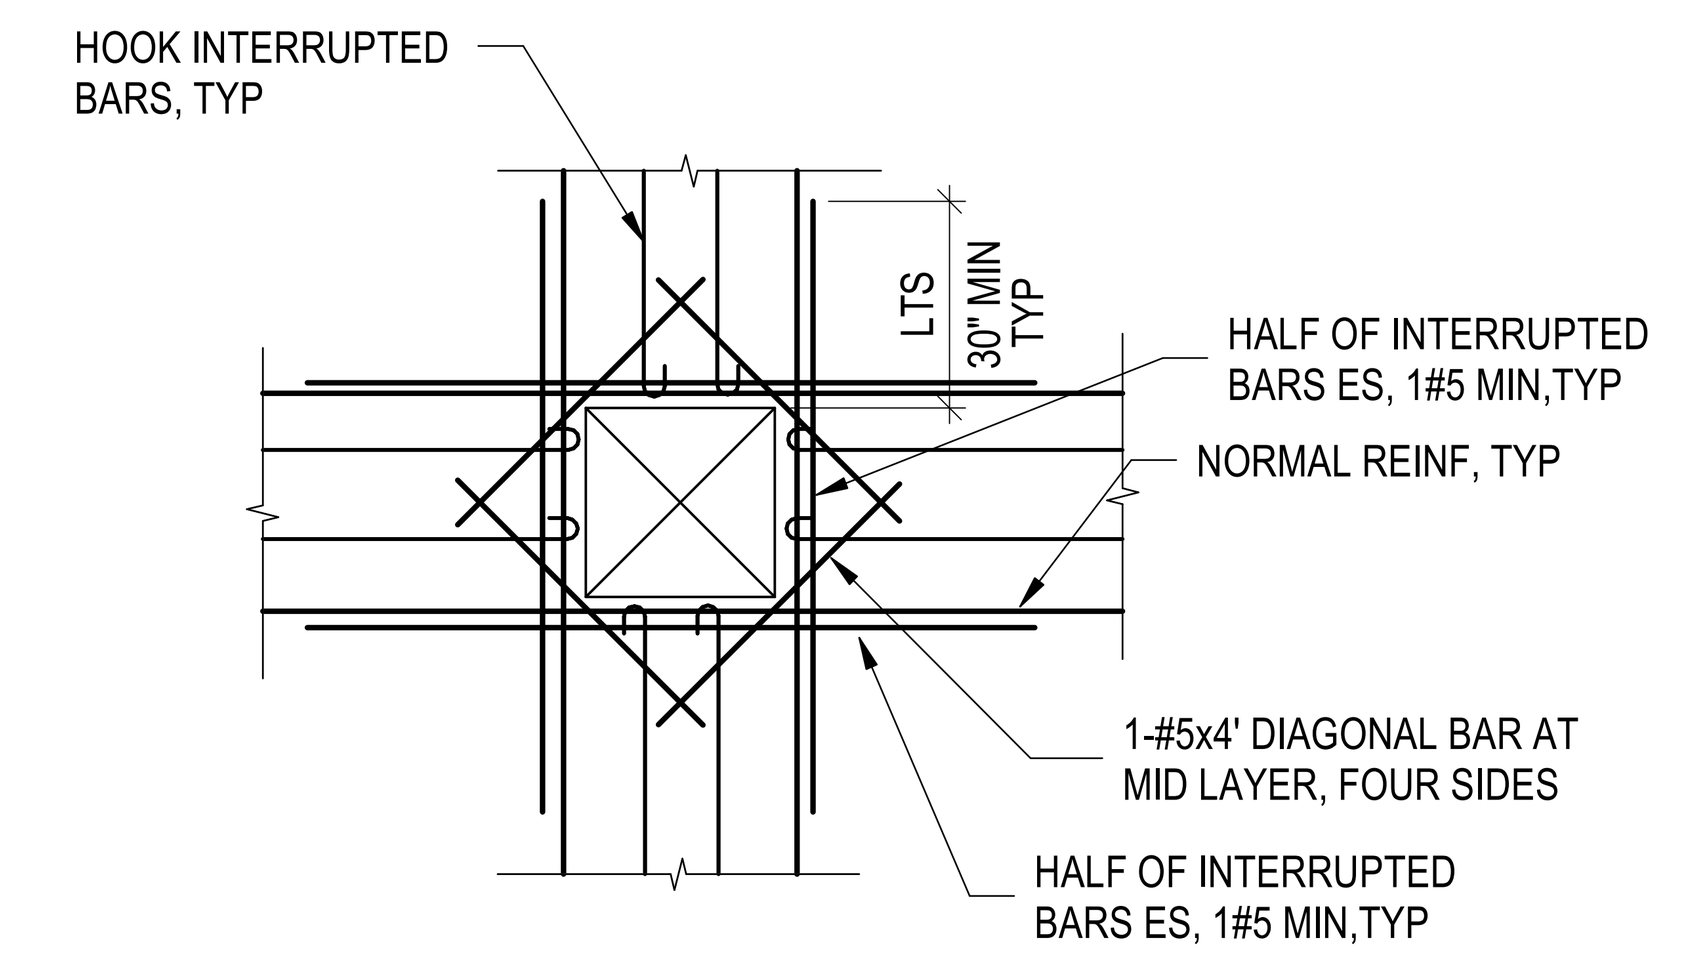

NOTES:

1. OMIT ADDED BARS WHERE EACH SIDE OF OPENING IS 8" OR LESS. RUN NORMAL SLAB REINFORCEMENT BY SIDE OF OPENING.
2. WHERE ADDED BARS CANNOT BE EXTENDED SUCH AS AT EOS, HOOK BARS AT END.

TYPICAL SLAB OPENING REINFORCING DETAIL

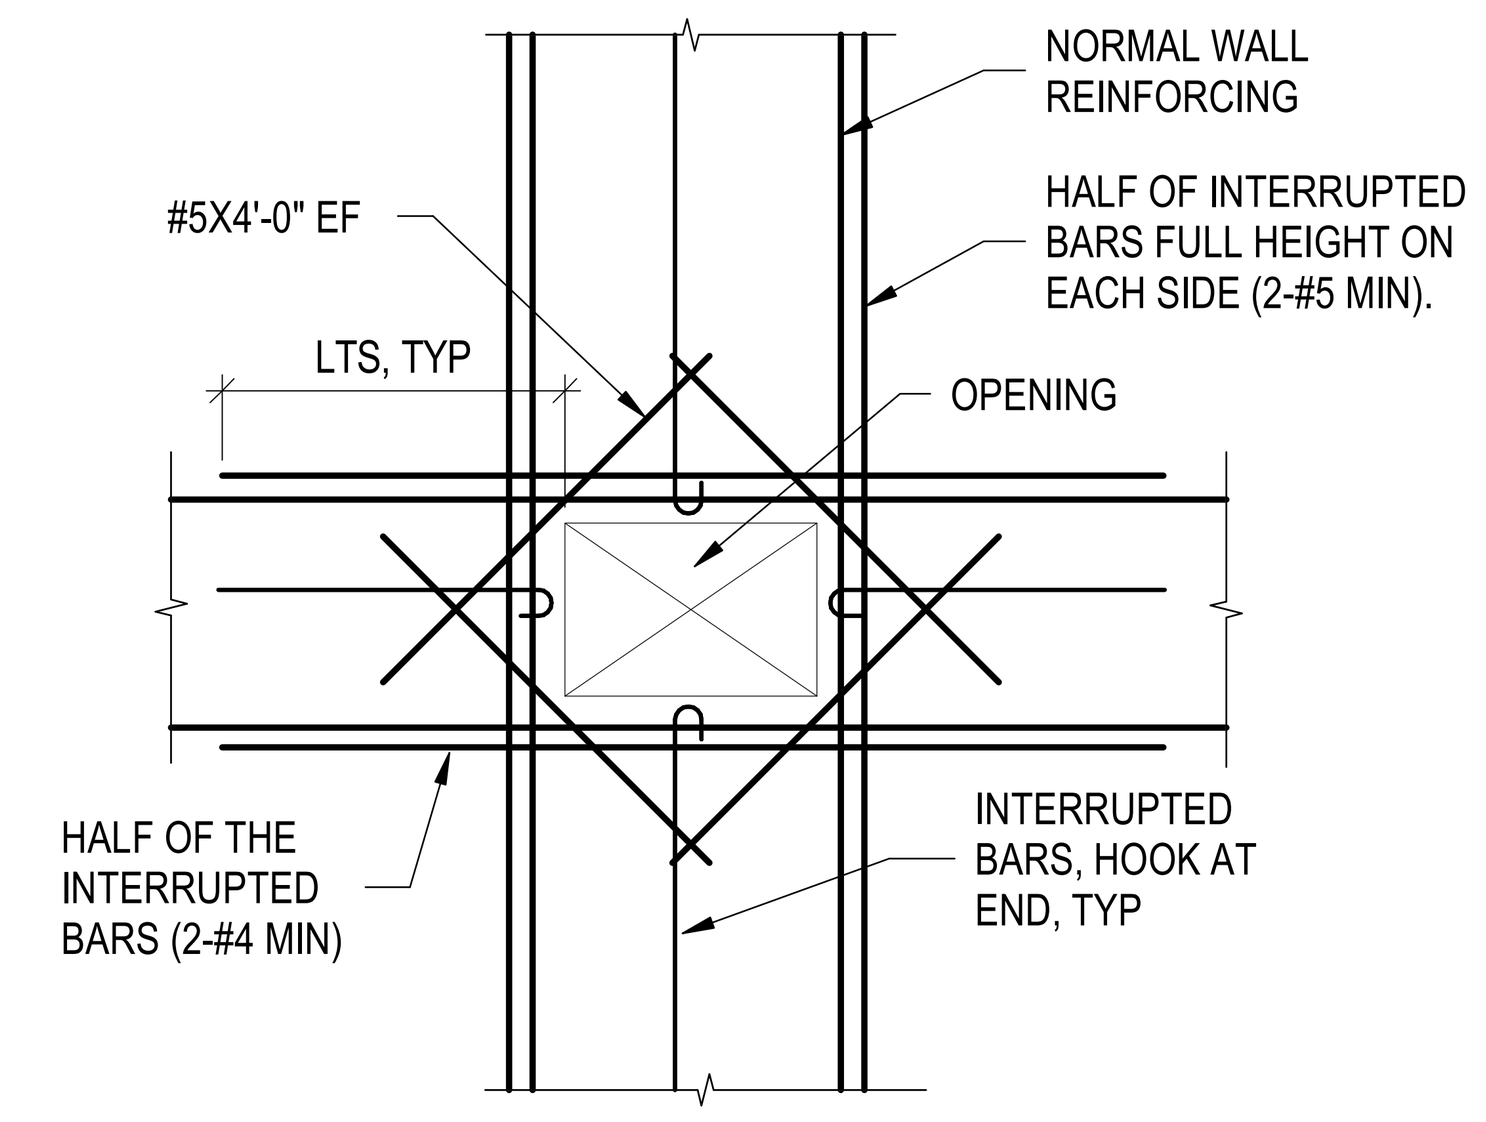

TYPICAL WALL OPENING REINFORCING DETAIL

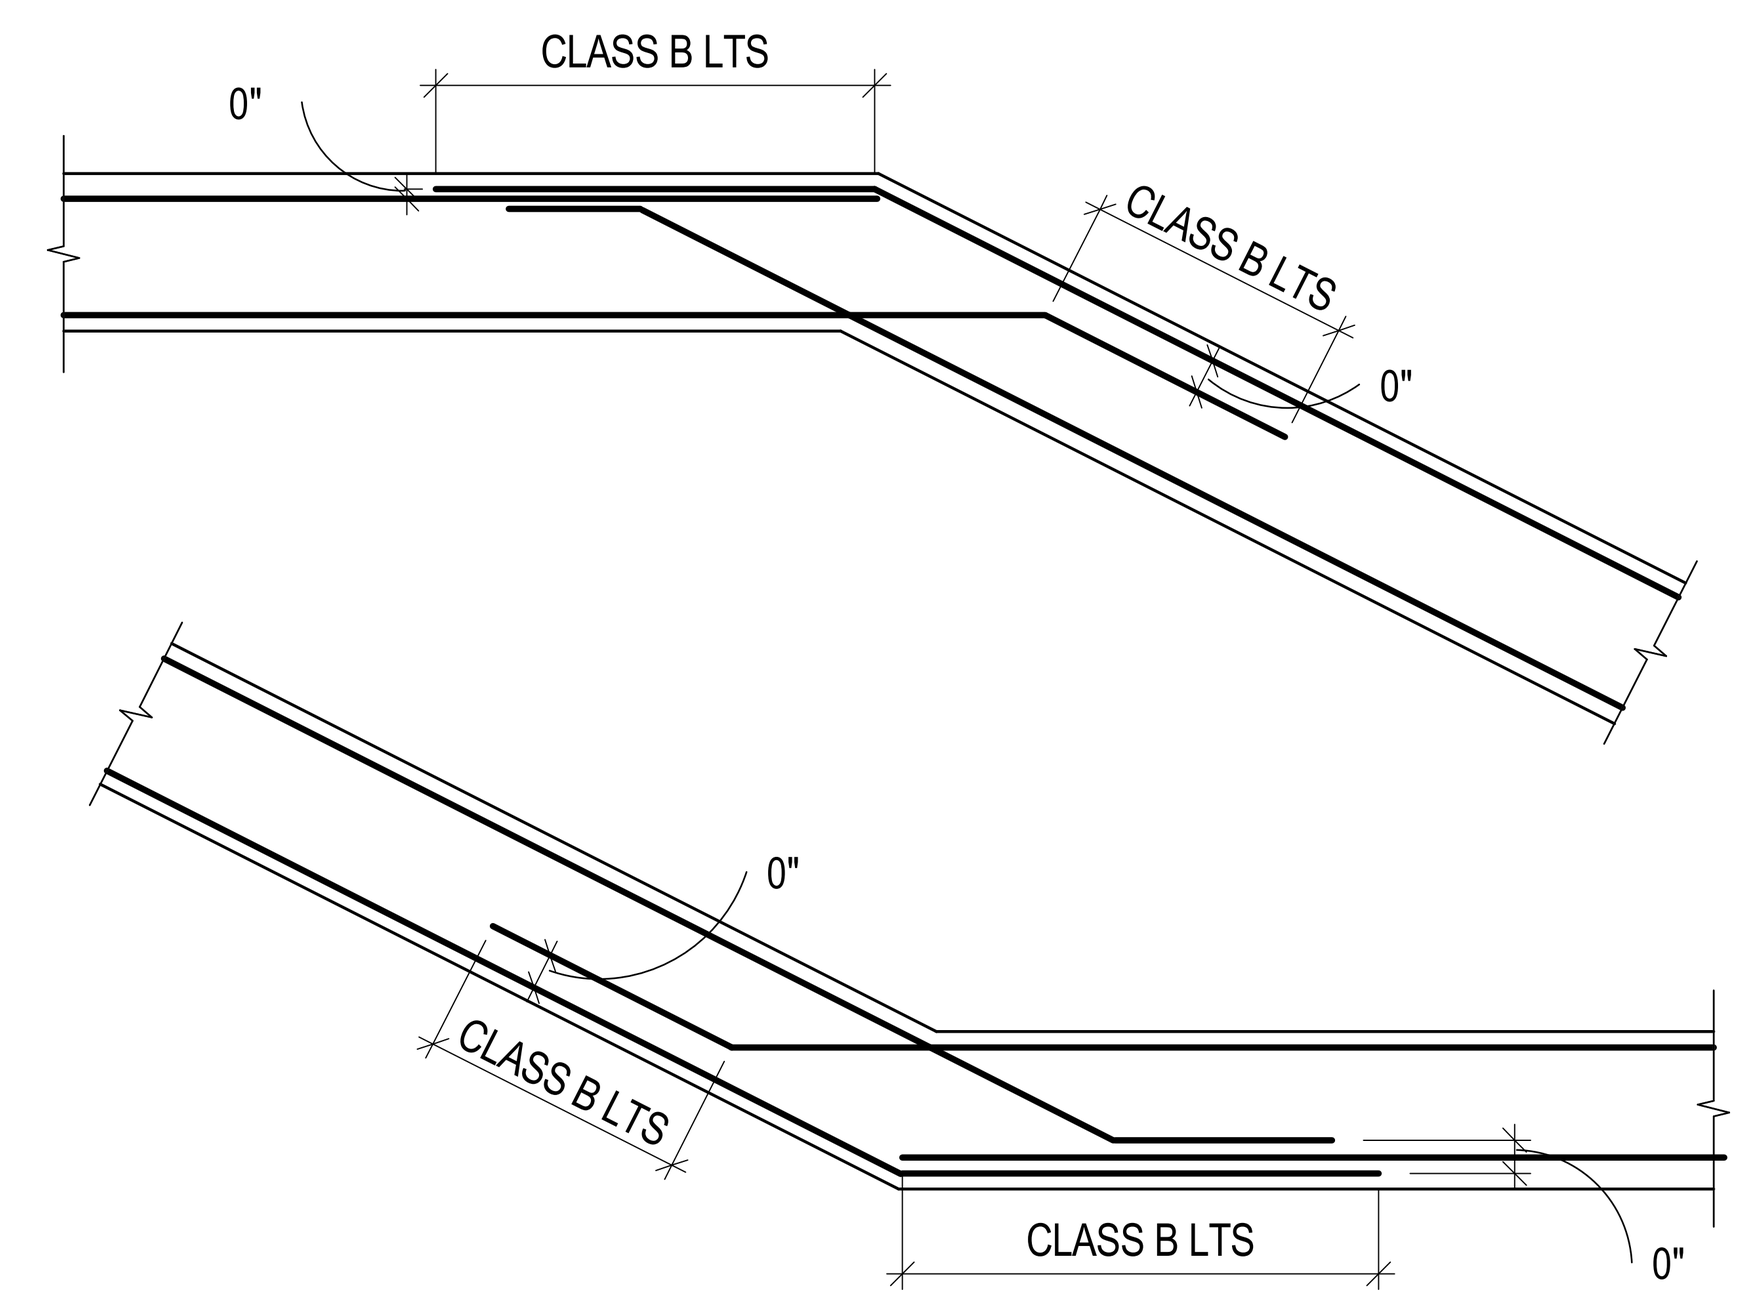

TYPICAL SLAB BEND REINFORCING DETAIL

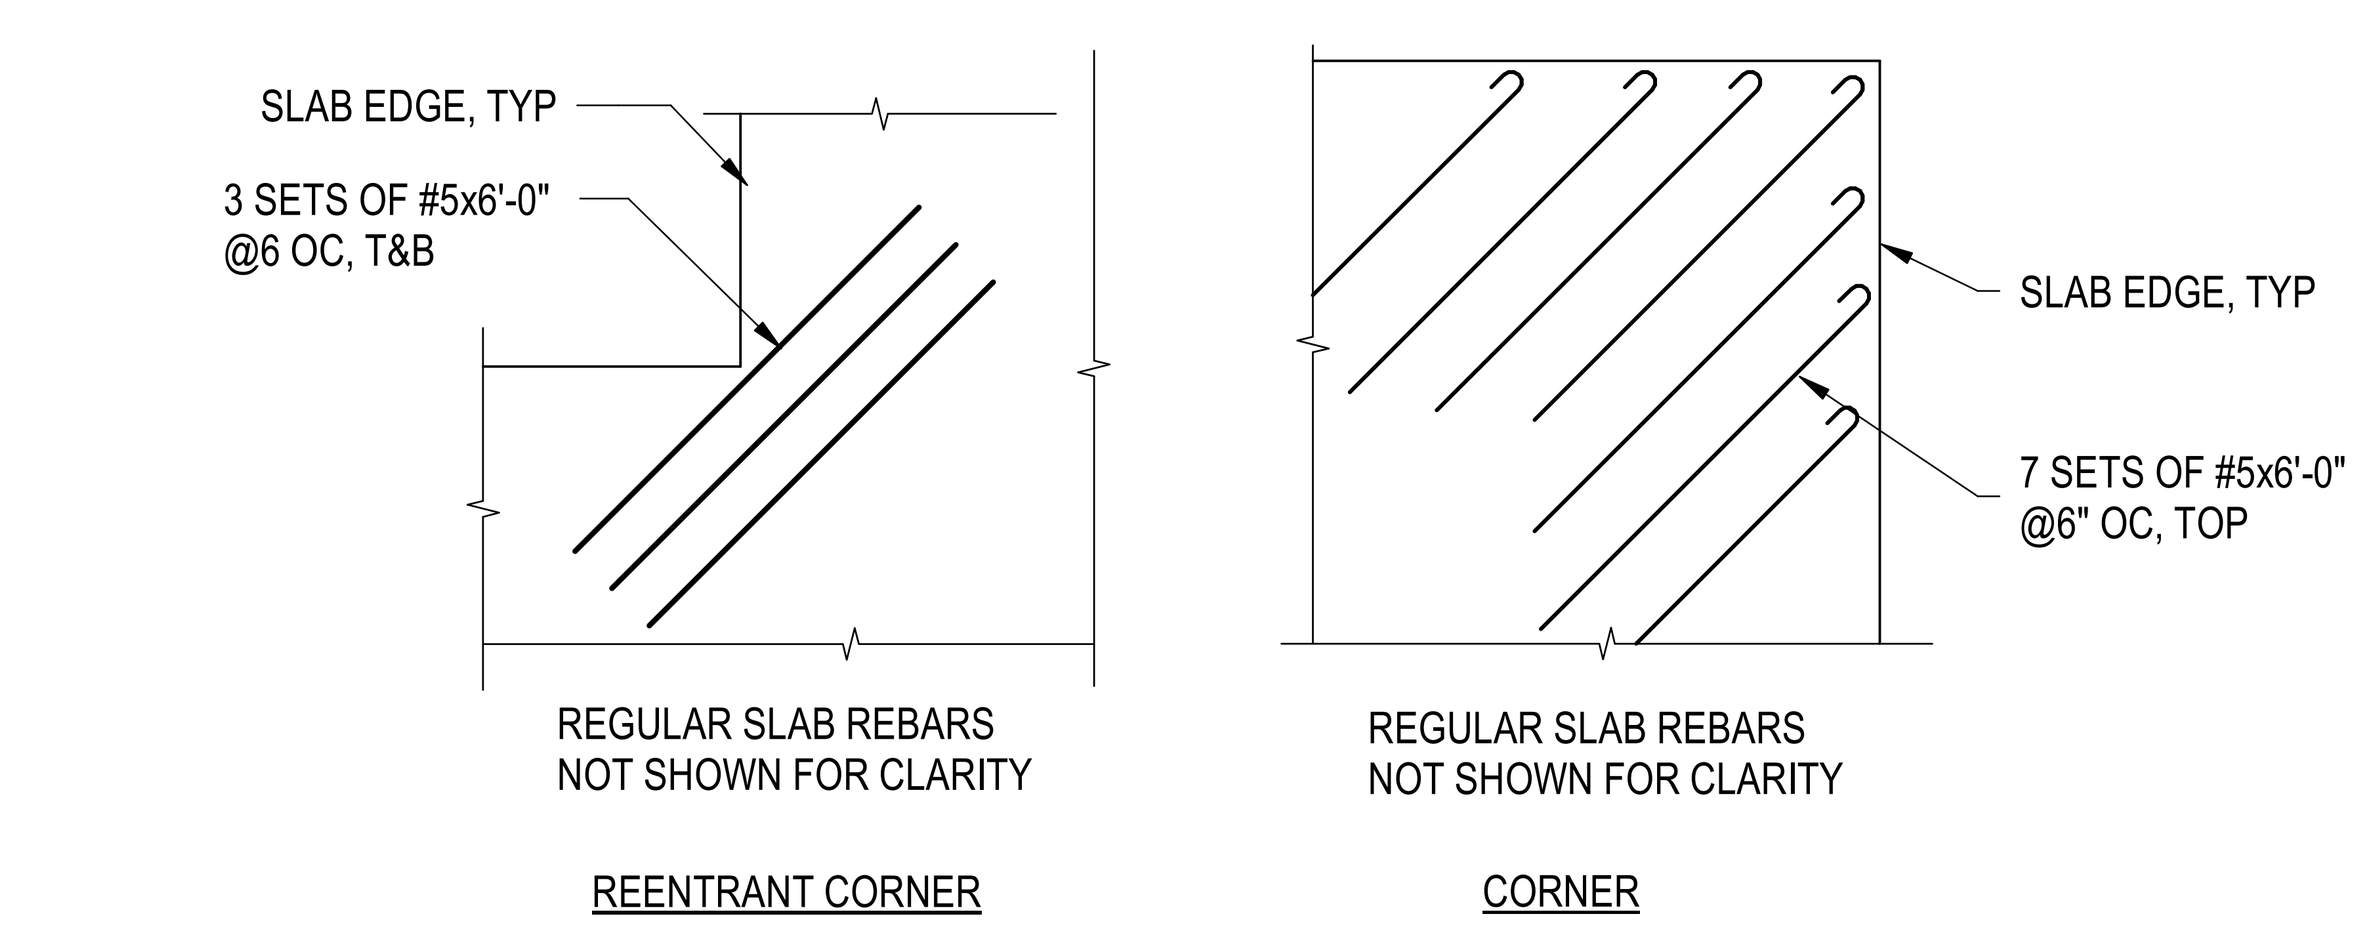

TYPICAL SLAB CORNER REINFORCING DETAIL

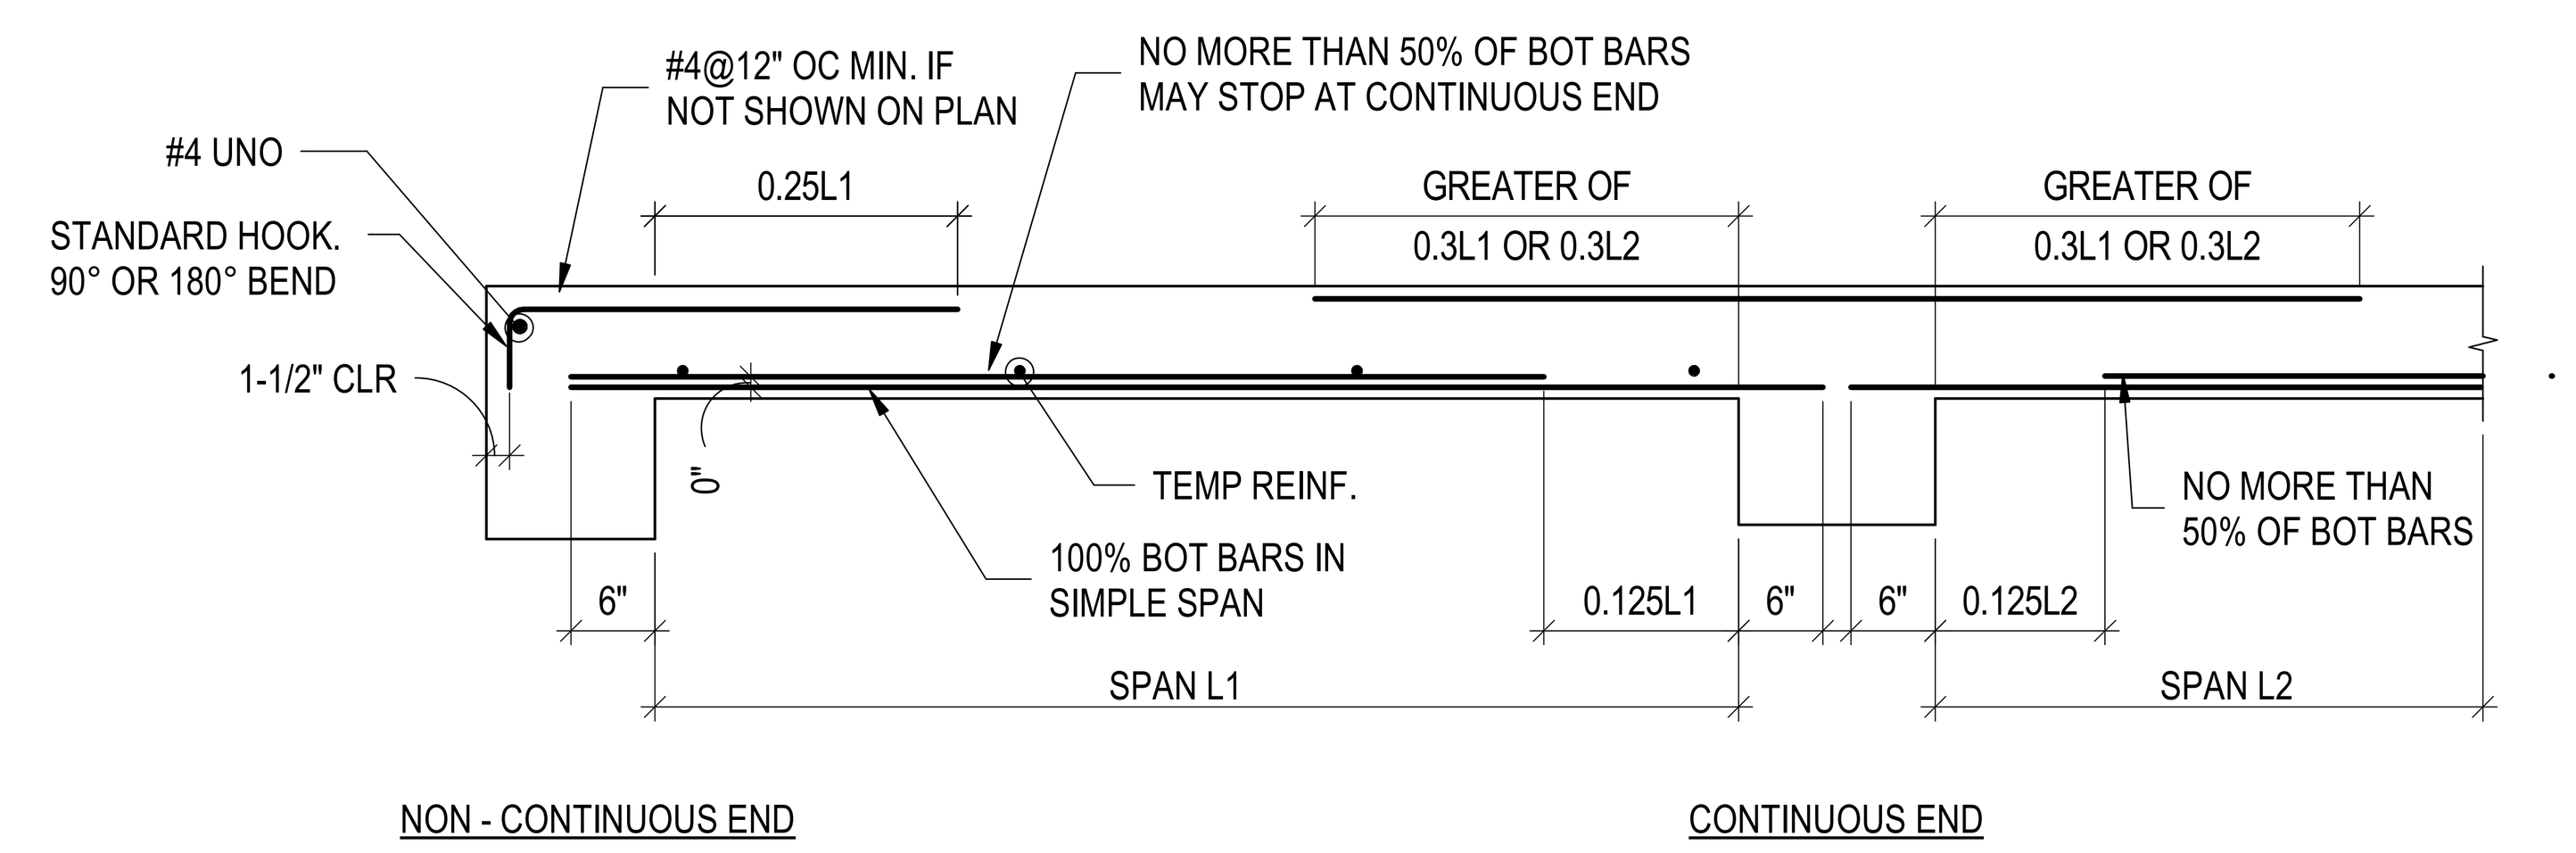

ONE WAY SLAB TEMP REINF		
THICKNESS		REINFORCEING
AT LEAST	LESS THAN	
4"	5"	#3@12"
5"	6"	#4@18"
6"	7"	#4@16"
7"	8"	#4@14"
8"	9"	#4@12"
9"	10"	#4@11"
10"	12"	#5@12"
12"	14"	#5@12"
14"	16"	#5@10"
16"	18"	#5@9"

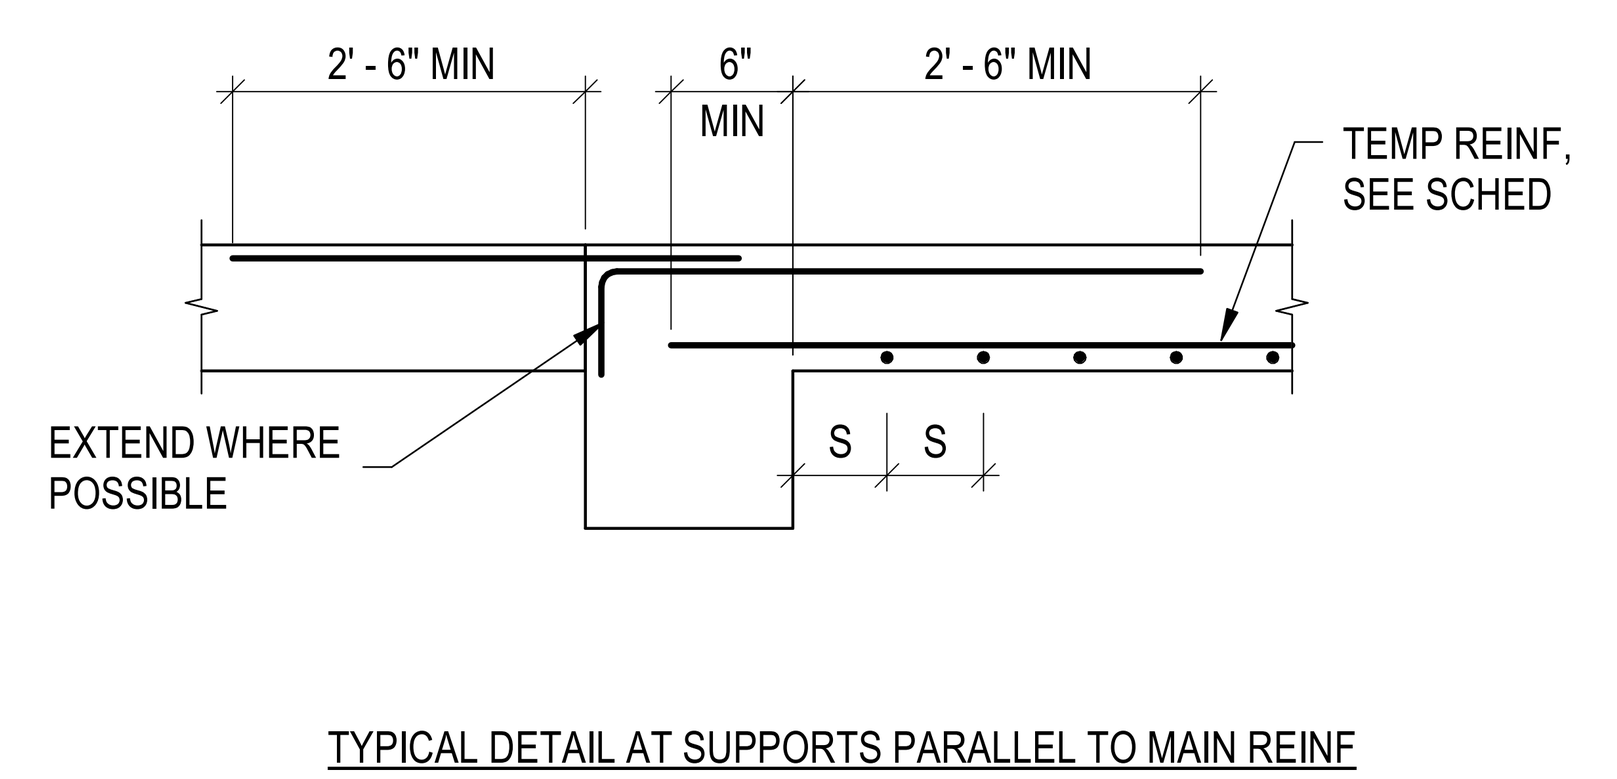

TYPICAL DETAIL AT SUPPORTS PARALLEL TO MAIN REINF

TYPICAL ONE WAY SLAB DETAIL

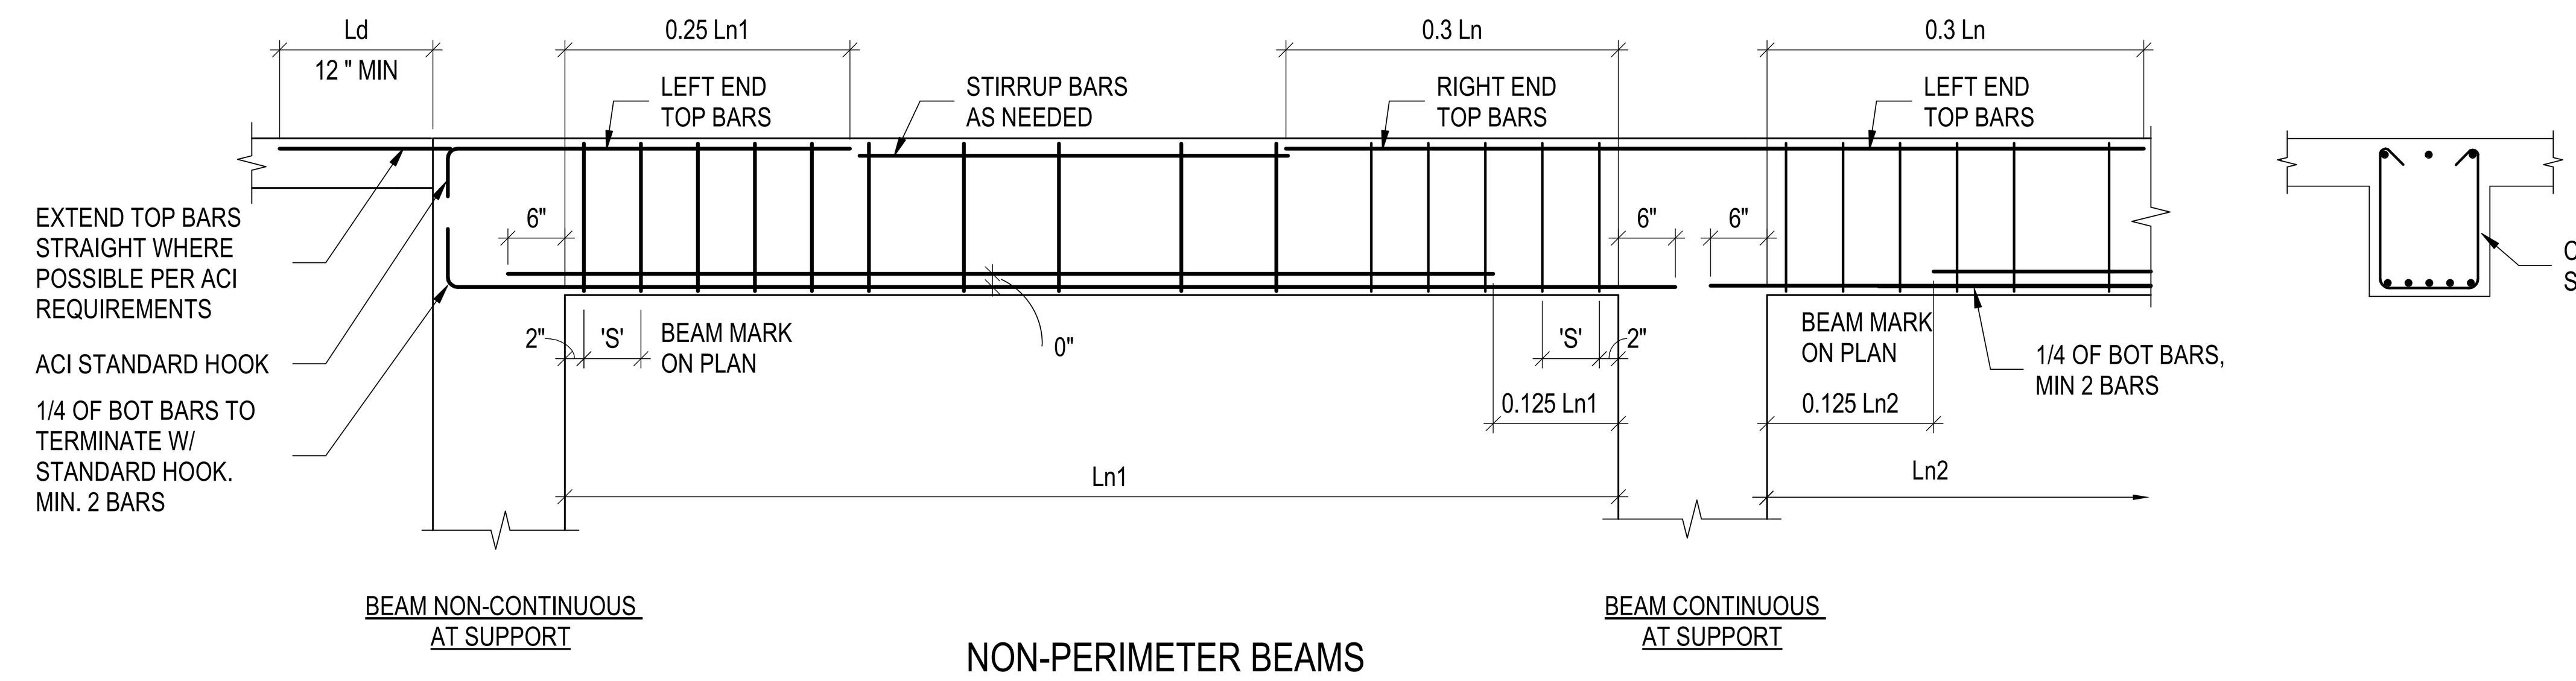

NON-PERIMETER BEAMS

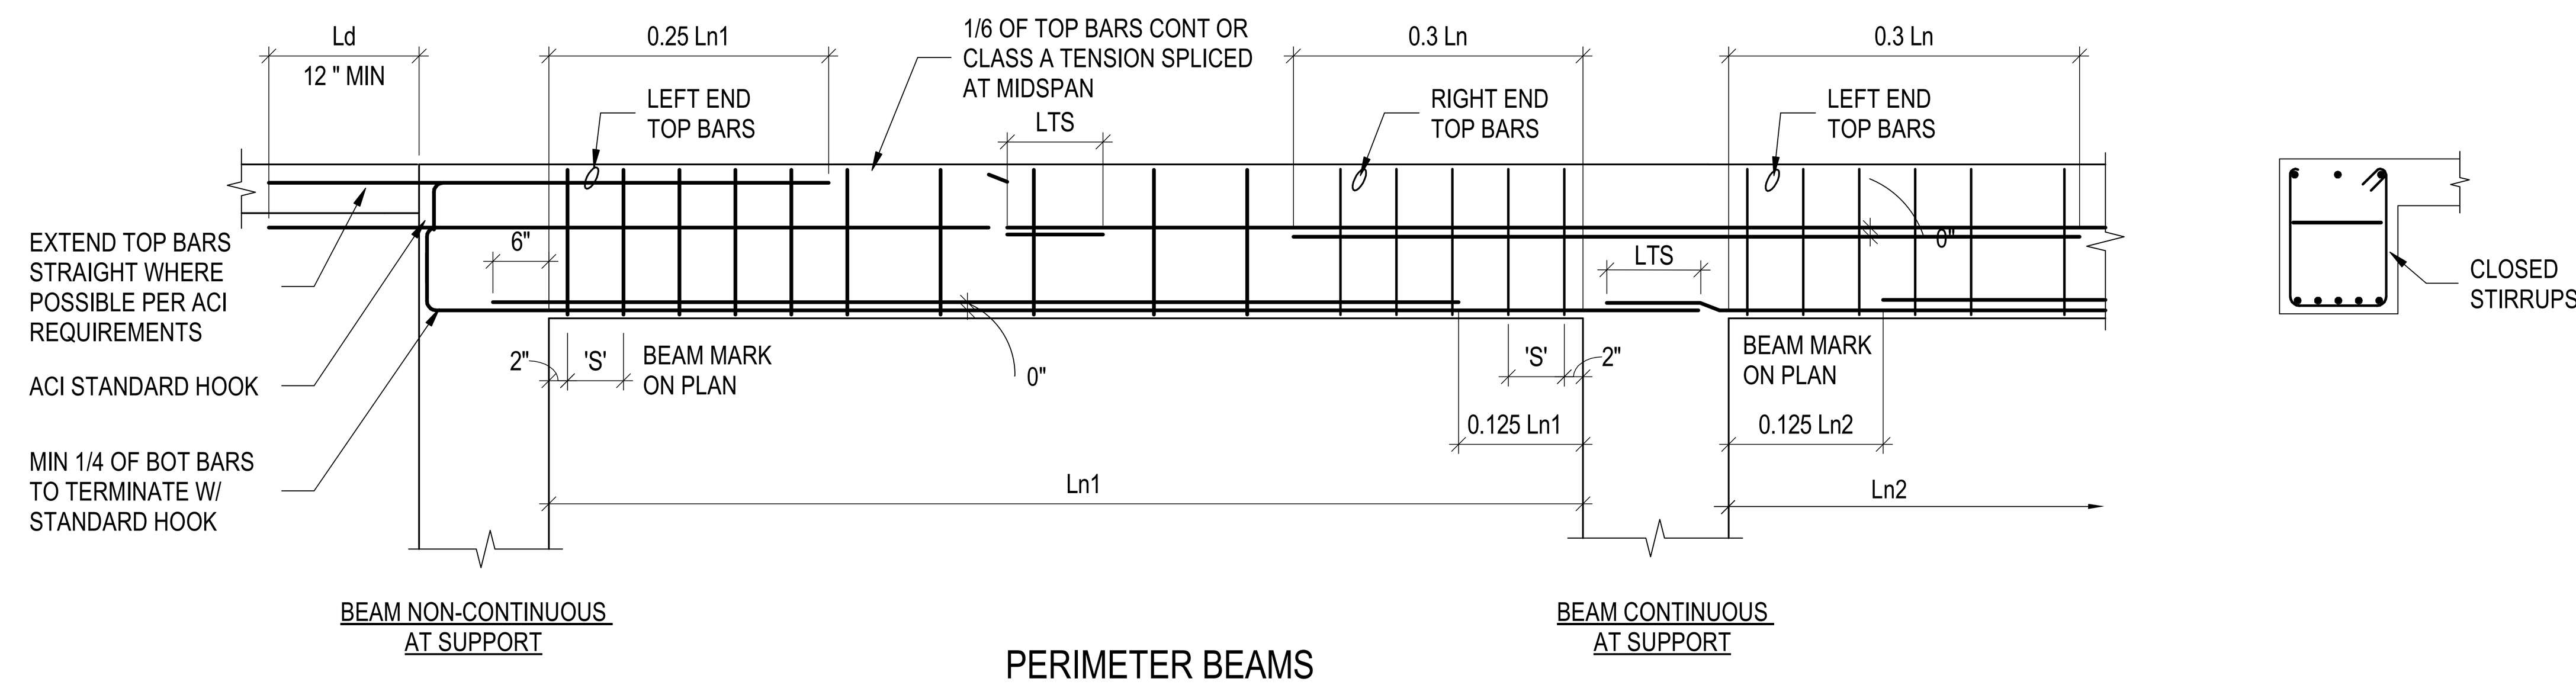

PERIMETER BEAMS

NOTES:
1. Ln IS THE LARGER OF Ln1 AND Ln2.
2. SEE BEAM SCHEDULE FOR REBARS AND STIRRUPS.

TYPICAL CONCRETE BEAM REINFORCING DETAIL

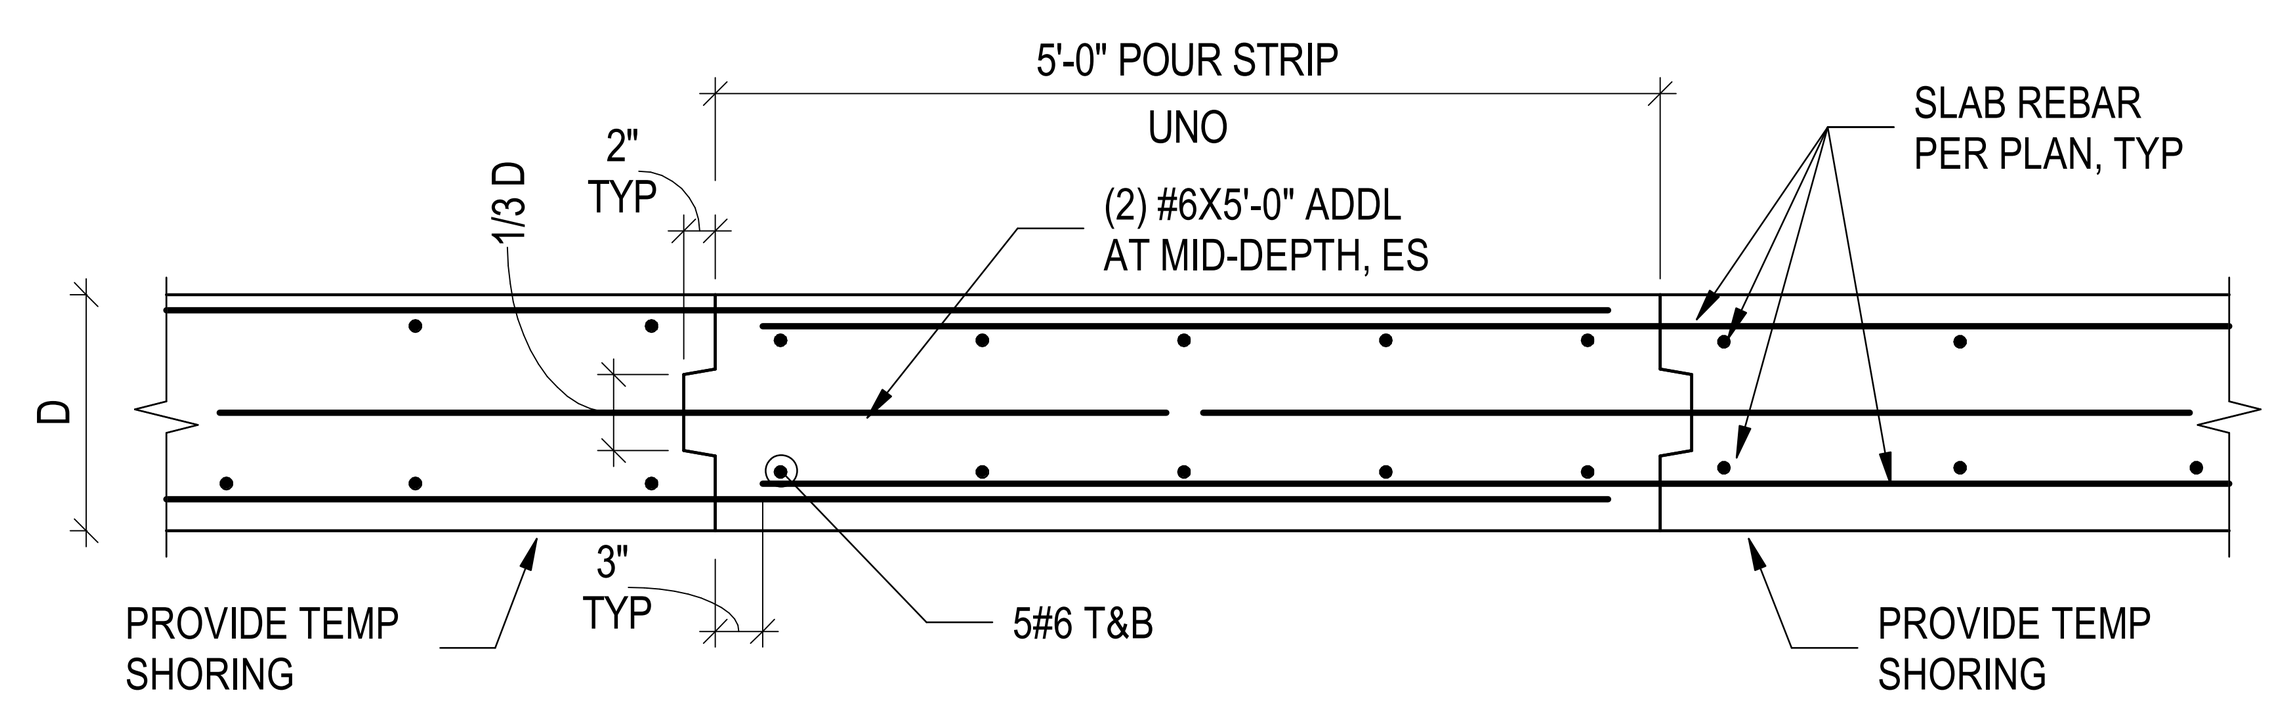

NOTES:
1. LOCATE POUR STRIP IN MIDDLE THIRD OF CLEAR SPAN.
2. WAIT MINIIMUM 30 DAYS AFTER THE SLABS ARE POURED BEFORE PLACING CONCRETE IN POUR STRIP.
3. TEMPORARY SHORING SHOULD STAY UNTIL THE POUR STRIP CONCRETE REACHES 75% OF DESIGN STREGNTH.
4. THOROUGHLY CLEAN CONTACT SURFACES TO REMOVE ALL LAITANCE MATERIAL. APPLY BONDING AGENT PER MANUFACTURERE'S INSTRUCTION BEFORE PLACING NEW CONCRETE.

TYPICAL CONCRETE SLAB POUR STRIP DETAIL

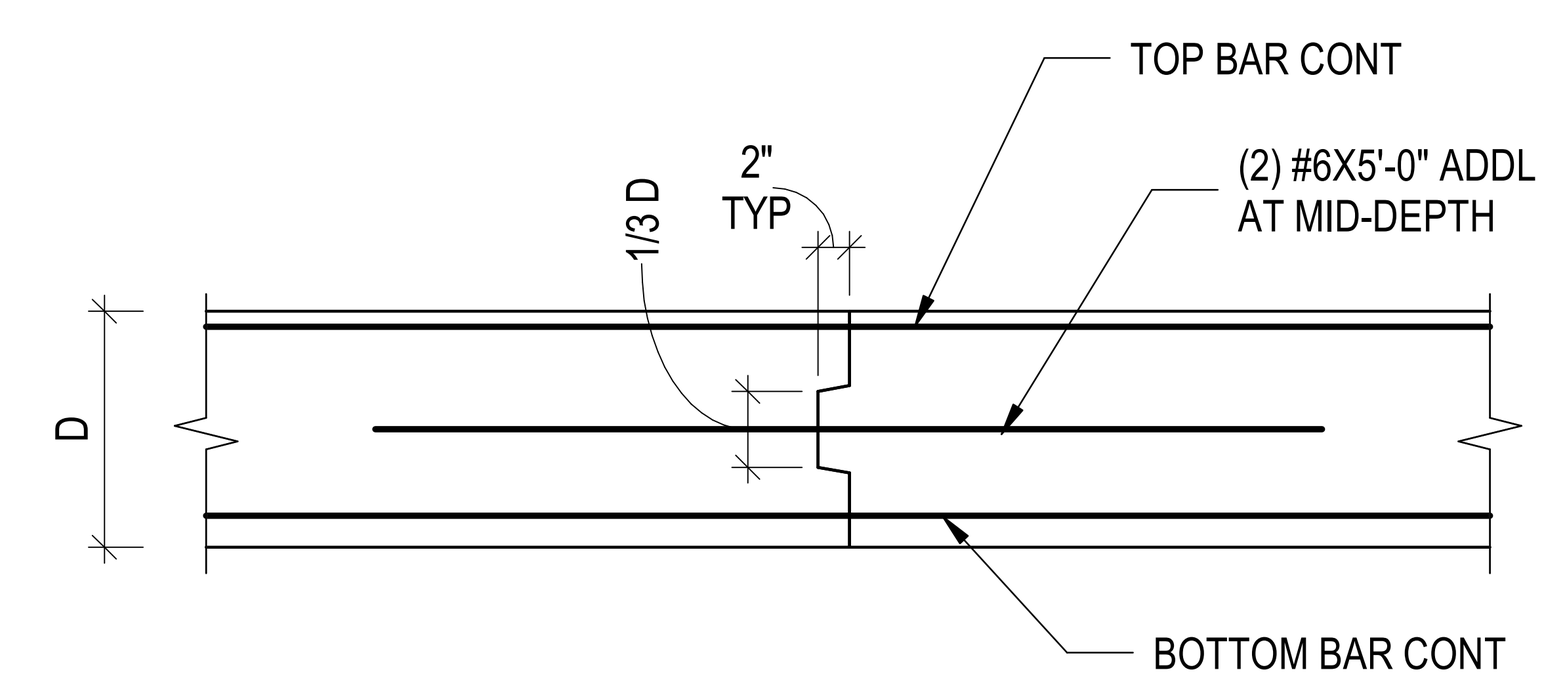

NOTES:
1. LOCATE CONSTRUCTION JOINTS IN MIDDLE THIRD OF CLEAR SPAN AND STAY MINIMUM 4 FEET AWAY FROM PERPENDICULAR BEAMS. SUBMIT PROPOSED CONSTRUCTION JOINT LOCATIONS FOR REVIEW AND APPROVAL.
2. THOROUGHLY CLEAN CONTACT SURFACES TO REMOVE ALL LAITANCE MATERIAL. APPLY BONDING AGENT PER MANUFACTURERE'S INSTRUCTION BEFORE PLACING NEW CONCRETE.

TYPICAL CONCRETE BEAM CONSTRUCTION JOINT DETAIL

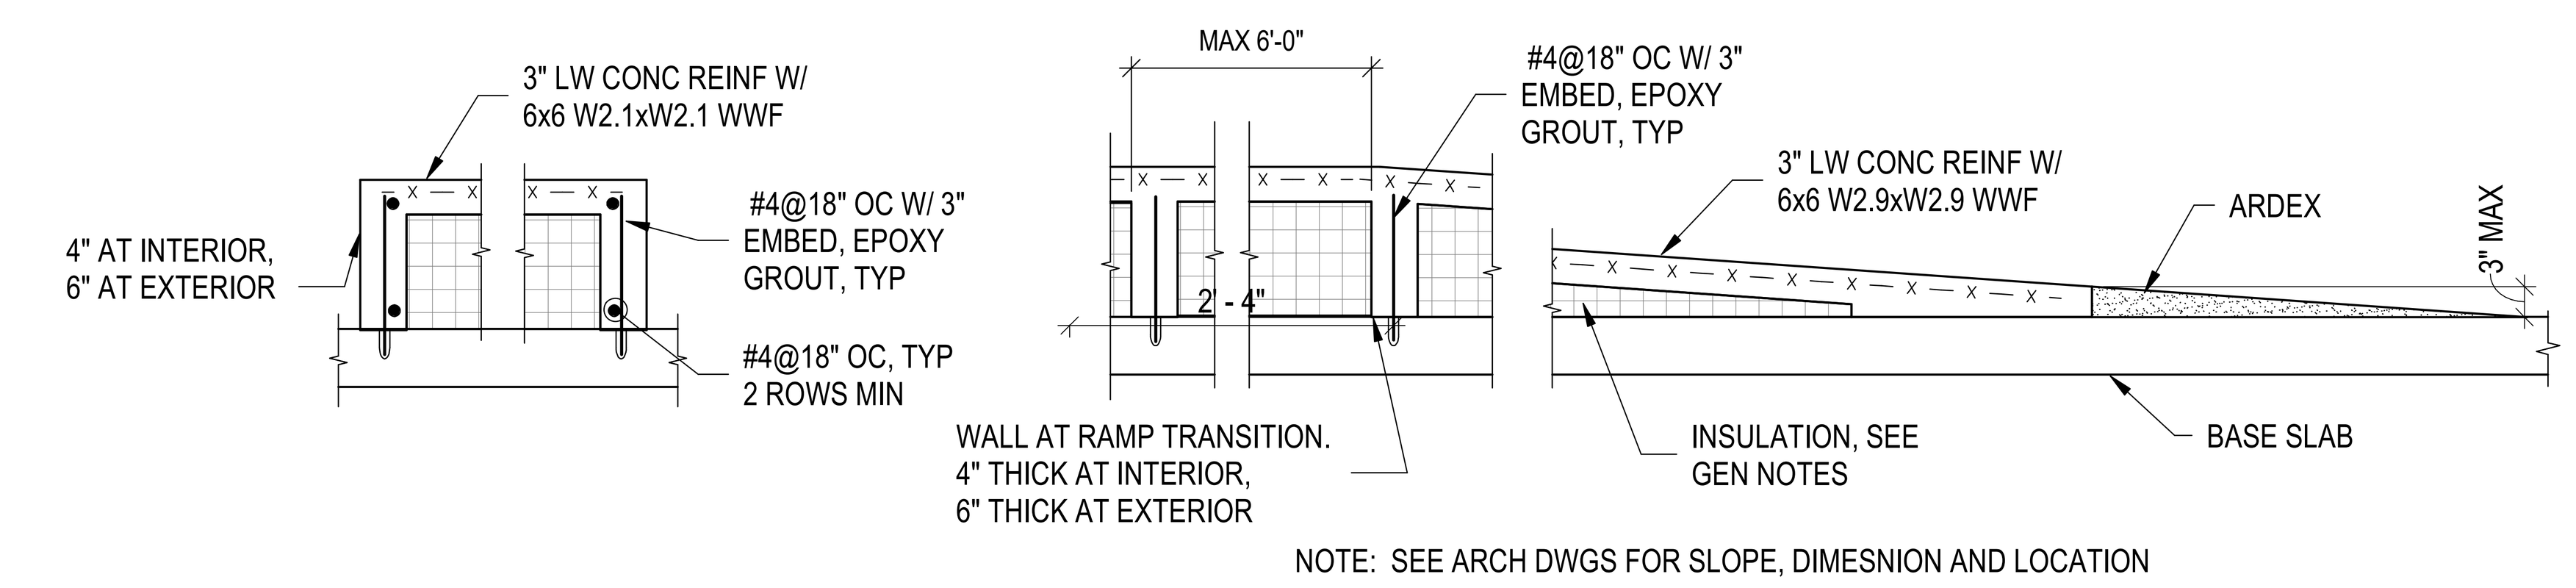

NOTE: SEE ARCH DWGS FOR SLOPE, DIMESNION AND LOCATION

TYPICAL RAMP ON SLABS DETAIL

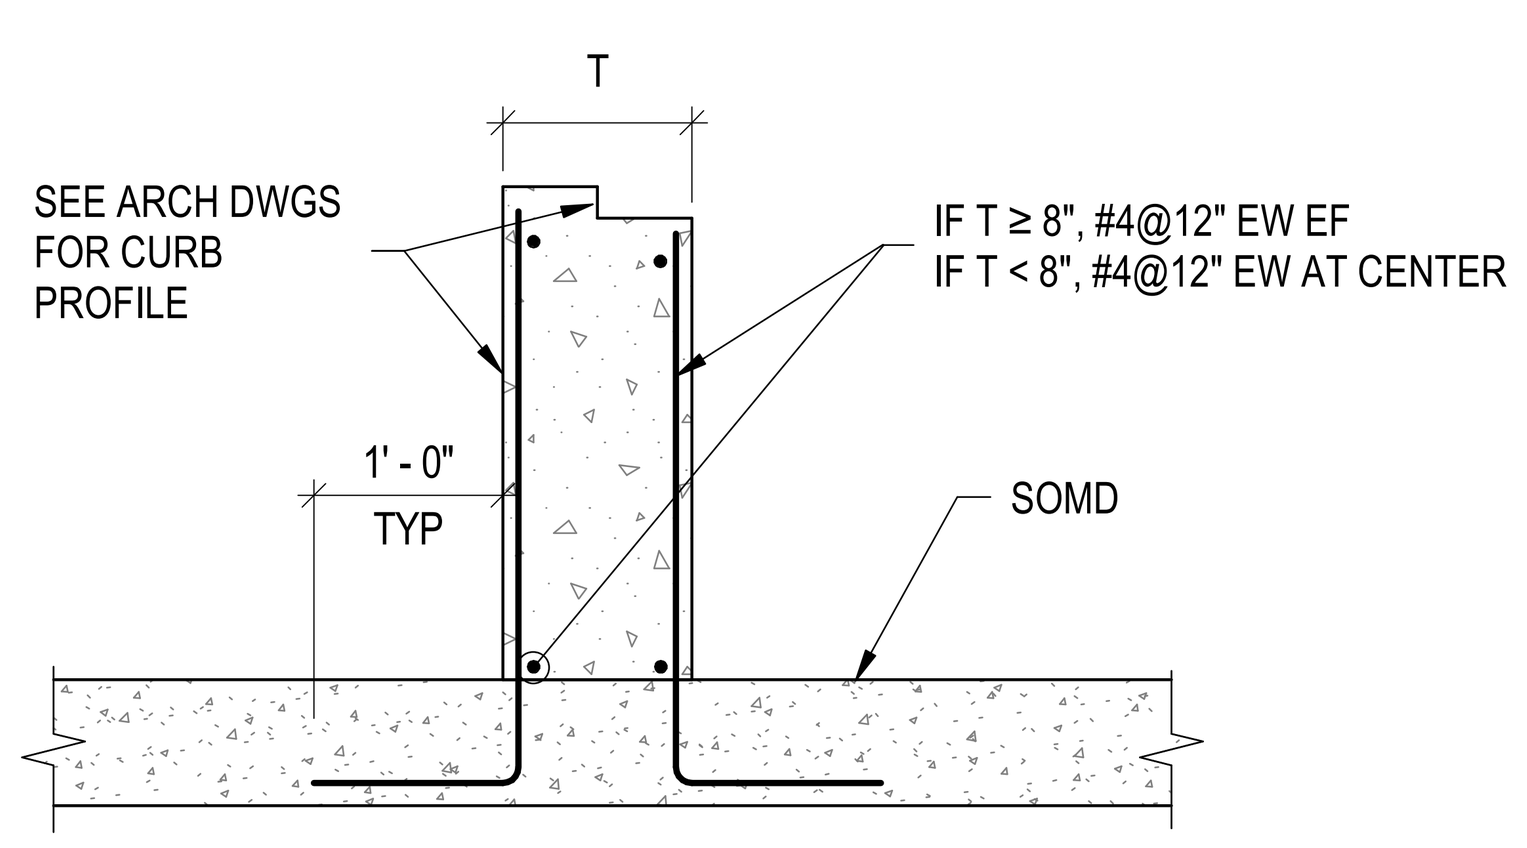

TYPICAL CONCRETE CURB DETAIL

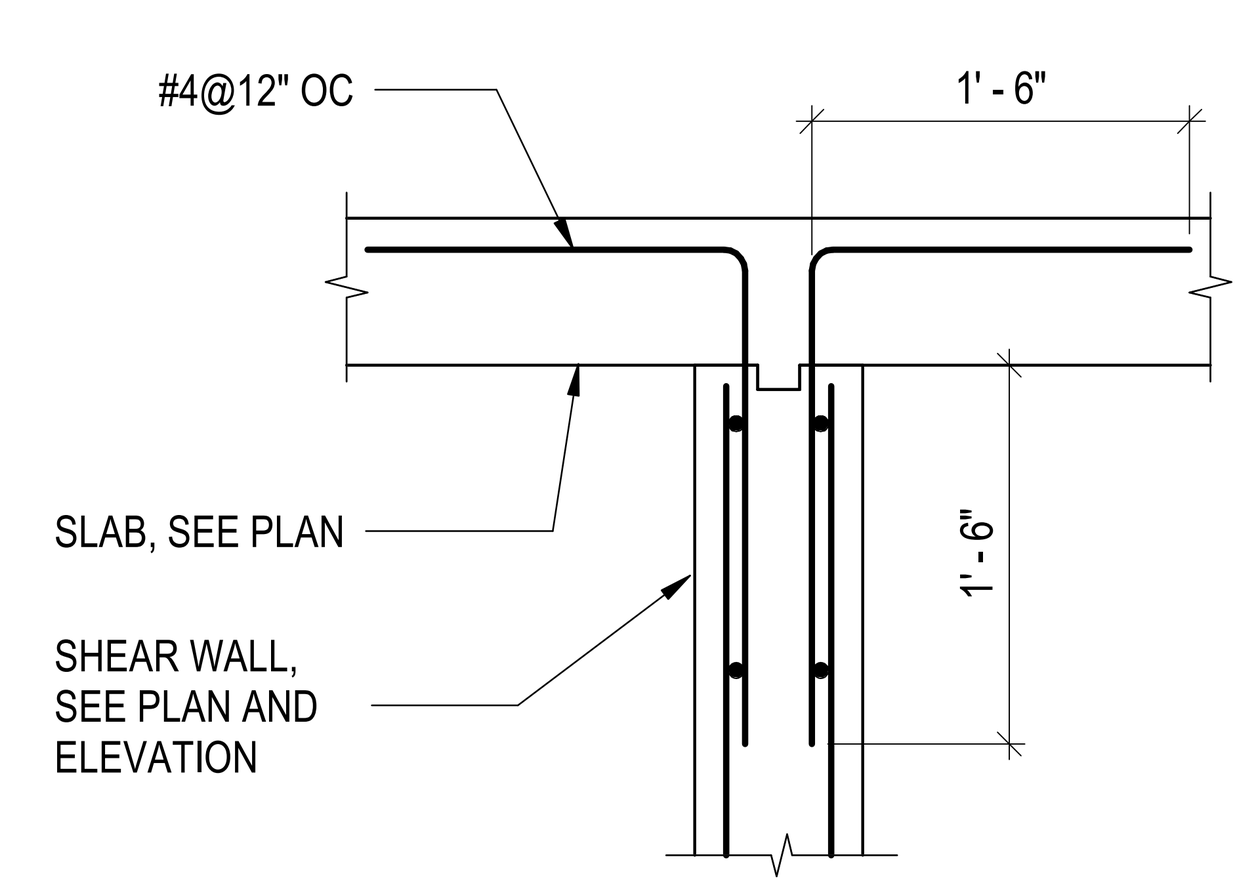

TYPICAL TOP OF SHEAR WALL DETAIL

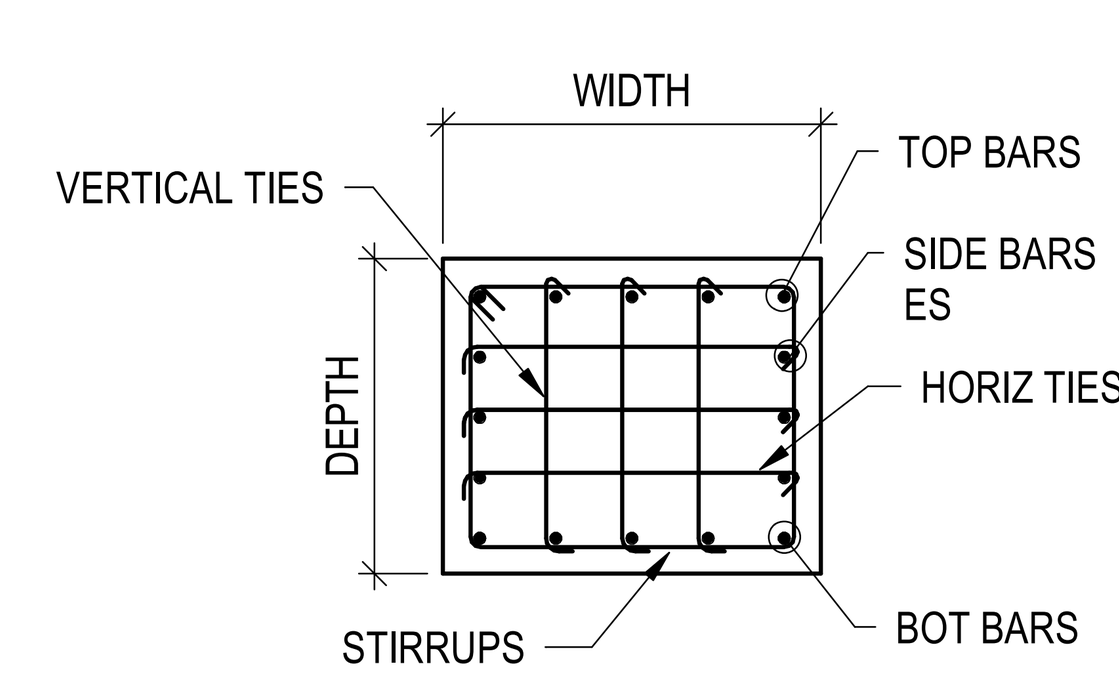

CONCRETE BEAM REBAR LAYOUT DIAGRAM

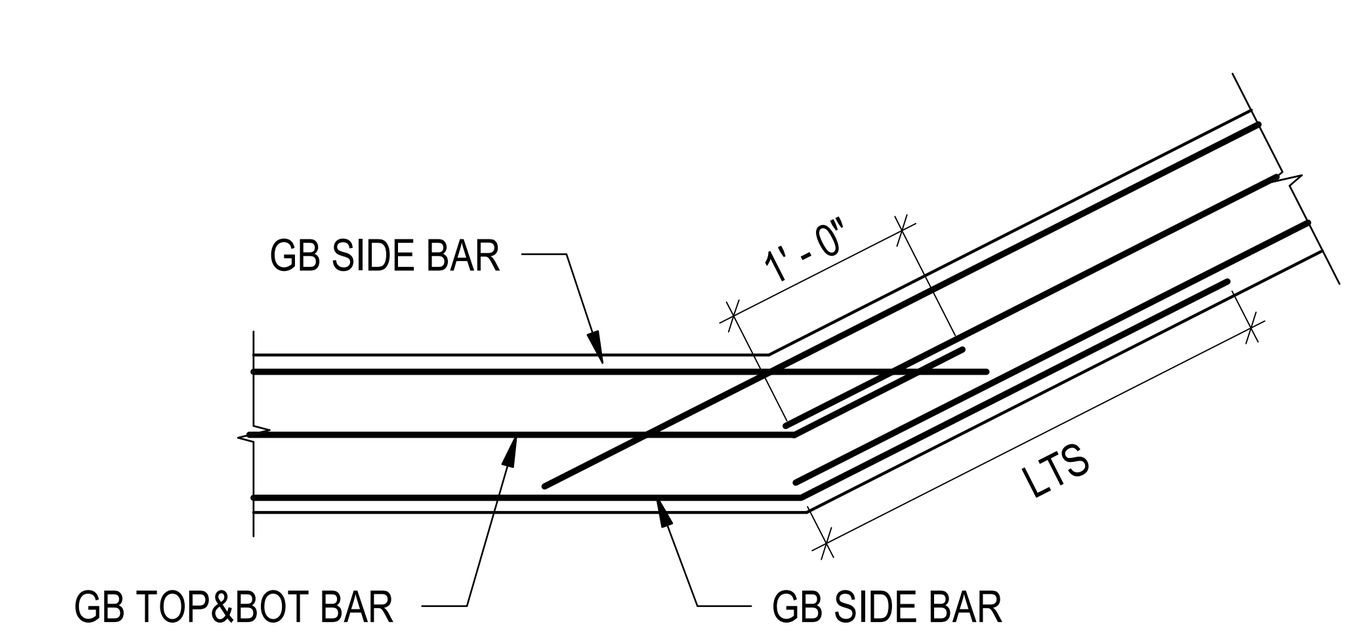

TYPICAL GRADE BEAM BEND REINFORCING DETAIL

NO.	DATE	ISSUE
A	09/30/2025	Permit
	10/29/2025	BID SET

SEAL

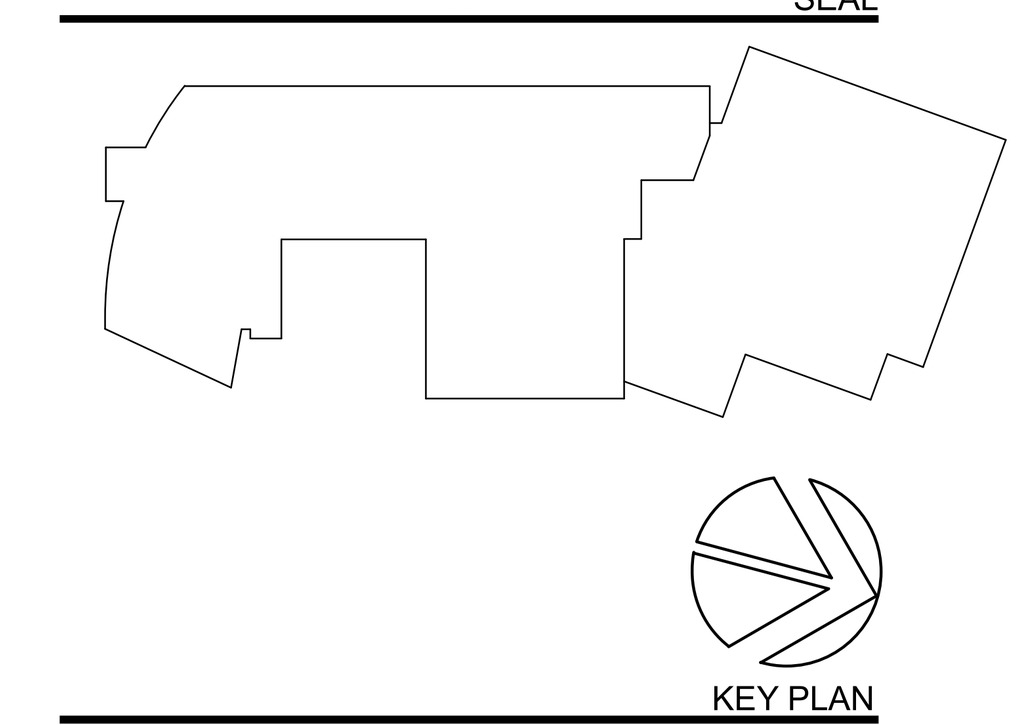

KEY PLAN

PERKINS EASTMAN
One Thomas Circle NW, Suite 200
Washington, DC 20005
T: +1 202 861 1325
F: +1 202 861 1326

Owner:
Sidwell Friends School
3825 Wisconsin Ave NW, Washington DC 20016

Construction Manager:
Advanced Project Management, Inc (APM)
4530 Walney Rd, Ste 202, Chantilly, VA 20151

Civil / Site:
Bowman Consulting Group, Ltd
888 17th St NW, Suite 510, Washington, DC 20006

Landscape:
Natural Resources Design, Inc (NRD)
1009 Shepherd Street NE, Washington, DC 20017

Structural:
Yun Associates LLC
1050 Connecticut Ave NW, Suite 500, Washington, DC 20036

MEP / FP / Lighting:
CMTA Inc
220 Lexington Green Circle, Suite 600, Lexington, KY 40503

AV / IT / Telecom / Security:
Educational Systems Planning (ESP)
2448 Holly Avenue, Suite 302, Annapolis, MD 21401

Food Service
Nyikos-Garcia Foodservice Design, Inc
7146 Starmount Way, New Market, MD 21774

Accessibility Consultant:
Galbo Wolf LLC
4410 Massachusetts Ave NW, #240, Washington, DC 20016

Acoustics:
Polysonics Corp
555 Hospital Drive, Warrenton, VA 20186

Building Envelope Consultant:
Sustainable Building Partners LLC
2701 Prosperity Ave, Suite 105, Fairfax, VA 22031

Code Consultant:
Campbell Code Consulting LLC
7834 Taggart Ct, Elkridge, MD 21075

Specifications:

PROJECT TITLE:

SIDWELL FRIENDS NEW LOWER SCHOOL AT DC CAMPUS

3825 WISCONSIN AVE NW
WASHINGTON, DC 20016

PROJECT No: 2025008

DRAWING TITLE:

TYPICAL DETAILS

SCALE: As indicated

S-208

BID SET
10/29/2025

Autodesk Docs://Sidwell Lower School/Sidwell Lower School_ST_R24.rvt
10/28/2025 10:15:12 AM

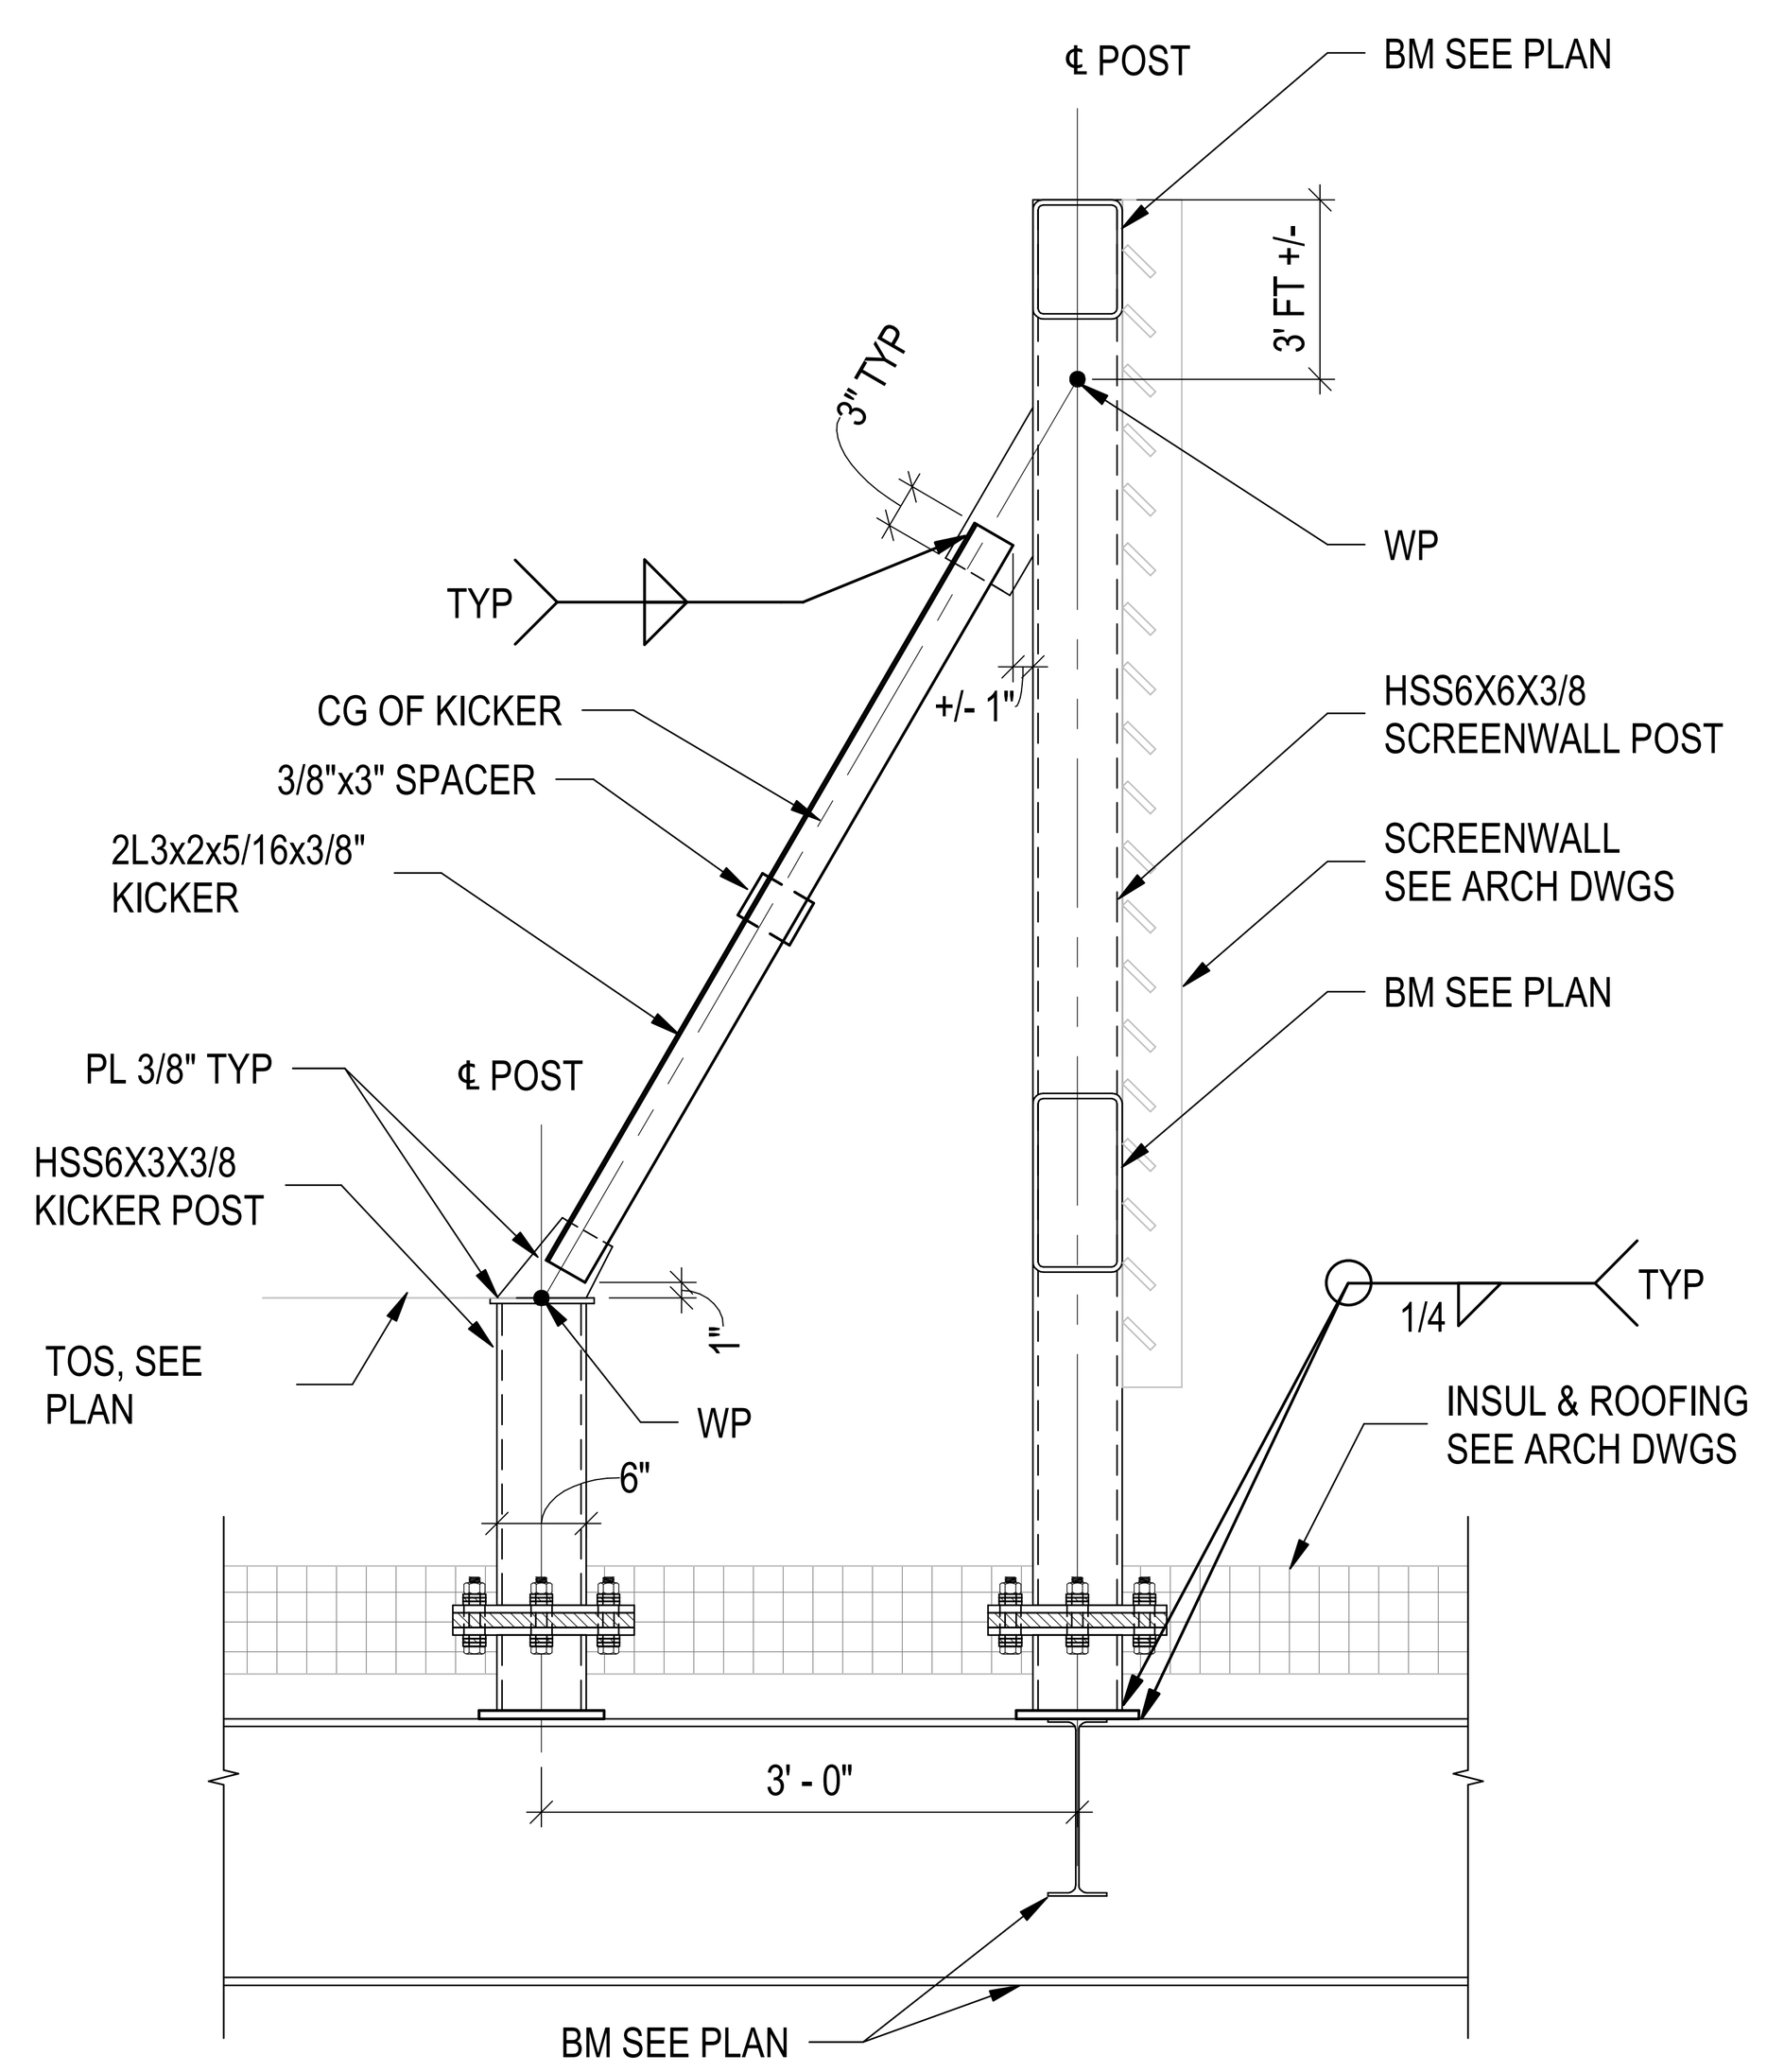

NOTE:
1. ROOF DECK NOT SHOWN FOR CLARITY.
2. SEE "TYPICAL THERMAL BREAK CONNECTION DETAIL" FOR THERMAL BREAK CONNECTION AT POSTS.

TYPICAL SCREENWALL FRAMING DETAIL

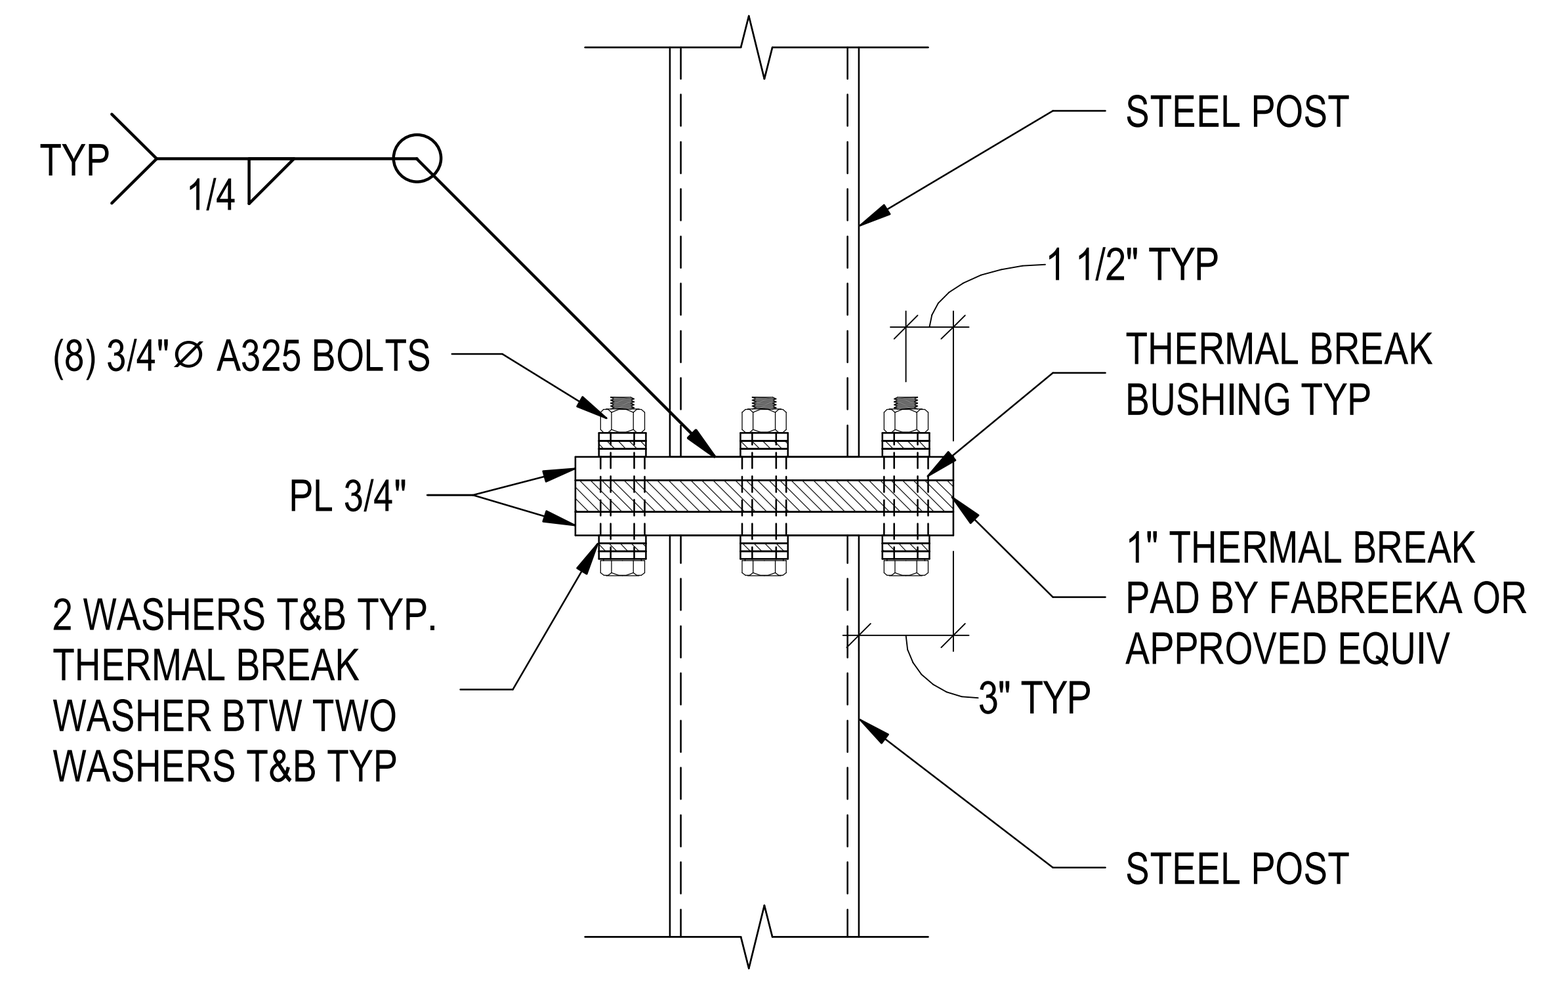

TYPICAL THERMAL BREAK CONNECTION DETAIL

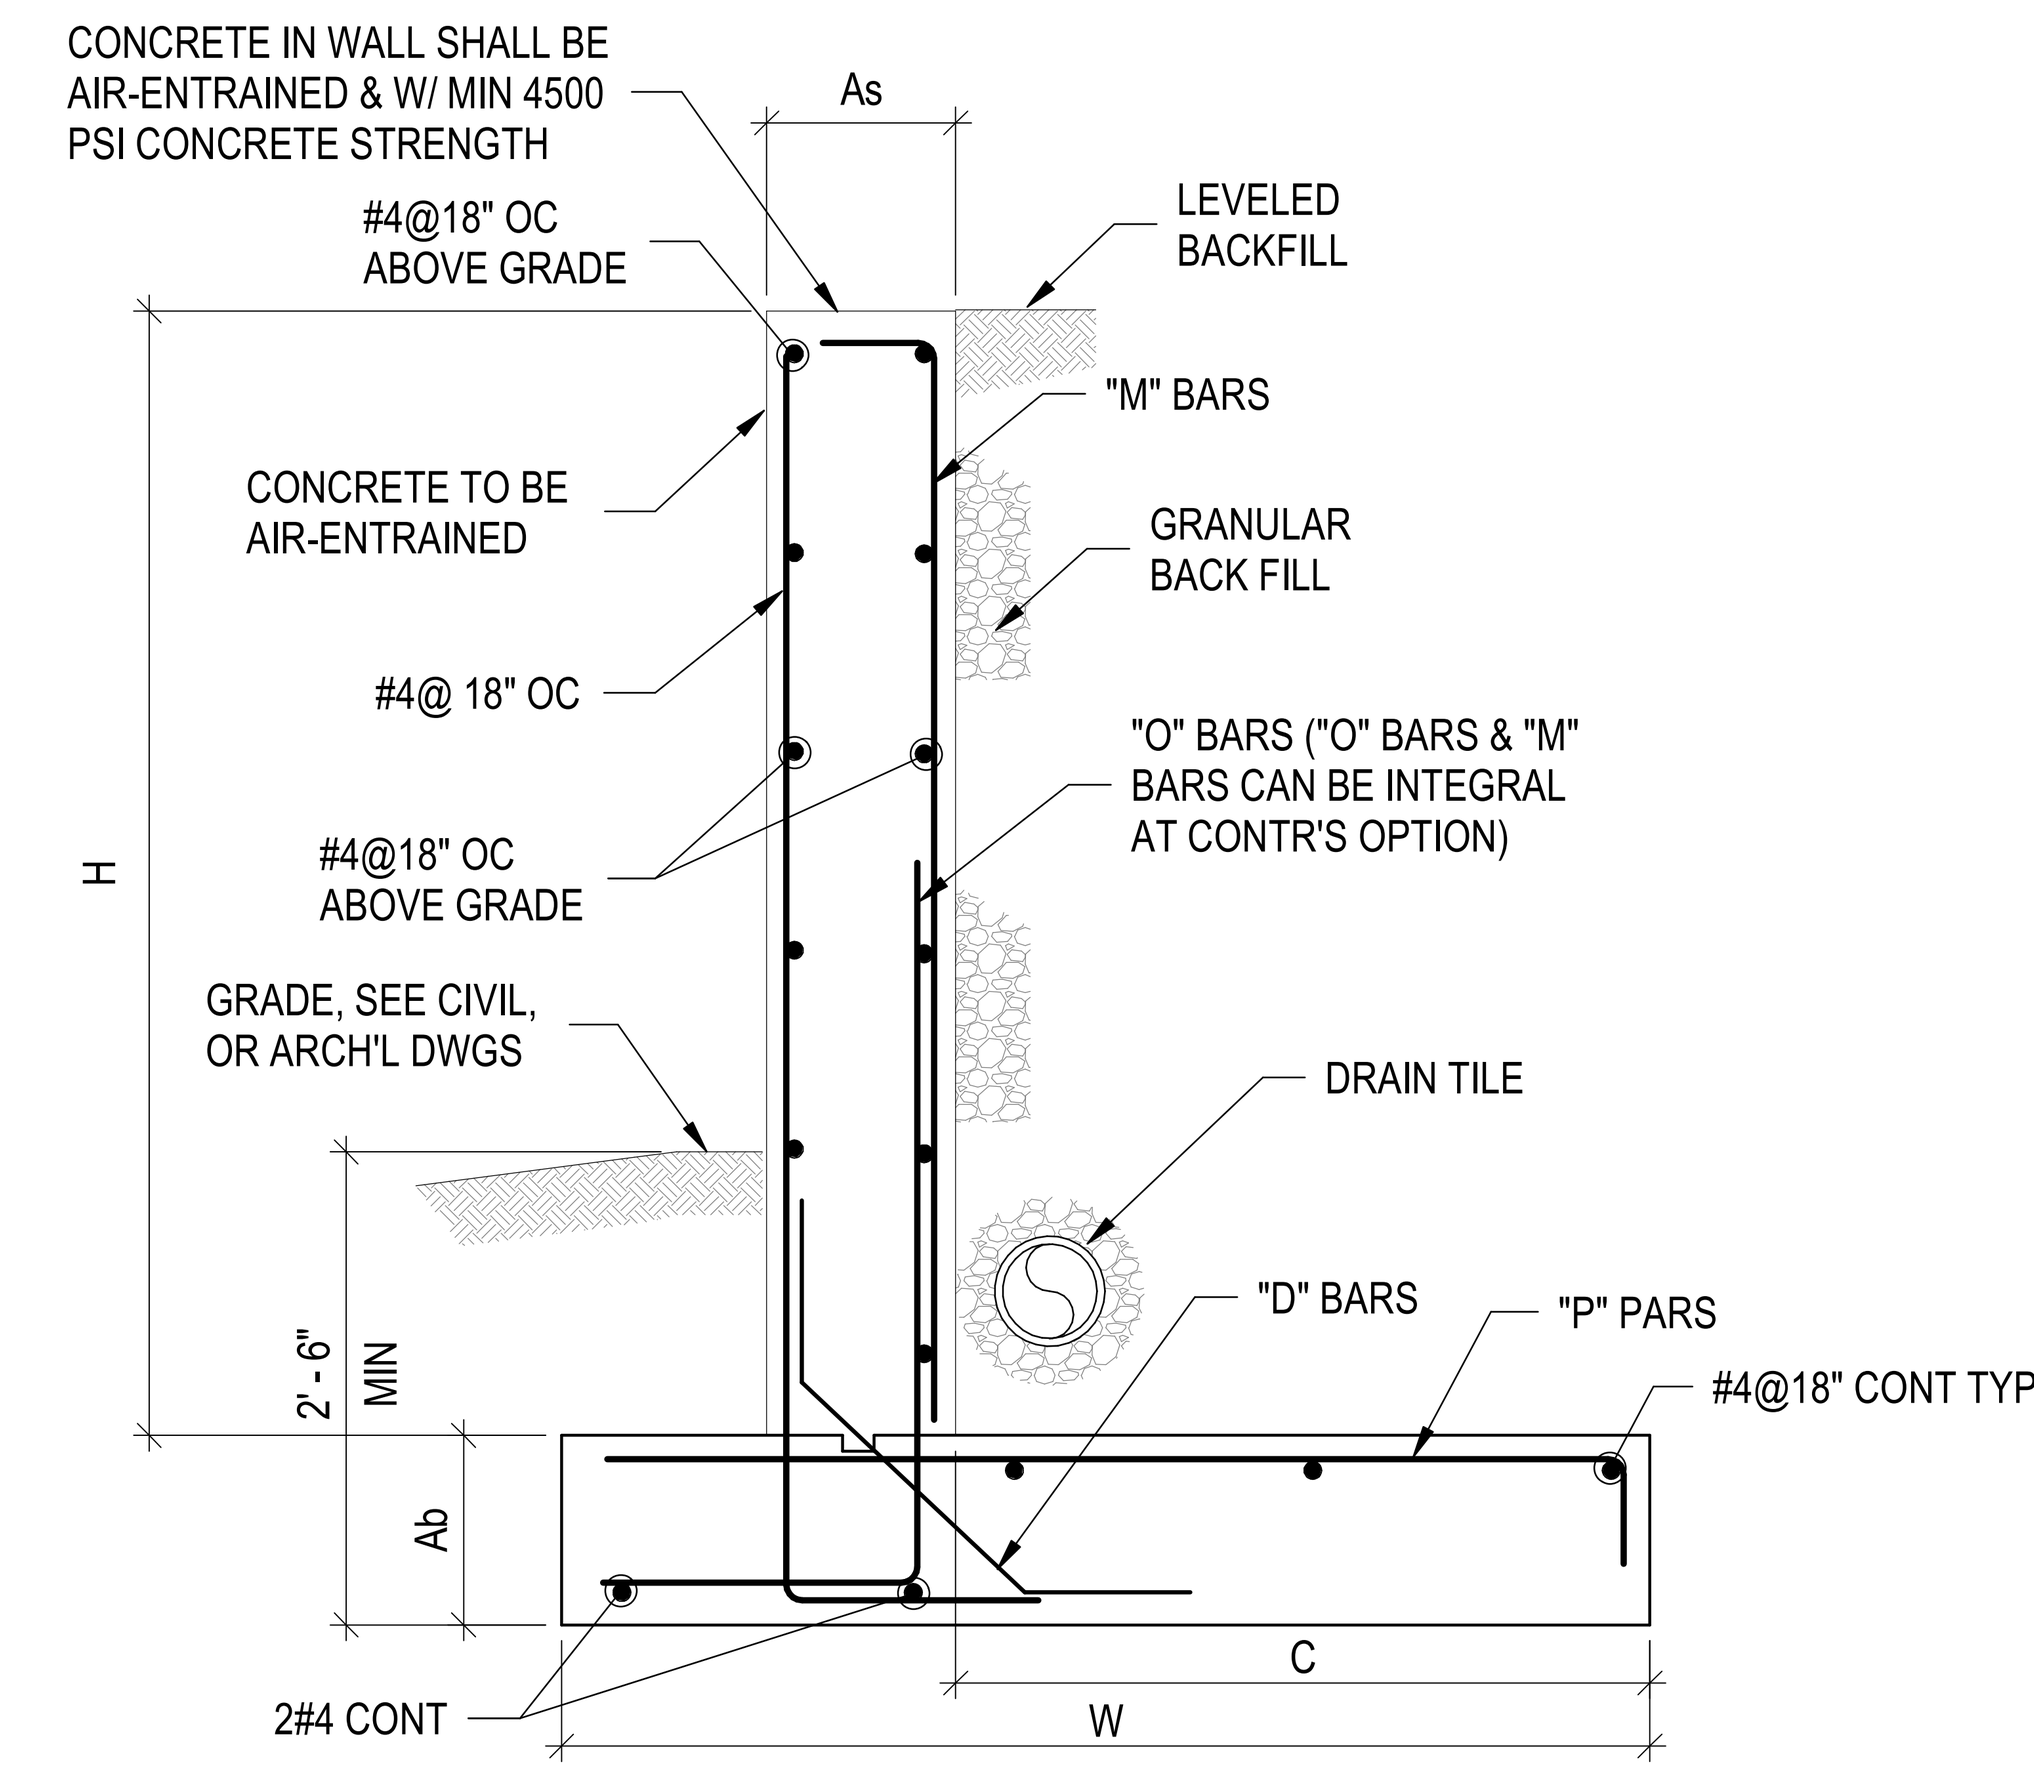

RETAINING WALL SCHEDULE								
STEM HT (H)	As	Ab	C	W	M	O	P	D
H ≤ 4'-0"	10"	12"	1'-2"	3'-0"	#4@12"	#4@12"	#4@12"	#4@12"
4'-0"< H ≤ 6'-0"	10"	12"	2'-5"	4'-3"	#4@12"	#4@12"	#4@12"	#4@12"
6'-0"< H ≤ 8'-0"	10"	12"	4'-5"	6'-3"	#5@12"	#5@12"	#5@12"	#4@12"
8'-0"< H ≤ 10'-0"	12"	14"	6'-0"	8'-0"	#6@12"	#6@12"	#6@12"	#4@12"
10'-0"< H ≤ 12'-0"	14"	18"	7'-7"	9'-9"	#7@12"	#7@12"	#7@12"	#4@12"

TYPICAL SITE RETAINING WALL DETAIL

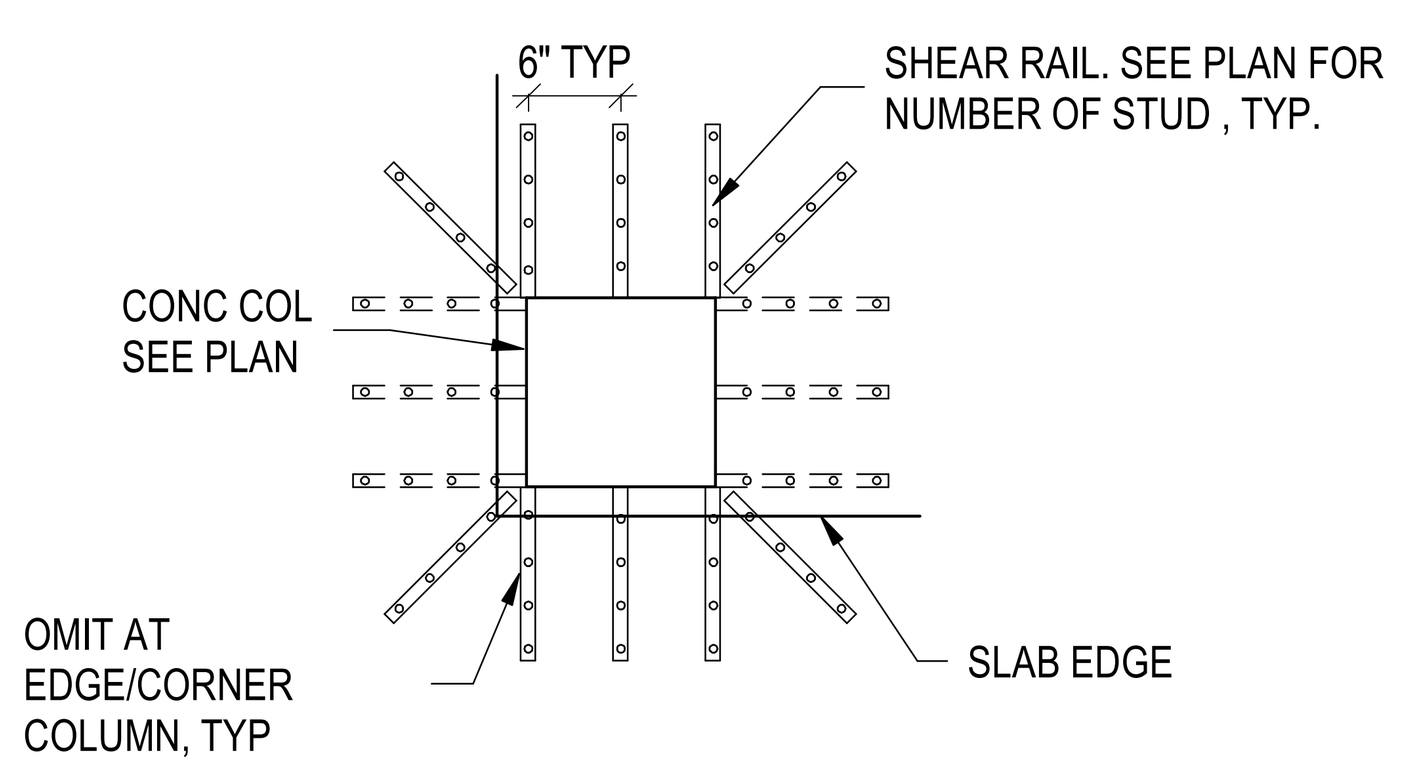

PLAN

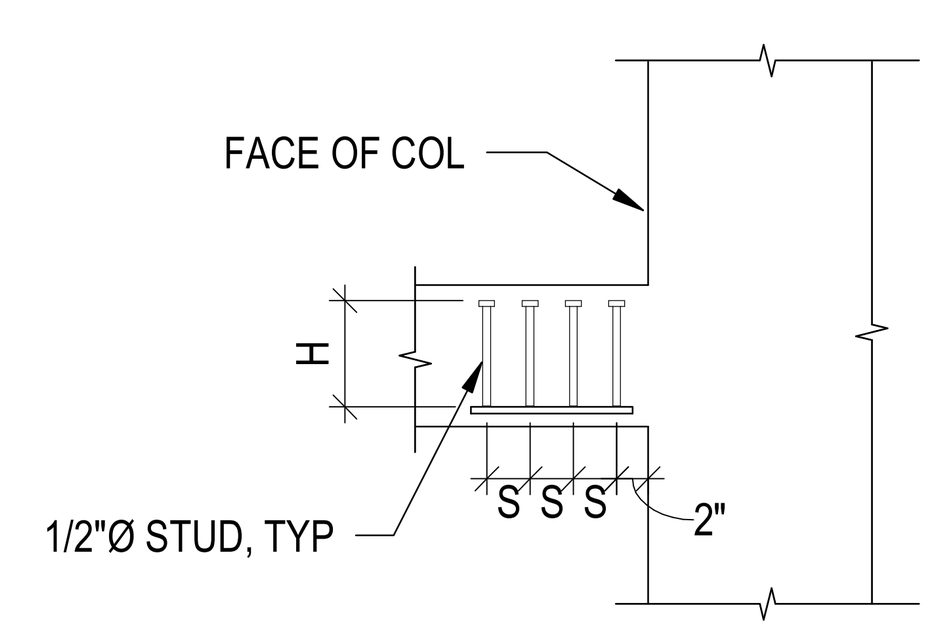

ELEVATION

NOTES:
1. SEE FRAMING PLAN FOR LOCATION OF SHEAR RAILS.
2. A RAIL MUST BE PLACED AT THE CORNERS OF THE COLUMN EXCEPET WHERE SLAB EDGE IS WITHIN 2" OF COLUMN FACE, LOCATE RAILS PARALLEL TO SLAB DEGE NOT CLOSER THAN 2" FRAOM THE EDGE.
3. TOP AND BOTTOM CLEAR COVER FOR THE RAILS SHALL BE THE SAME AS REINF COVER.
4. SHEAR RAILS SHALL BE STUD RAILS AS MANUFACTURED BY DECON OR APPROVED EQUAL.

TYPICAL SHEAR RAIL LAYOUT

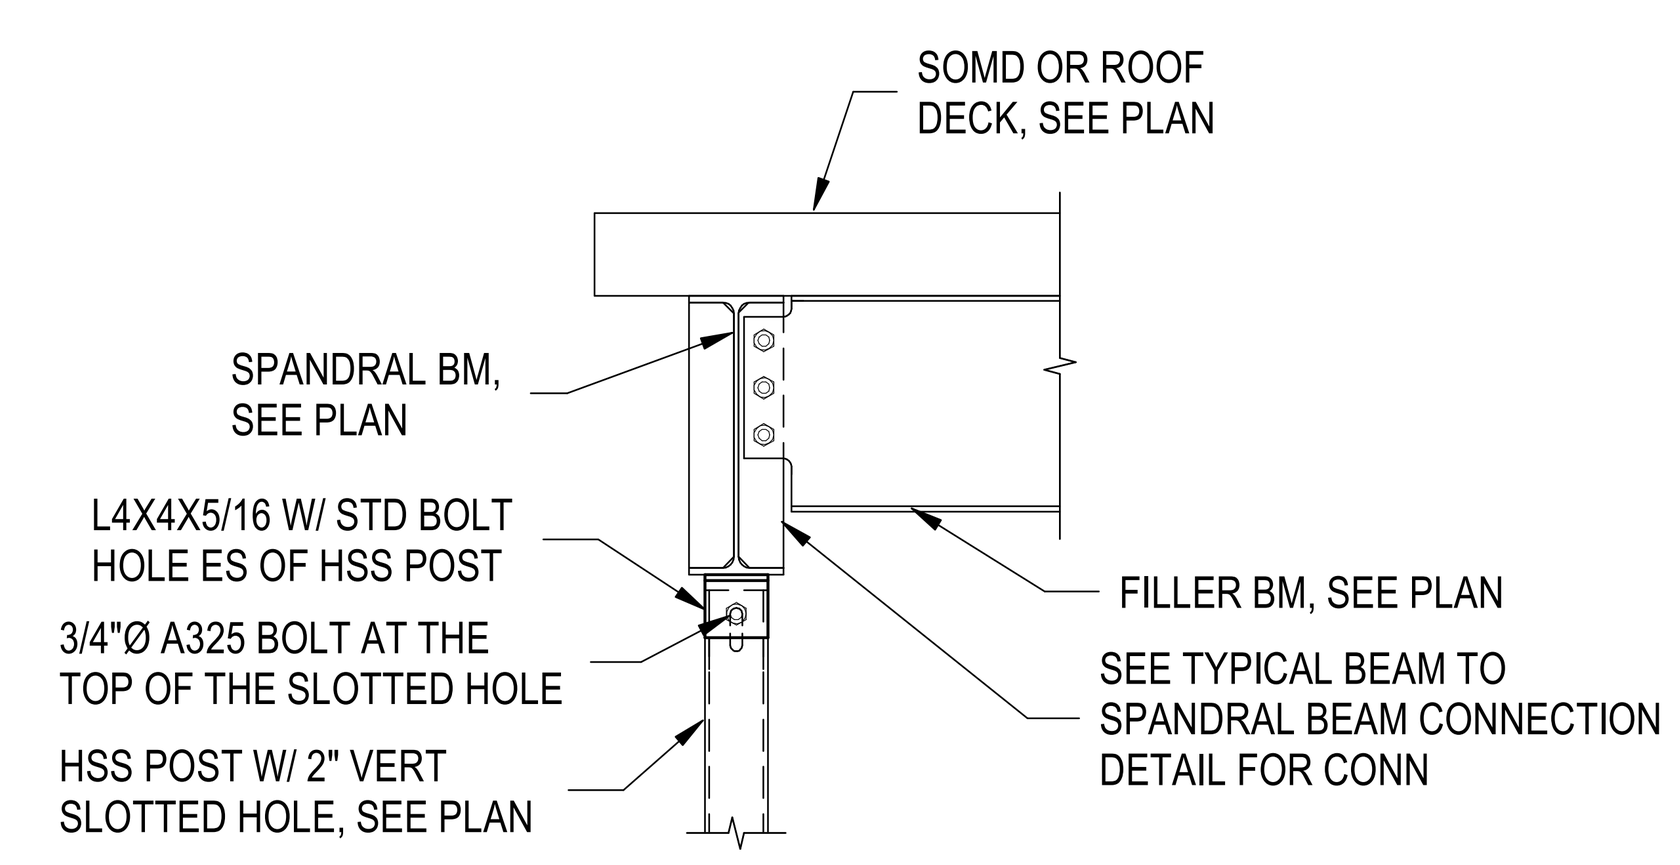

TYPICAL VERT SLIDING CONNECTION DETAIL

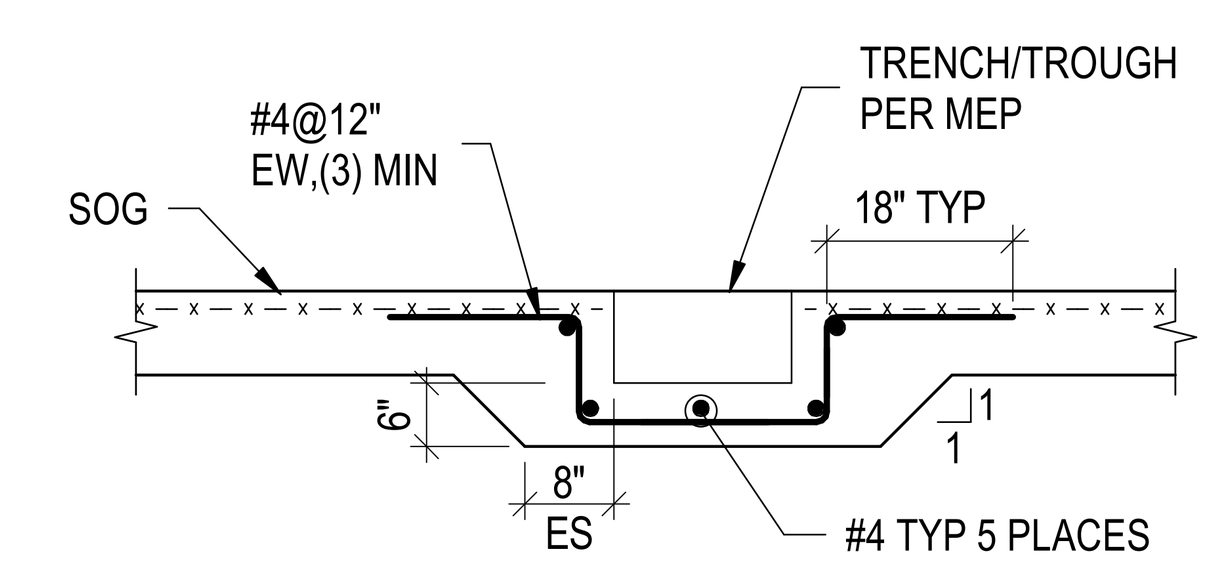

TYPICAL TRENCH/TROUGH AT SLAB ON GRADE DETAIL

NO.	DATE	ISSUE
A	09/30/2025	Permit
	10/29/2025	BID SET

SEAL

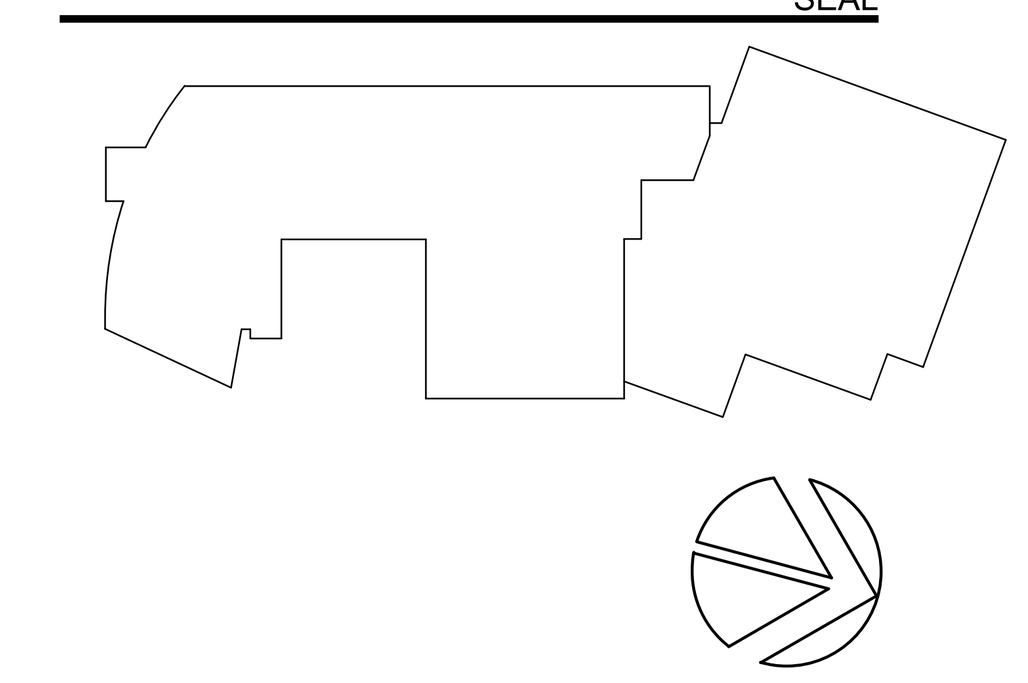

KEY PLAN

PERKINS EASTMAN
One Thomas Circle NW, Suite 200
Washington, DC 20005
T: +1 202 861 1325
F: +1 202 861 1326

Owner:
Sidwell Friends School
3825 Wisconsin Ave NW, Washington DC 20016

Construction Manager:
Advanced Project Management, Inc (APM)
4530 Walney Rd, Ste 202, Chantilly, VA 20151

Civil / Site:
Bowman Consulting Group, Ltd
888 17th St NW, Suite 510, Washington, DC 20006

Landscape:
Natural Resources Design, Inc (NRD)
1009 Shepherd Street NE, Washington, DC 20017

Structural:
Yun Associates LLC
1050 Connecticut Ave NW, Suite 500, Washington, DC 20036

MEP / FP / Lighting:
CMTA Inc
220 Lexington Green Circle, Suite 600, Lexington, KY 40503

AV / IT / Telecom / Security:
Educational Systems Planning (ESP)
2448 Holly Avenue, Suite 302, Annapolis, MD 21401

Food Service
Nyikos-Garcia Foodservice Design, Inc
7146 Starmount Way, New Market, MD 21774

Accessibility Consultant:
Galbo Wolf LLC
4410 Massachusetts Ave NW, #240, Washington, DC 20016

Acoustics:
Polysonics Corp
555 Hospital Drive, Warrenton, VA 20186

Building Envelope Consultant:
Sustainable Building Partners LLC
2701 Prosperity Ave, Suite 105, Fairfax, VA 22031

Code Consultant:
Campbell Code Consulting LLC
7834 Taggart Ct, Elkridge, MD 21075

Specifications:

PROJECT TITLE:

SIDWELL FRIENDS NEW LOWER SCHOOL AT DC CAMPUS

3825 WISCONSIN AVE NW
WASHINGTON, DC 20016

PROJECT No: 2025008

DRAWING TITLE:

TYPICAL DETAILS

SCALE: As indicated

S-209

BID SET
10/29/2025

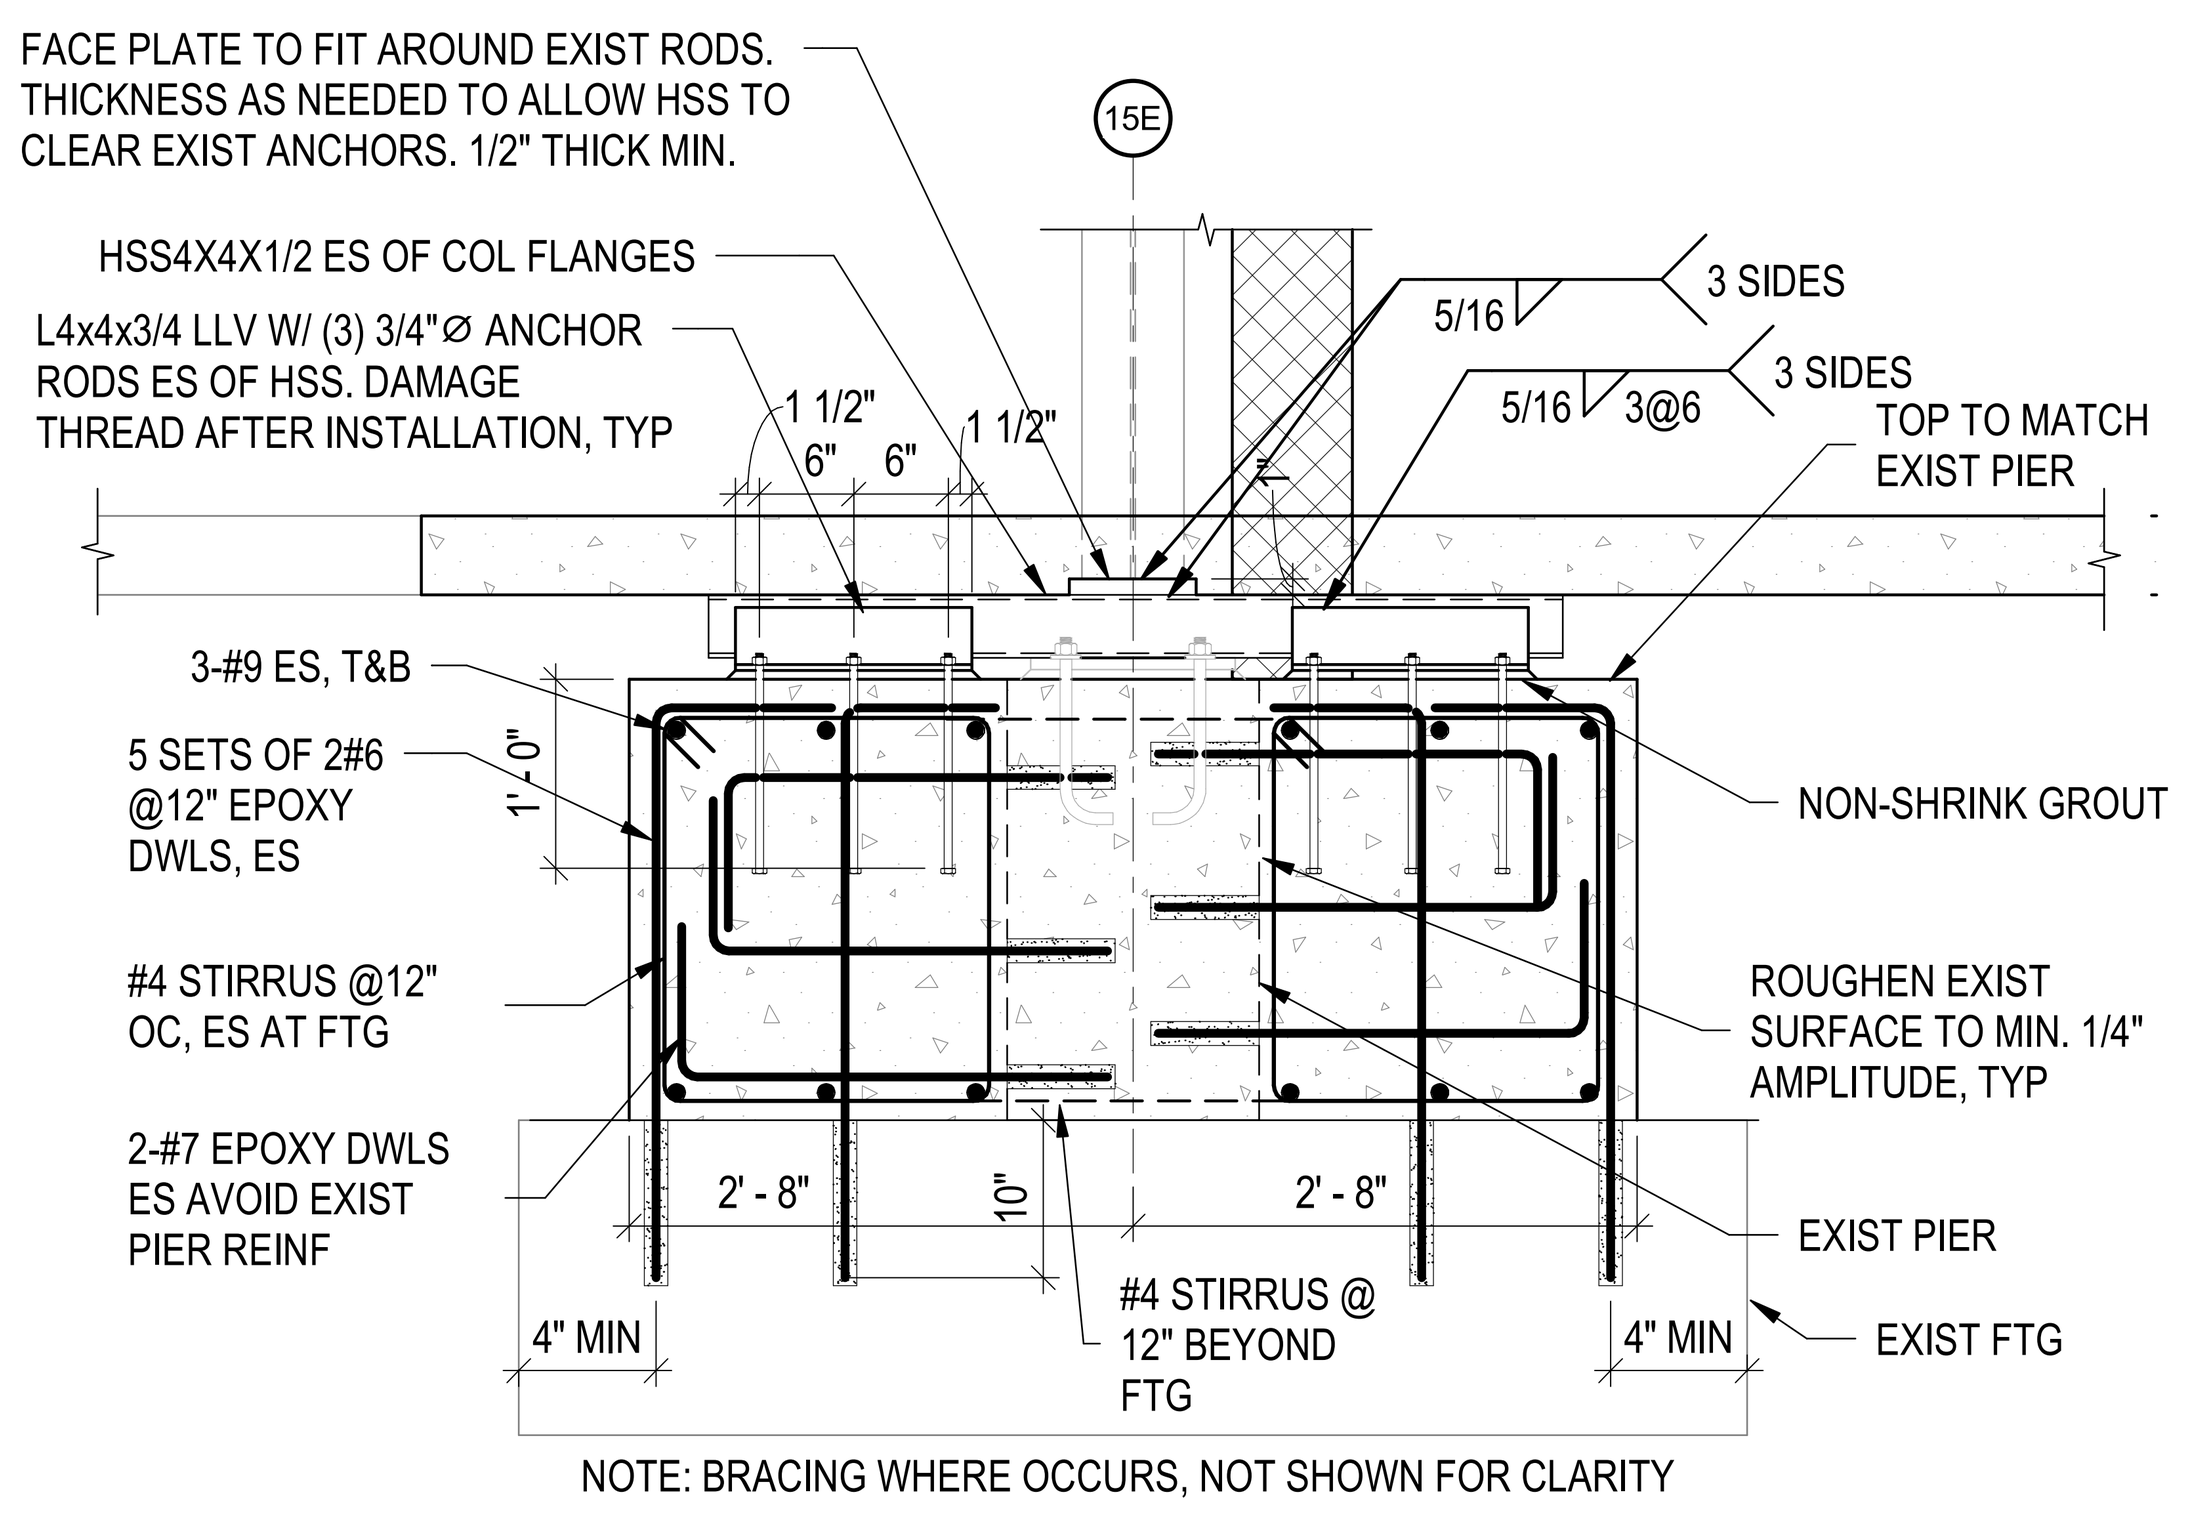

SECTION 1
SCALE: 3/4" = 1'-0" S-301

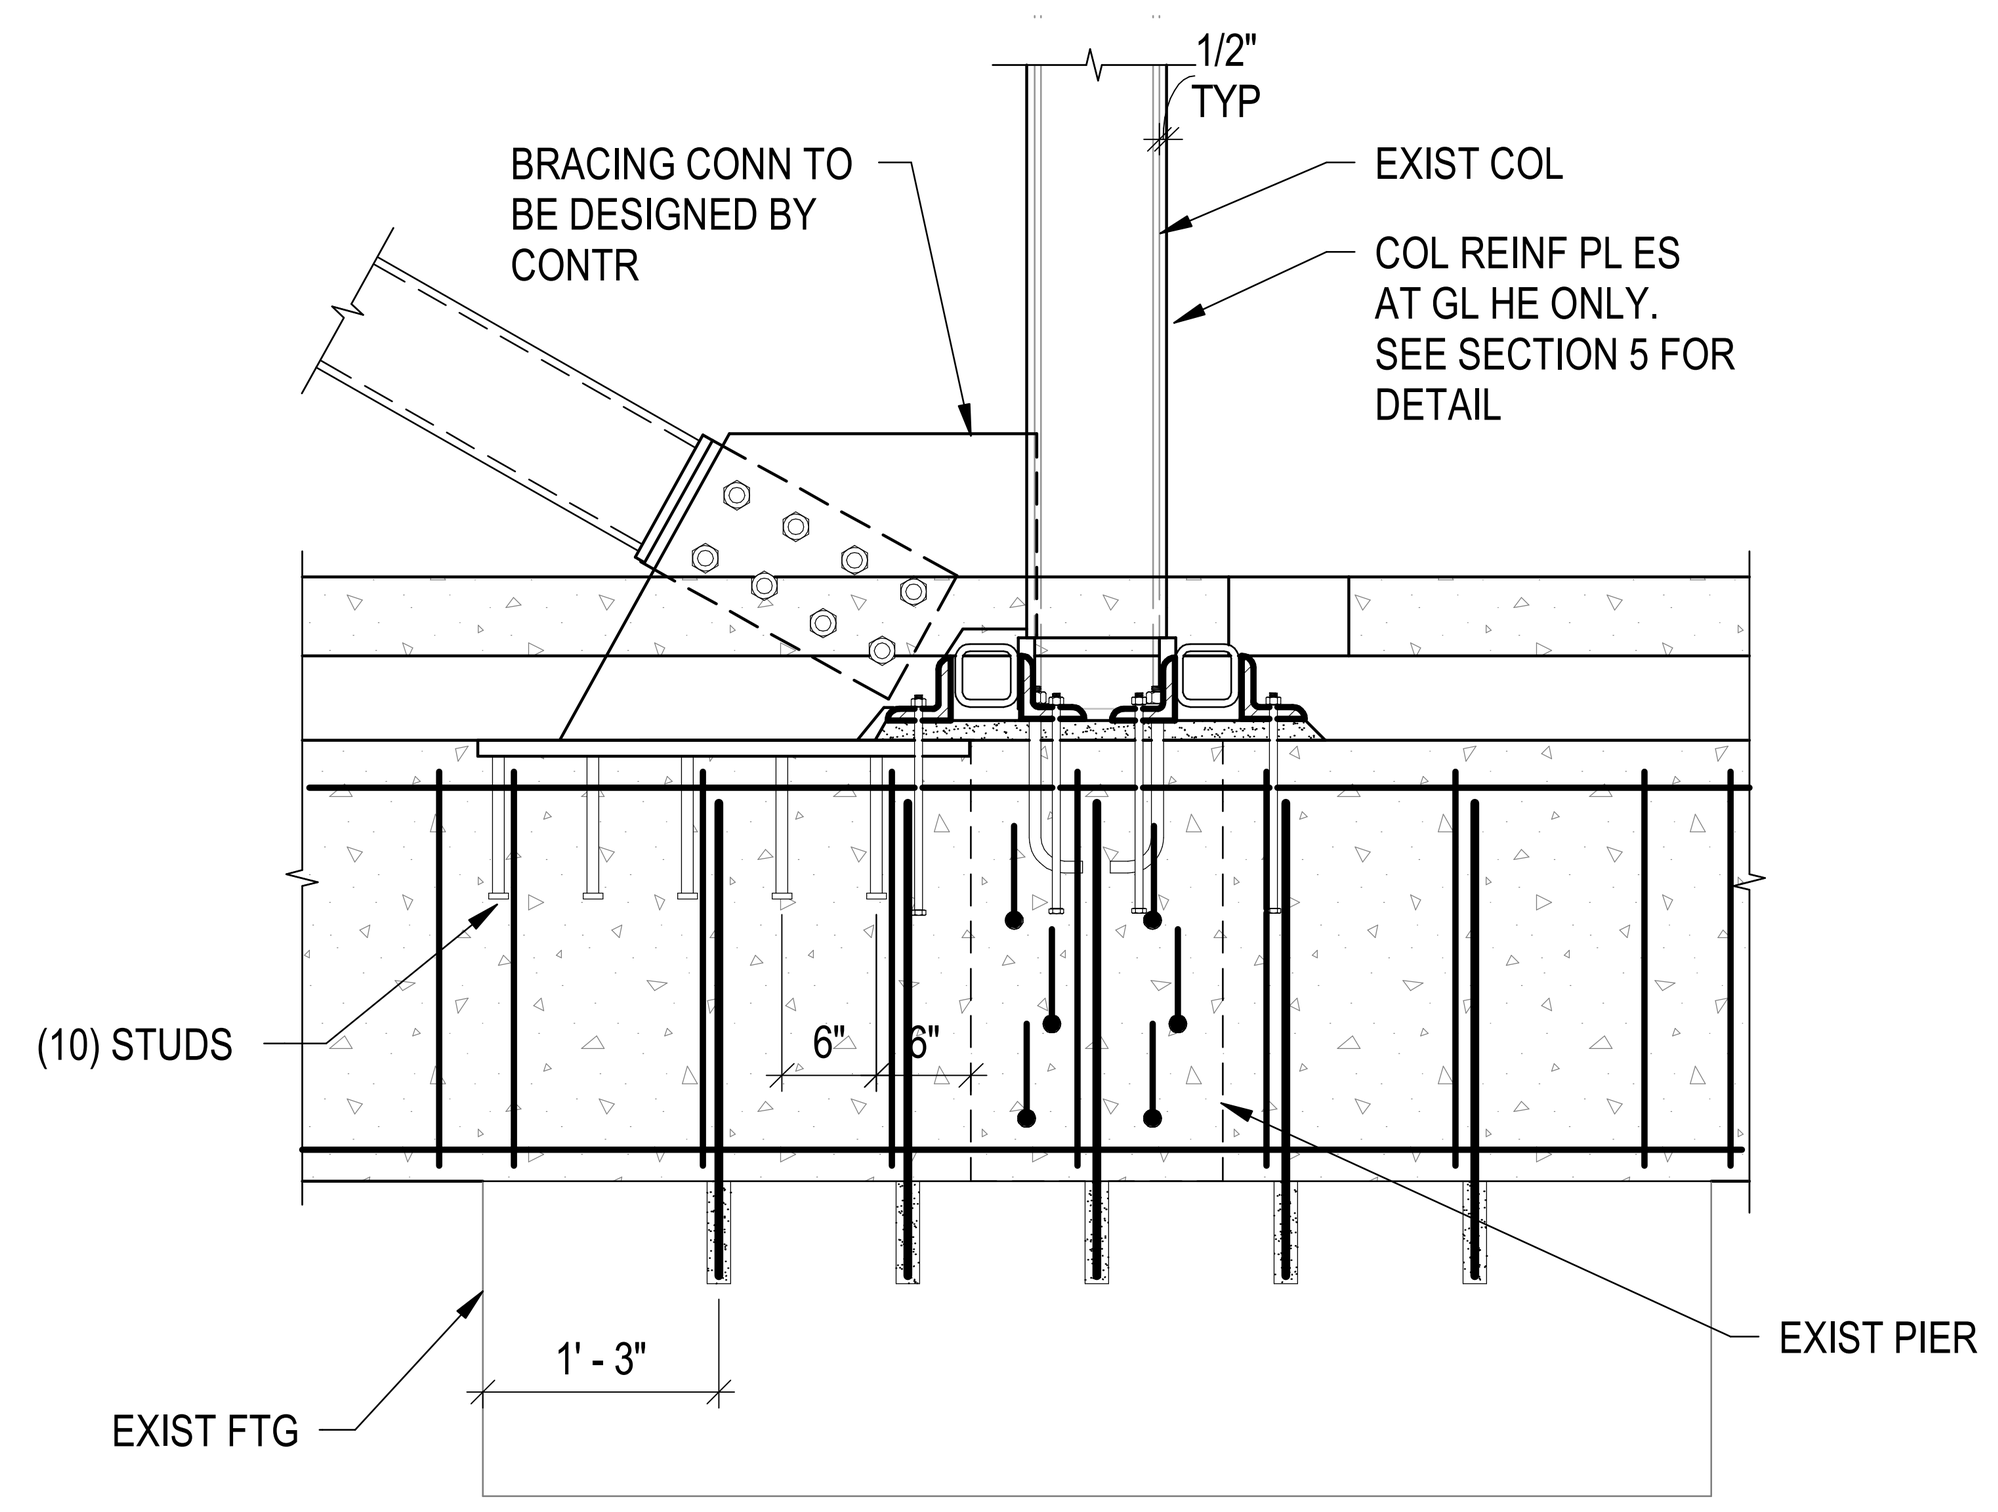

SECTION 2
SCALE: 3/4" = 1'-0" S-301

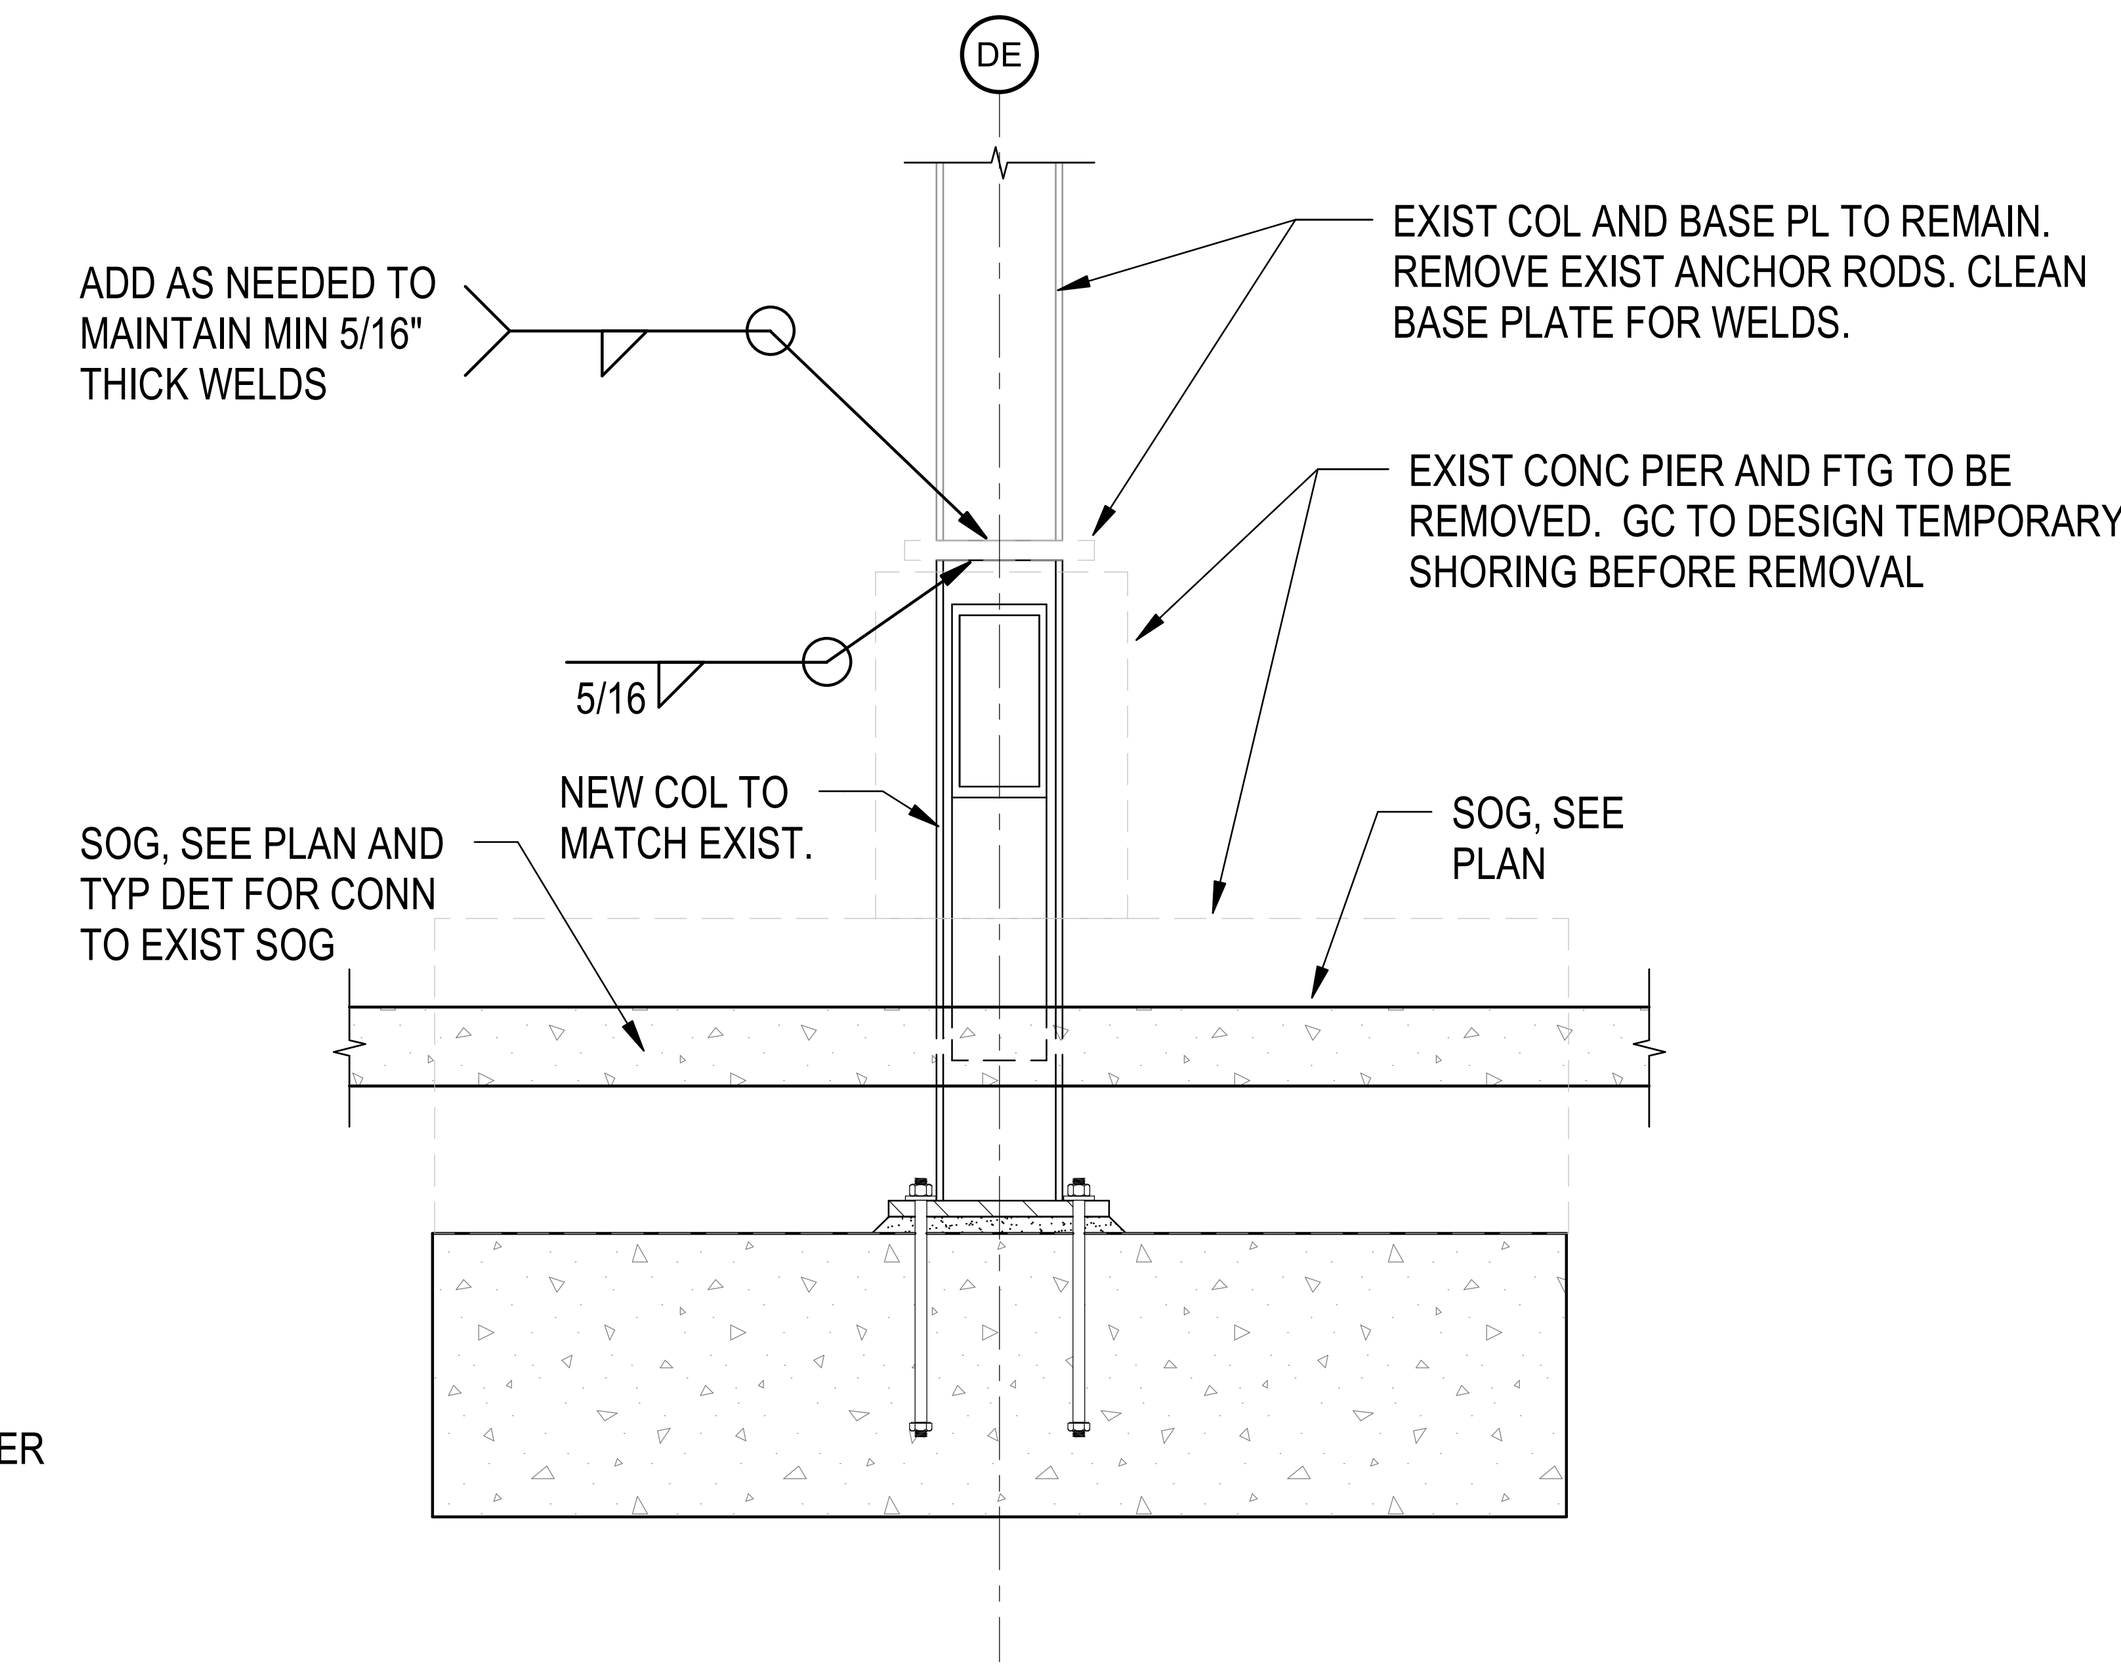

SECTION 3
SCALE: 3/4" = 1'-0" S-301

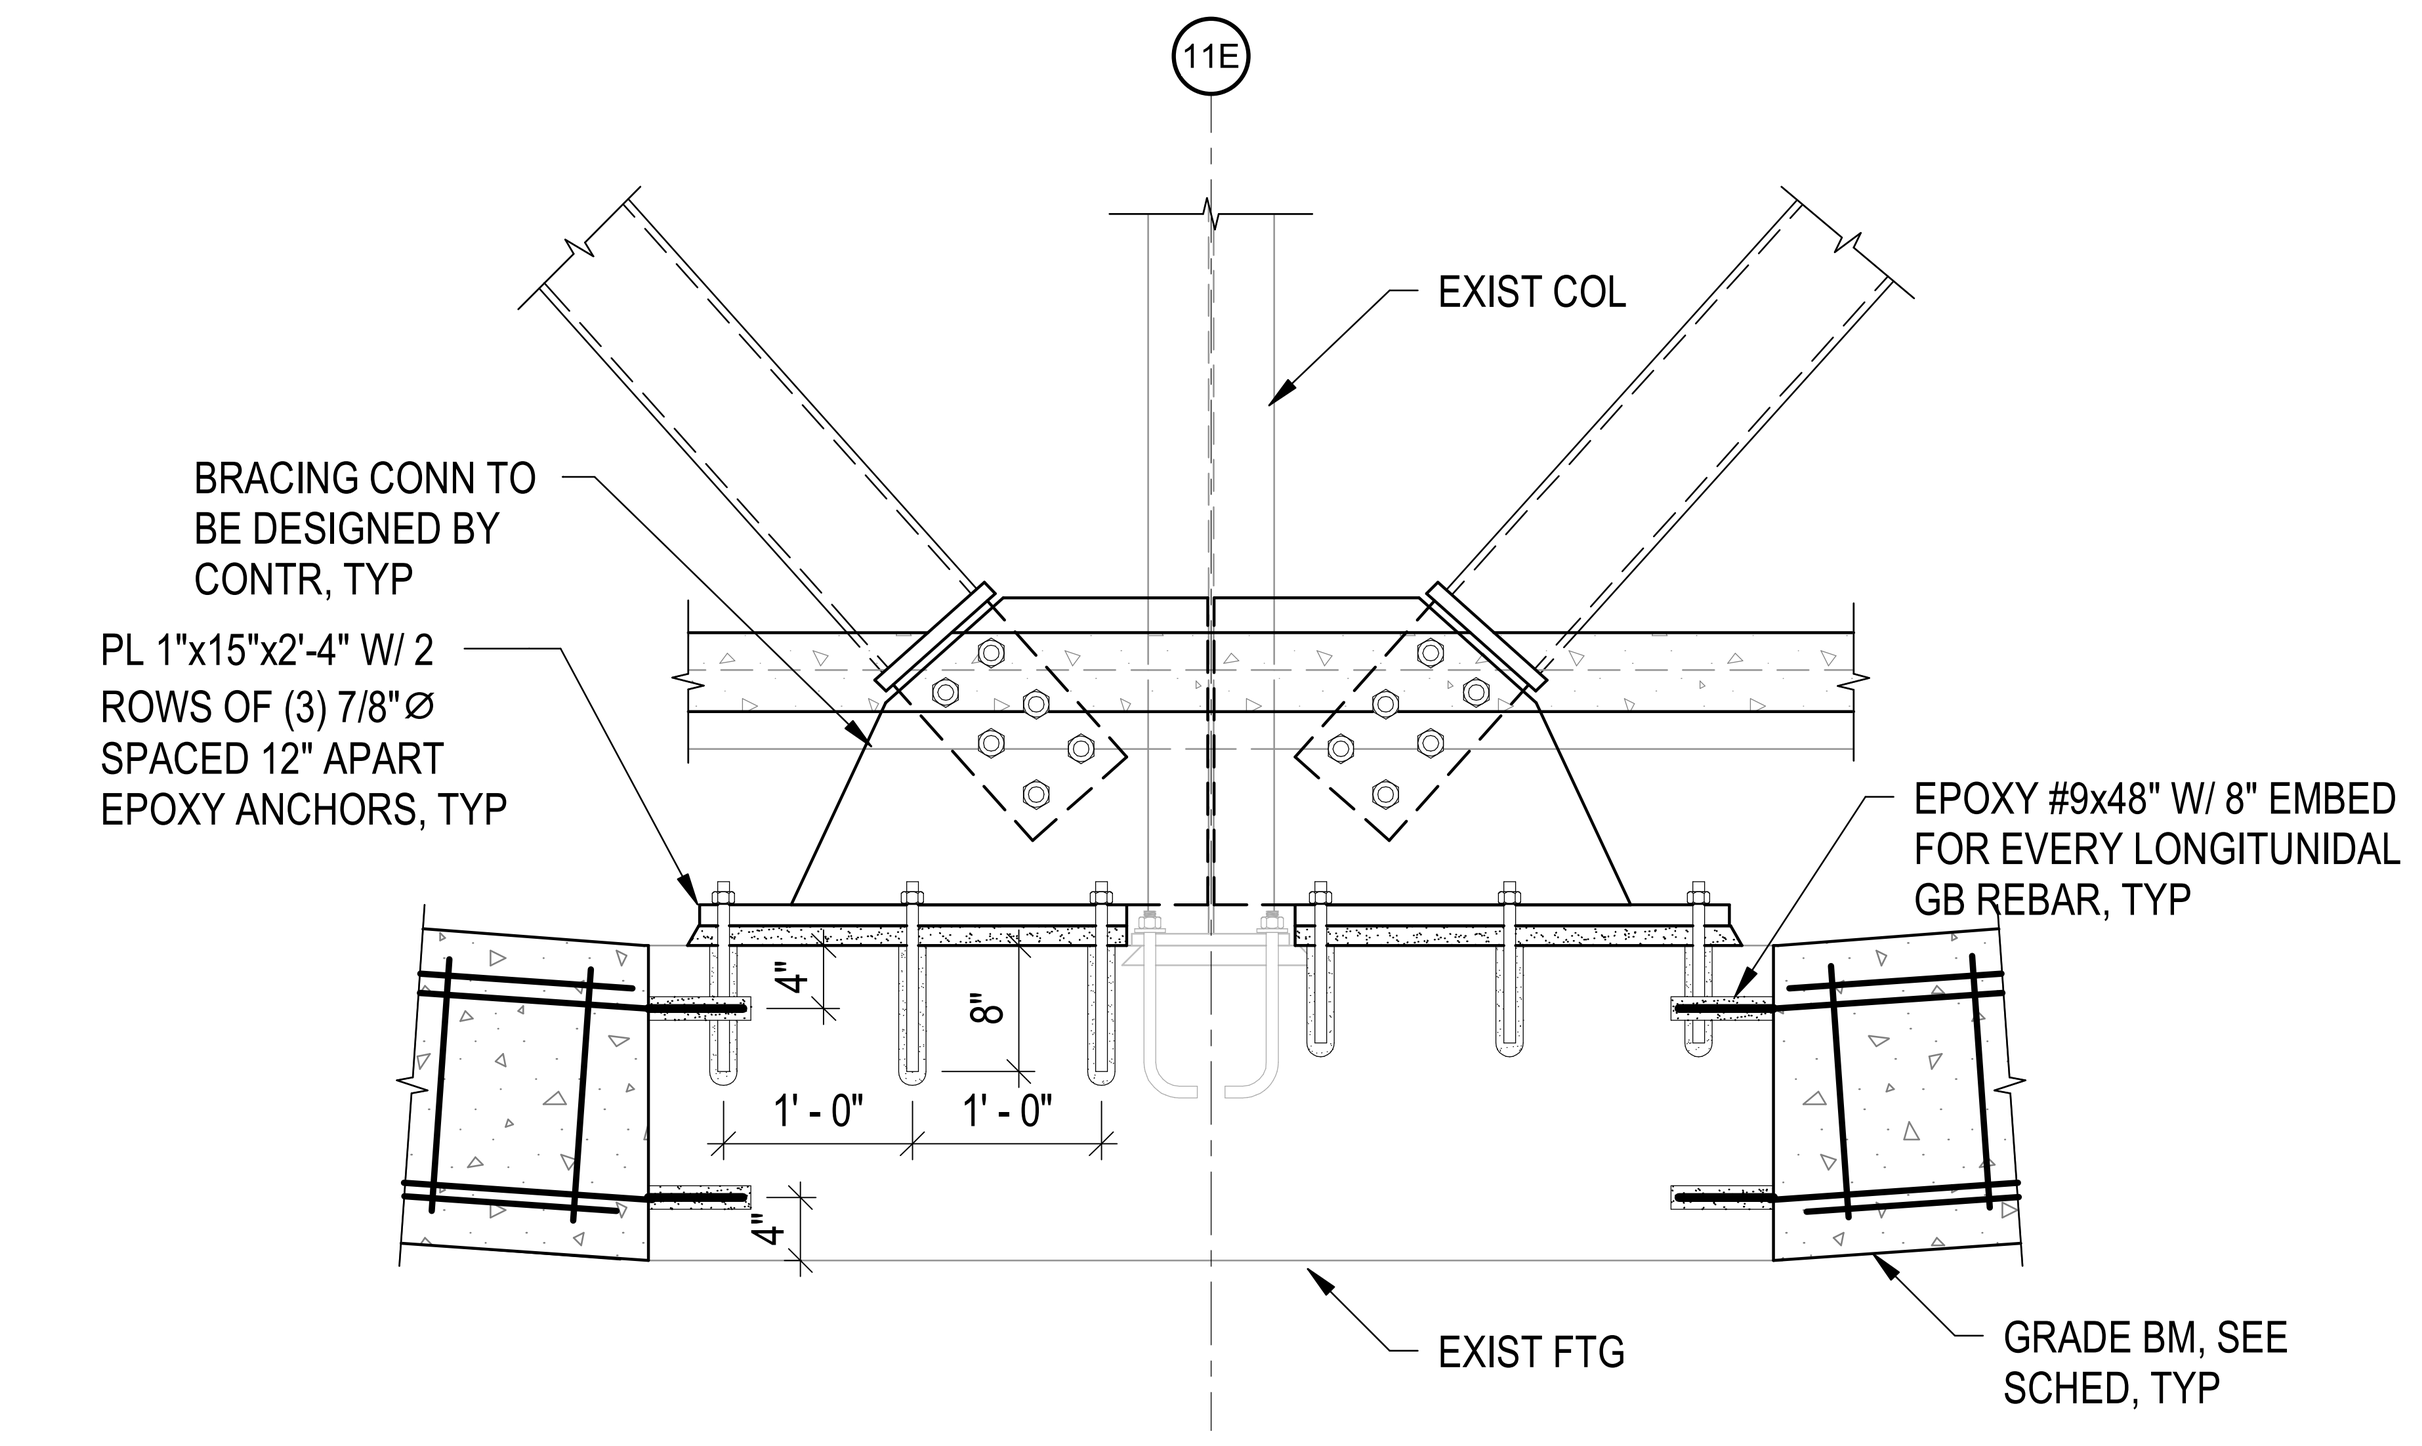

SECTION 4
SCALE: 3/4" = 1'-0" S-301

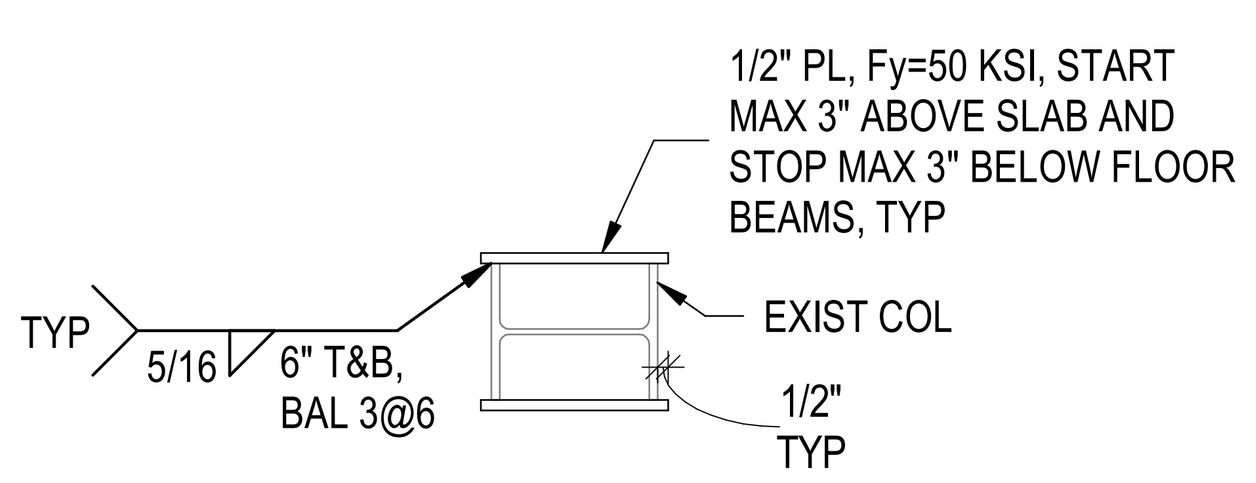

DETAIL 5
SCALE: 1" = 1'-0" S-301

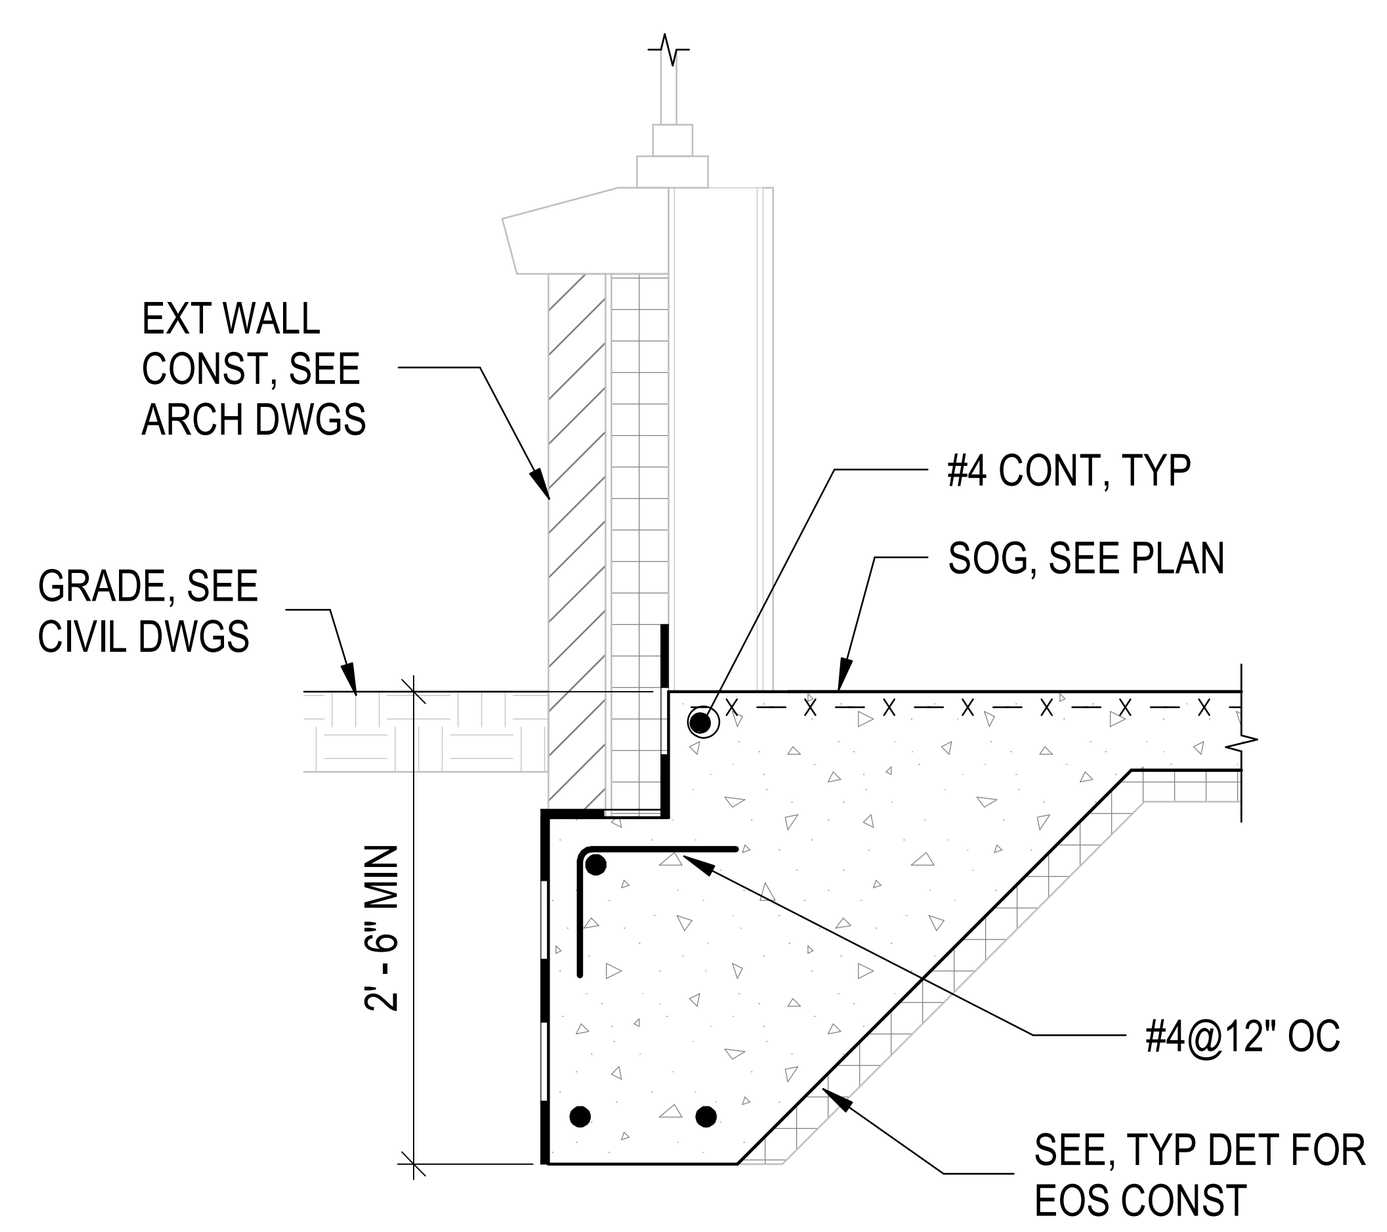

SECTION 6
SCALE: 3/4" = 1'-0" S-301

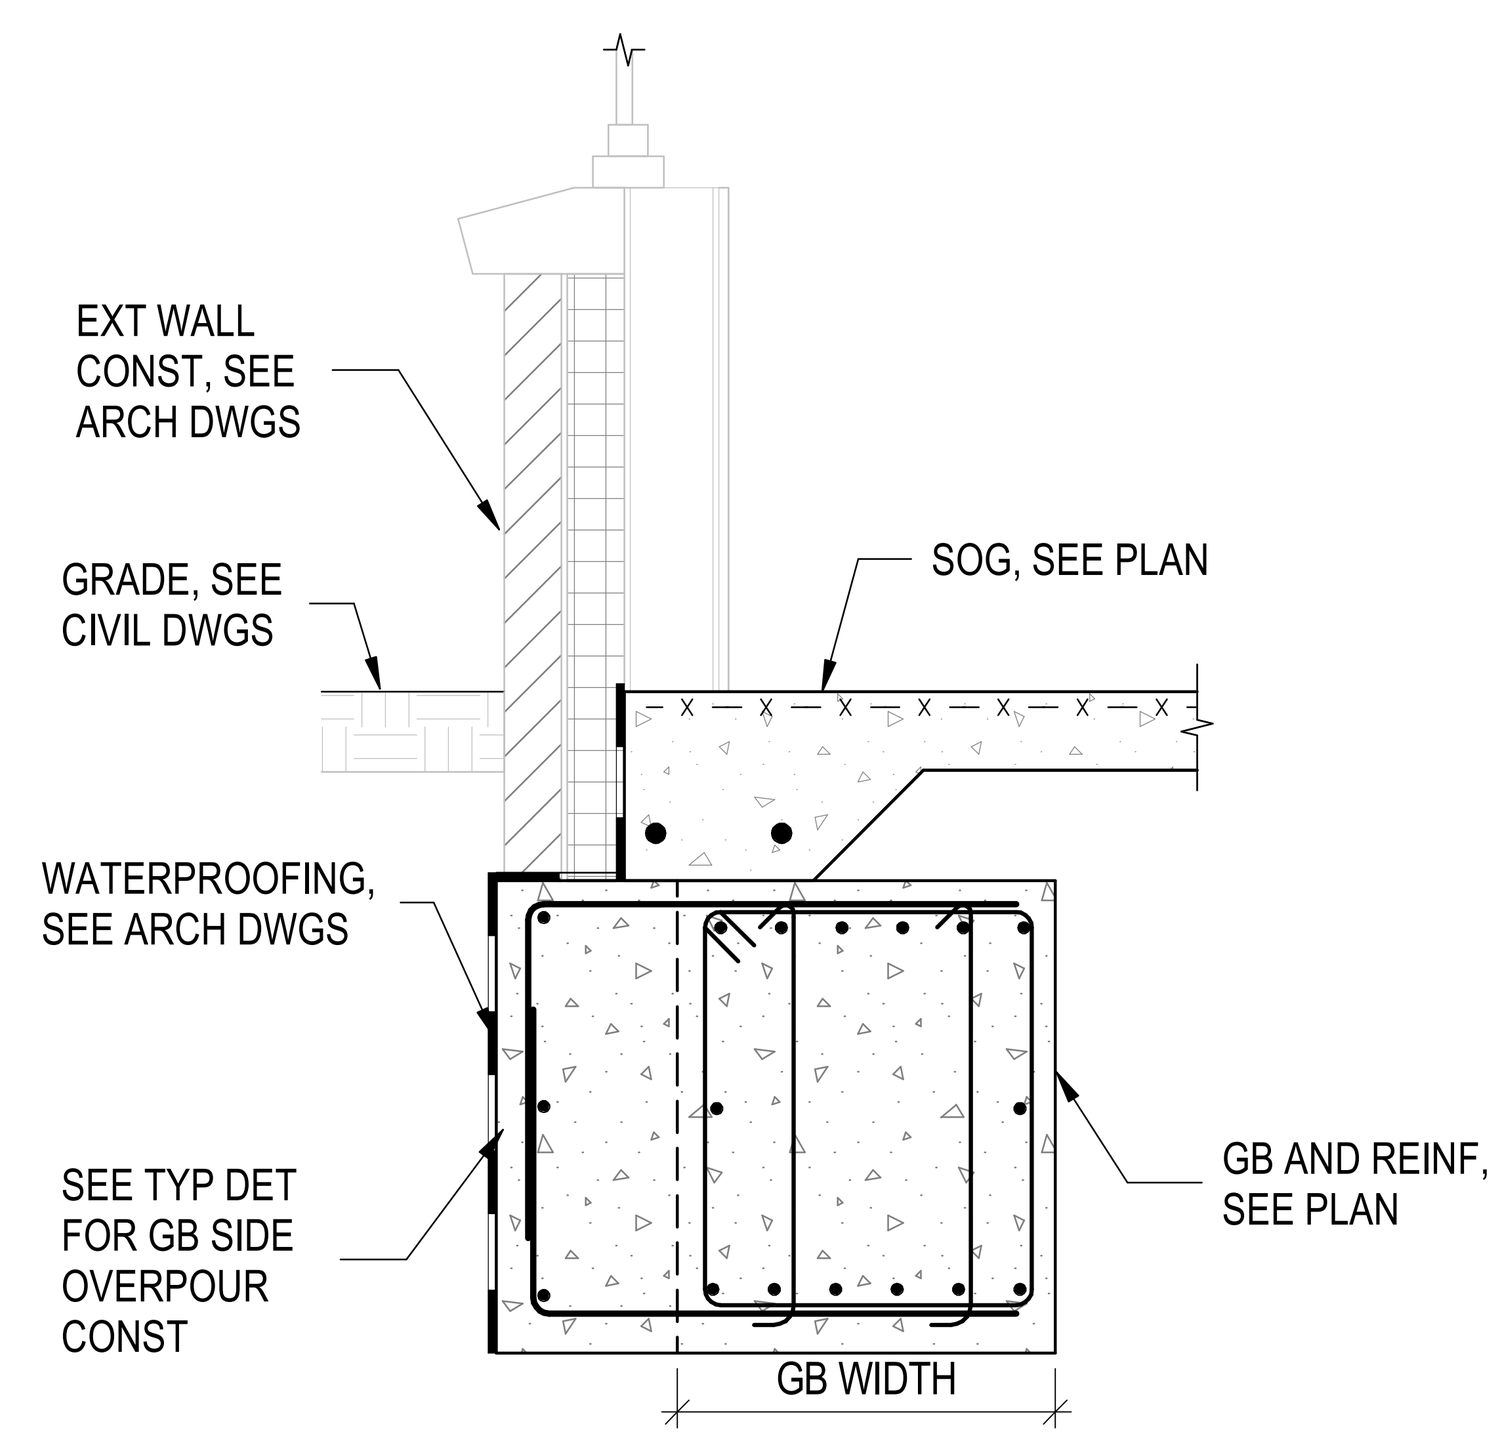

SECTION 7
SCALE: 3/4" = 1'-0" S-301

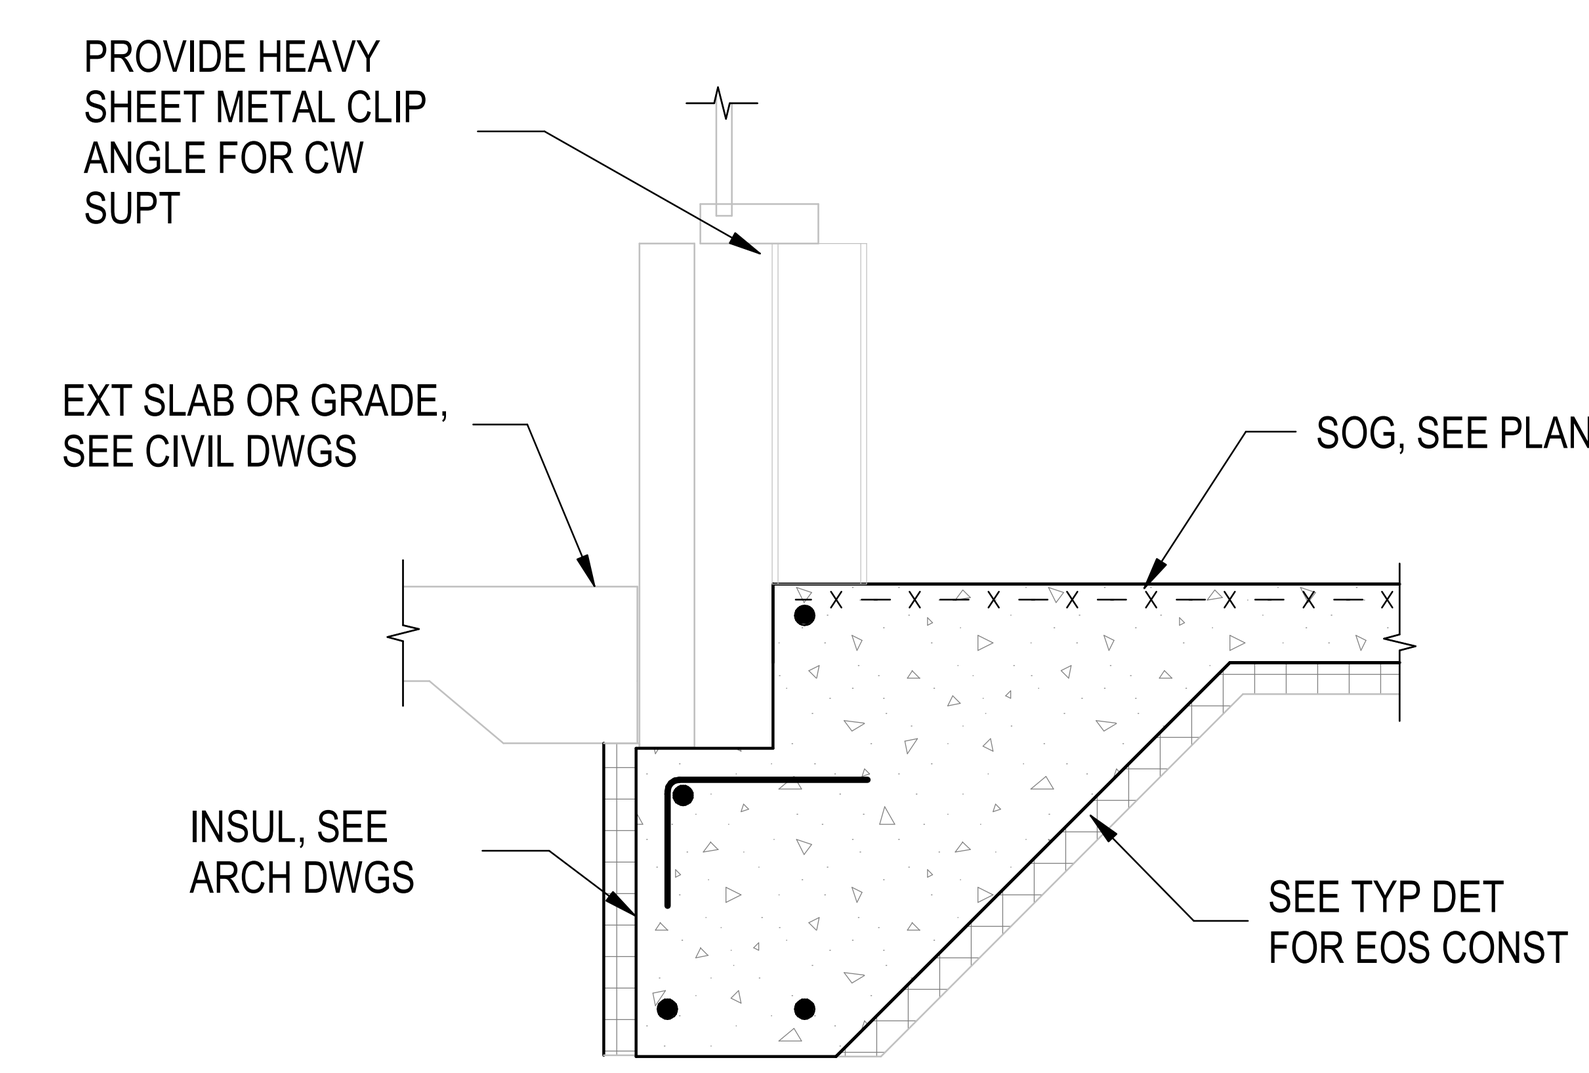

SECTION 8
SCALE: 3/4" = 1'-0" S-301

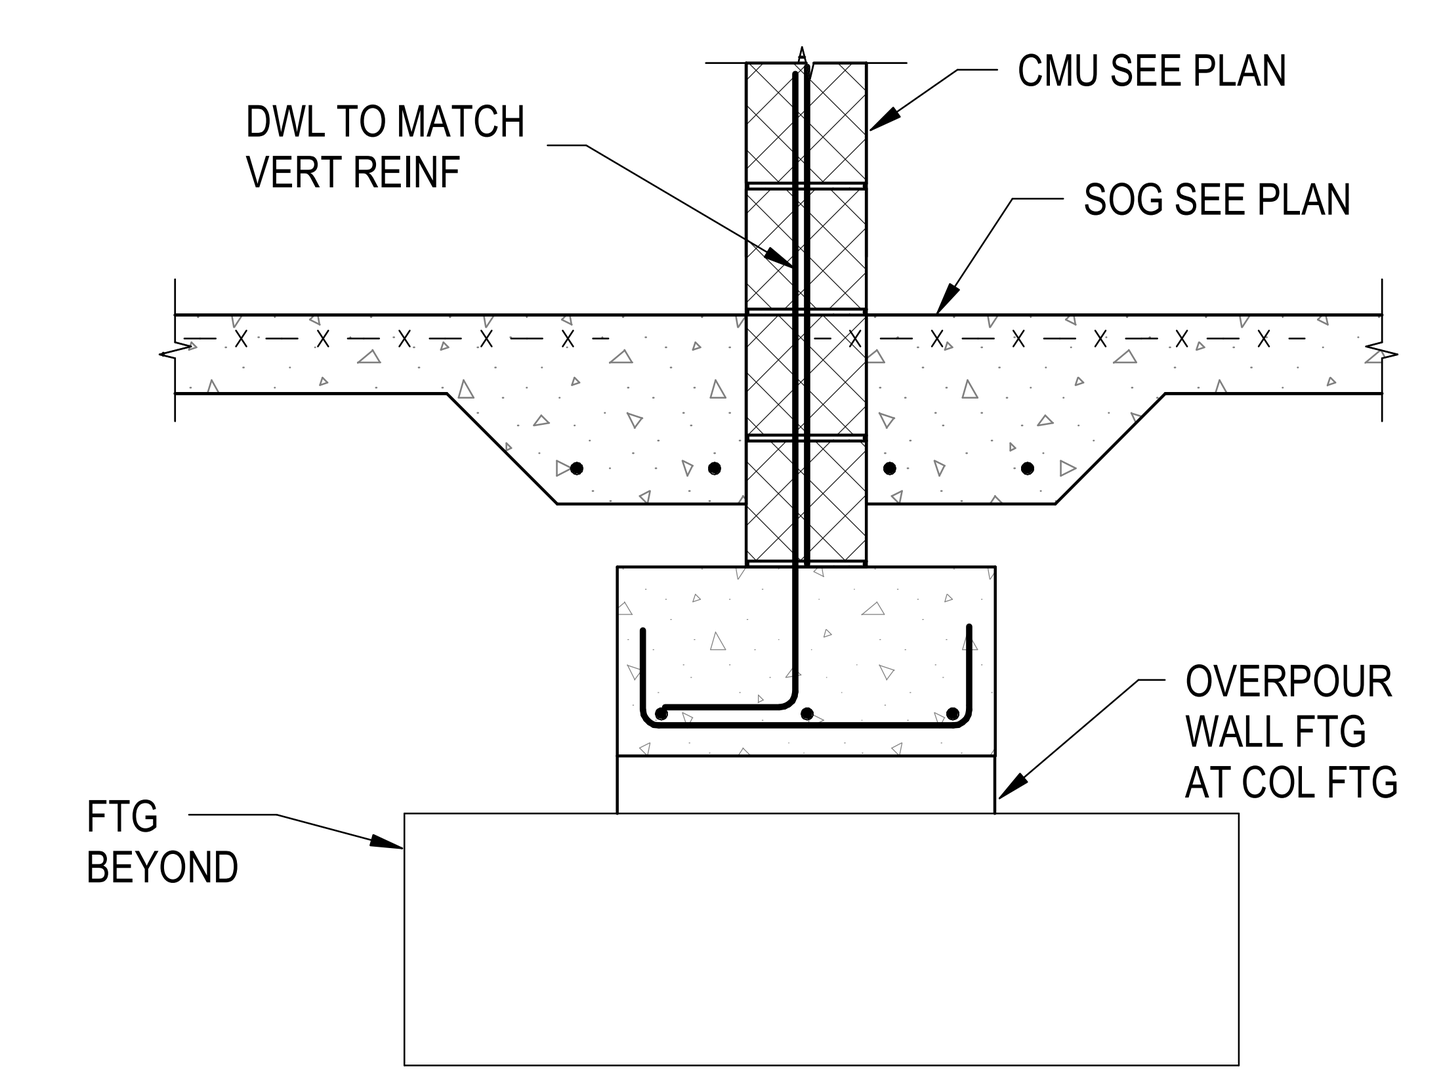

SECTION 9
SCALE: 3/4" = 1'-0" S-301

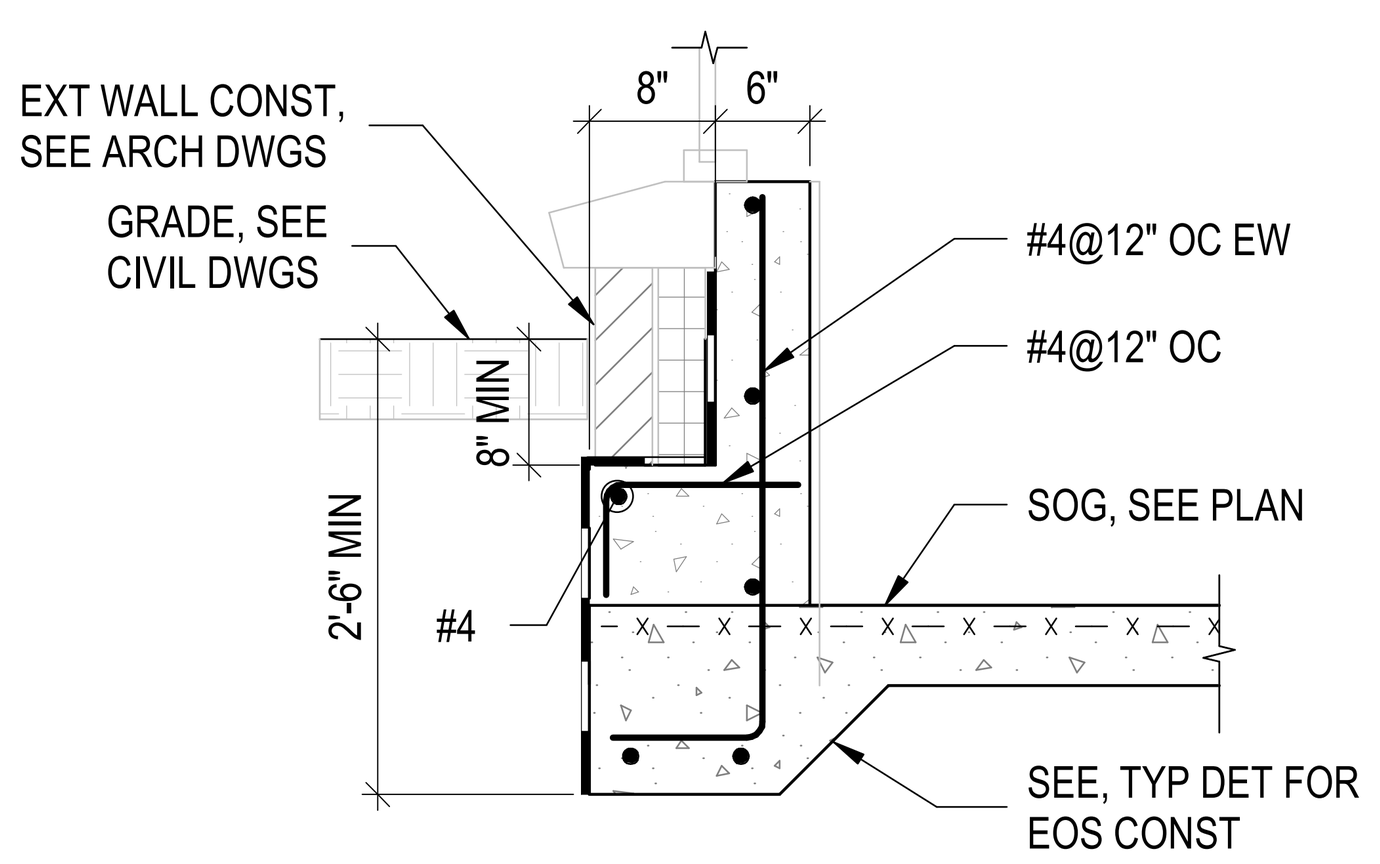

SECTION 10
SCALE: 3/4" = 1'-0" S-301

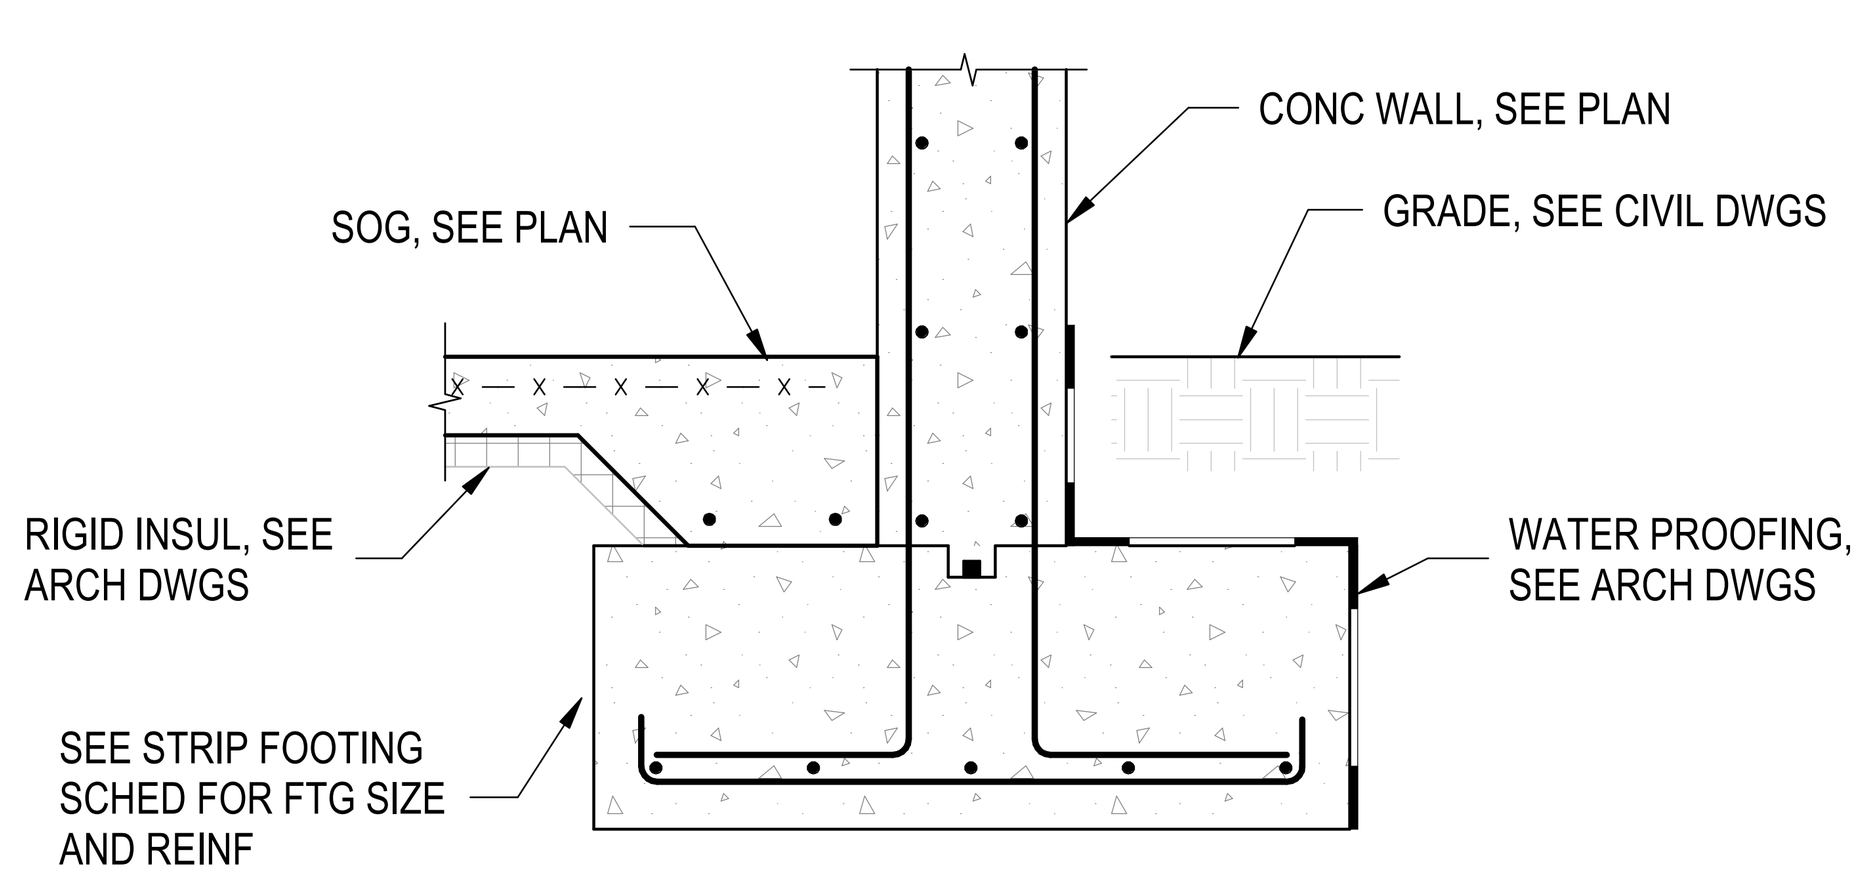

SECTION 11
SCALE: 3/4" = 1'-0" S-301

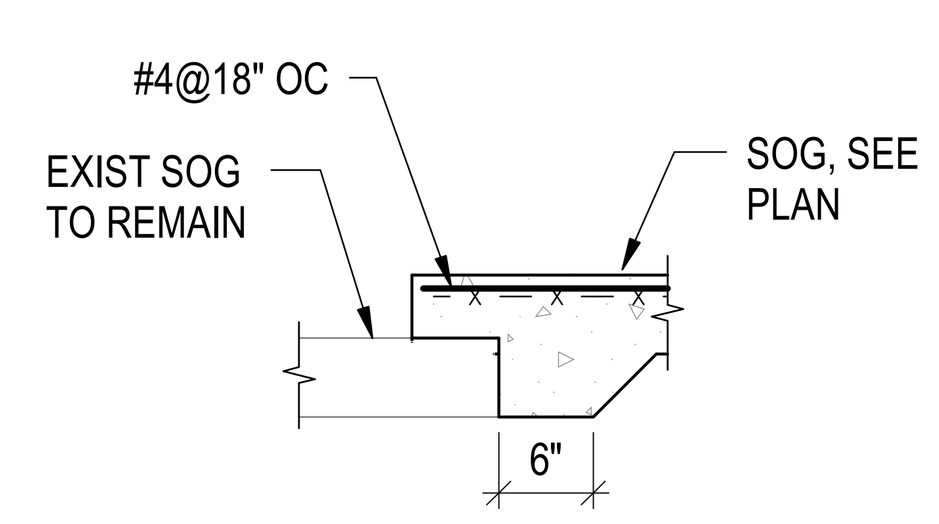

SECTION 12
SCALE: 3/4" = 1'-0" S-301

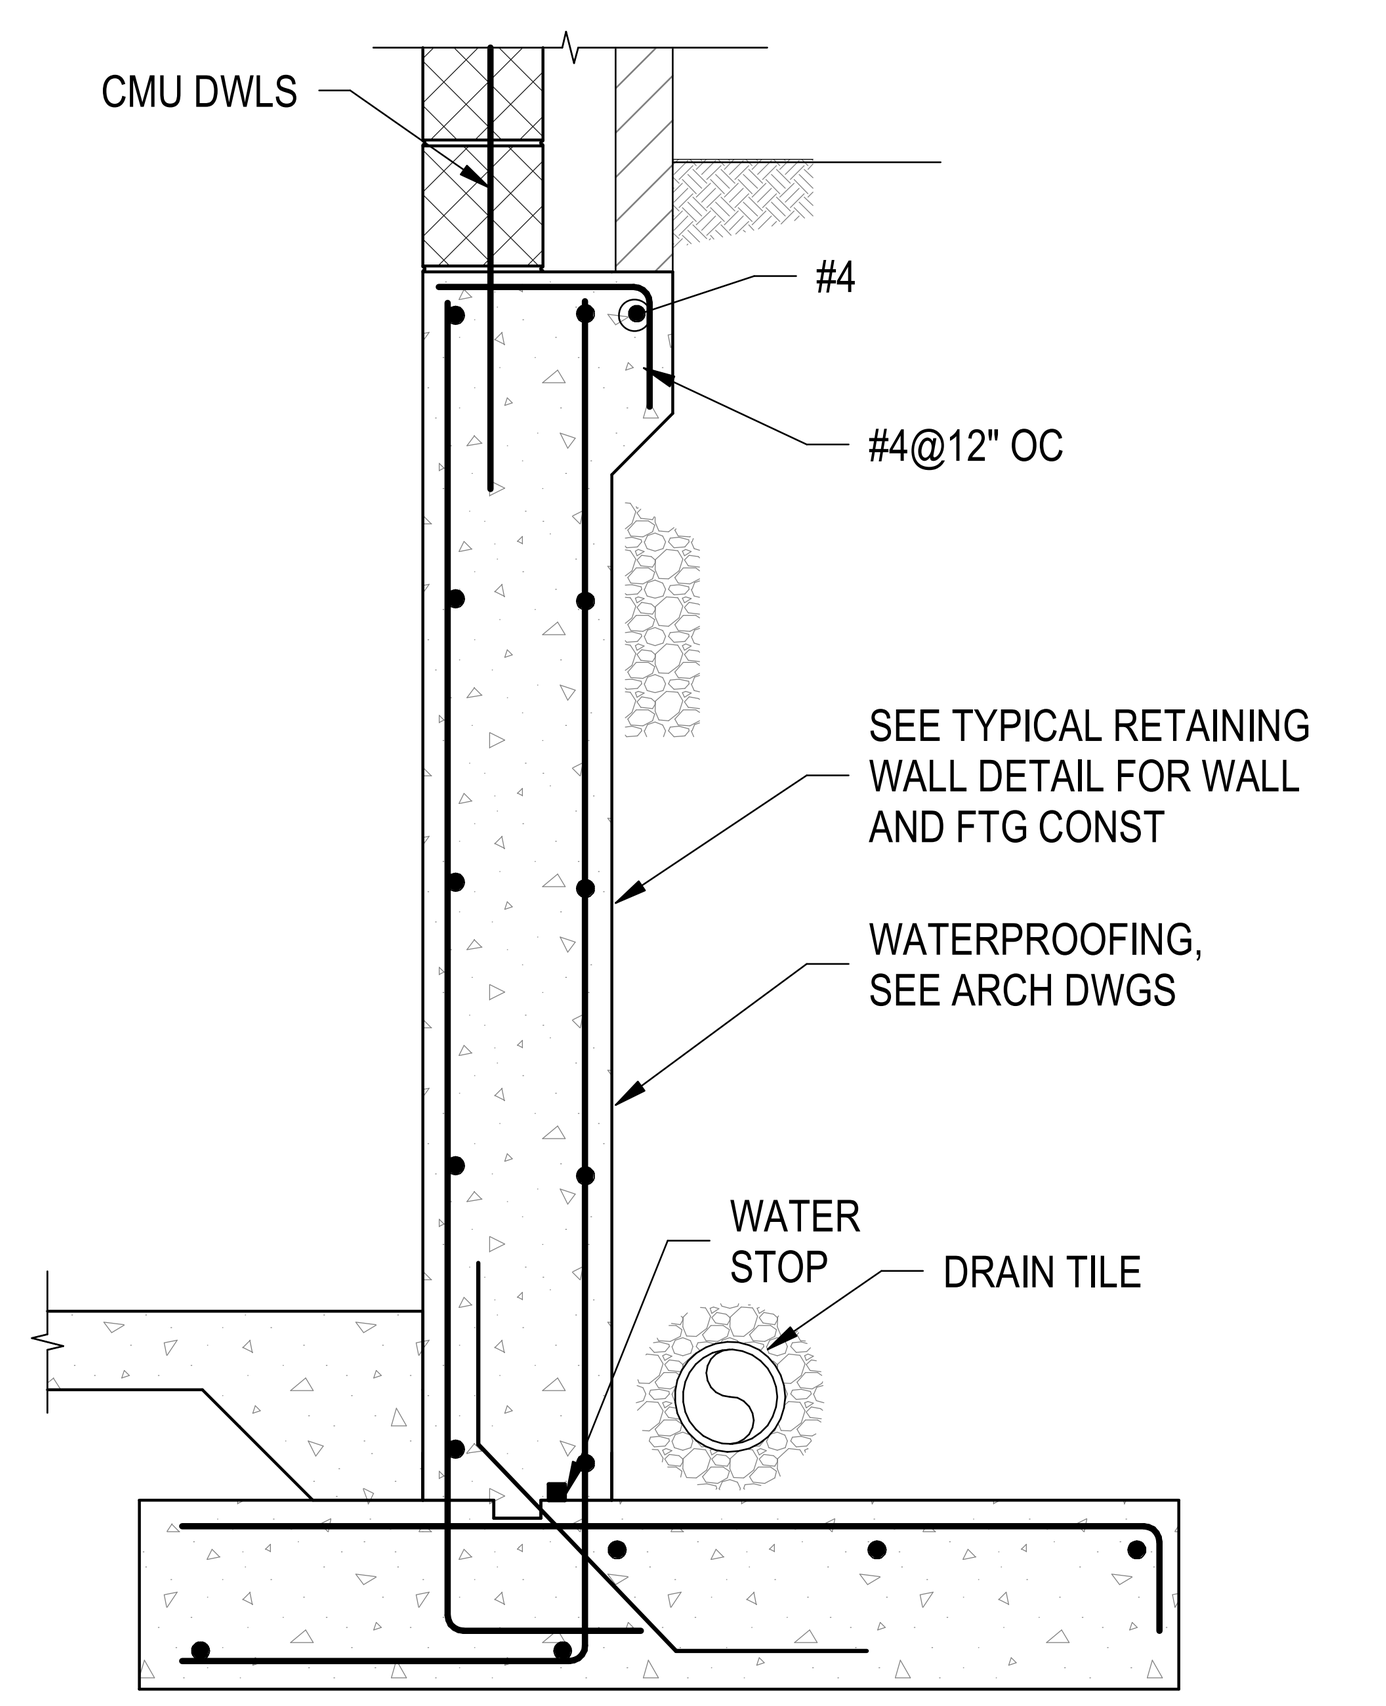

SECTION 13
SCALE: 3/4" = 1'-0" S-301

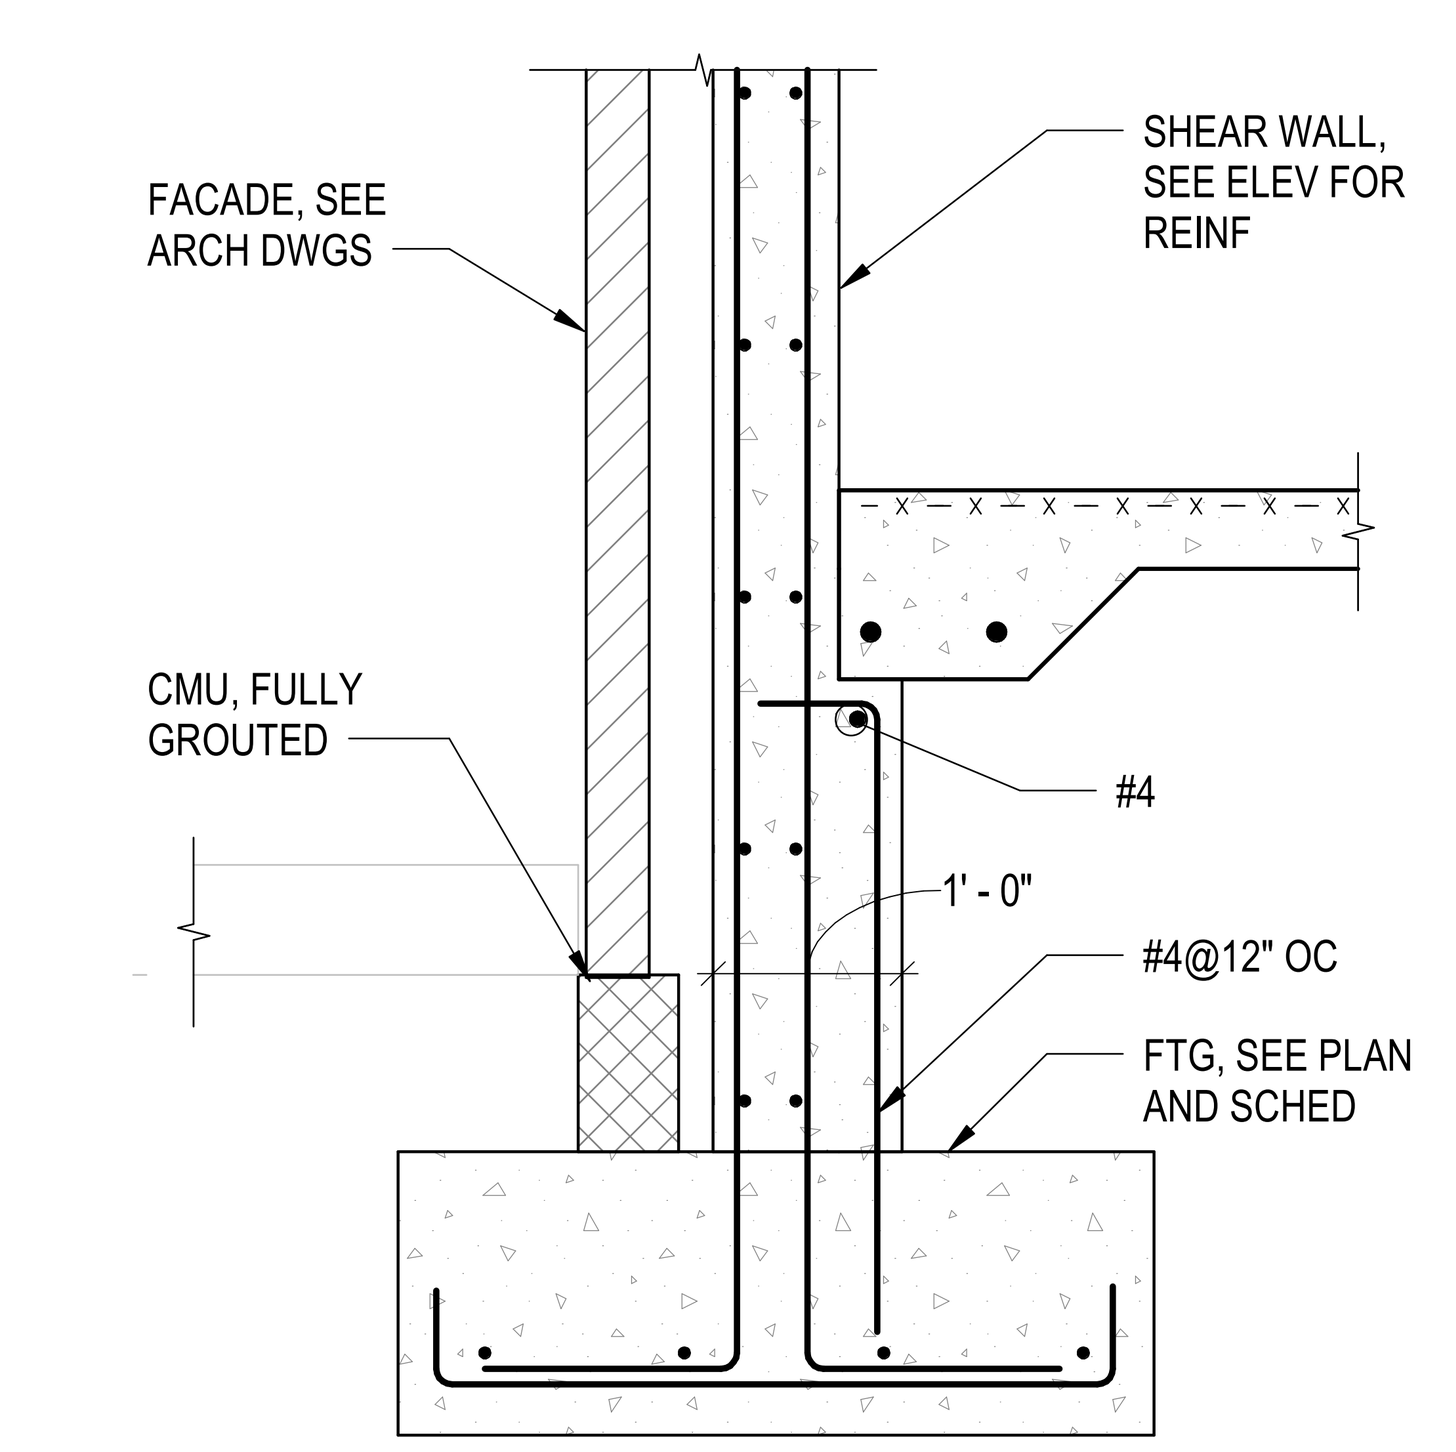

SECTION 14
SCALE: 3/4" = 1'-0" S-301

NO.	DATE	ISSUE
A	09/30/2025	Permit
	10/29/2025	BID SET

0' 4" 8" 1' 2' 3'
SCALE : 3/4" = 1'-0"

SEAL

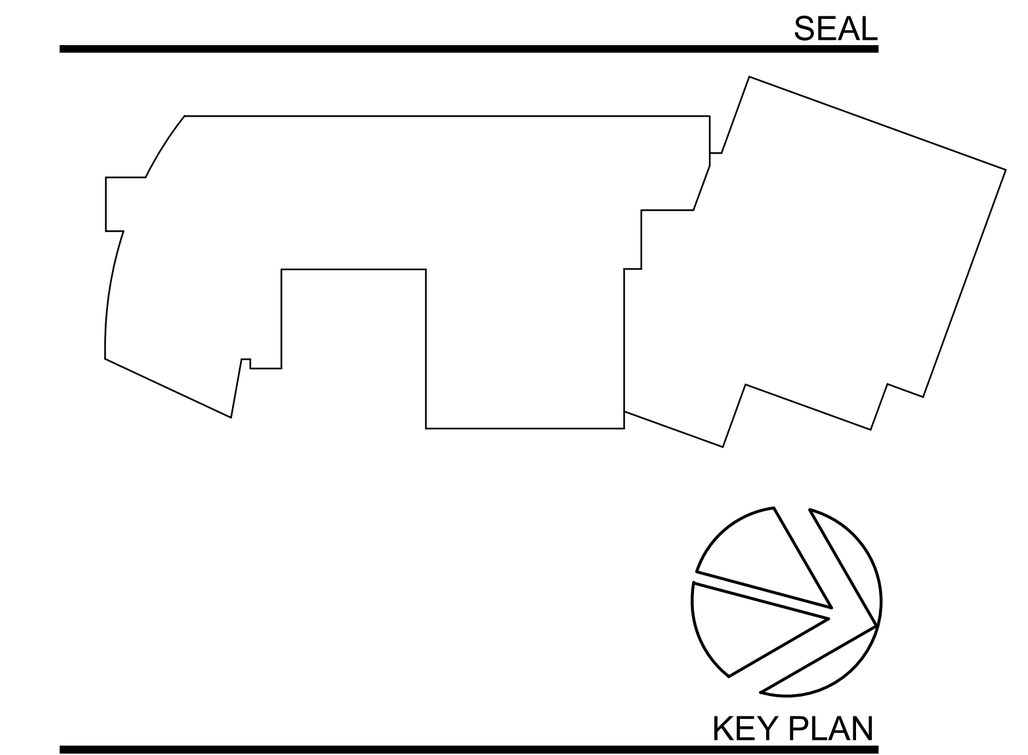

PERKINS EASTMAN
One Thomas Circle NW, Suite 200
Washington, DC 20005
T: +1 202 861 1325
F: +1 202 861 1326

Owner:
Sidwell Friends School
3825 Wisconsin Ave NW, Washington DC 20016

Construction Manager:
Advanced Project Management, Inc (APM)
4530 Walney Rd, Ste 202, Chantilly, VA 20151

Civil / Site:
Bowman Consulting Group, Ltd
888 17th St NW, Suite 510, Washington, DC 20006

Landscape:
Natural Resources Design, Inc (NRD)
1009 Shepherd Street NE, Washington, DC 20017

Structural:
Yun Associates LLC
1050 Connecticut Ave NW, Suite 500, Washington, DC 20036

MEP / FP / Lighting:
CMTA Inc
220 Lexington Green Circle, Suite 600, Lexington, KY 40503

AV / IT / Telecom / Security:
Educational Systems Planning (ESP)
2448 Holly Avenue, Suite 302, Annapolis, MD 21401

Food Service
Nyikos-Garcia Foodservice Design, Inc
7146 Starmount Way, New Market, MD 21774

Accessibility Consultant:
Galbo Wolf LLC
4410 Massachusetts Ave NW, #240, Washington, DC 20016

Acoustics:
Polysonics Corp
555 Hospital Drive, Warrenton, VA 20186

Building Envelope Consultant:
Sustainable Building Partners LLC
2701 Prosperity Ave, Suite 105, Fairfax, VA 22031

Code Consultant:
Campbell Code Consulting LLC
7834 Taggart Ct, Elkridge, MD 21075

Specifications:

PROJECT TITLE:

SIDWELL FRIENDS NEW LOWER SCHOOL AT DC CAMPUS

3825 WISCONSIN AVE NW
WASHINGTON, DC 20016

PROJECT No: 2025008

DRAWING TITLE:

SECTIONS

SCALE: As indicated

S-301

BID SET
10/29/2025

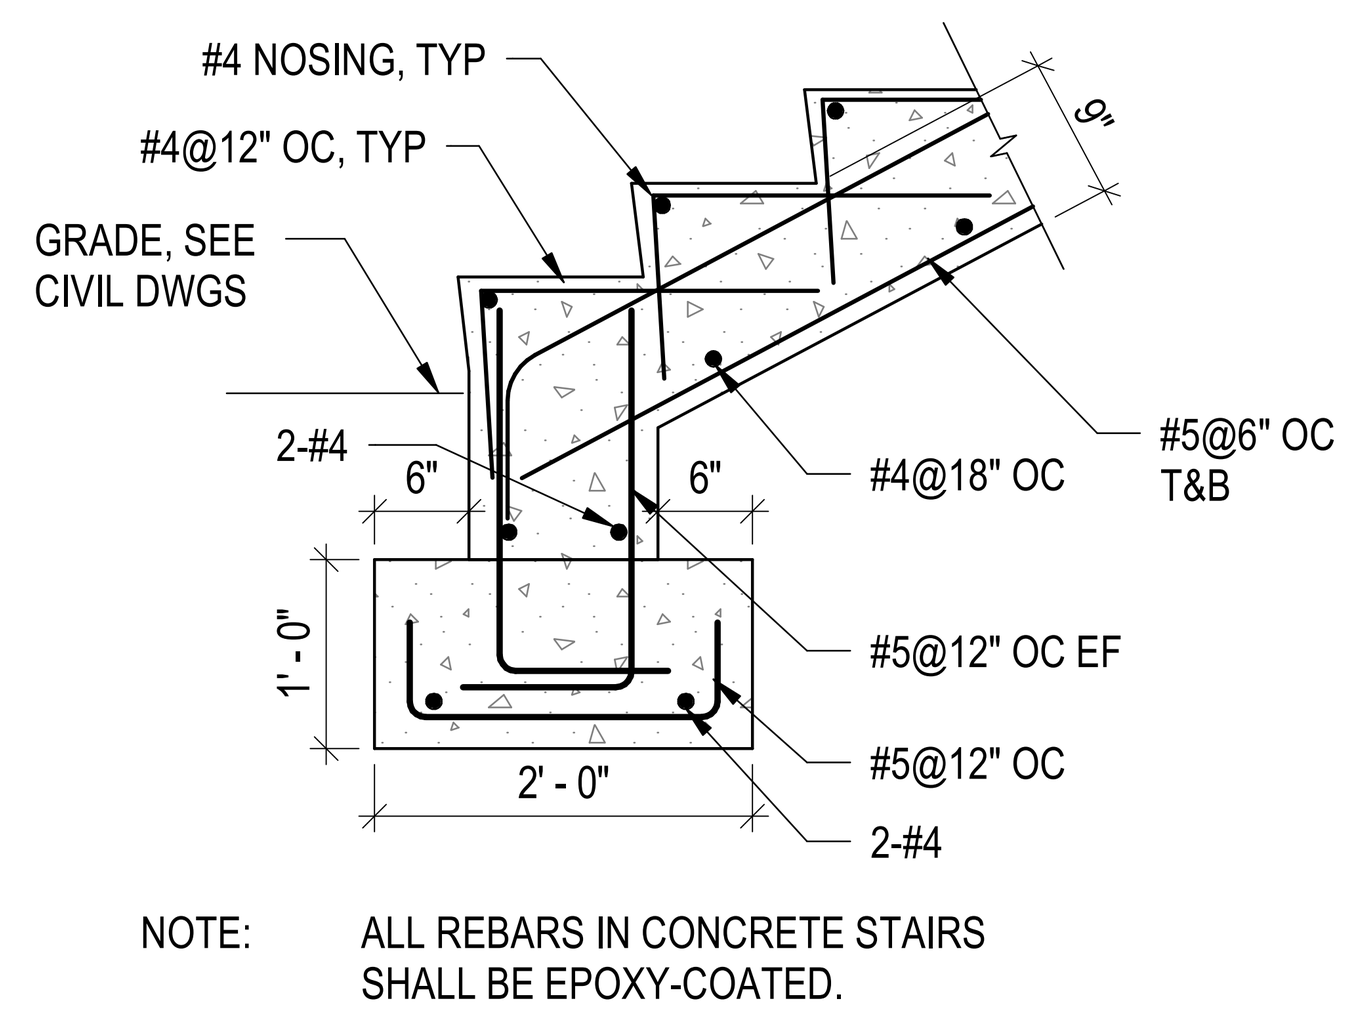

SECTION 1 S-302
SCALE: 3/4" = 1'-0"

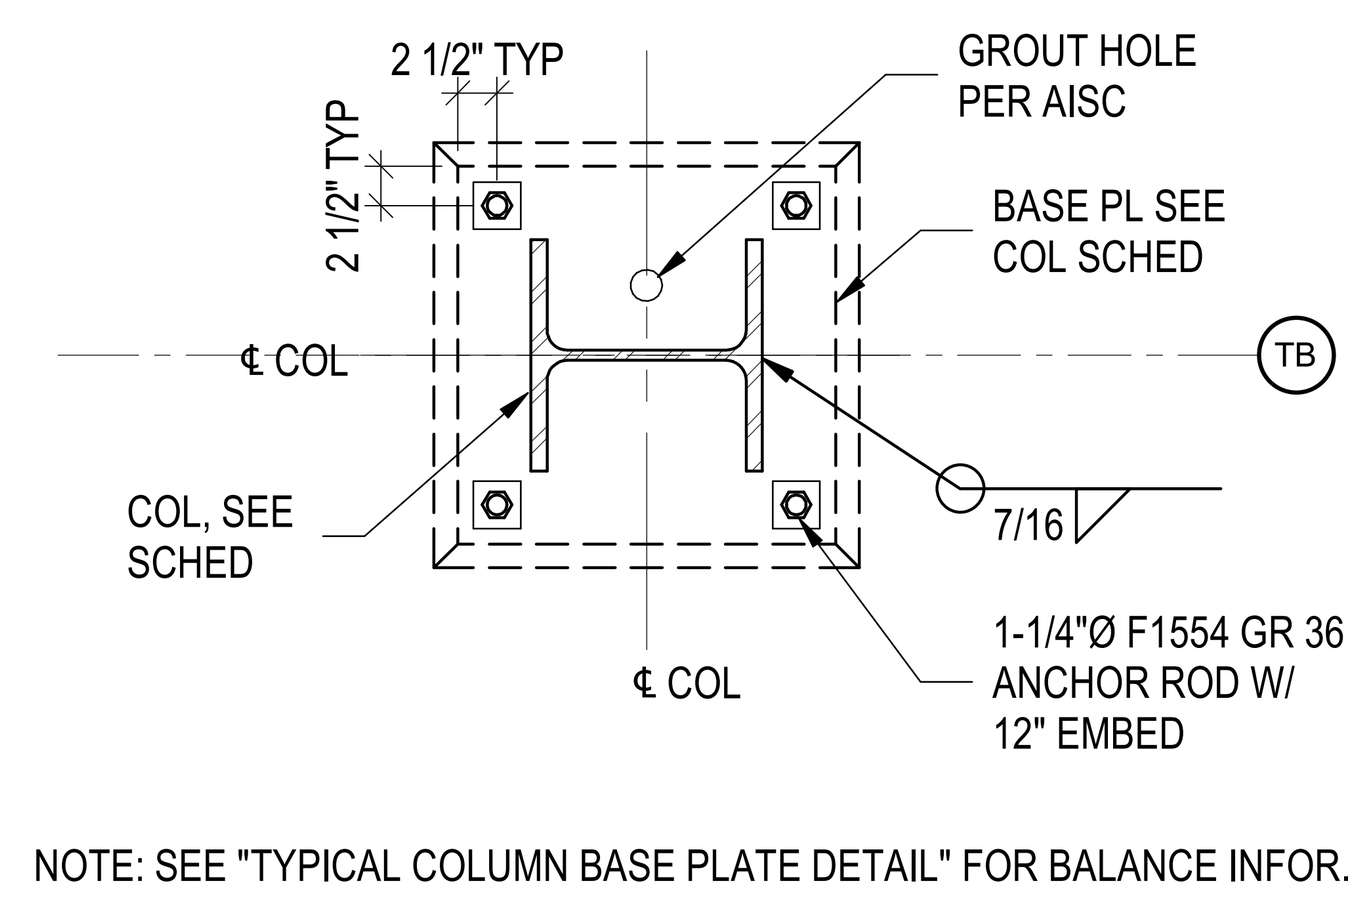

DETAIL 2 S-302
SCALE: 3/4" = 1'-0"

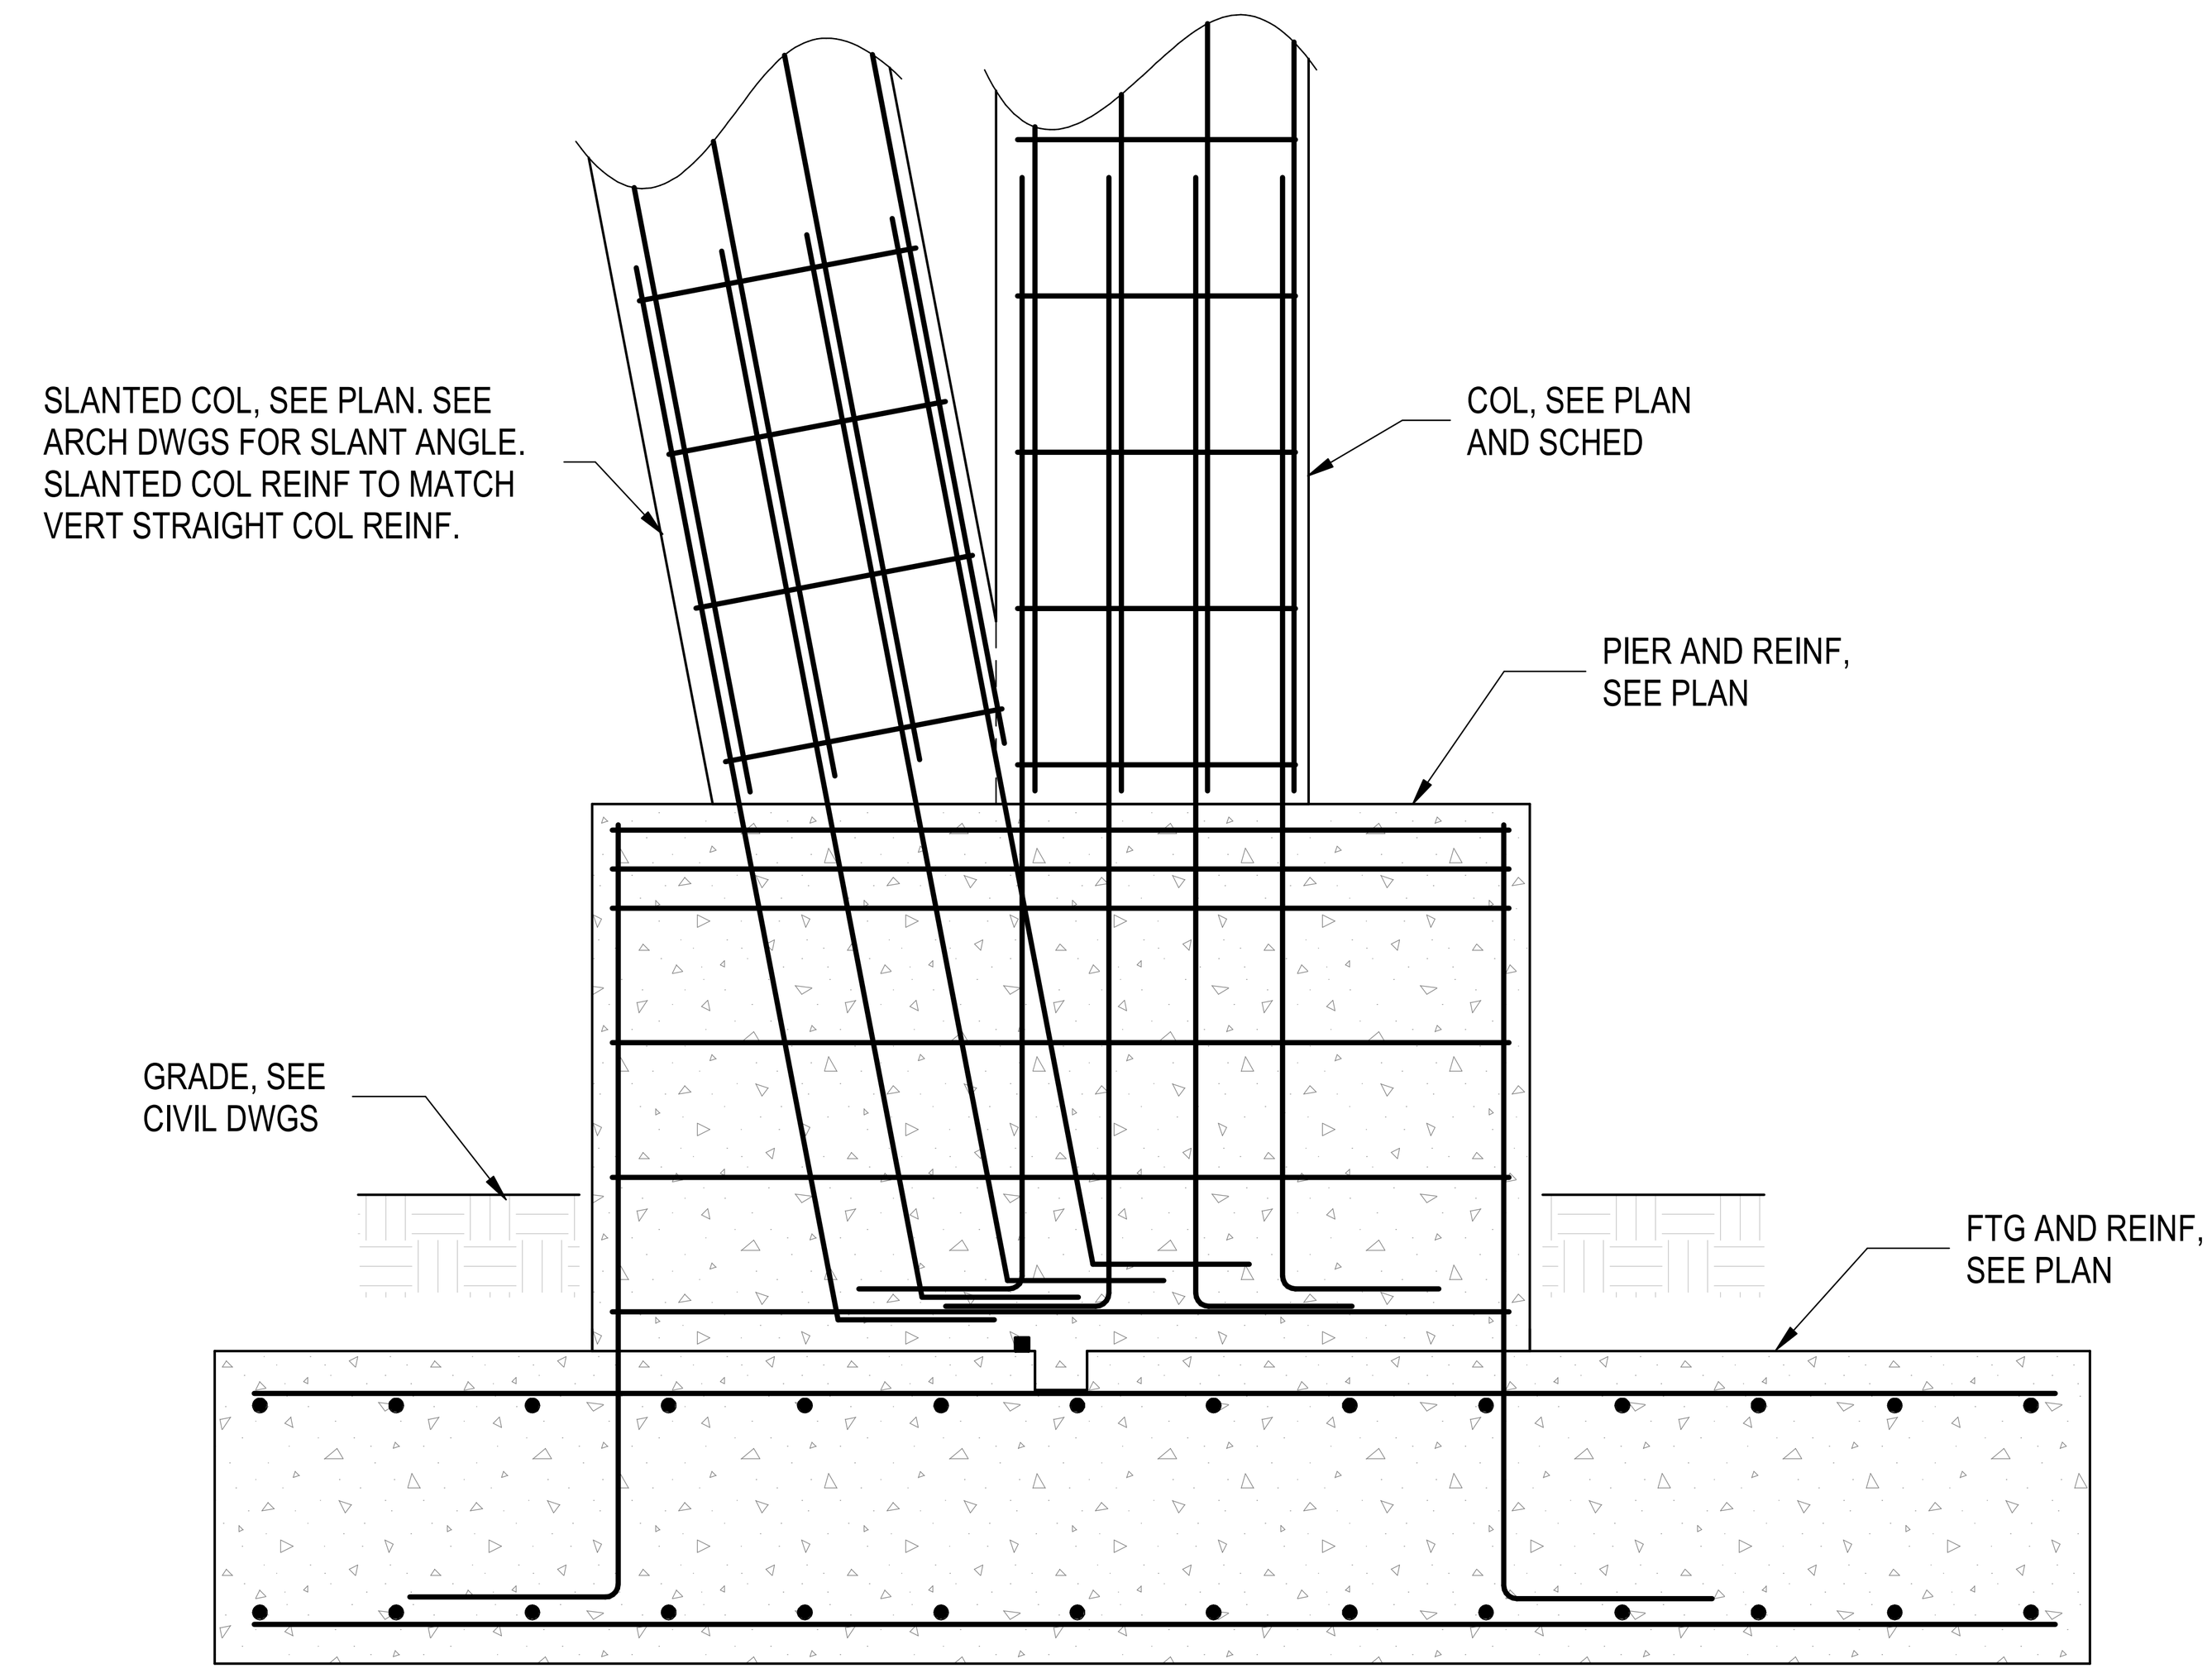

SECTION 3 S-302
SCALE: 3/4" = 1'-0"

NO.	DATE	ISSUE
A	09/30/2025	Permit
	10/29/2025	BID SET

0' 4" 8" 1' 2' 3'
SCALE : 3/4" = 1'-0"

SEAL

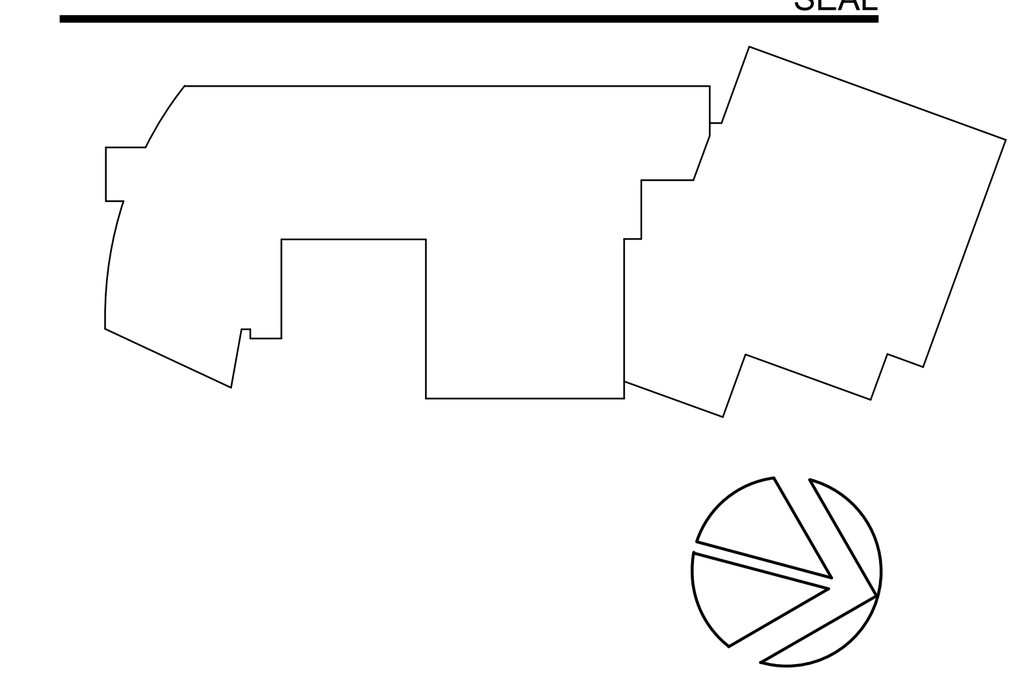

KEY PLAN

PERKINS EASTMAN
One Thomas Circle NW, Suite 200
Washington, DC 20005
T: +1 202 861 1325
F: +1 202 861 1326

Owner:
Sidwell Friends School
3825 Wisconsin Ave NW, Washington DC 20016

Construction Manager:
Advanced Project Management, Inc (APM)
4530 Walney Rd, Ste 202, Chantilly, VA 20151

Civil / Site:
Bowman Consulting Group, Ltd
888 17th St NW, Suite 510, Washington, DC 20006

Landscape:
Natural Resources Design, Inc (NRD)
1009 Shepherd Street NE, Washington, DC 20017

Structural:
Yun Associates LLC
1050 Connecticut Ave NW, Suite 500, Washington, DC 20036

MEP / FP / Lighting:
CMTA Inc
220 Lexington Green Circle, Suite 600, Lexington, KY 40503

AV / IT / Telecom / Security:
Educational Systems Planning (ESP)
2448 Holly Avenue, Suite 302, Annapolis, MD 21401

Food Service
Nyikos-Garcia Foodservice Design, Inc
7146 Starmount Way, New Market, MD 21774

Accessibility Consultant:
Galbo Wolf LLC
4410 Massachusetts Ave NW, #240, Washington, DC 20016

Acoustics:
Polysonics Corp
555 Hospital Drive, Warrenton, VA 20186

Building Envelope Consultant:
Sustainable Building Partners LLC
2701 Prosperity Ave, Suite 105, Fairfax, VA 22031

Code Consultant:
Campbell Code Consulting LLC
7834 Taggart Ct, Elkridge, MD 21075

Specifications:

PROJECT TITLE:

SIDWELL FRIENDS NEW LOWER SCHOOL AT DC CAMPUS

3825 WISCONSIN AVE NW
WASHINGTON, DC 20016

PROJECT No: 2025008

DRAWING TITLE:

SECTIONS

SCALE: 3/4" = 1'-0"

S-302

BID SET
10/29/2025

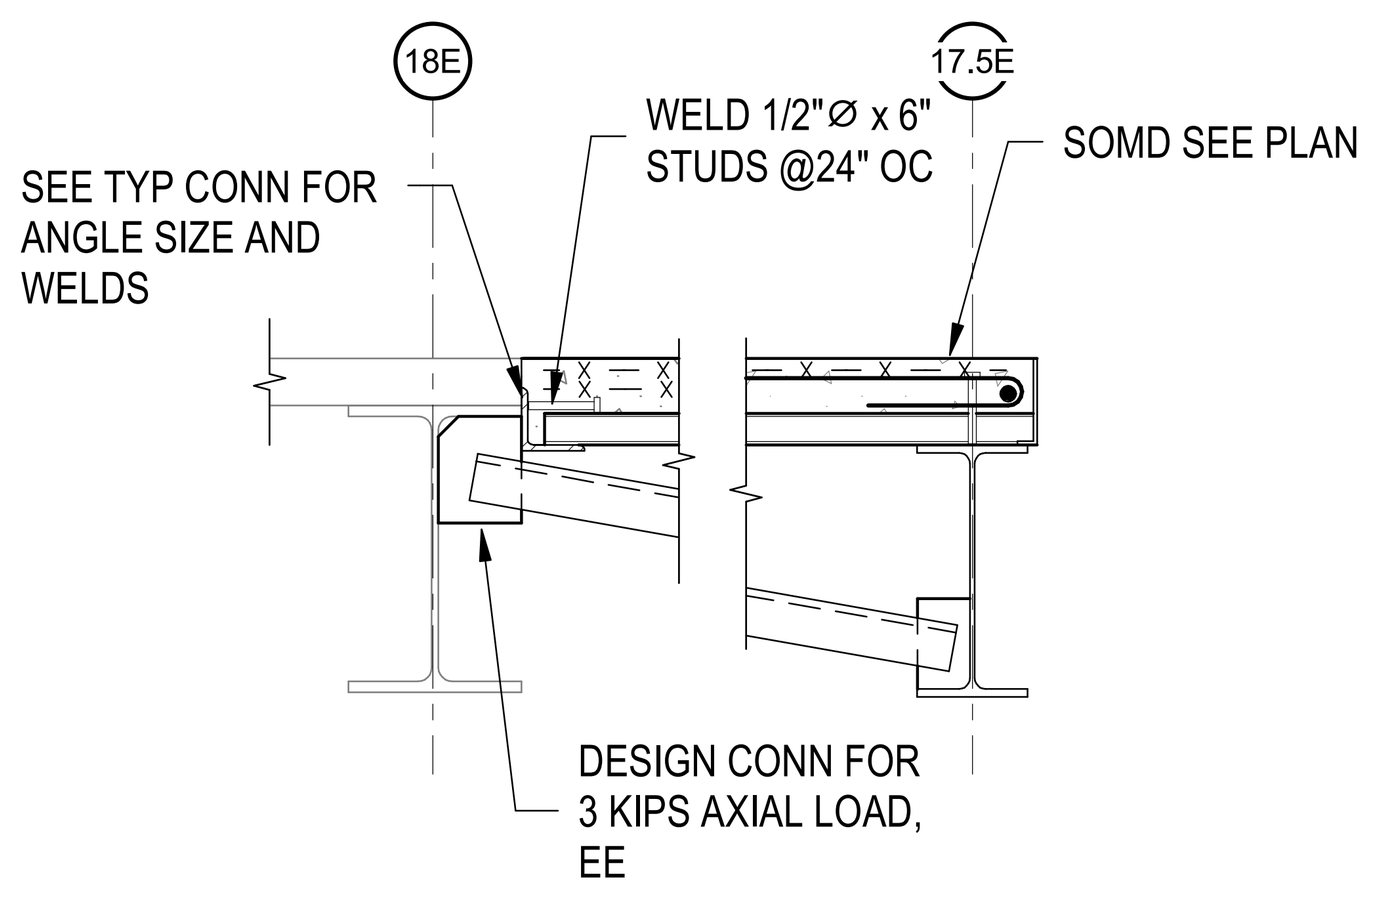

SECTION 1
SCALE: 3/4" = 1'-0" S-311

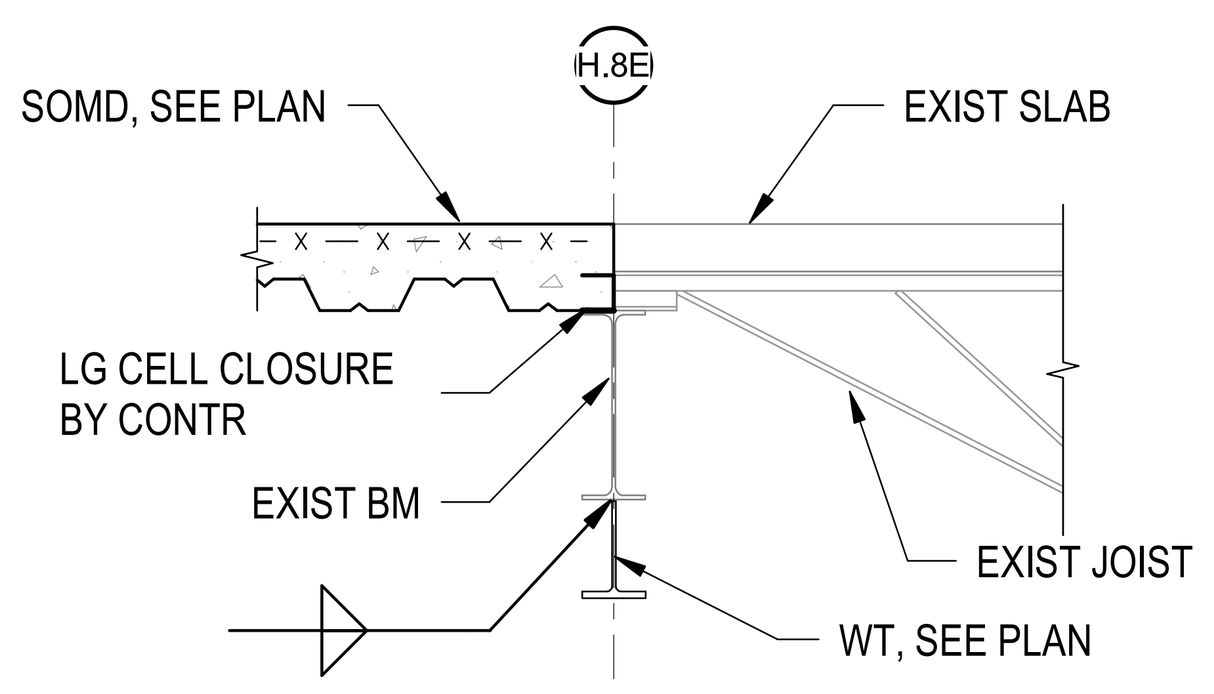

SECTION 2
SCALE: 3/4" = 1'-0" S-311

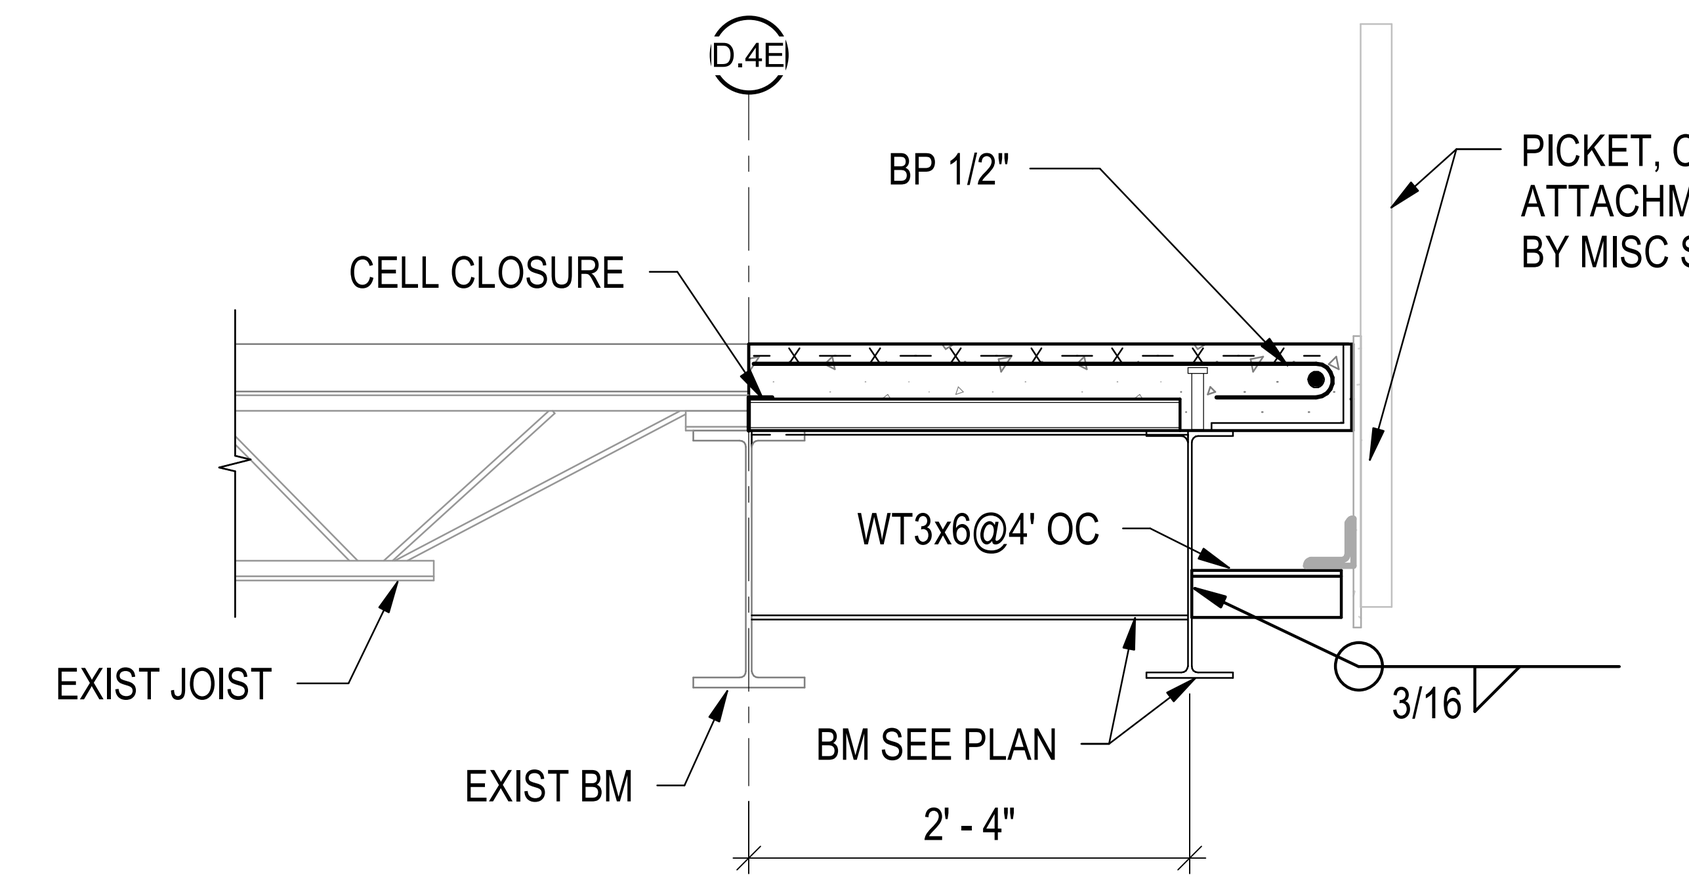

SECTION 3
SCALE: 3/4" = 1'-0" S-311

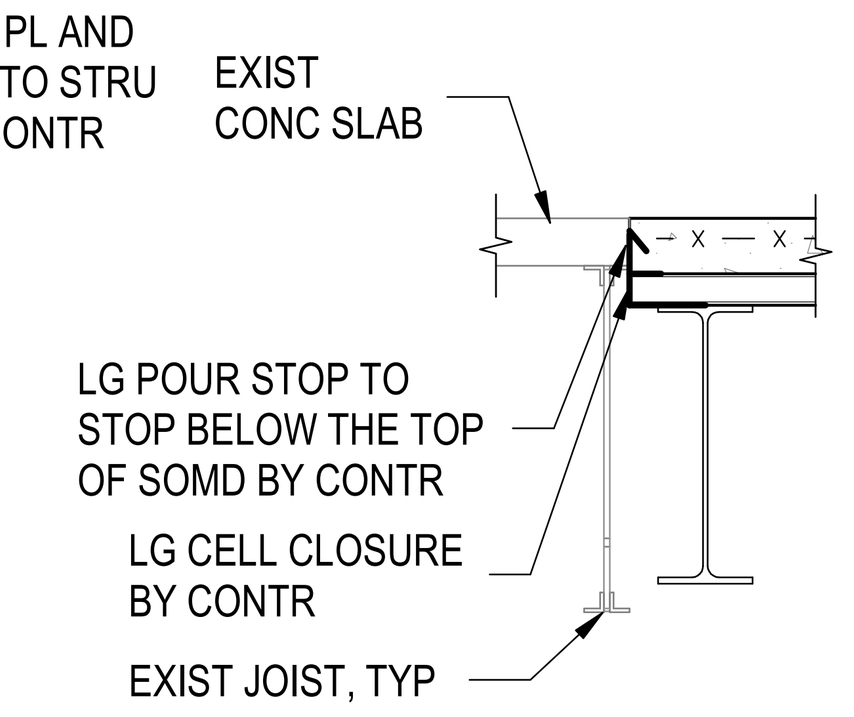

SECTION 4
SCALE: 3/4" = 1'-0" S-311

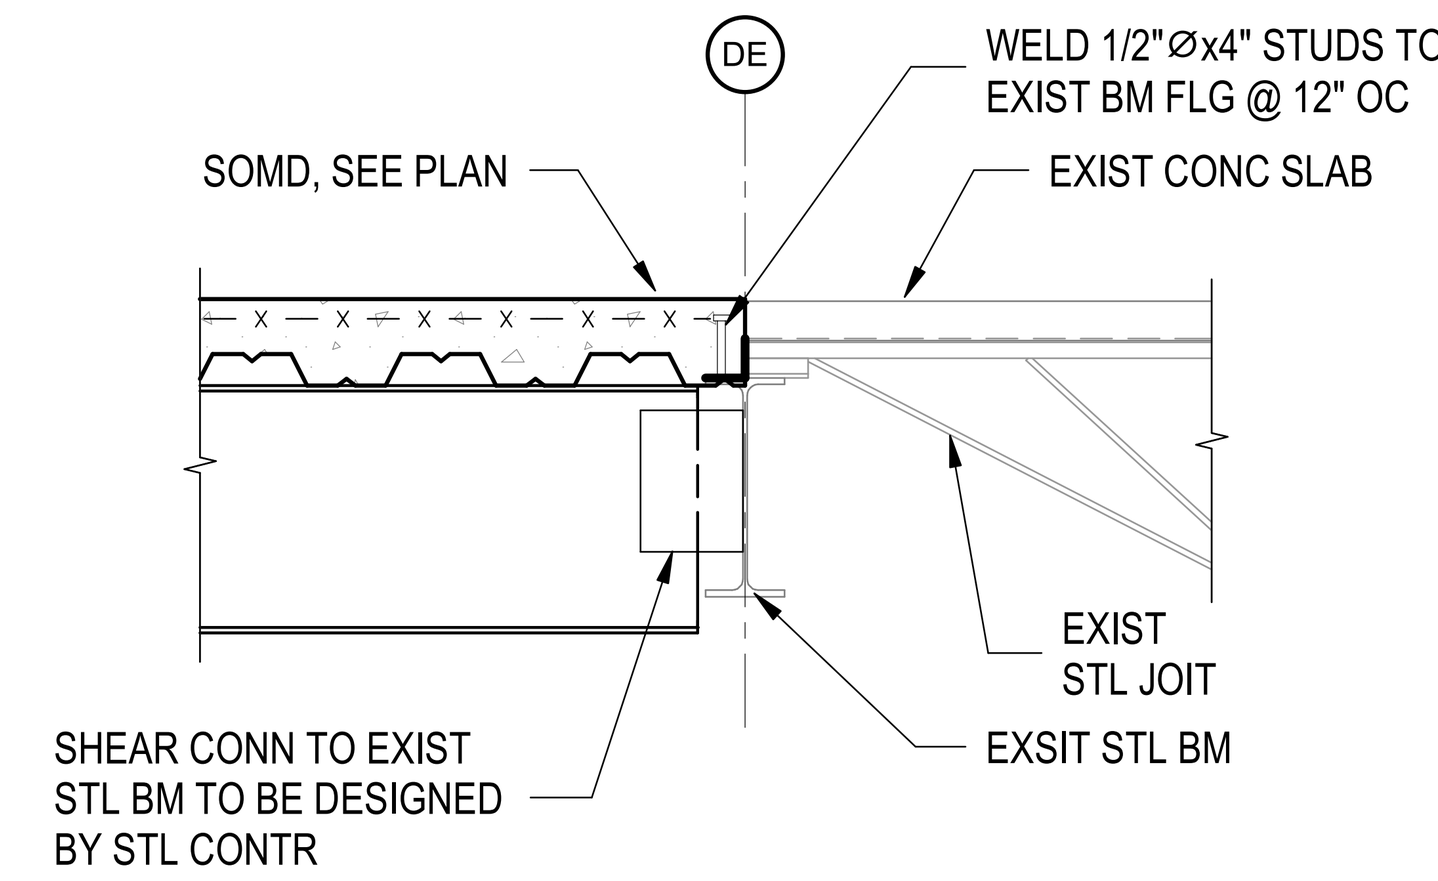

SECTION 5
SCALE: 3/4" = 1'-0" S-311

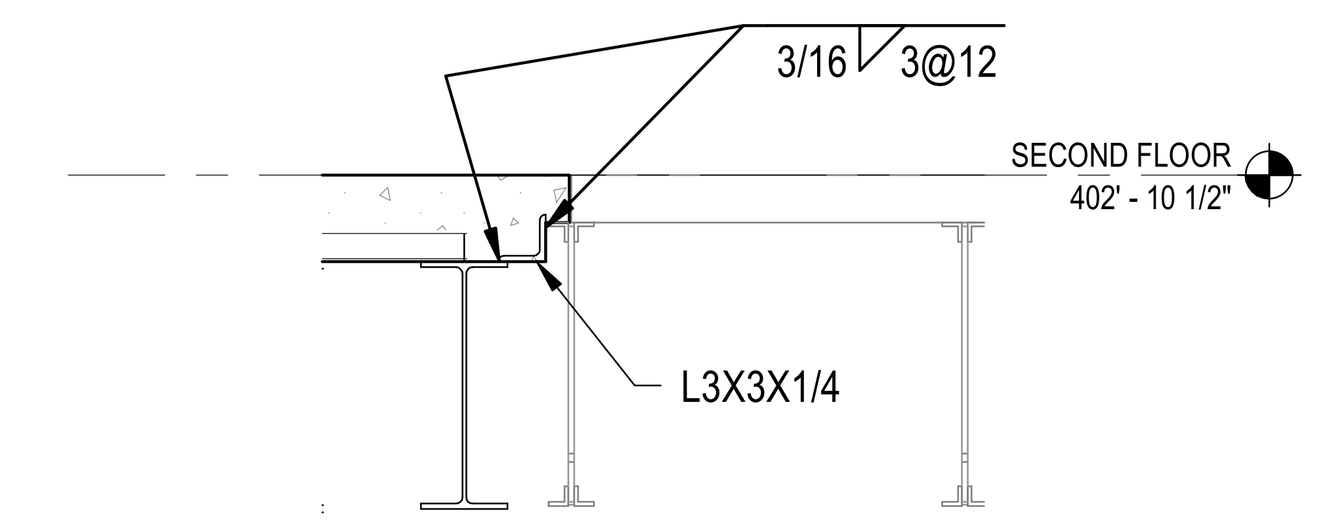

SECTION 6
SCALE: 3/4" = 1'-0" S-311

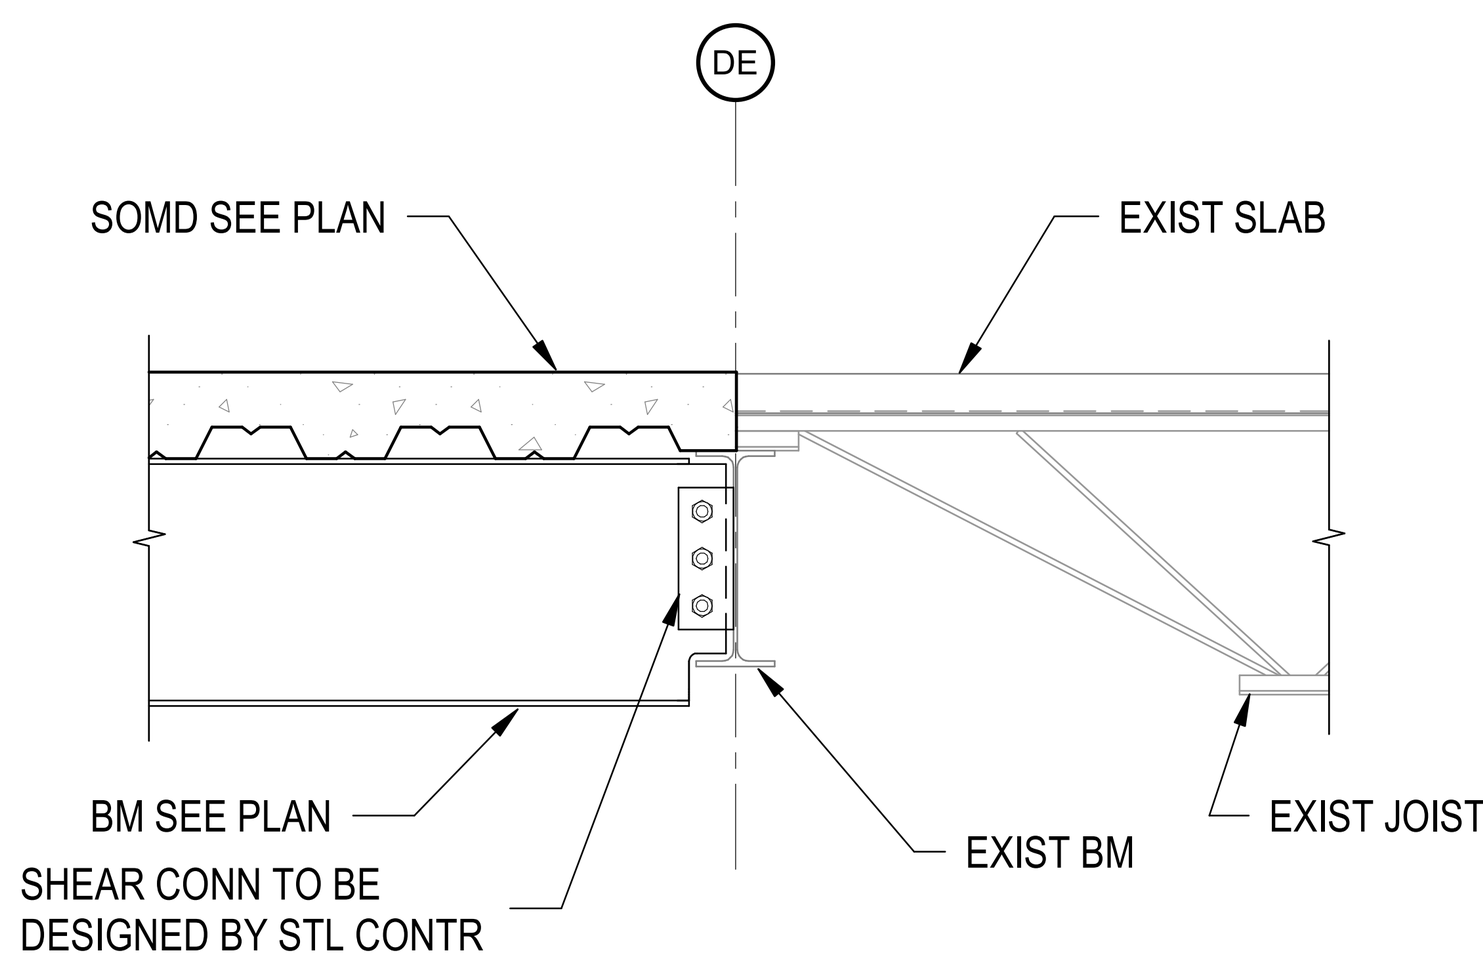

SECTION 7
SCALE: 3/4" = 1'-0" S-311

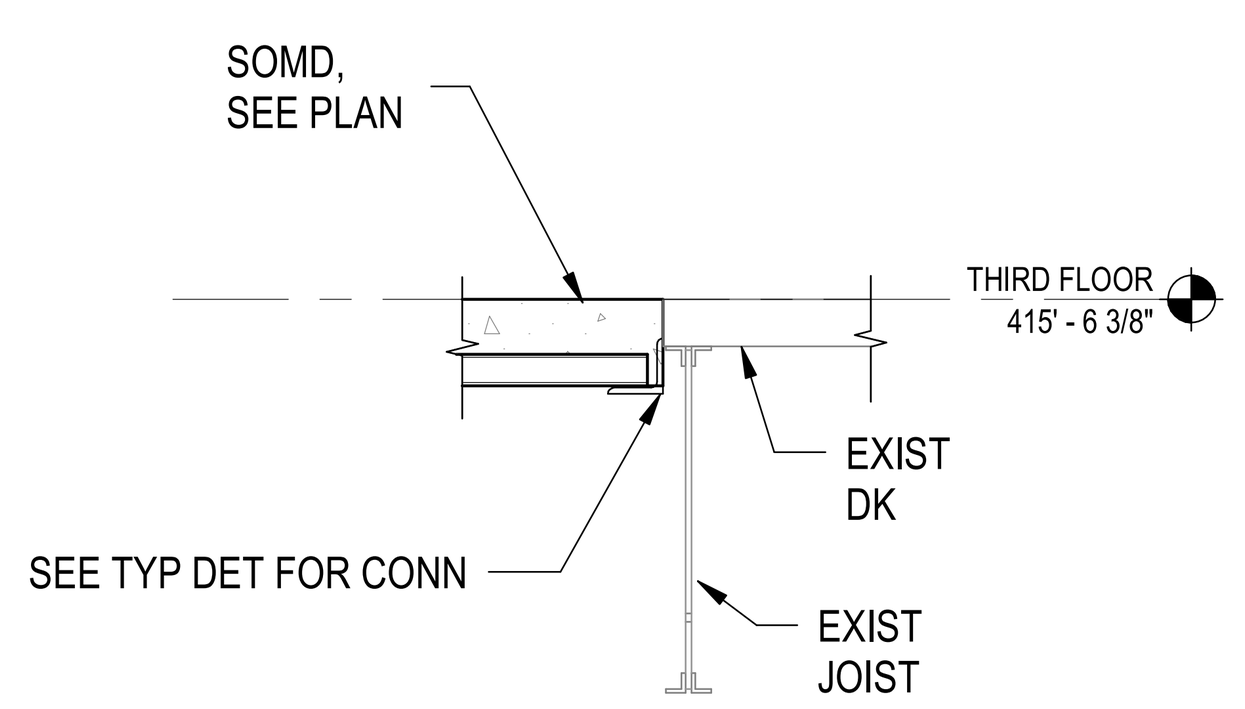

SECTION 8
SCALE: 3/4" = 1'-0" S-311

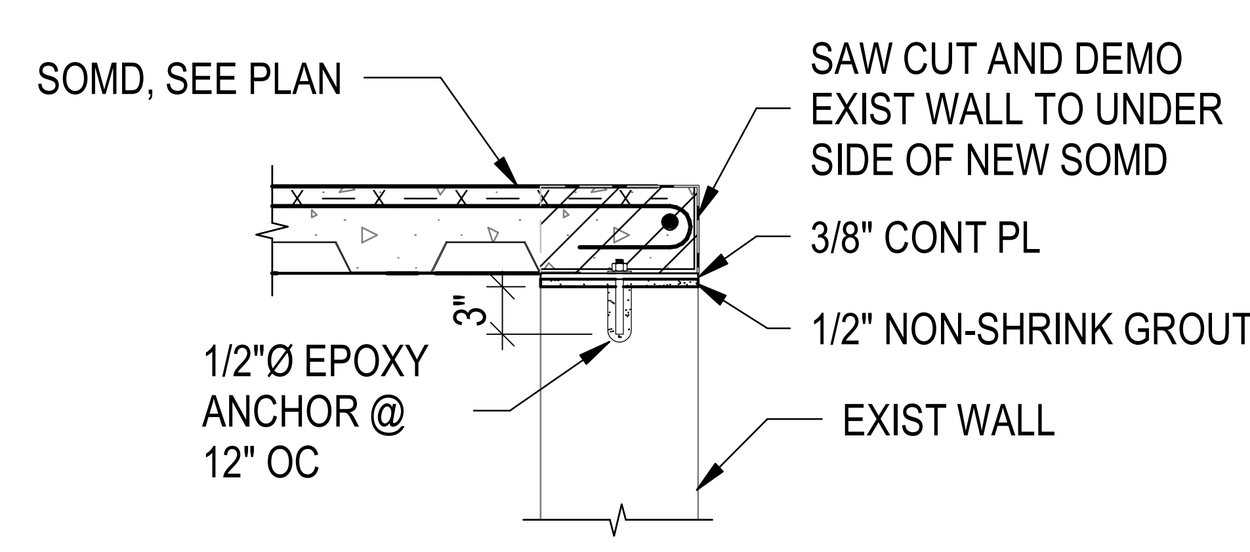

SECTION 9
SCALE: 3/4" = 1'-0" S-311

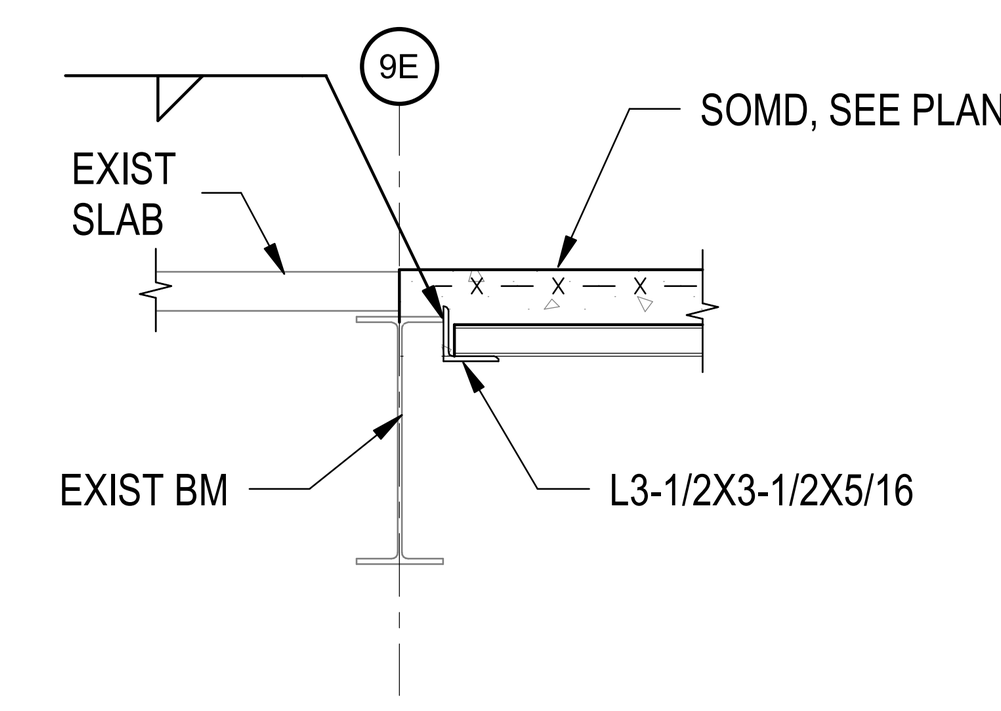

SECTION 10
SCALE: 3/4" = 1'-0" S-311

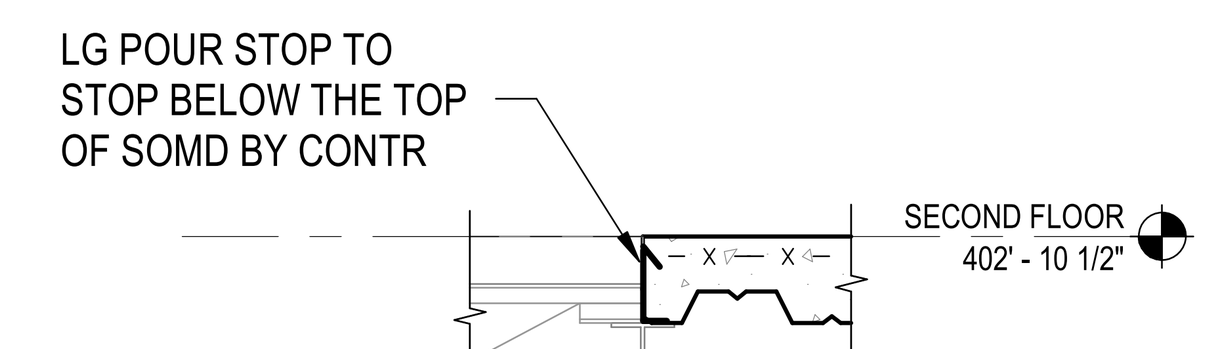

SECTION 11
SCALE: 3/4" = 1'-0" S-311

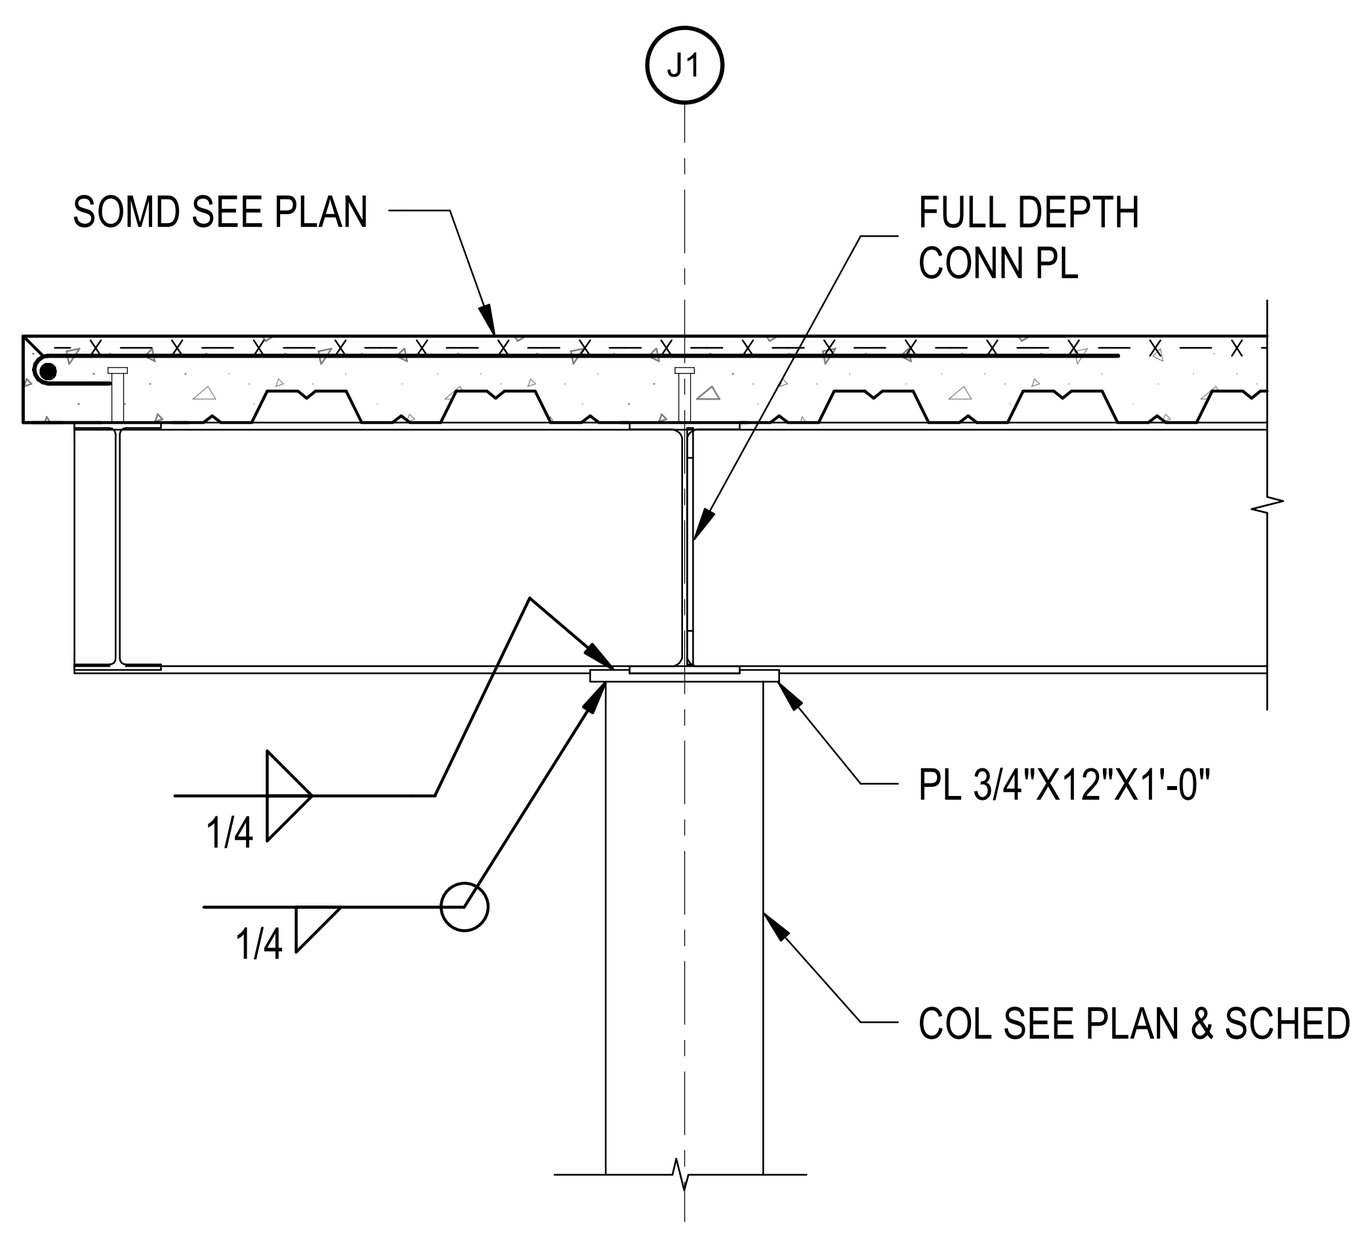

SECTION 12
SCALE: 3/4" = 1'-0" S-311

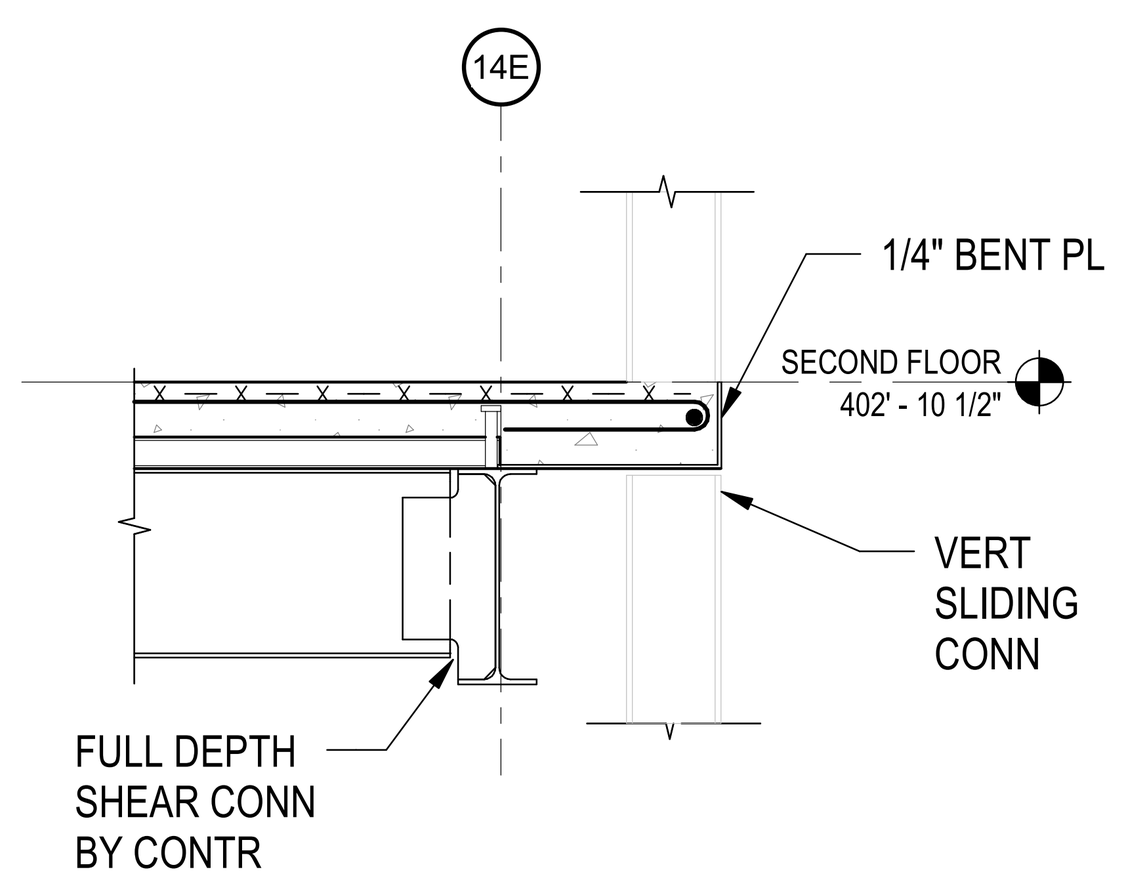

SECTION 13
SCALE: 3/4" = 1'-0" S-311

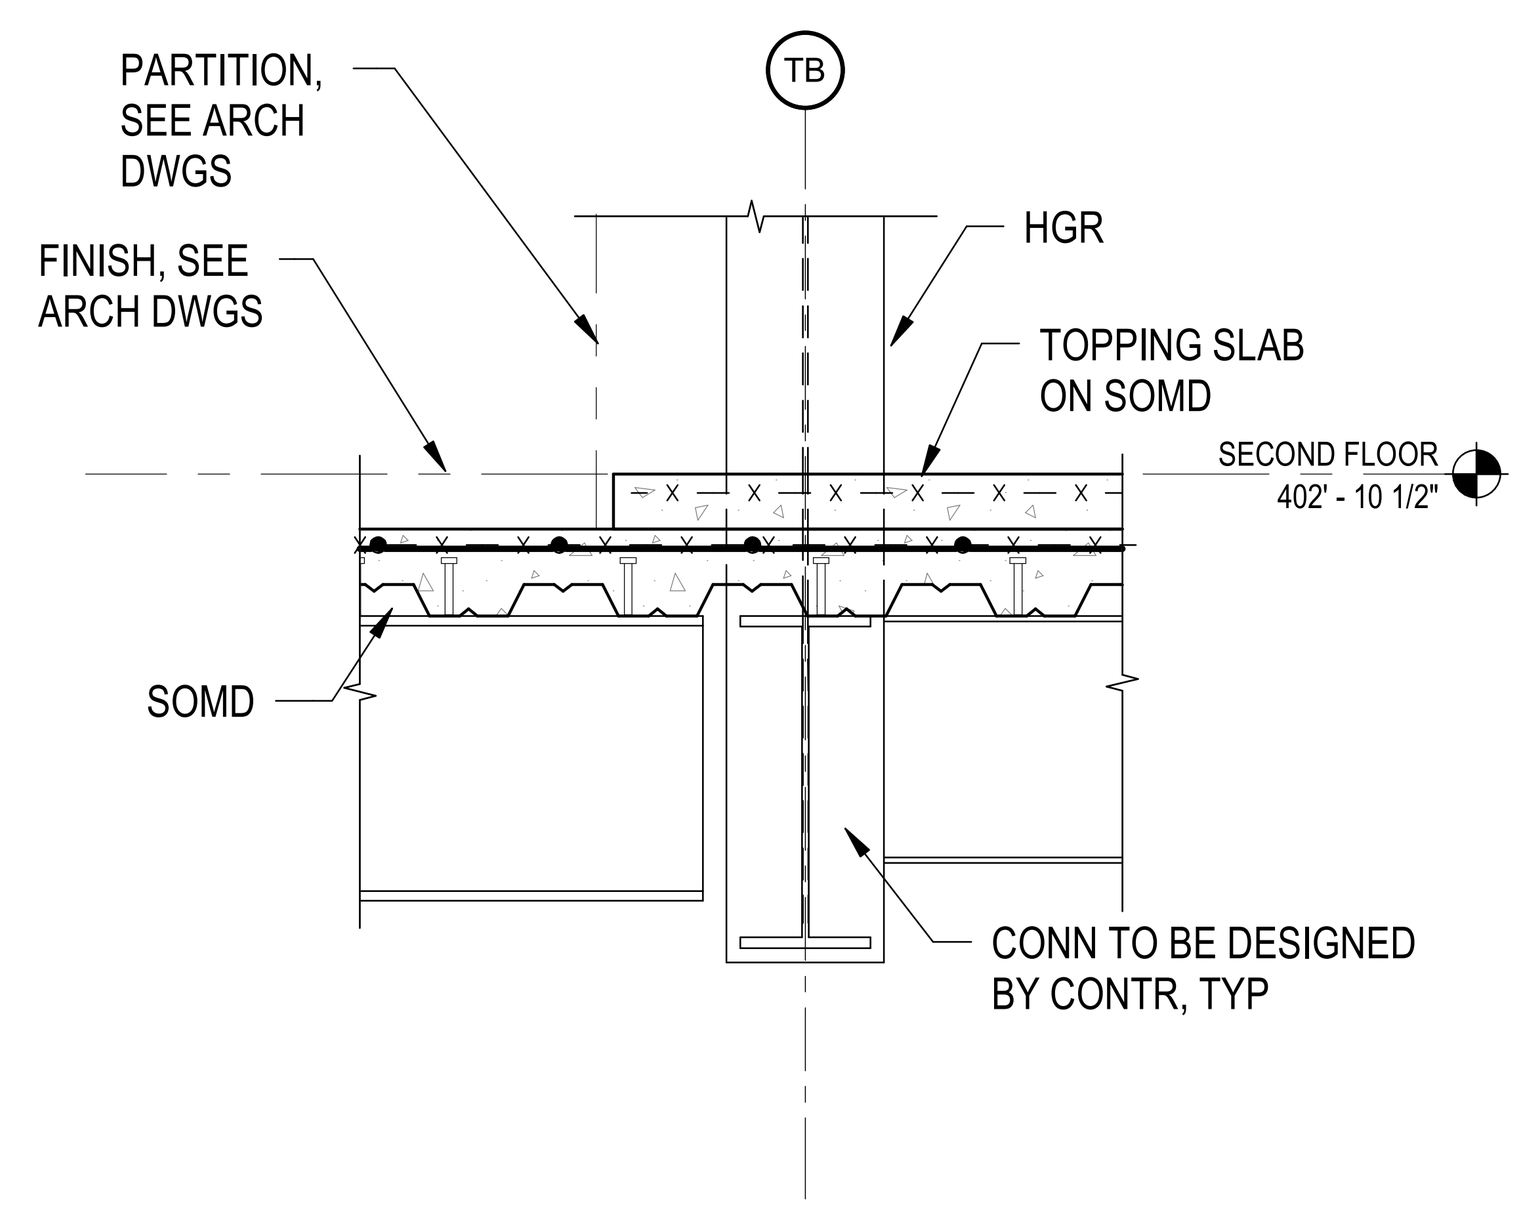

SECTION 14
SCALE: 3/4" = 1'-0" S-311

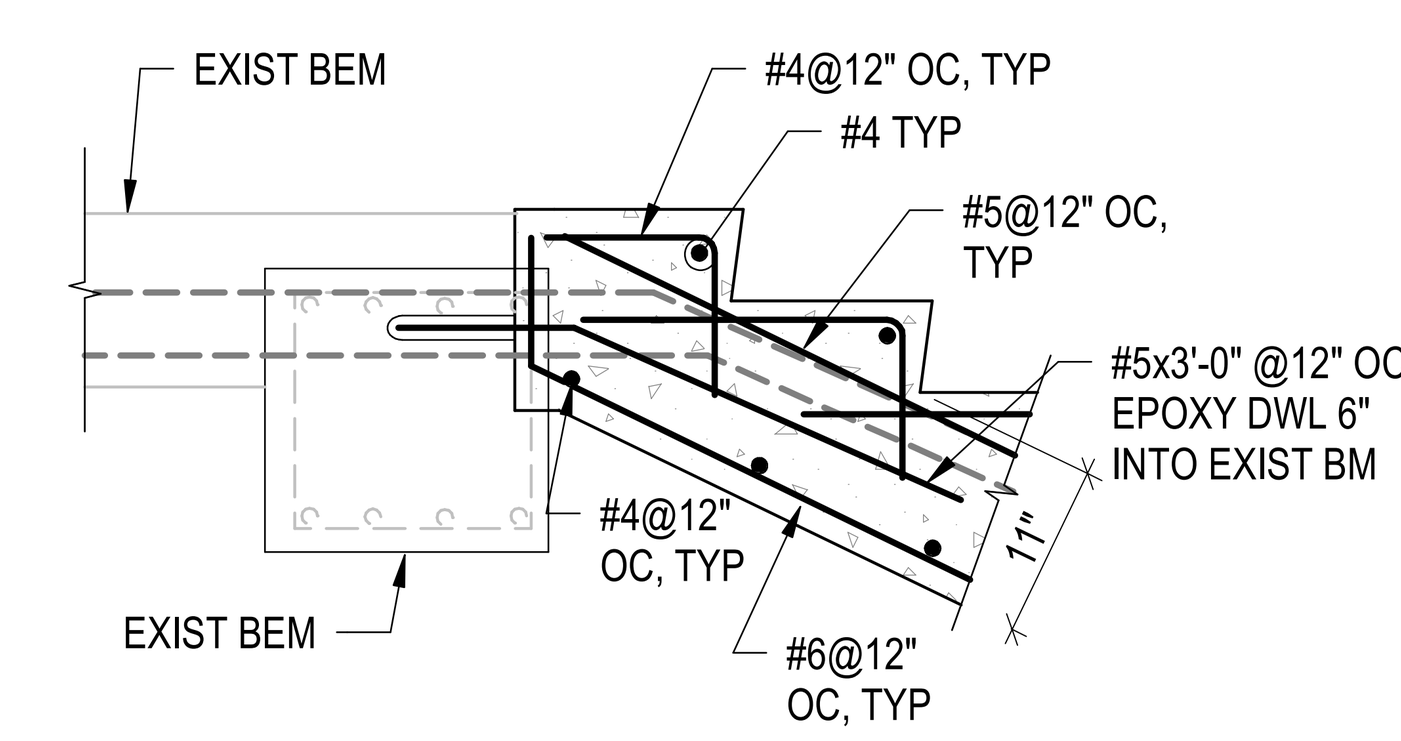

SECTION 15
SCALE: 3/4" = 1'-0" S-311

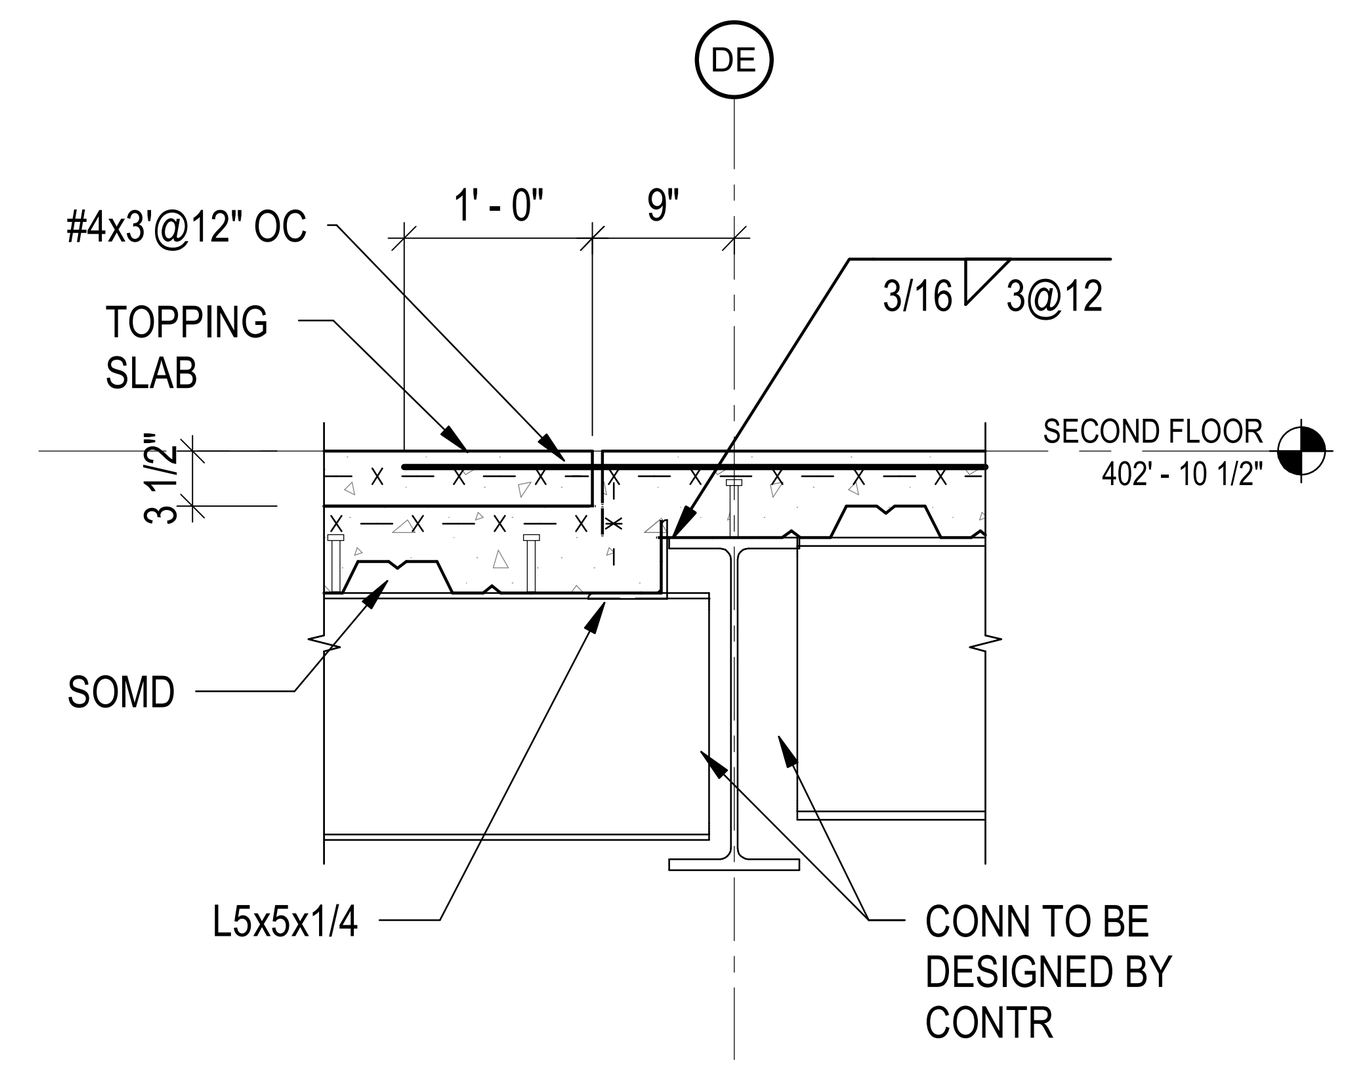

SECTION 16
SCALE: 3/4" = 1'-0" S-311

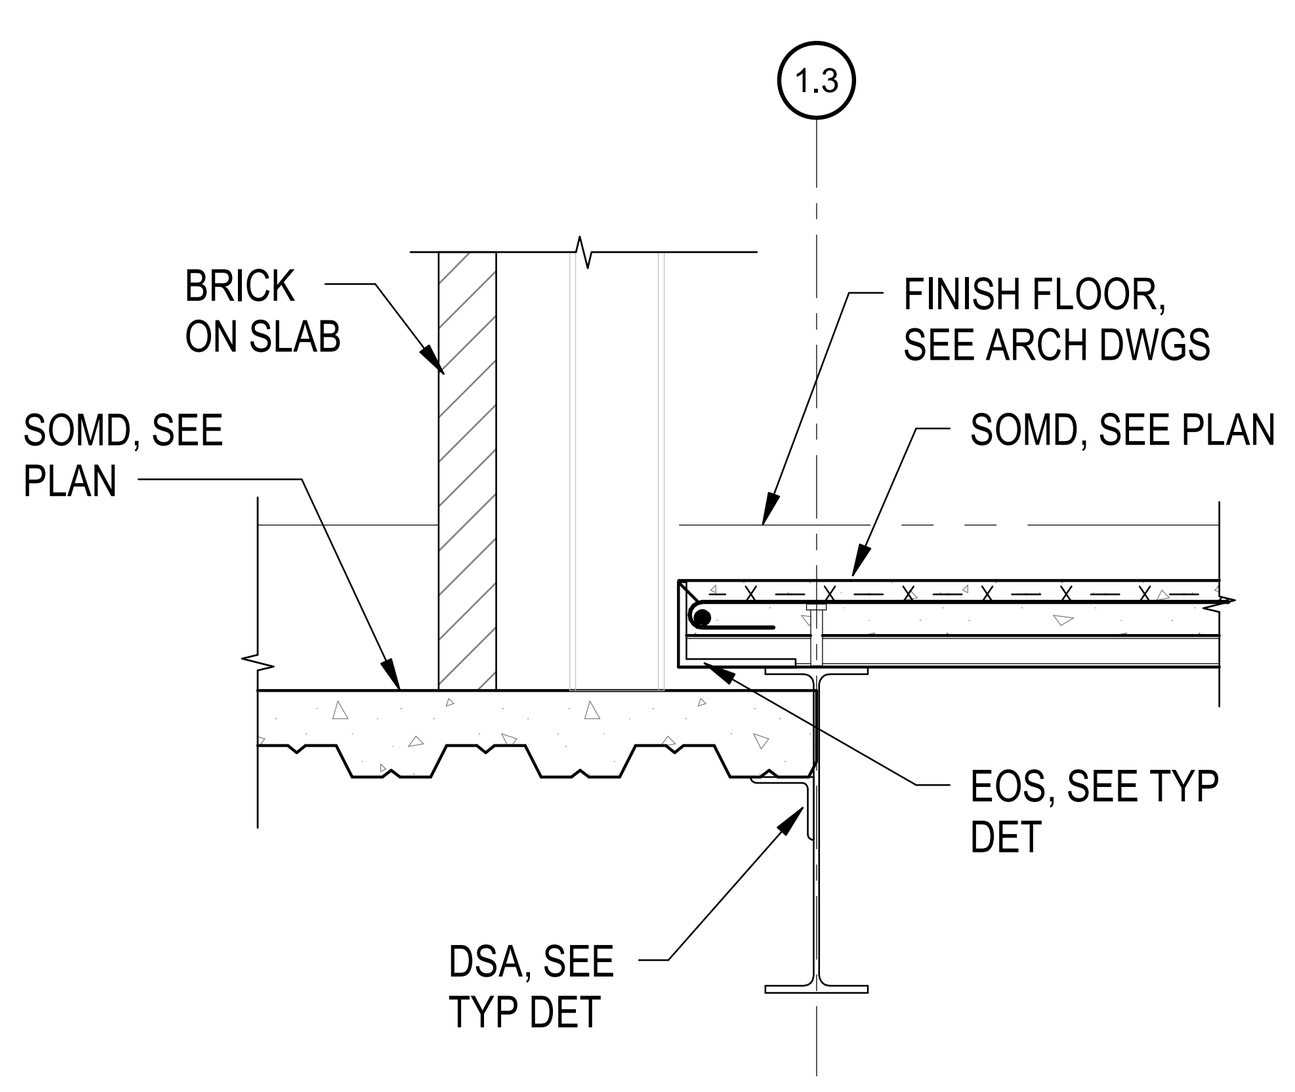

1
SECTION 17
SCALE: 3/4" = 1'-0" S-311

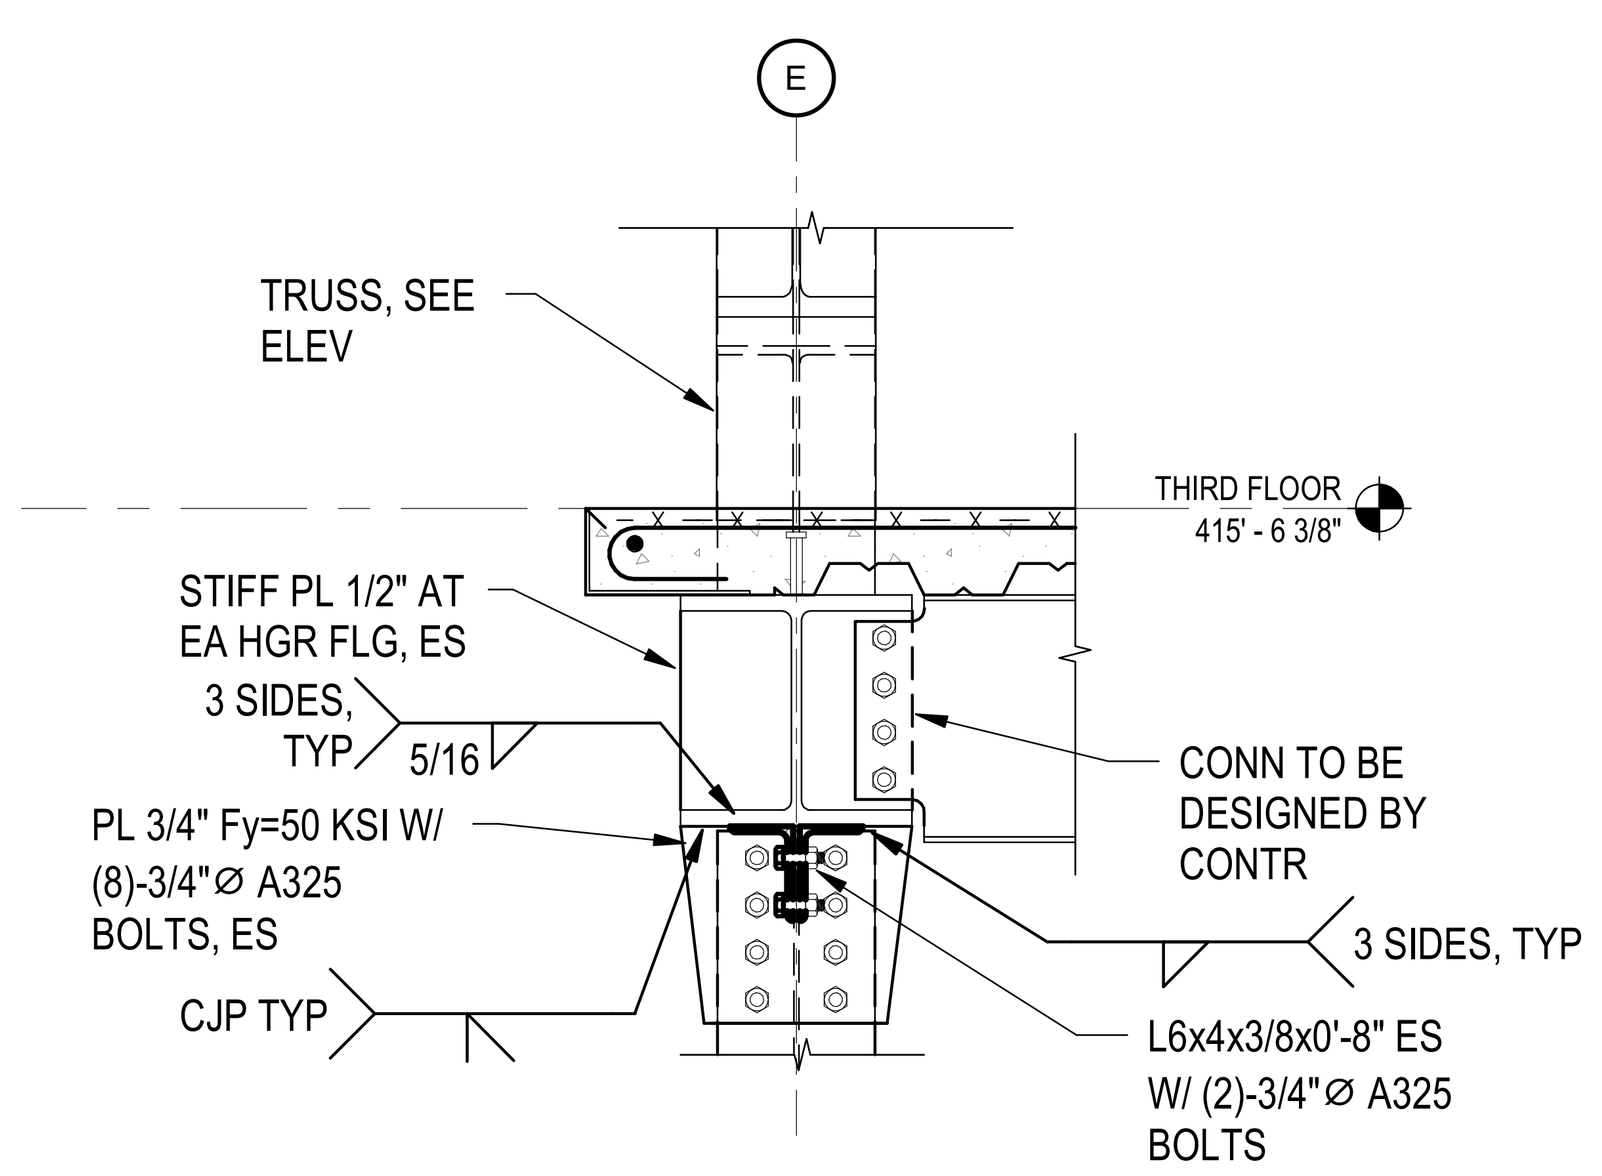

SECTION 18
SCALE: 3/4" = 1'-0" S-311

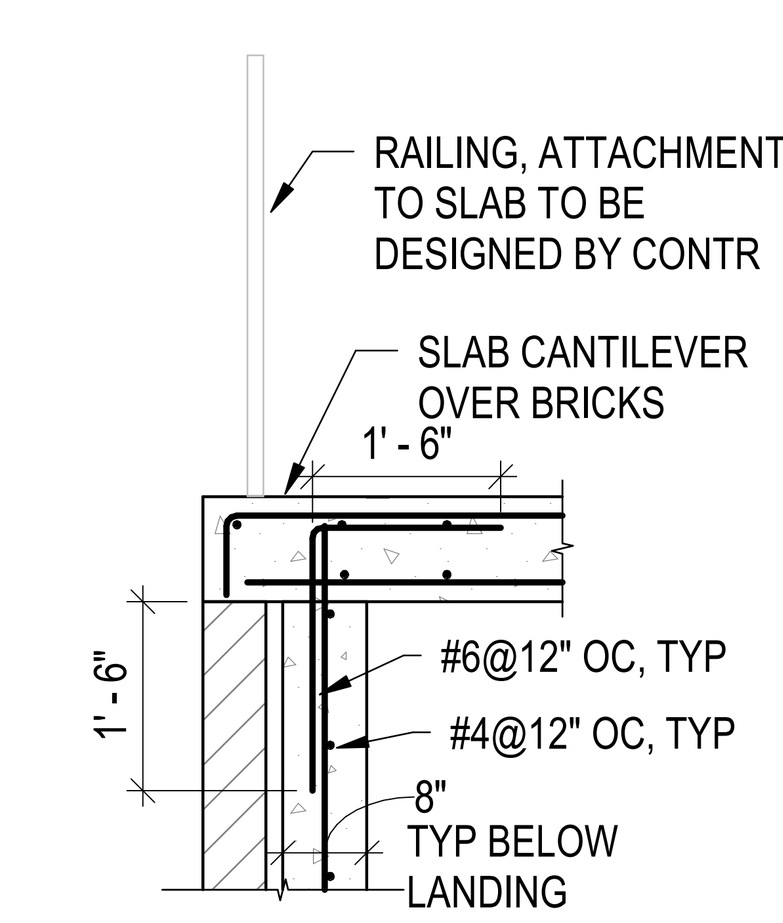

SECTION 19
SCALE: 1/2" = 1'-0" S-311

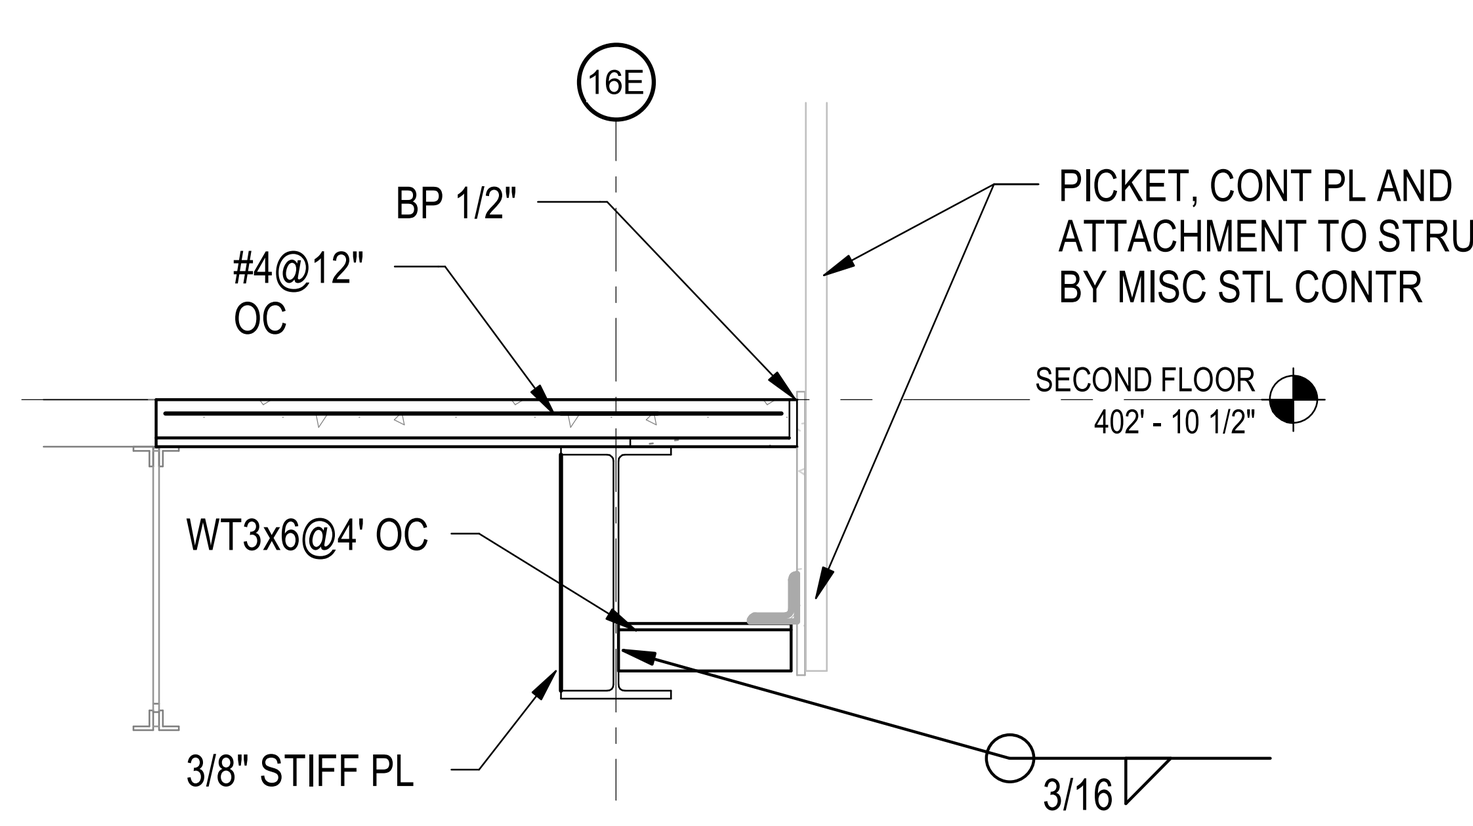

SECTION 20
SCALE: 3/4" = 1'-0" S-311

NO.	DATE	ISSUE
A	09/30/2025	Permit
	10/29/2025	BID SET
1	11/12/2025	BID ADDENDUM 1

0' 4" 8" 1' 2' 3'
SCALE : 3/4" = 1'-0"

SEAL

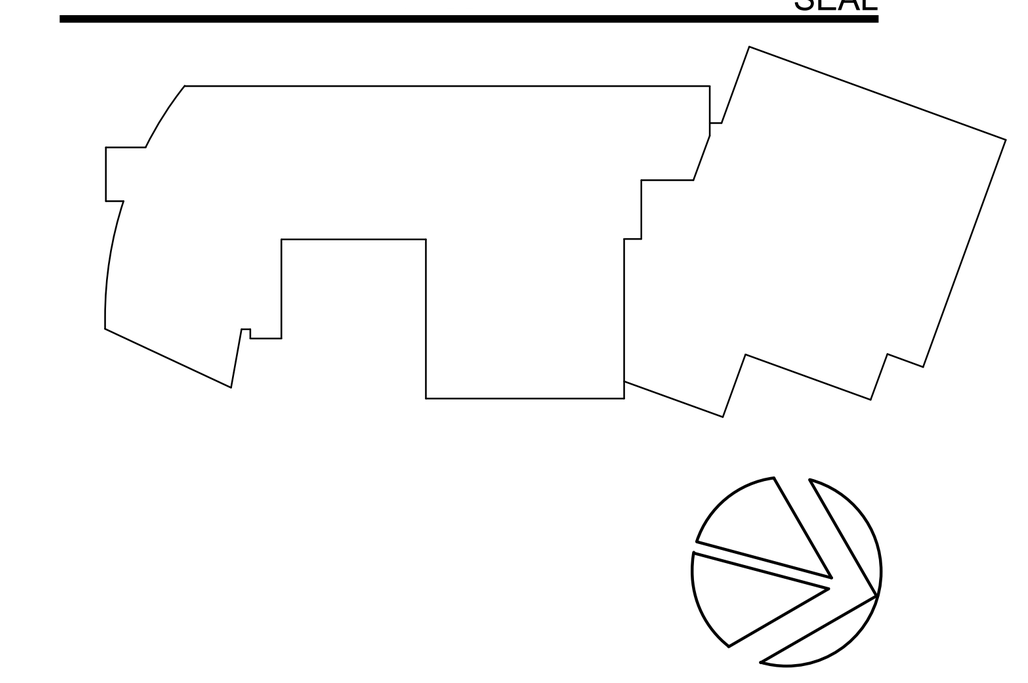

KEY PLAN

PERKINS EASTMAN
One Thomas Circle NW, Suite 200
Washington, DC 20005
T: +1 202 861 1325
F: +1 202 861 1326

Owner:
Sidwell Friends School
3825 Wisconsin Ave NW, Washington DC 20016

Construction Manager:
Advanced Project Management, Inc (APM)
4530 Walney Rd, Ste 202, Chantilly, VA 20151

Civil / Site:
Bowman Consulting Group, Ltd
888 17th St NW, Suite 510, Washington, DC 20006

Landscape:
Natural Resources Design, Inc (NRD)
1009 Shepherd Street NE, Washington, DC 20017

Structural:
Yun Associates LLC
1050 Connecticut Ave NW, Suite 500, Washington, DC 20036

MEP / FP / Lighting:
CMTA Inc
220 Lexington Green Circle, Suite 600, Lexington, KY 40503

AV / IT / Telecom / Security:
Educational Systems Planning (ESP)
2448 Holly Avenue, Suite 302, Annapolis, MD 21401

Food Service
Nyikos-Garcia Foodservice Design, Inc
7146 Starmount Way, New Market, MD 21774

Accessibility Consultant:
Galbo Wolf LLC
4410 Massachusetts Ave NW, #240, Washington, DC 20016

Acoustics:
Polysonics Corp
555 Hospital Drive, Warrenton, VA 20186

Building Envelope Consultant:
Sustainable Building Partners LLC
2701 Prosperity Ave, Suite 105, Fairfax, VA 22031

Code Consultant:
Campbell Code Consulting LLC
7834 Taggart Ct, Elkridge, MD 21075

Specifications:

PROJECT TITLE:

SIDWELL FRIENDS NEW LOWER SCHOOL AT DC CAMPUS

3825 WISCONSIN AVE NW
WASHINGTON, DC 20016

PROJECT No: 2025008

DRAWING TITLE:

SECTIONS

SCALE: As indicated

S-311

ISSUED FOR BID
10/29/2025

Autodesk Docs://Sidwell Lower School/Sidwell Lower School_ST_R24.rvt
11/12/2025 4:40:07 PM

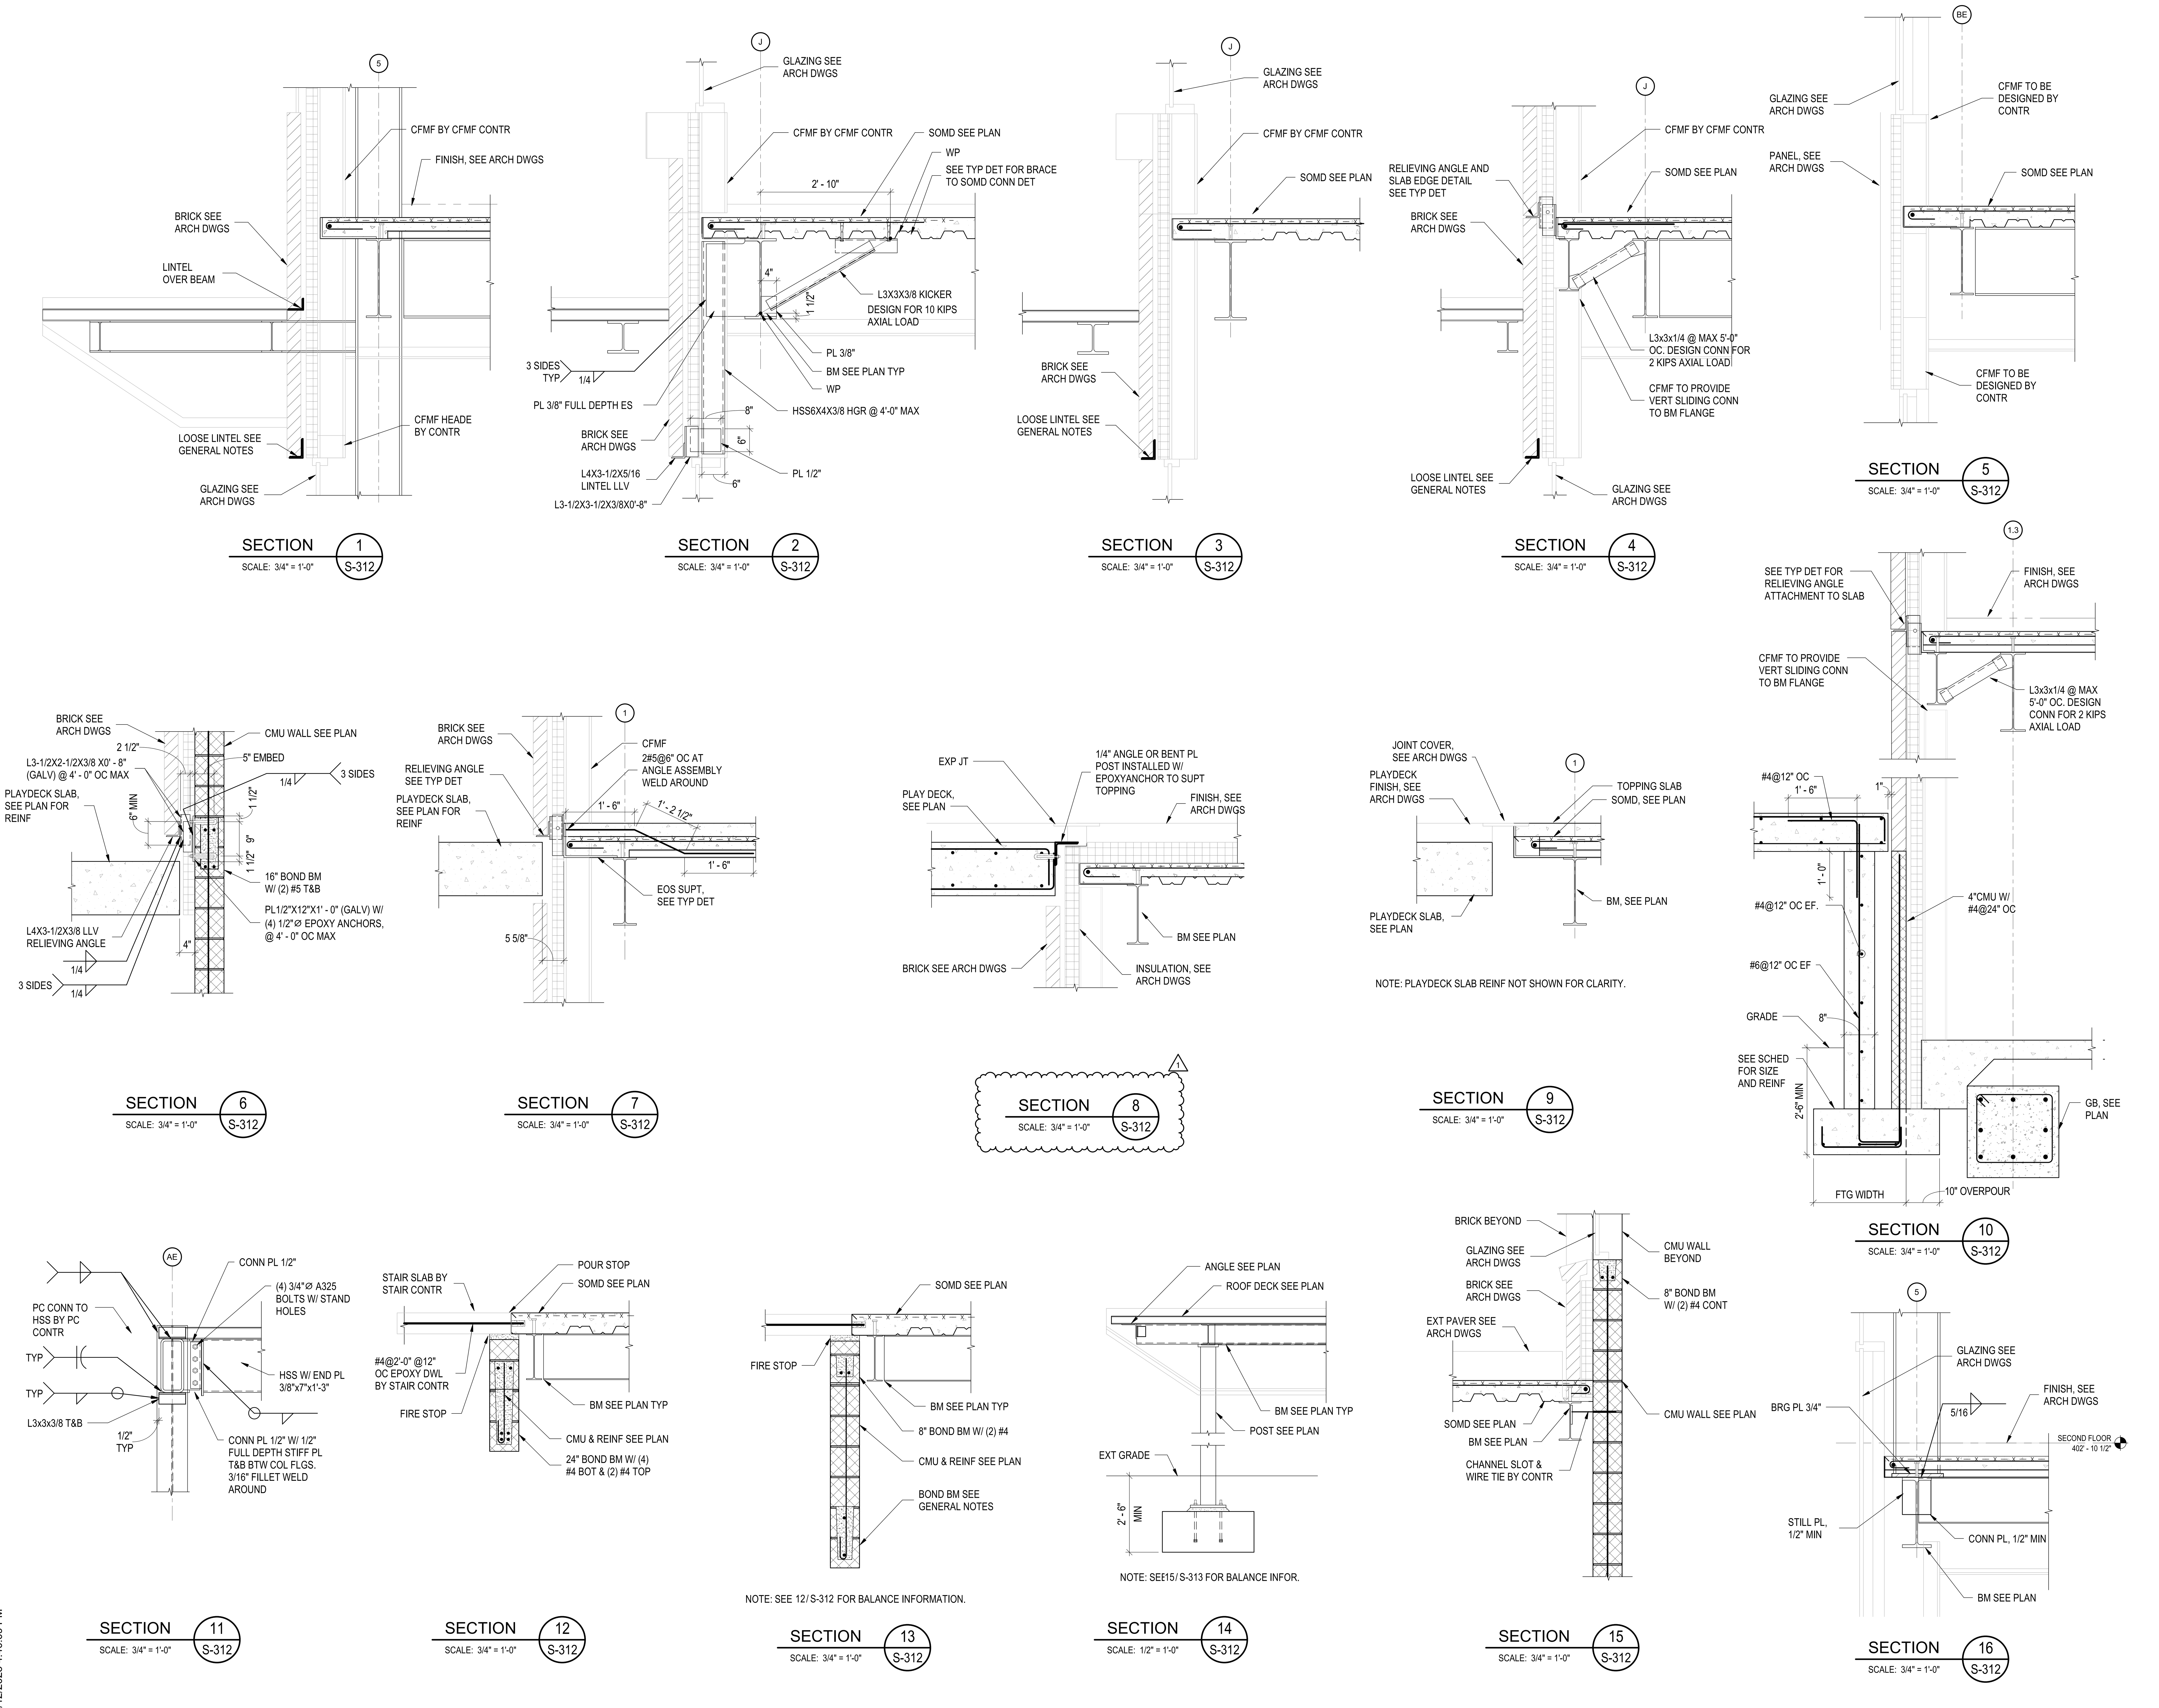

Autodesk Docs://Sidwell Lower School/Sidwell Lower School_ST_R24.rvt
11/12/2025 4:40:09 PM

NO.	DATE	ISSUE
A	09/30/2025	Permit
	10/29/2025	BID SET
1	11/12/2025	BID ADDENDUM 1

0' 4" 8" 1' 2' 3'
SCALE : 3/4" = 1'-0"

SEAL

KEY PLAN

PERKINS EASTMAN
One Thomas Circle NW, Suite 200
Washington, DC 20005
T: +1 202 861 1325
F: +1 202 861 1326

Owner:
Sidwell Friends School
3825 Wisconsin Ave NW, Washington DC 20016

Construction Manager:
Advanced Project Management, Inc (APM)
4530 Walney Rd, Ste 202, Chantilly, VA 20151

Civil / Site:
Bowman Consulting Group, Ltd
888 17th St NW, Suite 510, Washington, DC 20006

Landscape:
Natural Resources Design, Inc (NRD)
1009 Shepherd Street NE, Washington, DC 20017

Structural:
Yun Associates LLC
1050 Connecticut Ave NW, Suite 500, Washington, DC 20036

MEP / FP / Lighting:
CMTA Inc
220 Lexington Green Circle, Suite 600, Lexington, KY 40503

AV / IT / Telecom / Security:
Educational Systems Planning (ESP)
2448 Holly Avenue, Suite 302, Annapolis, MD 21401

Food Service
Nyikos-Garcia Foodservice Design, Inc
7146 Starmount Way, New Market, MD 21774

Accessibility Consultant:
Galbo Wolf LLC
4410 Massachusetts Ave NW, #240, Washington, DC 20016

Acoustics:
Polysonics Corp
555 Hospital Drive, Warrenton, VA 20186

Building Envelope Consultant:
Sustainable Building Partners LLC
2701 Prosperity Ave, Suite 105, Fairfax, VA 22031

Code Consultant:
Campbell Code Consulting LLC
7834 Taggart Ct, Elkridge, MD 21075

Specifications:

PROJECT TITLE:

SIDWELL FRIENDS NEW LOWER SCHOOL AT DC CAMPUS

3825 WISCONSIN AVE NW
WASHINGTON, DC 20016

PROJECT No: 2025008

DRAWING TITLE:

SECTIONS

SCALE: As indicated

S-312

ISSUED FOR BID
10/29/2025

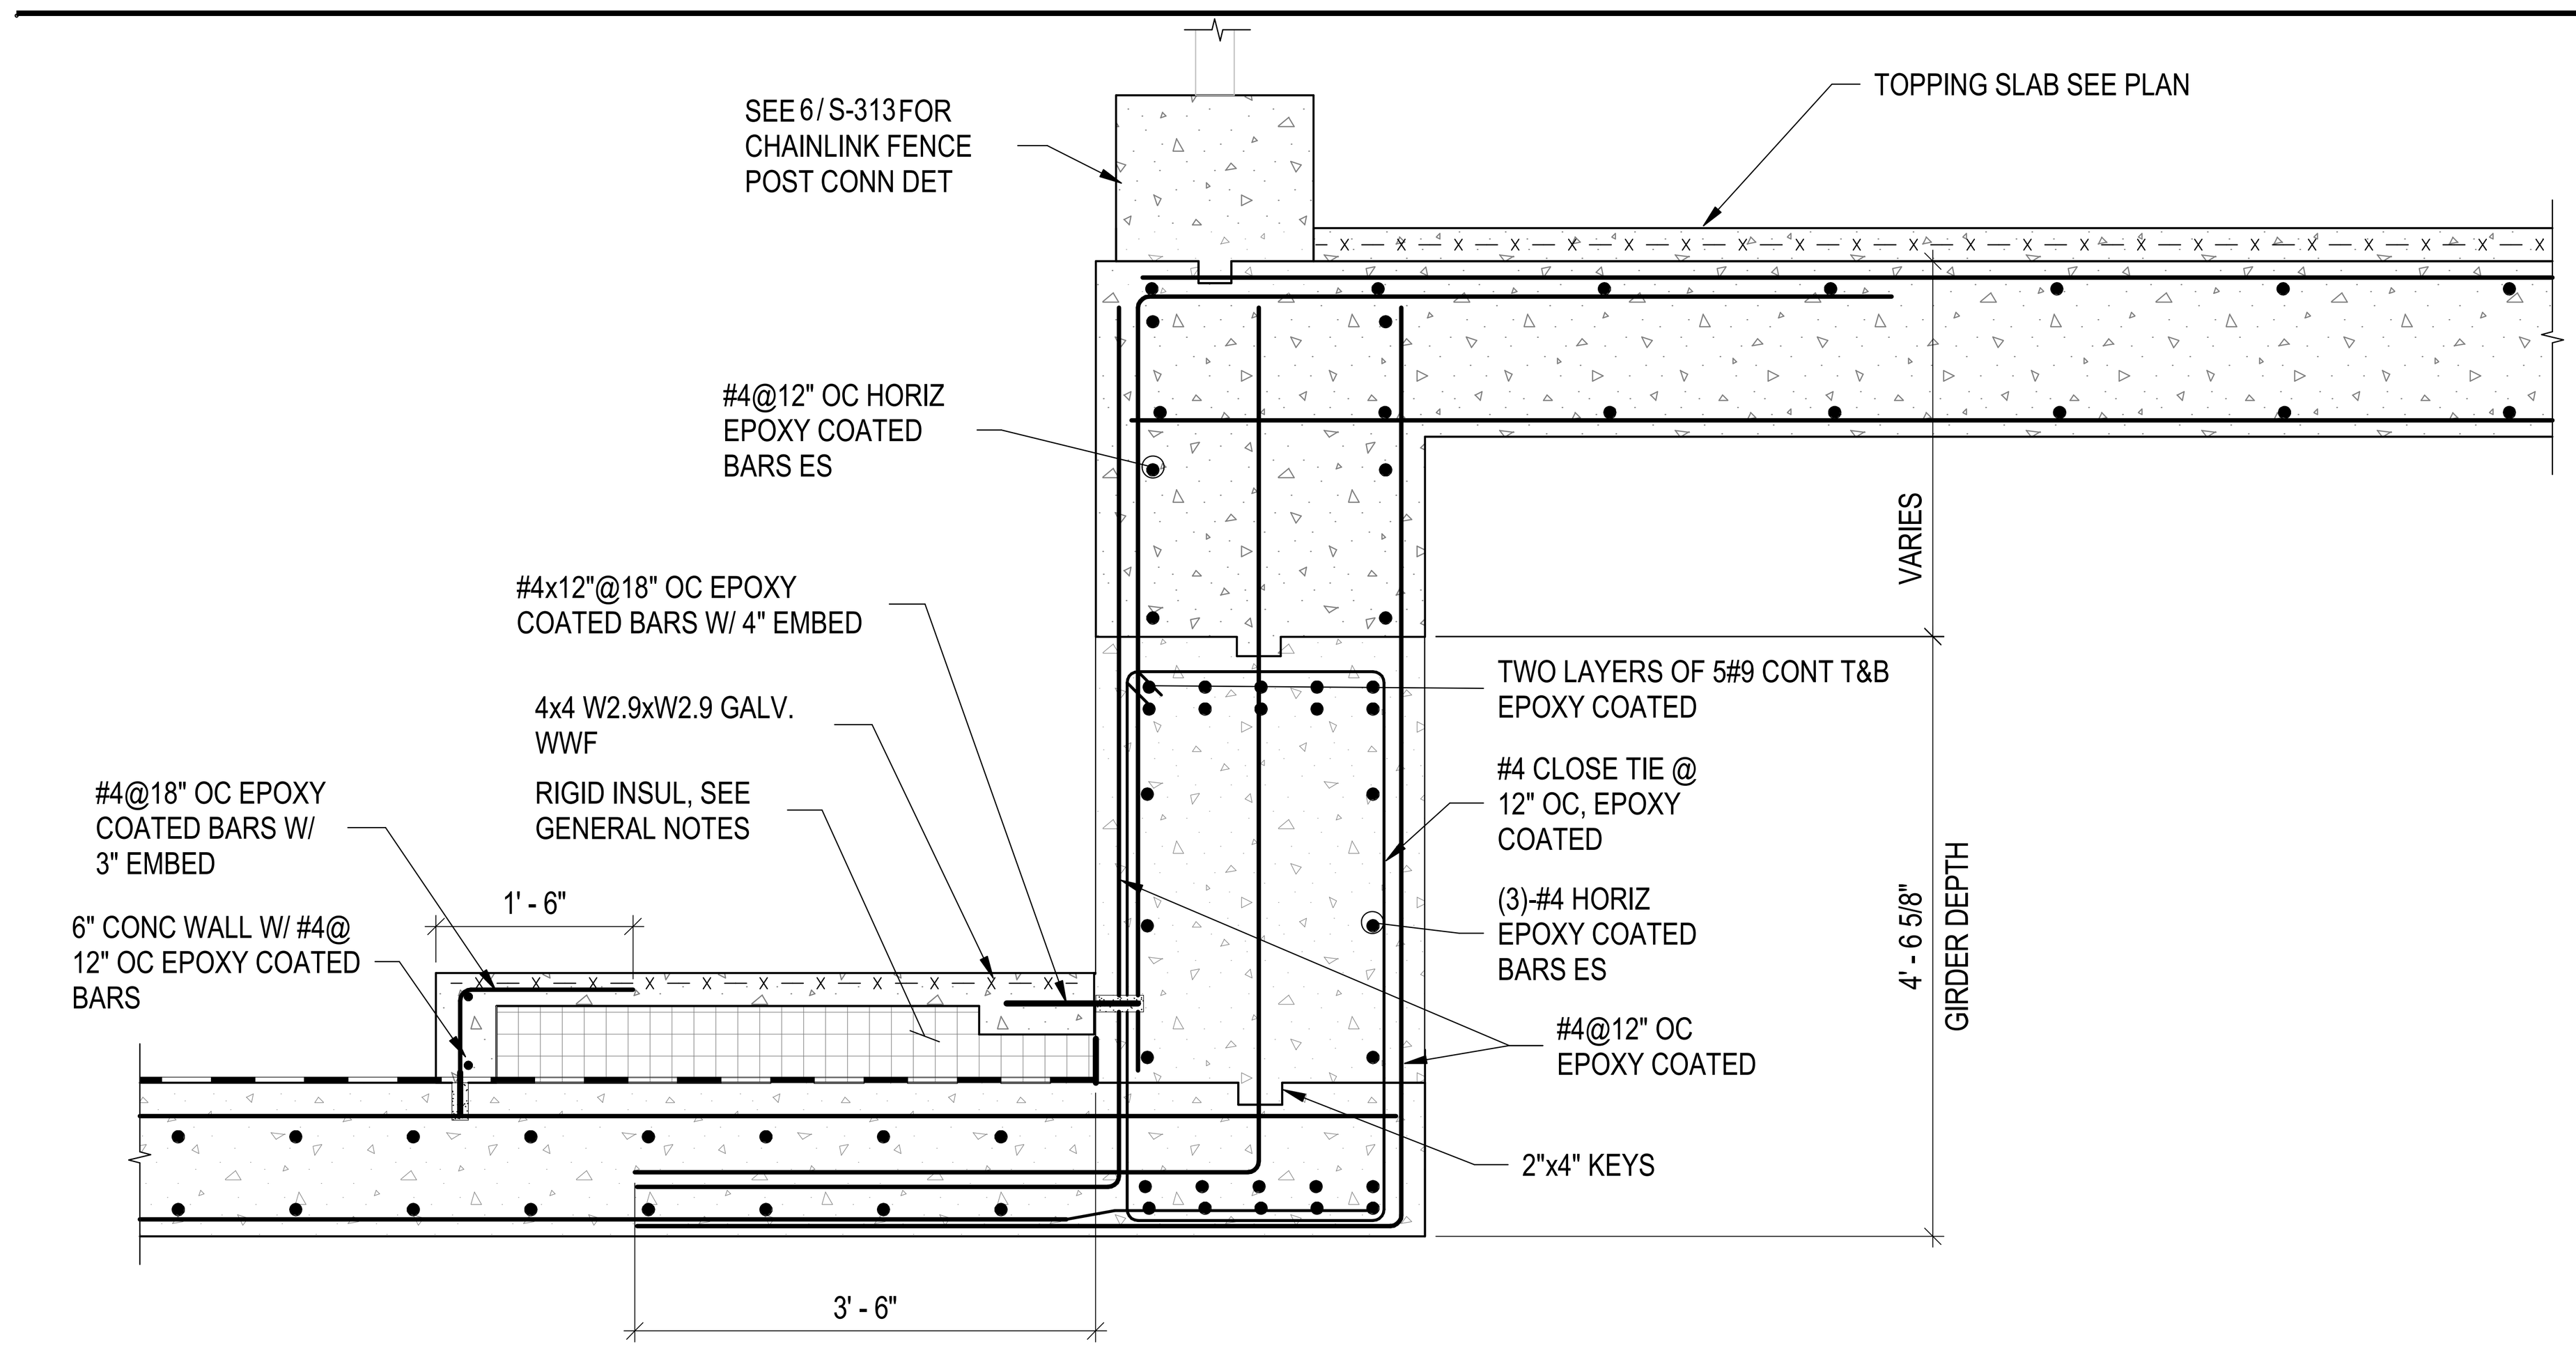

SECTION 1 S-313
SCALE: 3/4" = 1'-0"

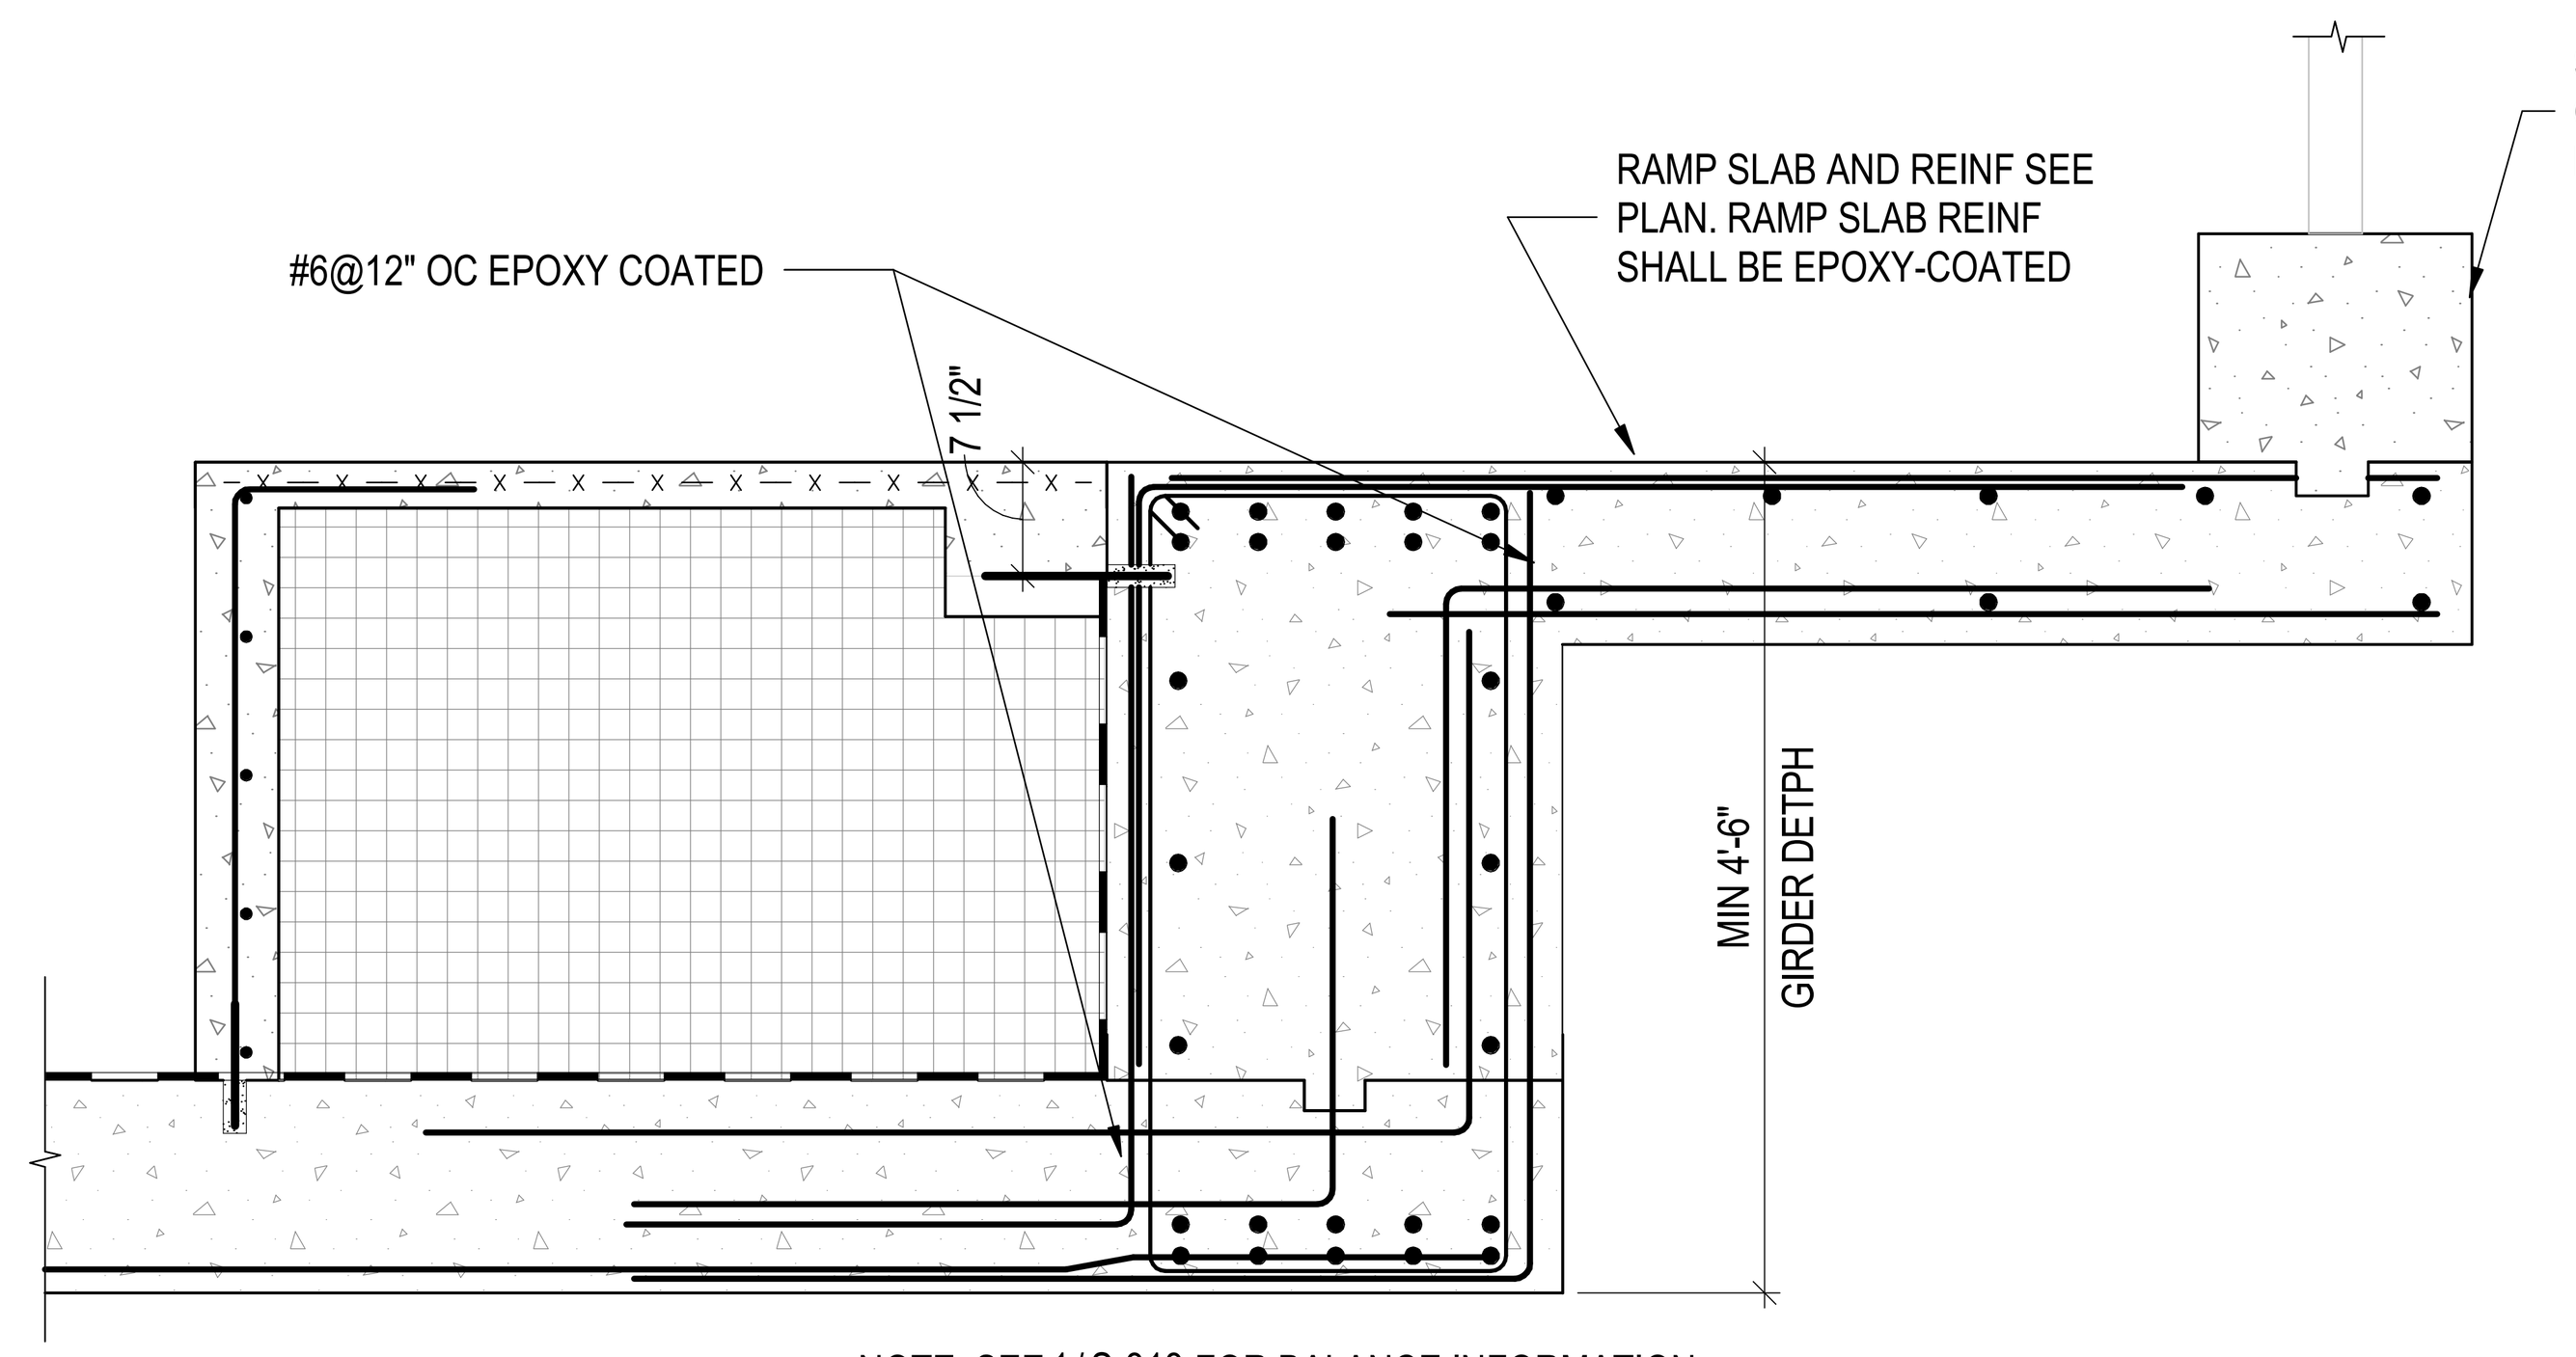

NOTE: SEE 1/S-313 FOR BALANCE INFORMATION.

SECTION 2 S-313
SCALE: 3/4" = 1'-0"

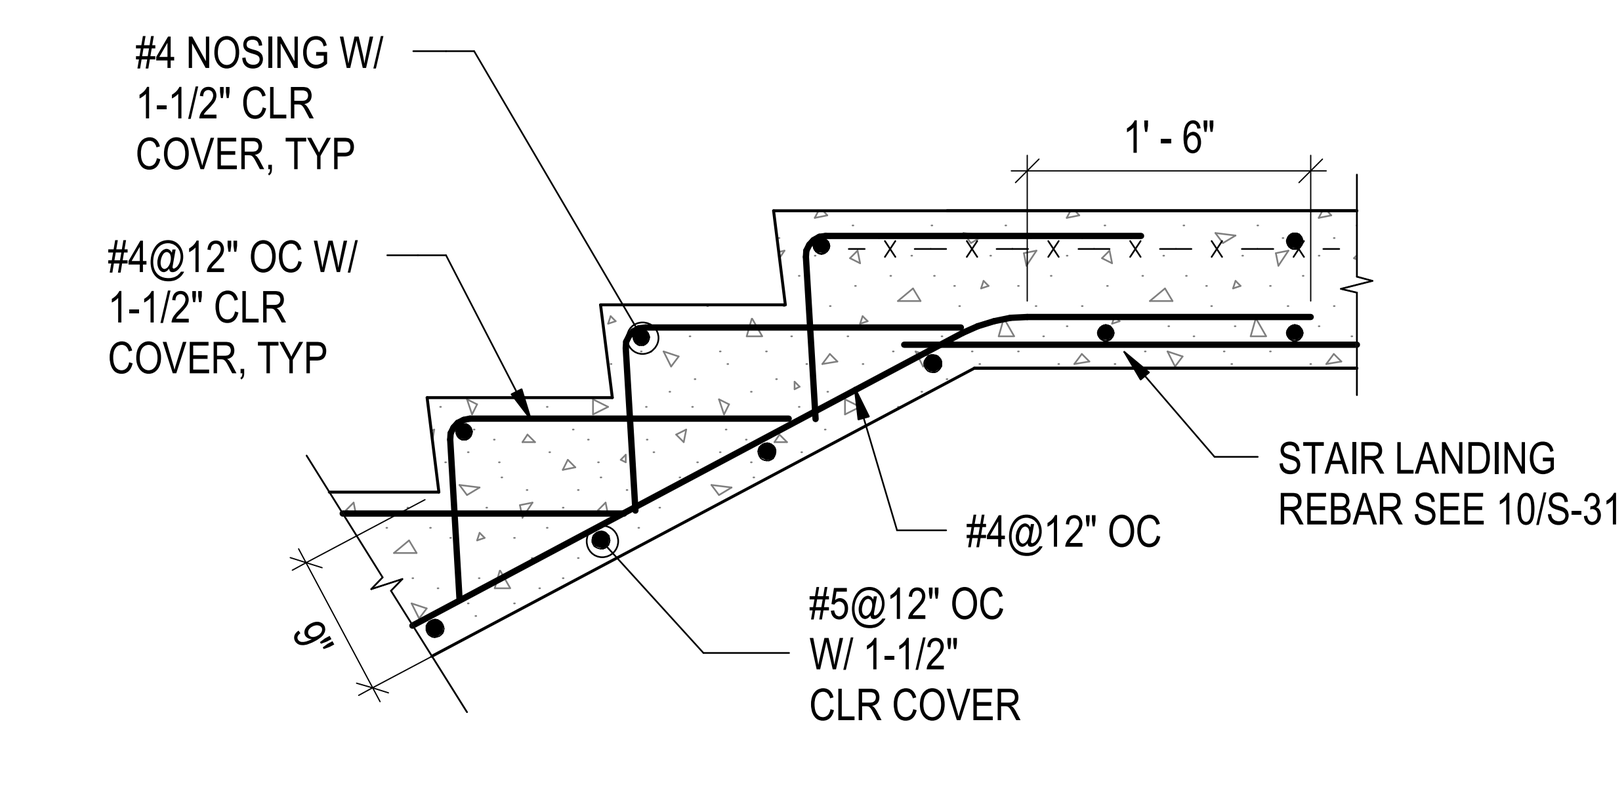

NOTE: ALL REBARS IN CONCRETE STAIRS SHALL BE EPOXY-COATED.

SECTION 3 S-313
SCALE: 3/4" = 1'-0"

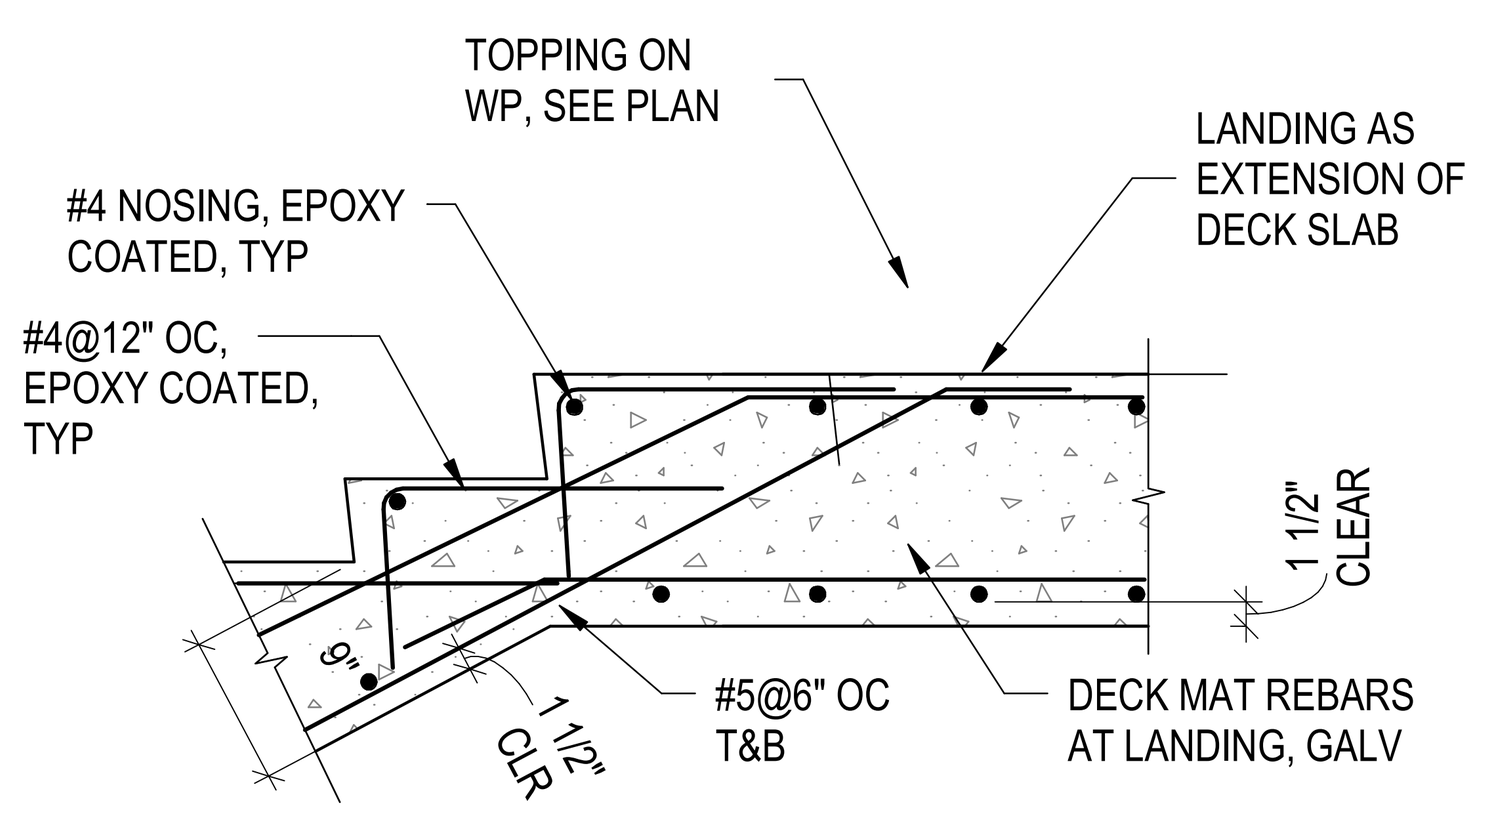

SECTION 4 S-313
SCALE: 3/4" = 1'-0"

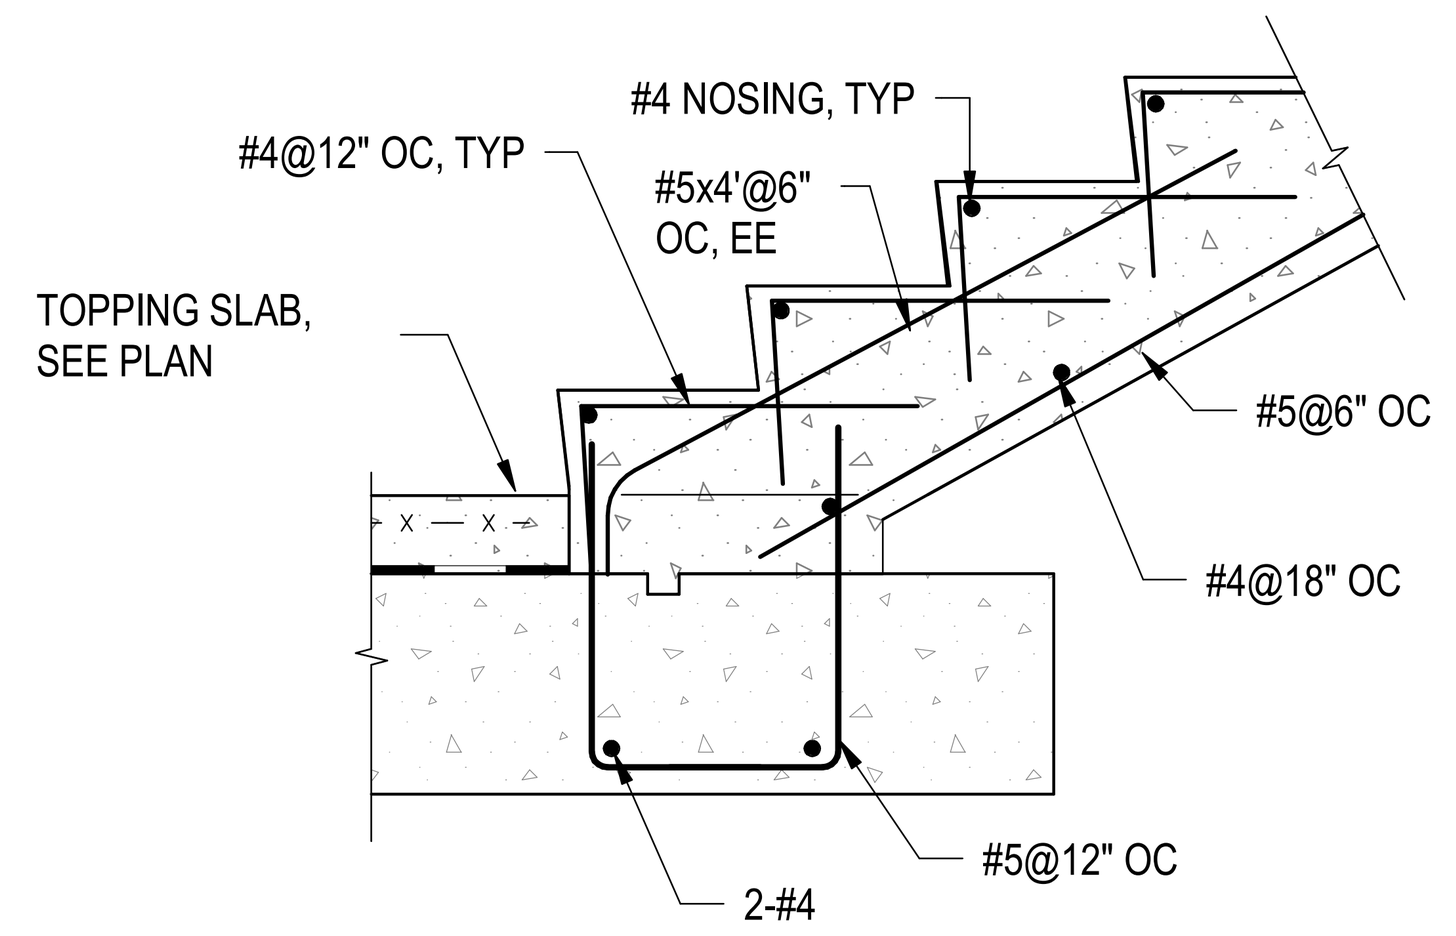

NOTES:
1. ALL REBARS IN CONCRETE STAIRS SHALL BE EPOXY-COATED.
2. PLAY DECK SLAB REBAR NOT SHOWN FOR CLARITY.

SECTION 5 S-313
SCALE: 3/4" = 1'-0"

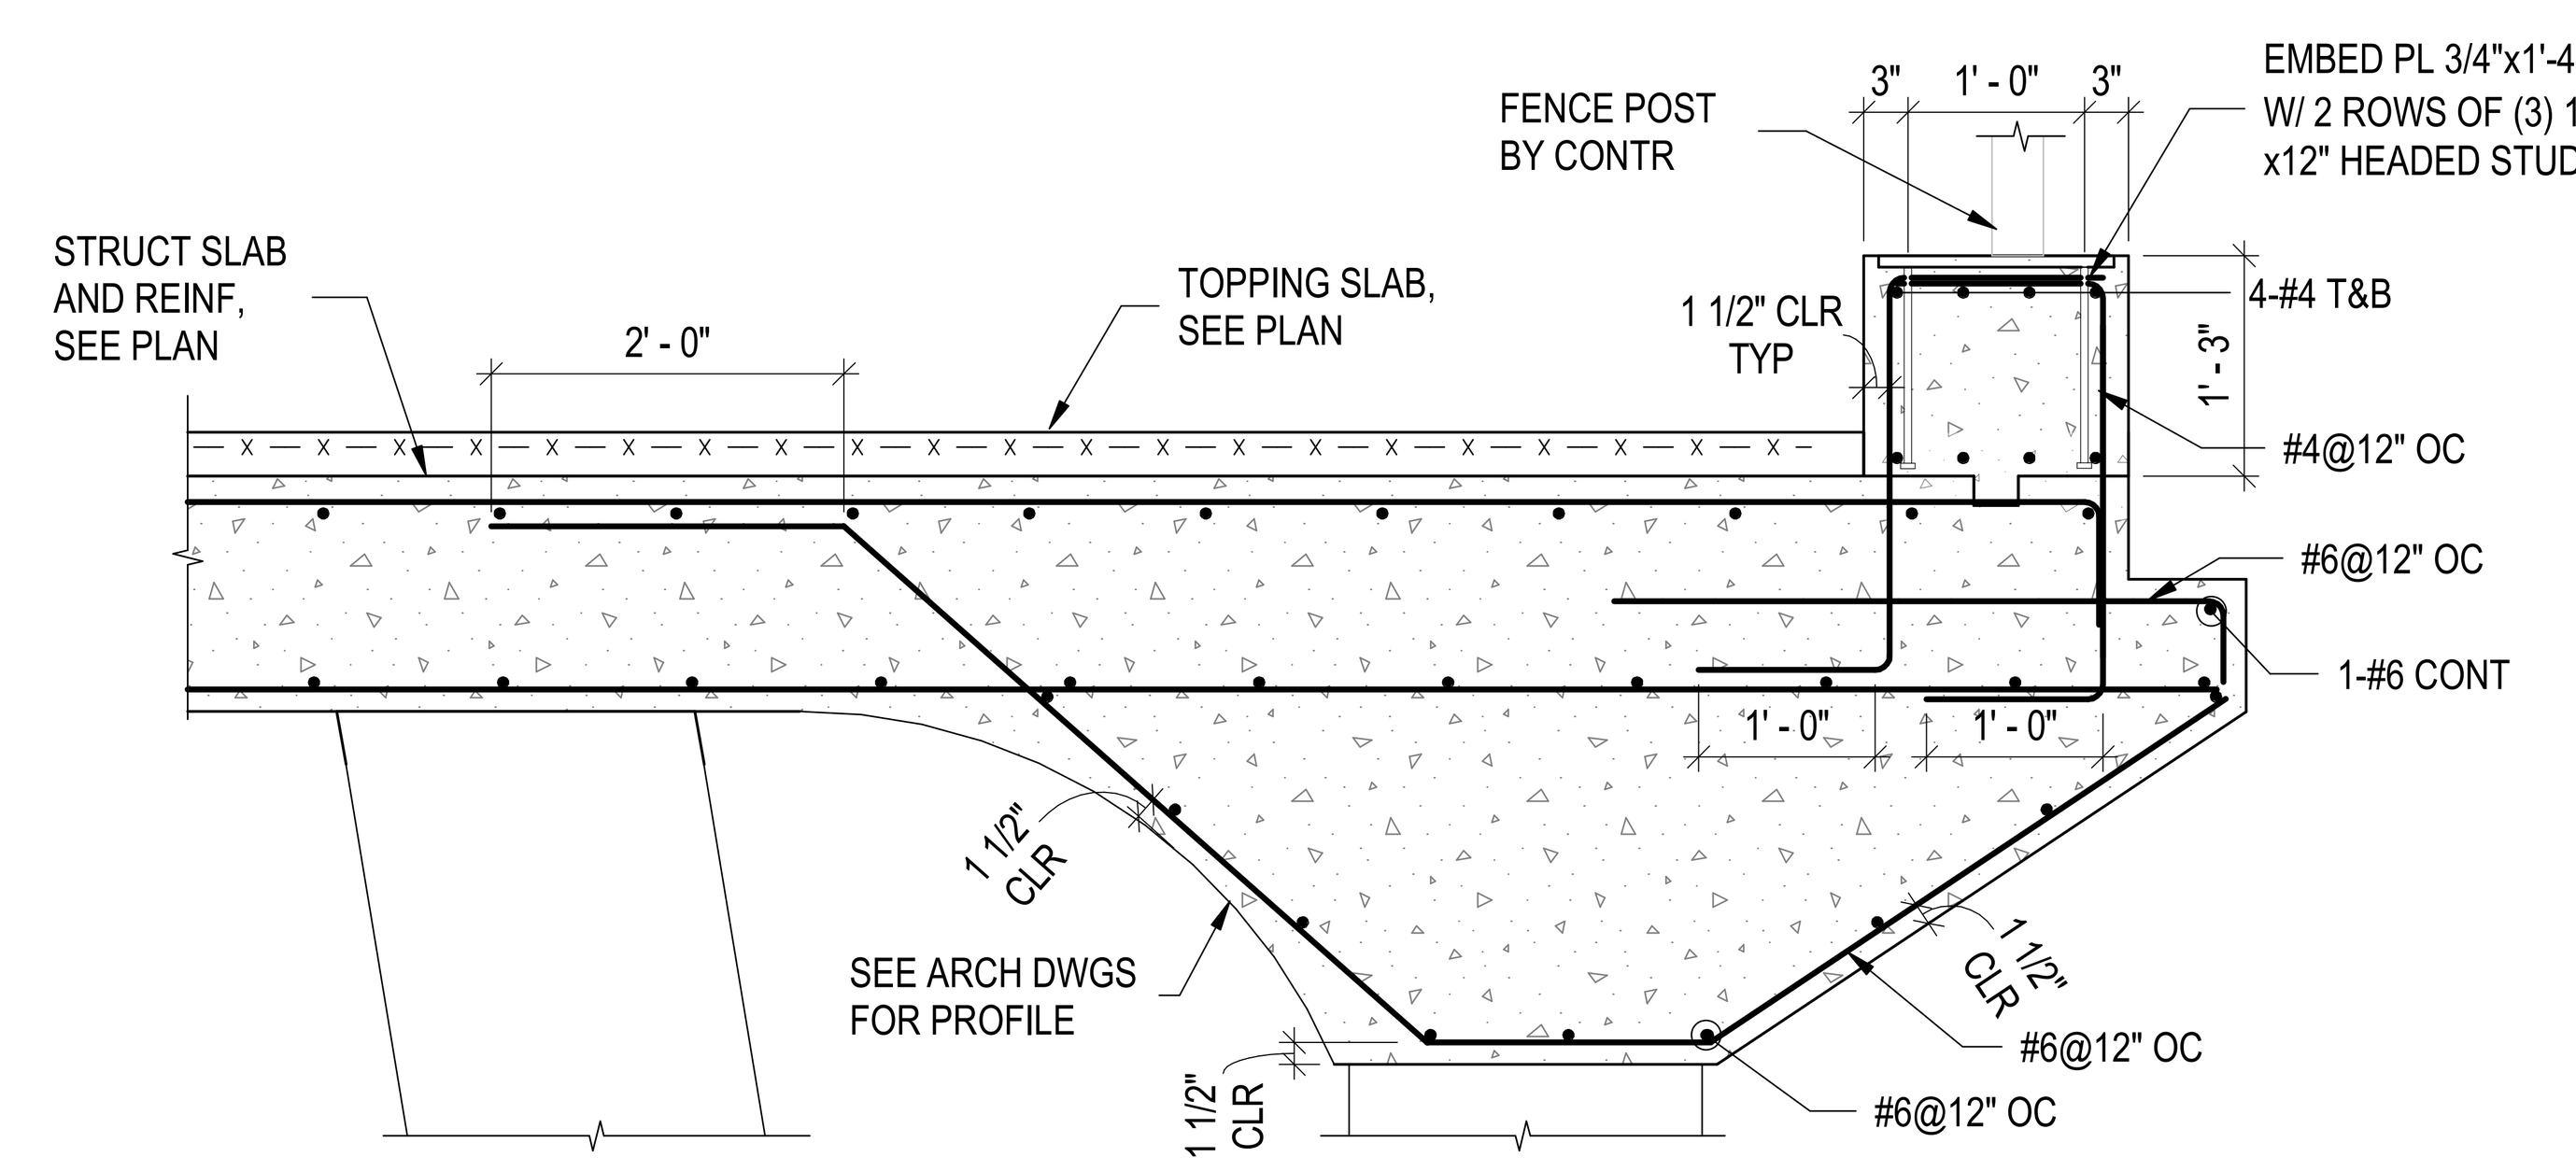

NOTE: REBARS AT SLAB EDGE AND CURBS SHALL BE EPOXY COATED.

SECTION 6 S-313
SCALE: 3/4" = 1'-0"

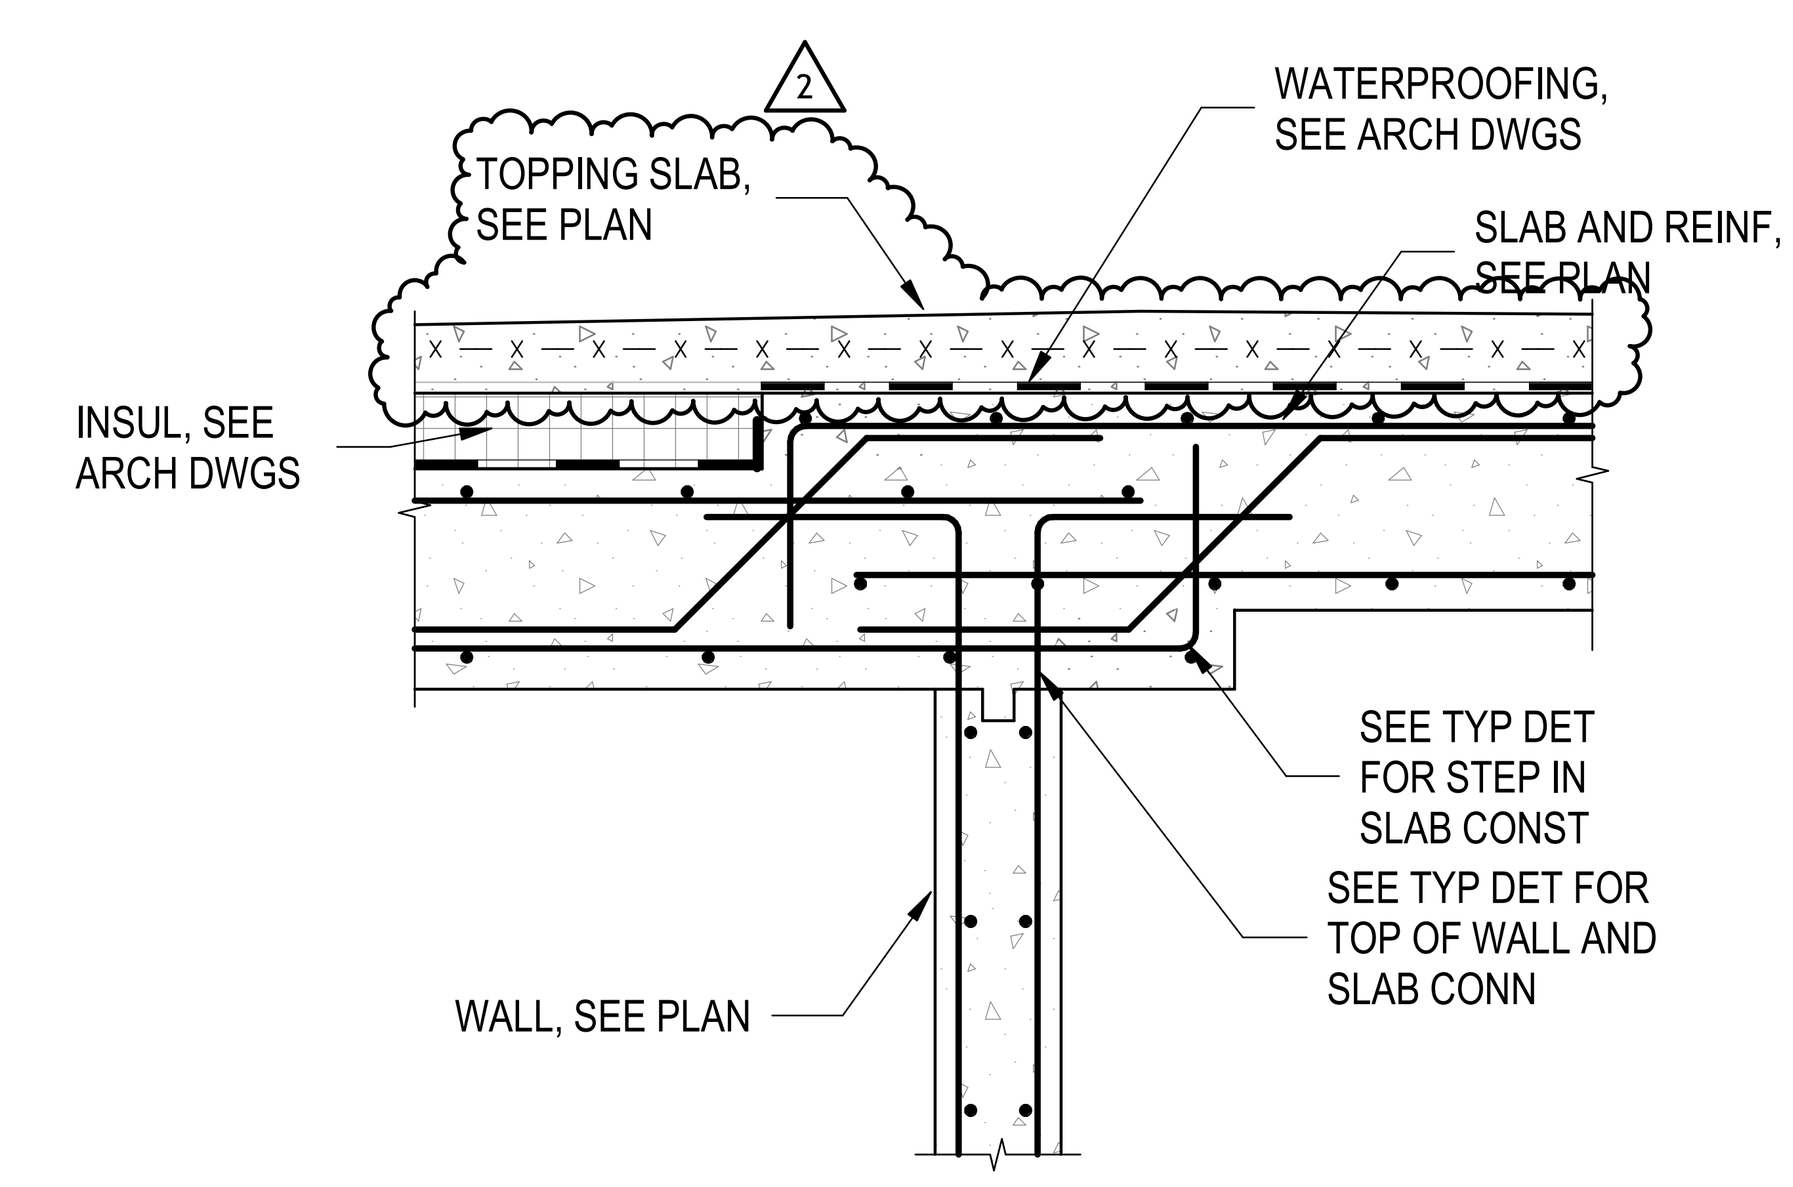

SECTION 7 S-313
SCALE: 3/4" = 1'-0"

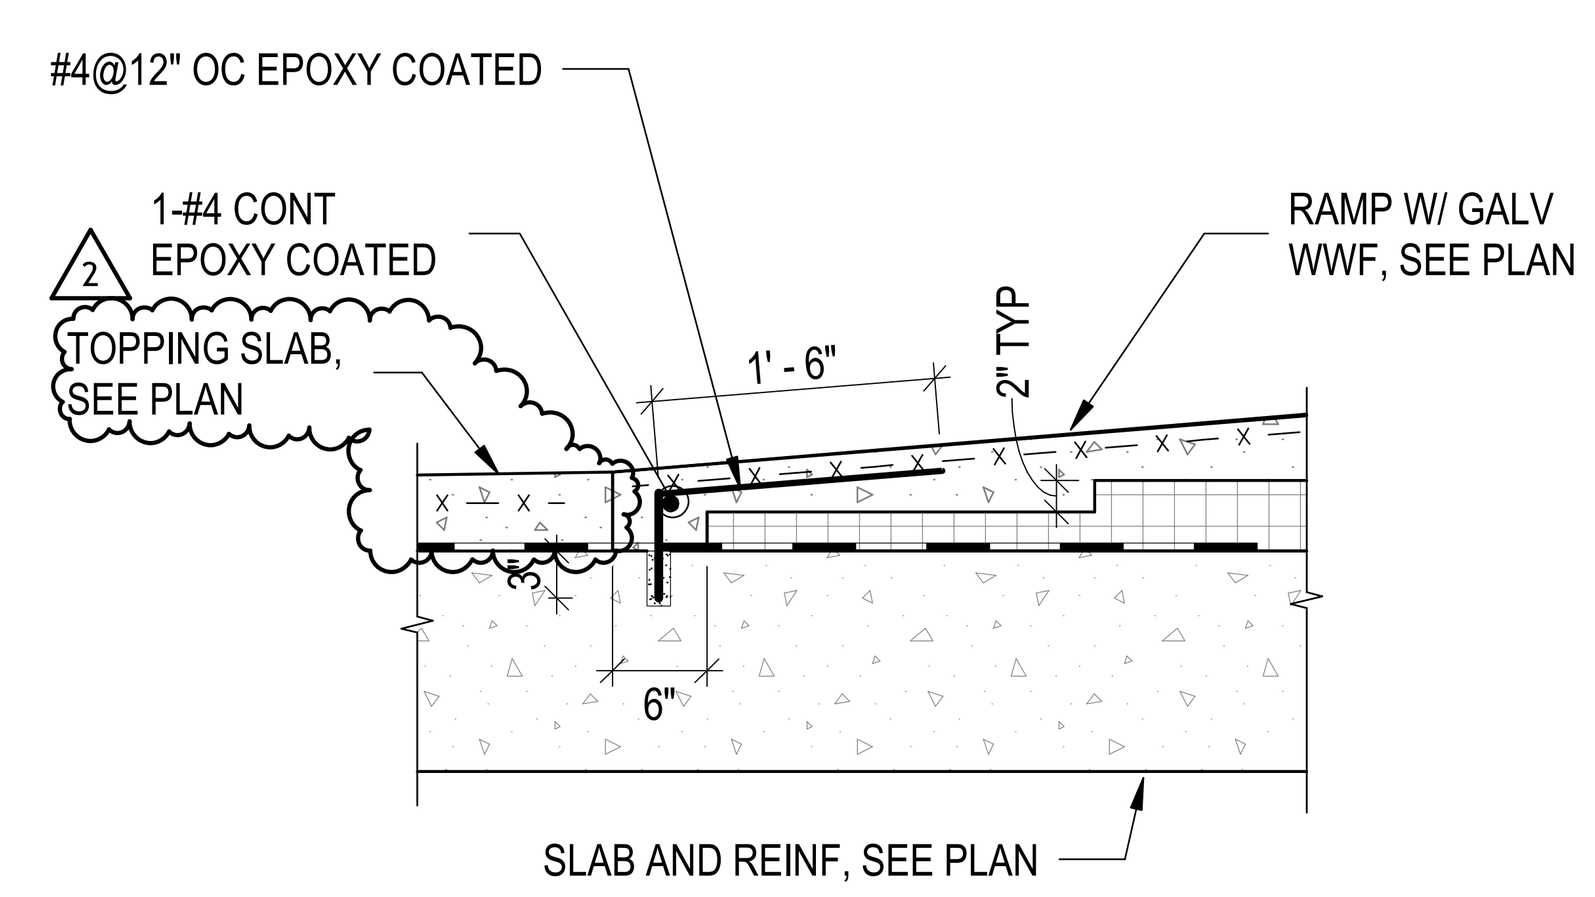

NOTE: SLAB REINF NOT SHOWN FOR CLARITY.

SECTION 9 S-313
SCALE: 3/4" = 1'-0"

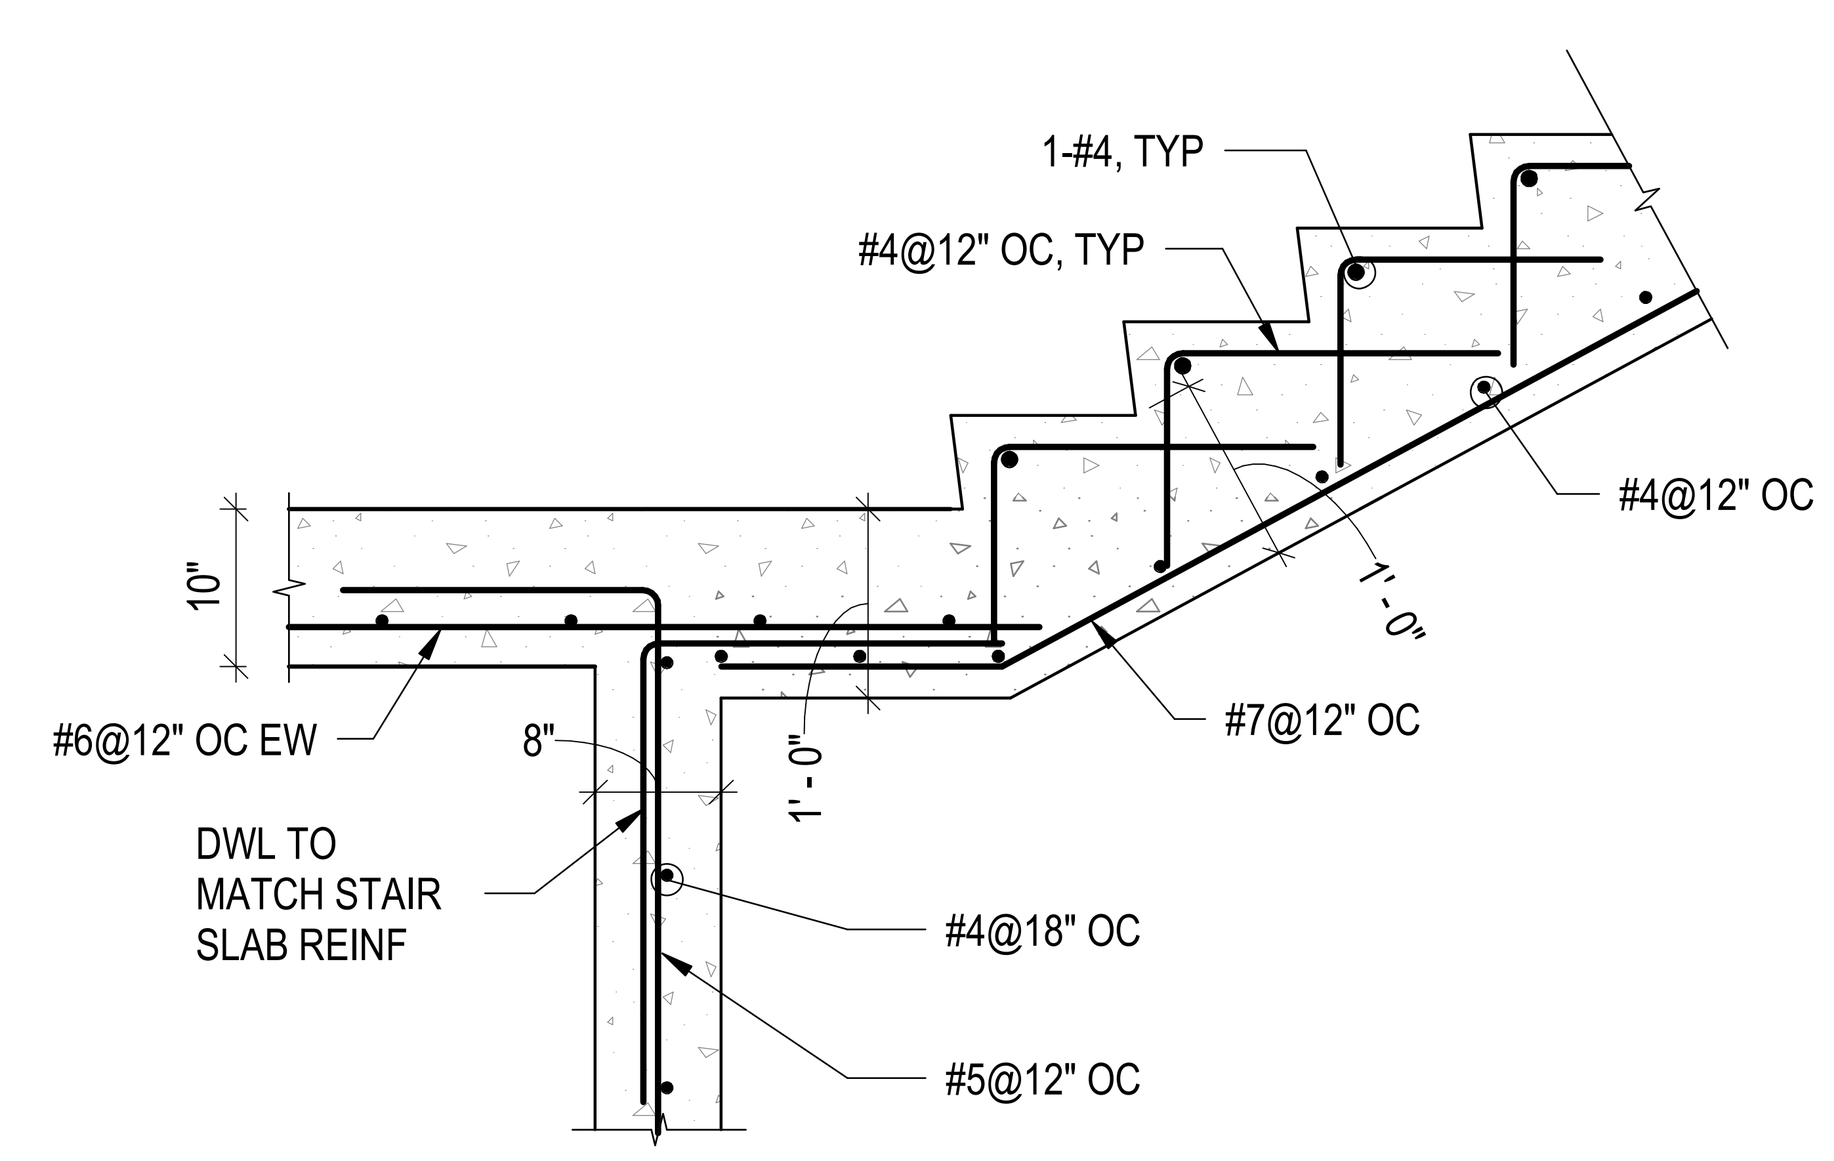

SECTION 10 S-313
SCALE: 3/4" = 1'-0"

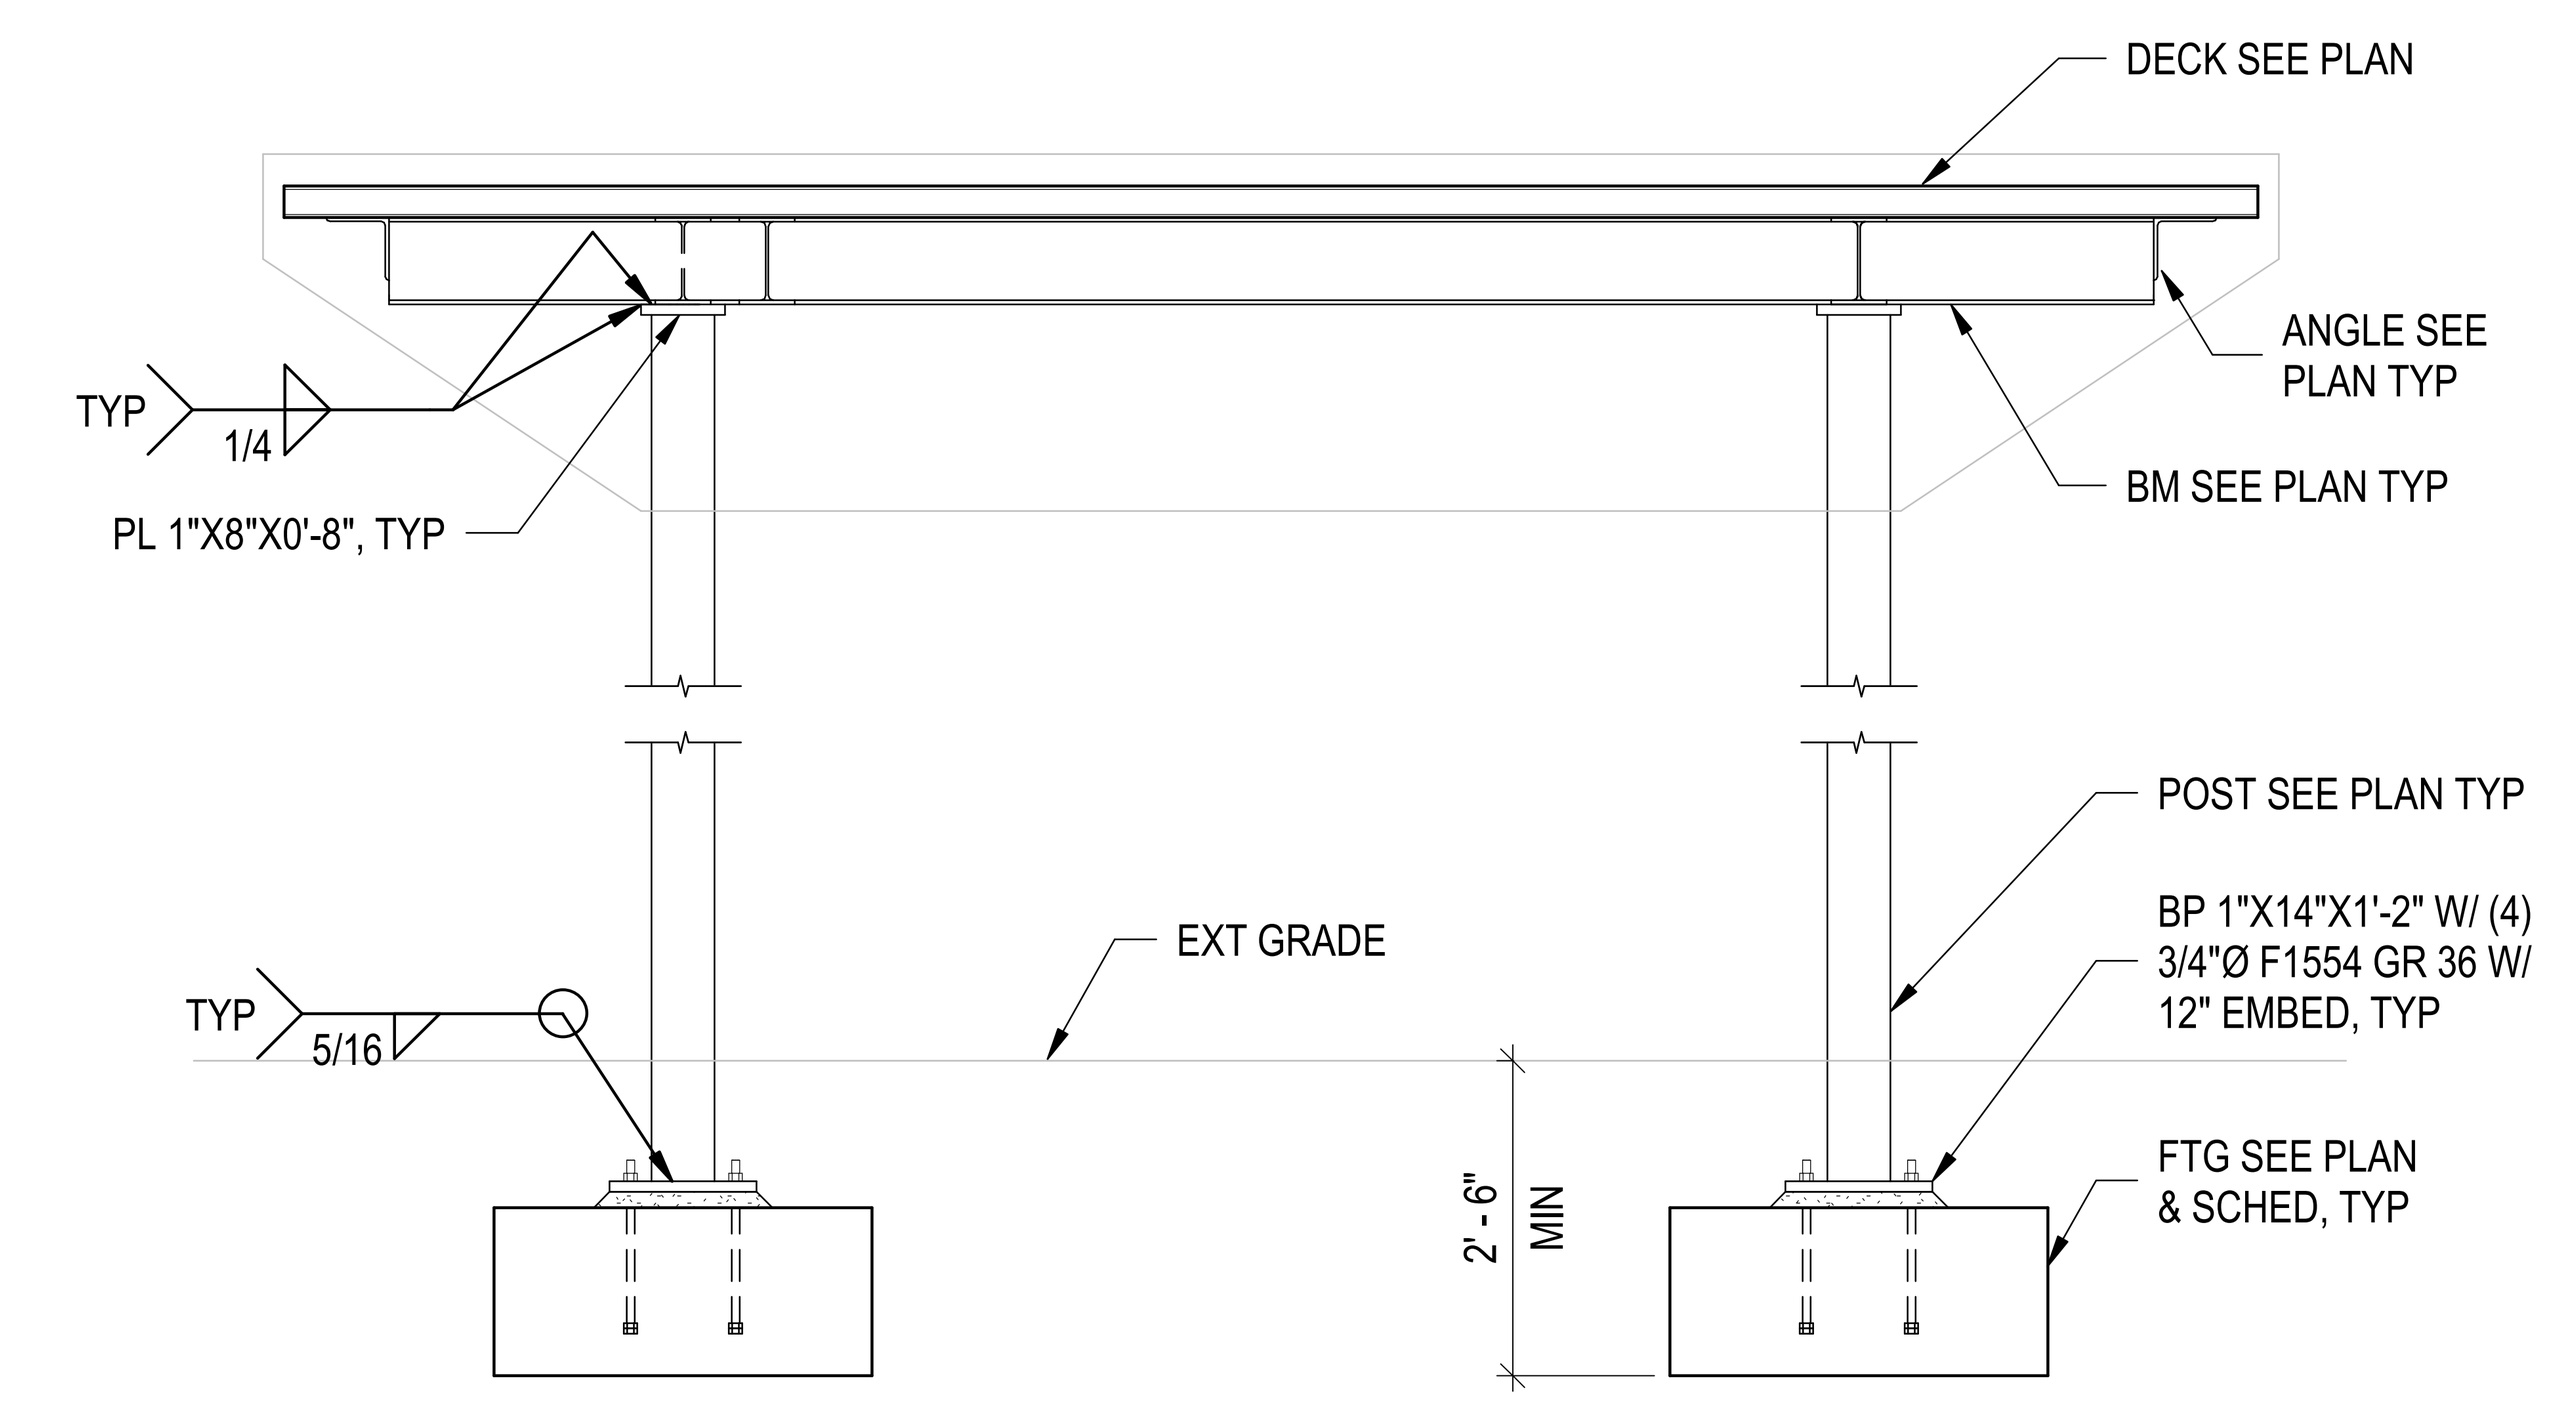

SECTION 15 S-313
SCALE: 1/2" = 1'-0"

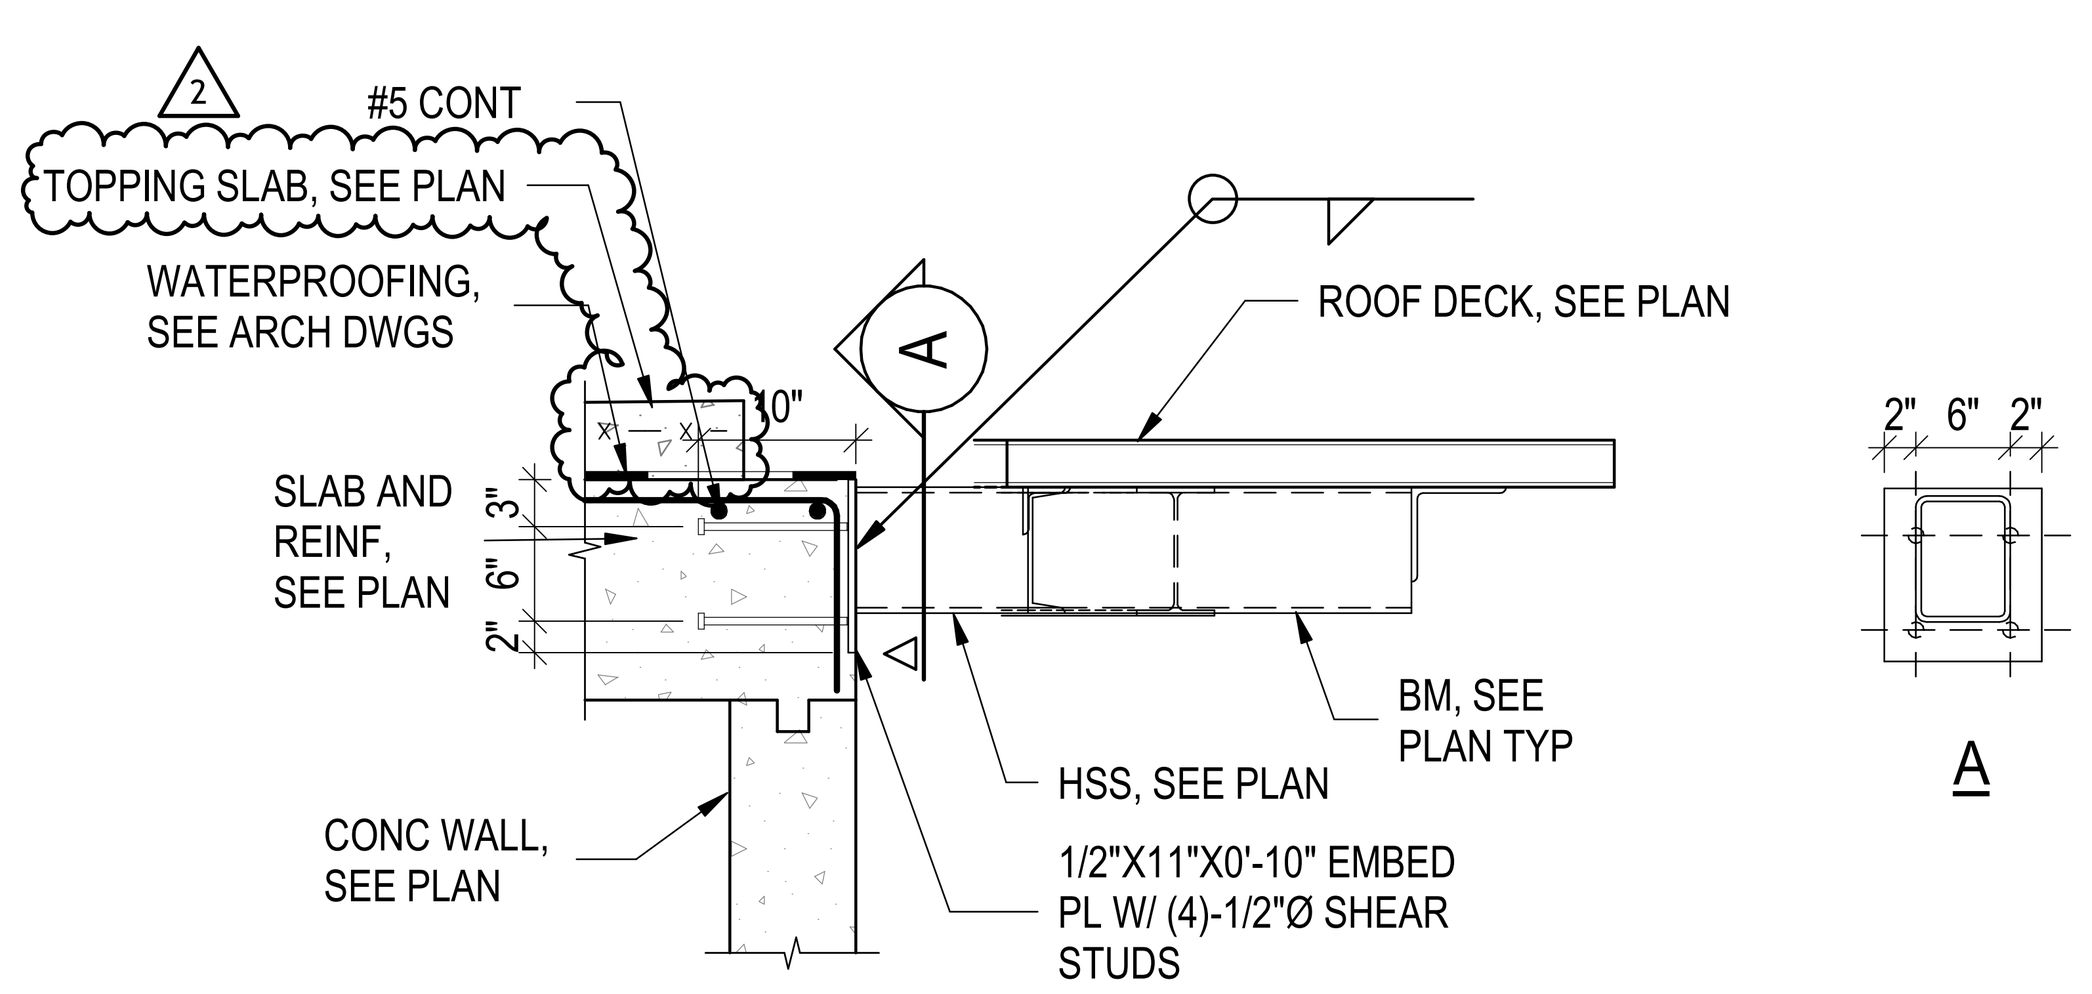

NOTE: SLAB AND WALL REINFORCEMENT NOT SHOWN FOR CLARITY.

SECTION 14 S-313
SCALE: 3/4" = 1'-0"

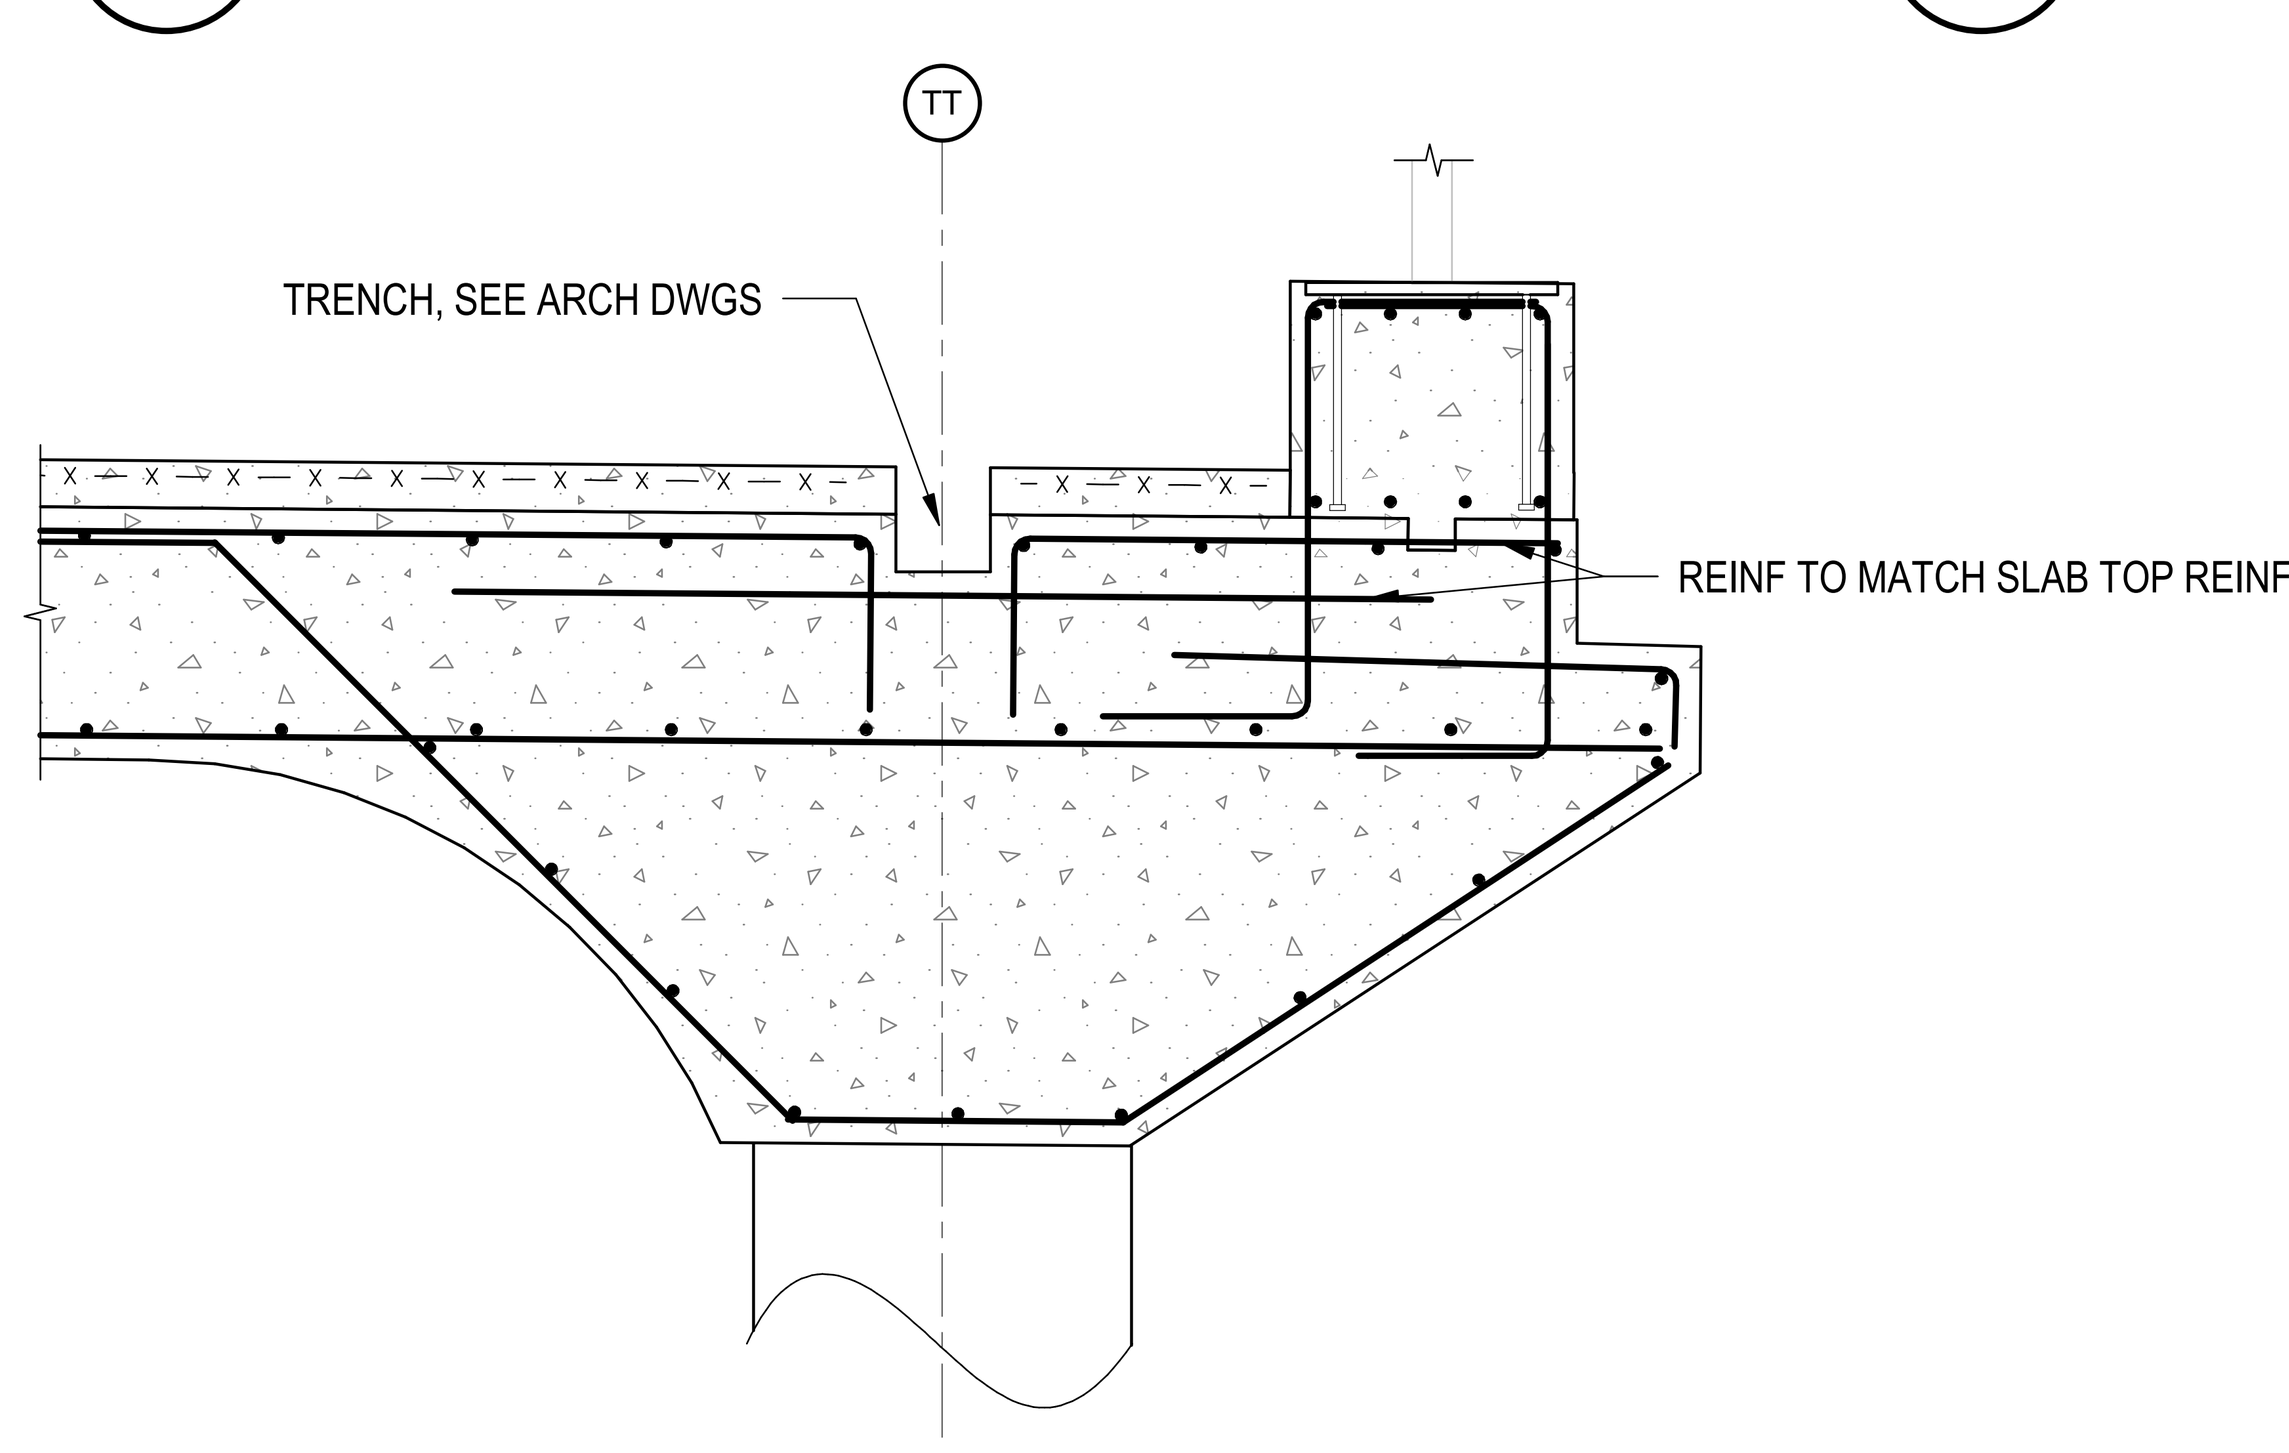

NOTE: SEE 6/S-313 FOR BALANCE INFORMATION.

SECTION 11 S-313
SCALE: 3/4" = 1'-0"

Autodesk Docs://Sidwell Lower School/Sidwell Lower School_ST_R24.rvt
11/17/2025 6:20:35 PM

NO.	DATE	ISSUE
A	09/30/2025	Permit
	10/29/2025	BID SET
2	11/17/2025	BID ADDENDUM 2

0' 4" 8" 1' 2' 3'
SCALE : 3/4" = 1'-0"

SEAL

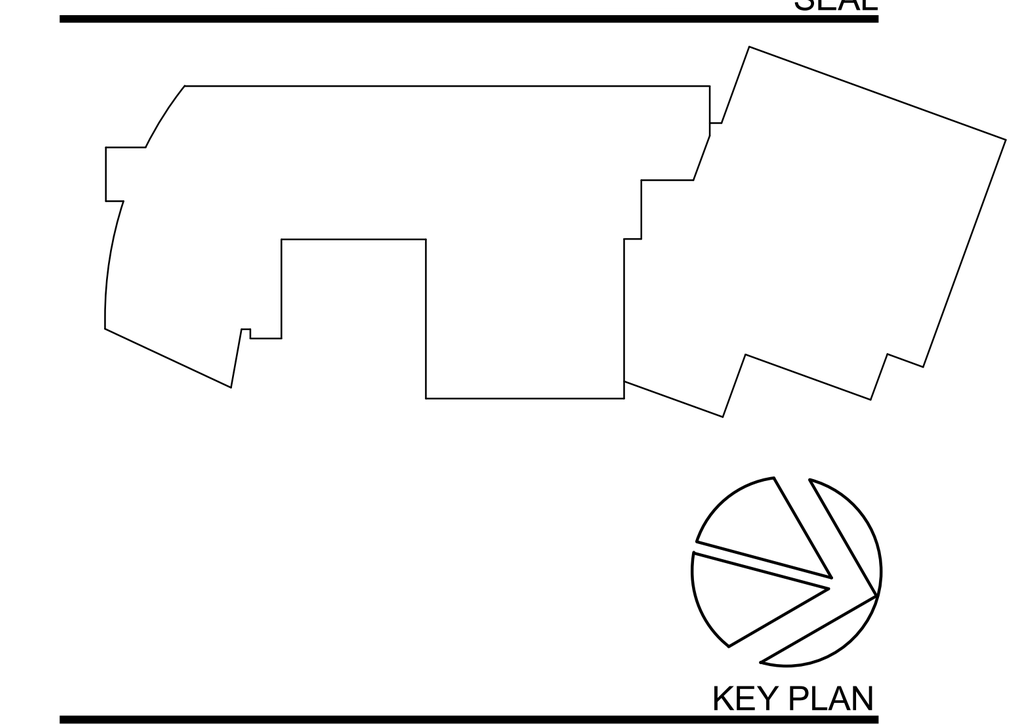

KEY PLAN

PERKINS EASTMAN
One Thomas Circle NW, Suite 200
Washington, DC 20005
T: +1 202 861 1325
F: +1 202 861 1326

Owner:
Sidwell Friends School
3825 Wisconsin Ave NW, Washington DC 20016

Construction Manager:
Advanced Project Management, Inc (APM)
4530 Walney Rd, Ste 202, Chantilly, VA 20151

Civil / Site:
Bowman Consulting Group, Ltd
888 17th St NW, Suite 510, Washington, DC 20006

Landscape:
Natural Resources Design, Inc (NRD)
1009 Shepherd Street NE, Washington, DC 20017

Structural:
Yun Associates LLC
1050 Connecticut Ave NW, Suite 500, Washington, DC 20036

MEP / FP / Lighting:
CMTA Inc
220 Lexington Green Circle, Suite 600, Lexington, KY 40503

AV / IT / Telecom / Security:
Educational Systems Planning (ESP)
2448 Holly Avenue, Suite 302, Annapolis, MD 21401

Food Service
Nyikos-Garcia Foodservice Design, Inc
7146 Starmount Way, New Market, MD 21774

Accessibility Consultant:
Galbo Wolf LLC
4410 Massachusetts Ave NW, #240, Washington, DC 20016

Acoustics:
Polysonics Corp
555 Hospital Drive, Warrenton, VA 20186

Building Envelope Consultant:
Sustainable Building Partners LLC
2701 Prosperity Ave, Suite 105, Fairfax, VA 22031

Code Consultant:
Campbell Code Consulting LLC
7834 Taggart Ct, Elkridge, MD 21075

Specifications:

PROJECT TITLE:

SIDWELL FRIENDS NEW LOWER SCHOOL AT DC CAMPUS

3825 WISCONSIN AVE NW
WASHINGTON, DC 20016

PROJECT No: 2025008

DRAWING TITLE:

SECTIONS

SCALE: As indicated

S-313

ISSUED FOR BID
10/29/2025

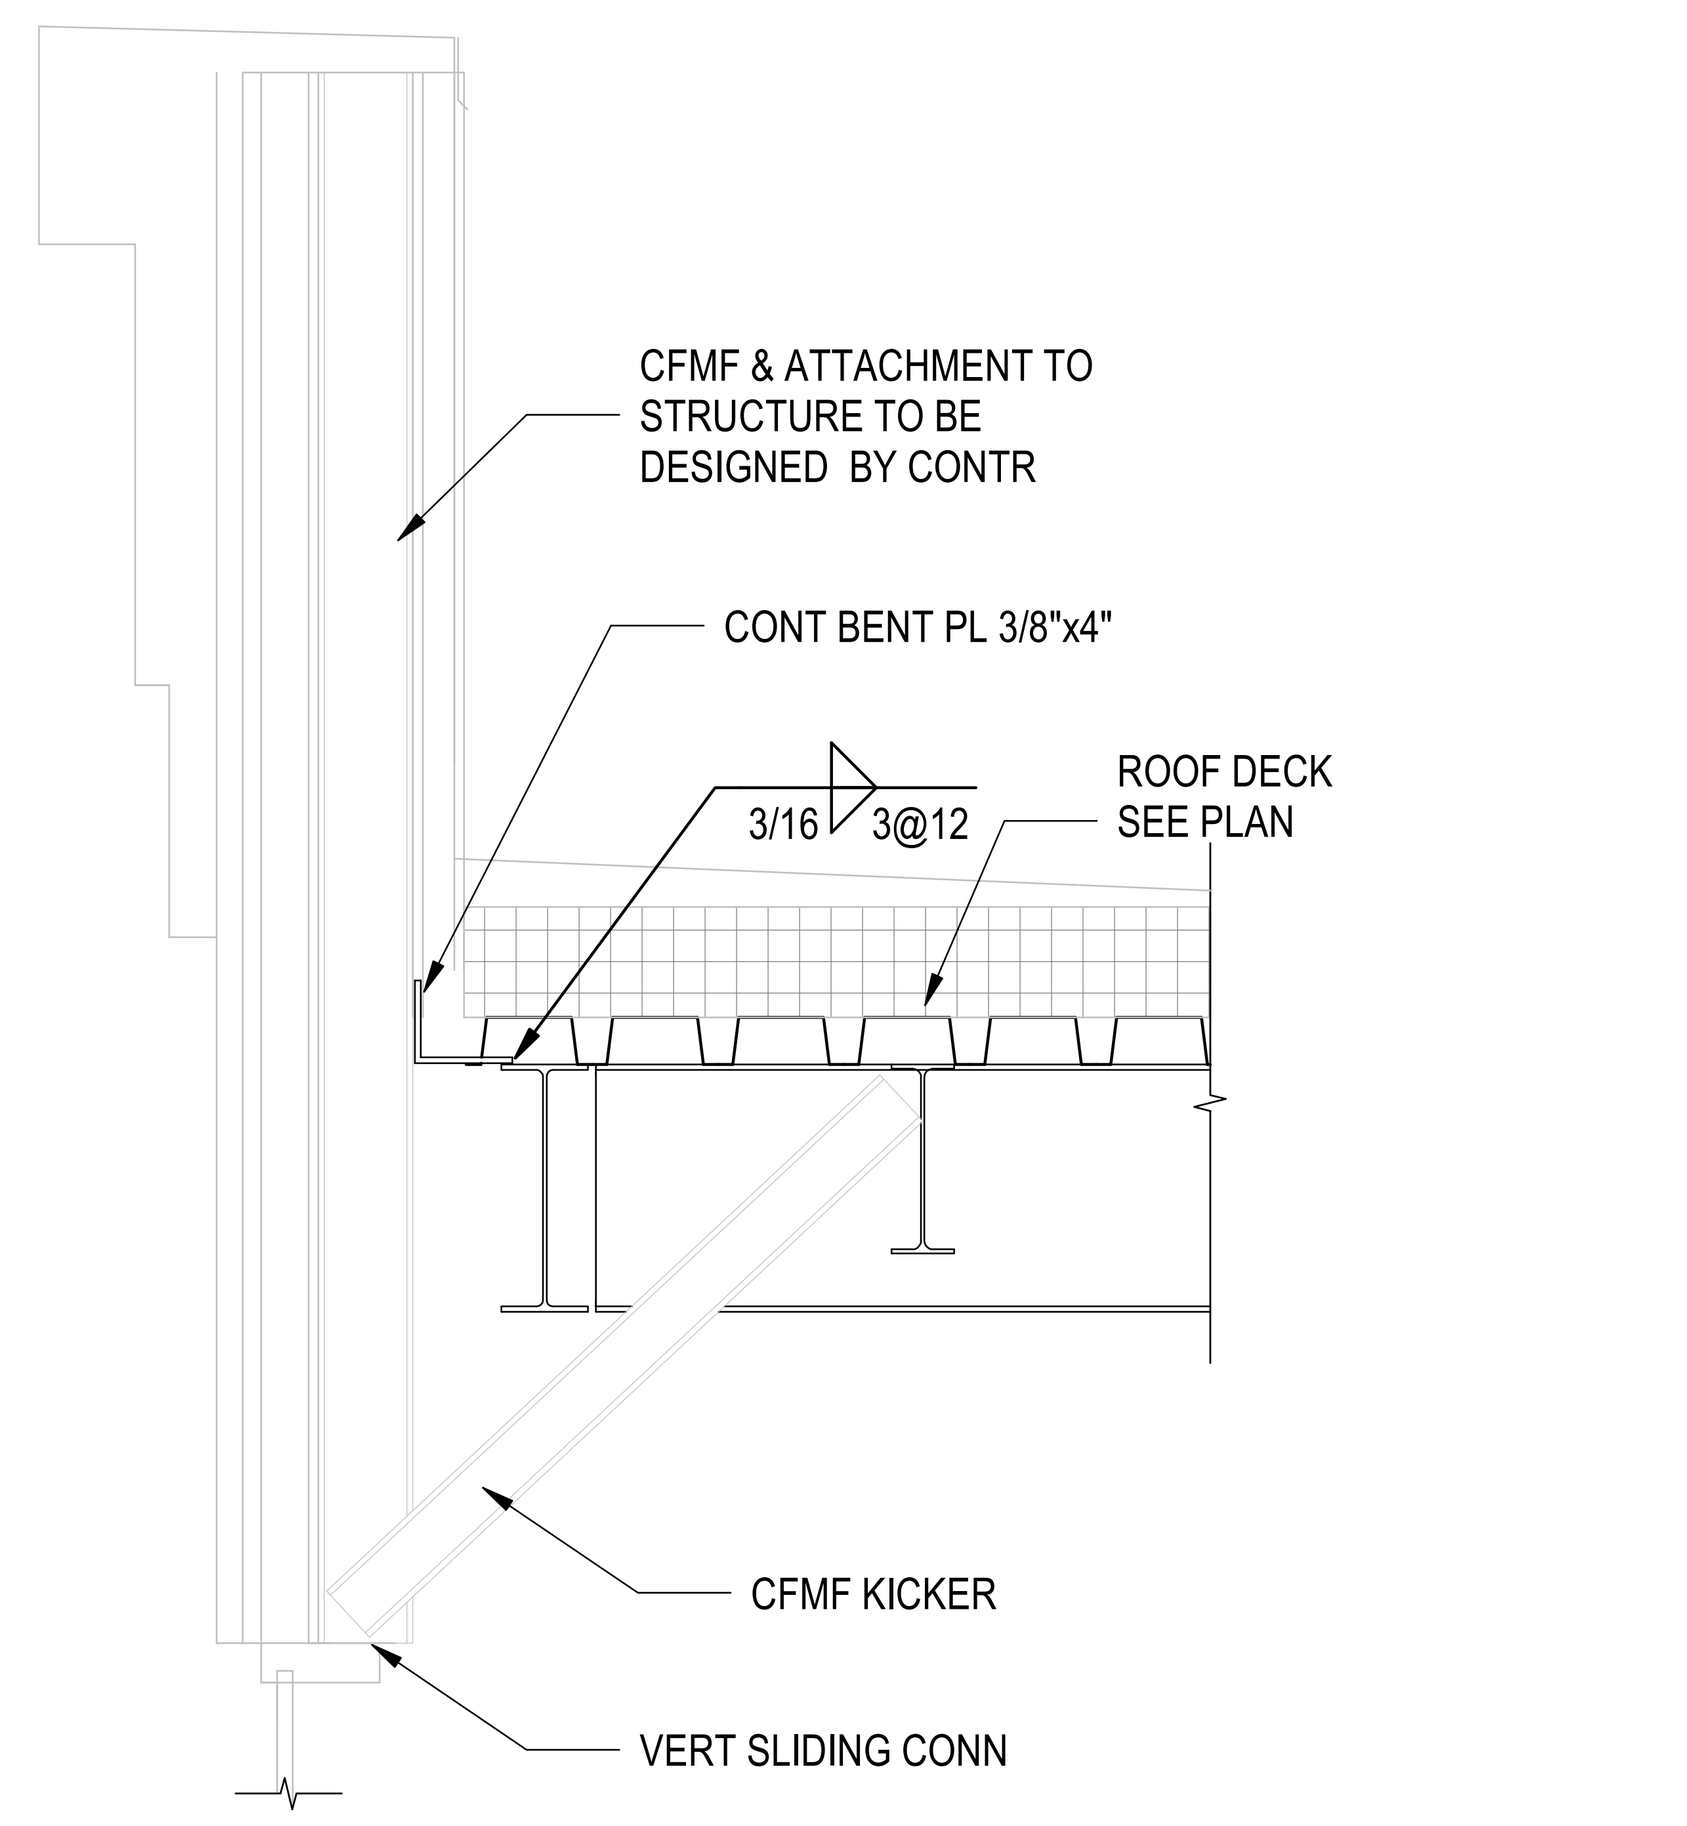

SECTION 1 S-321
SCALE: 3/4" = 1'-0"

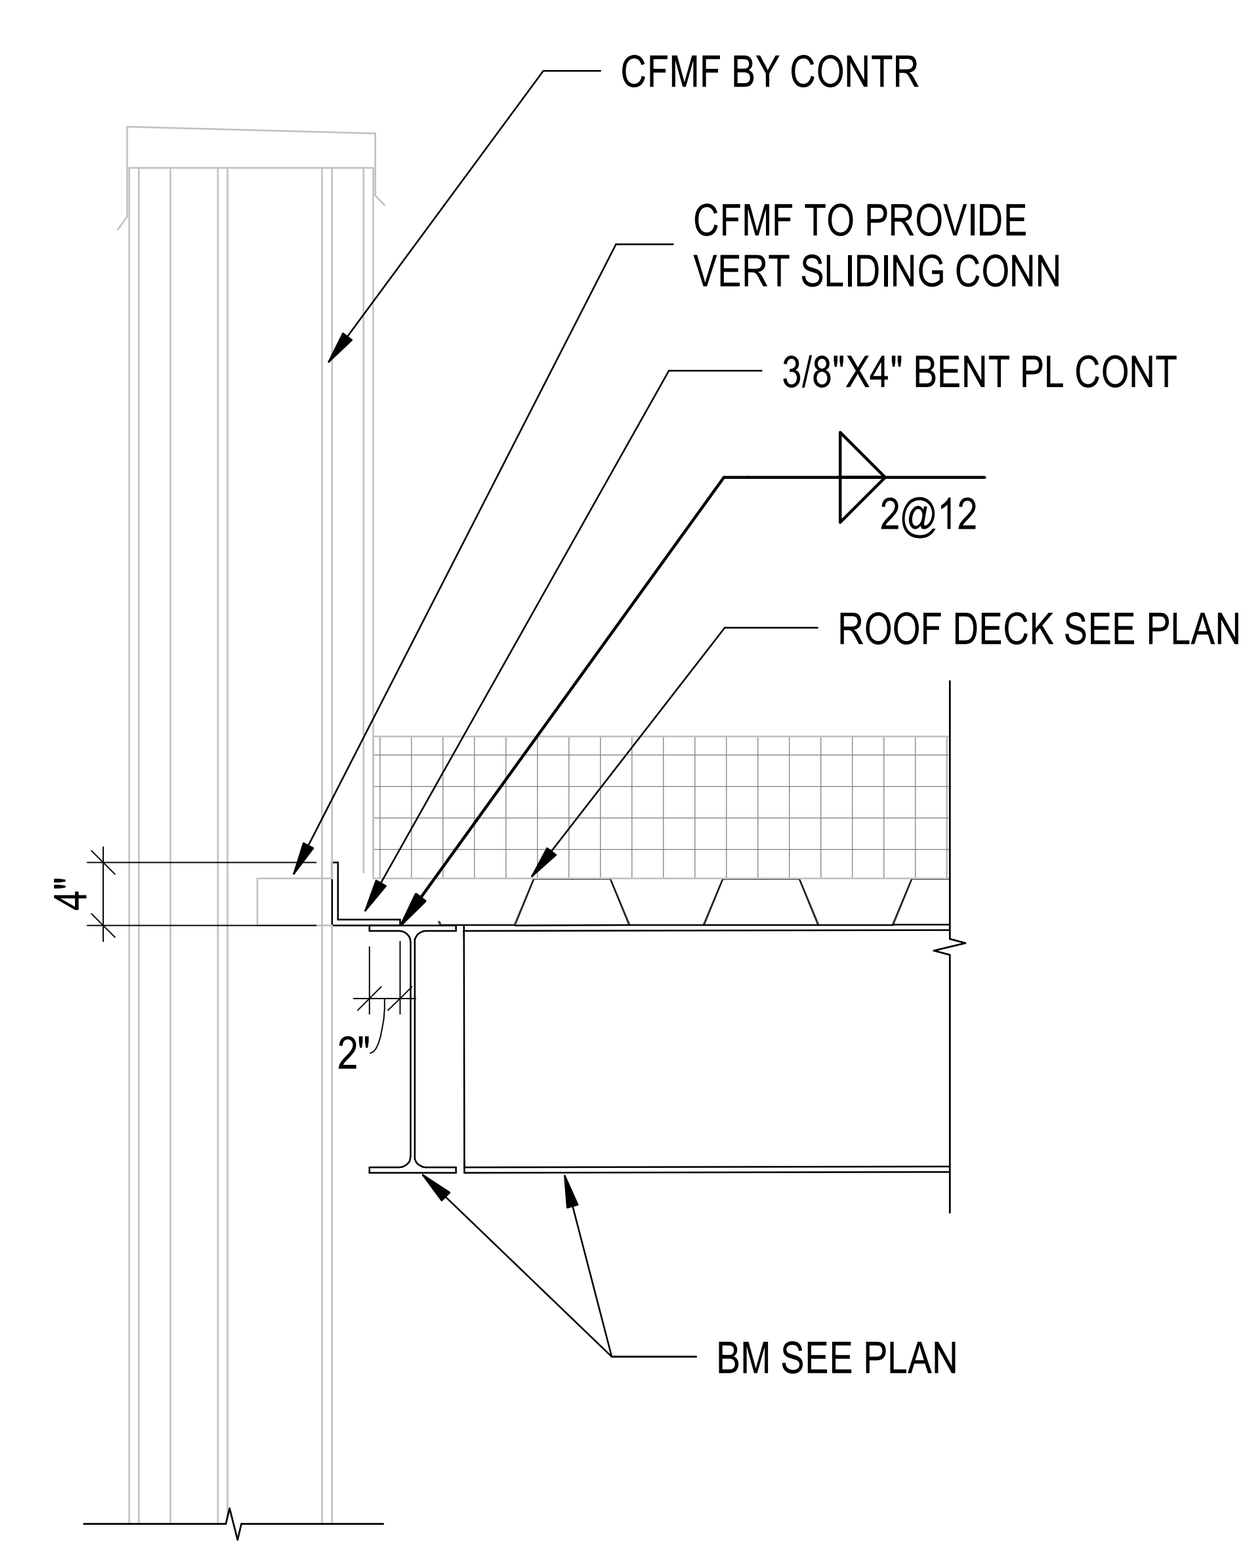

SECTION 2 S-321
SCALE: 3/4" = 1'-0"

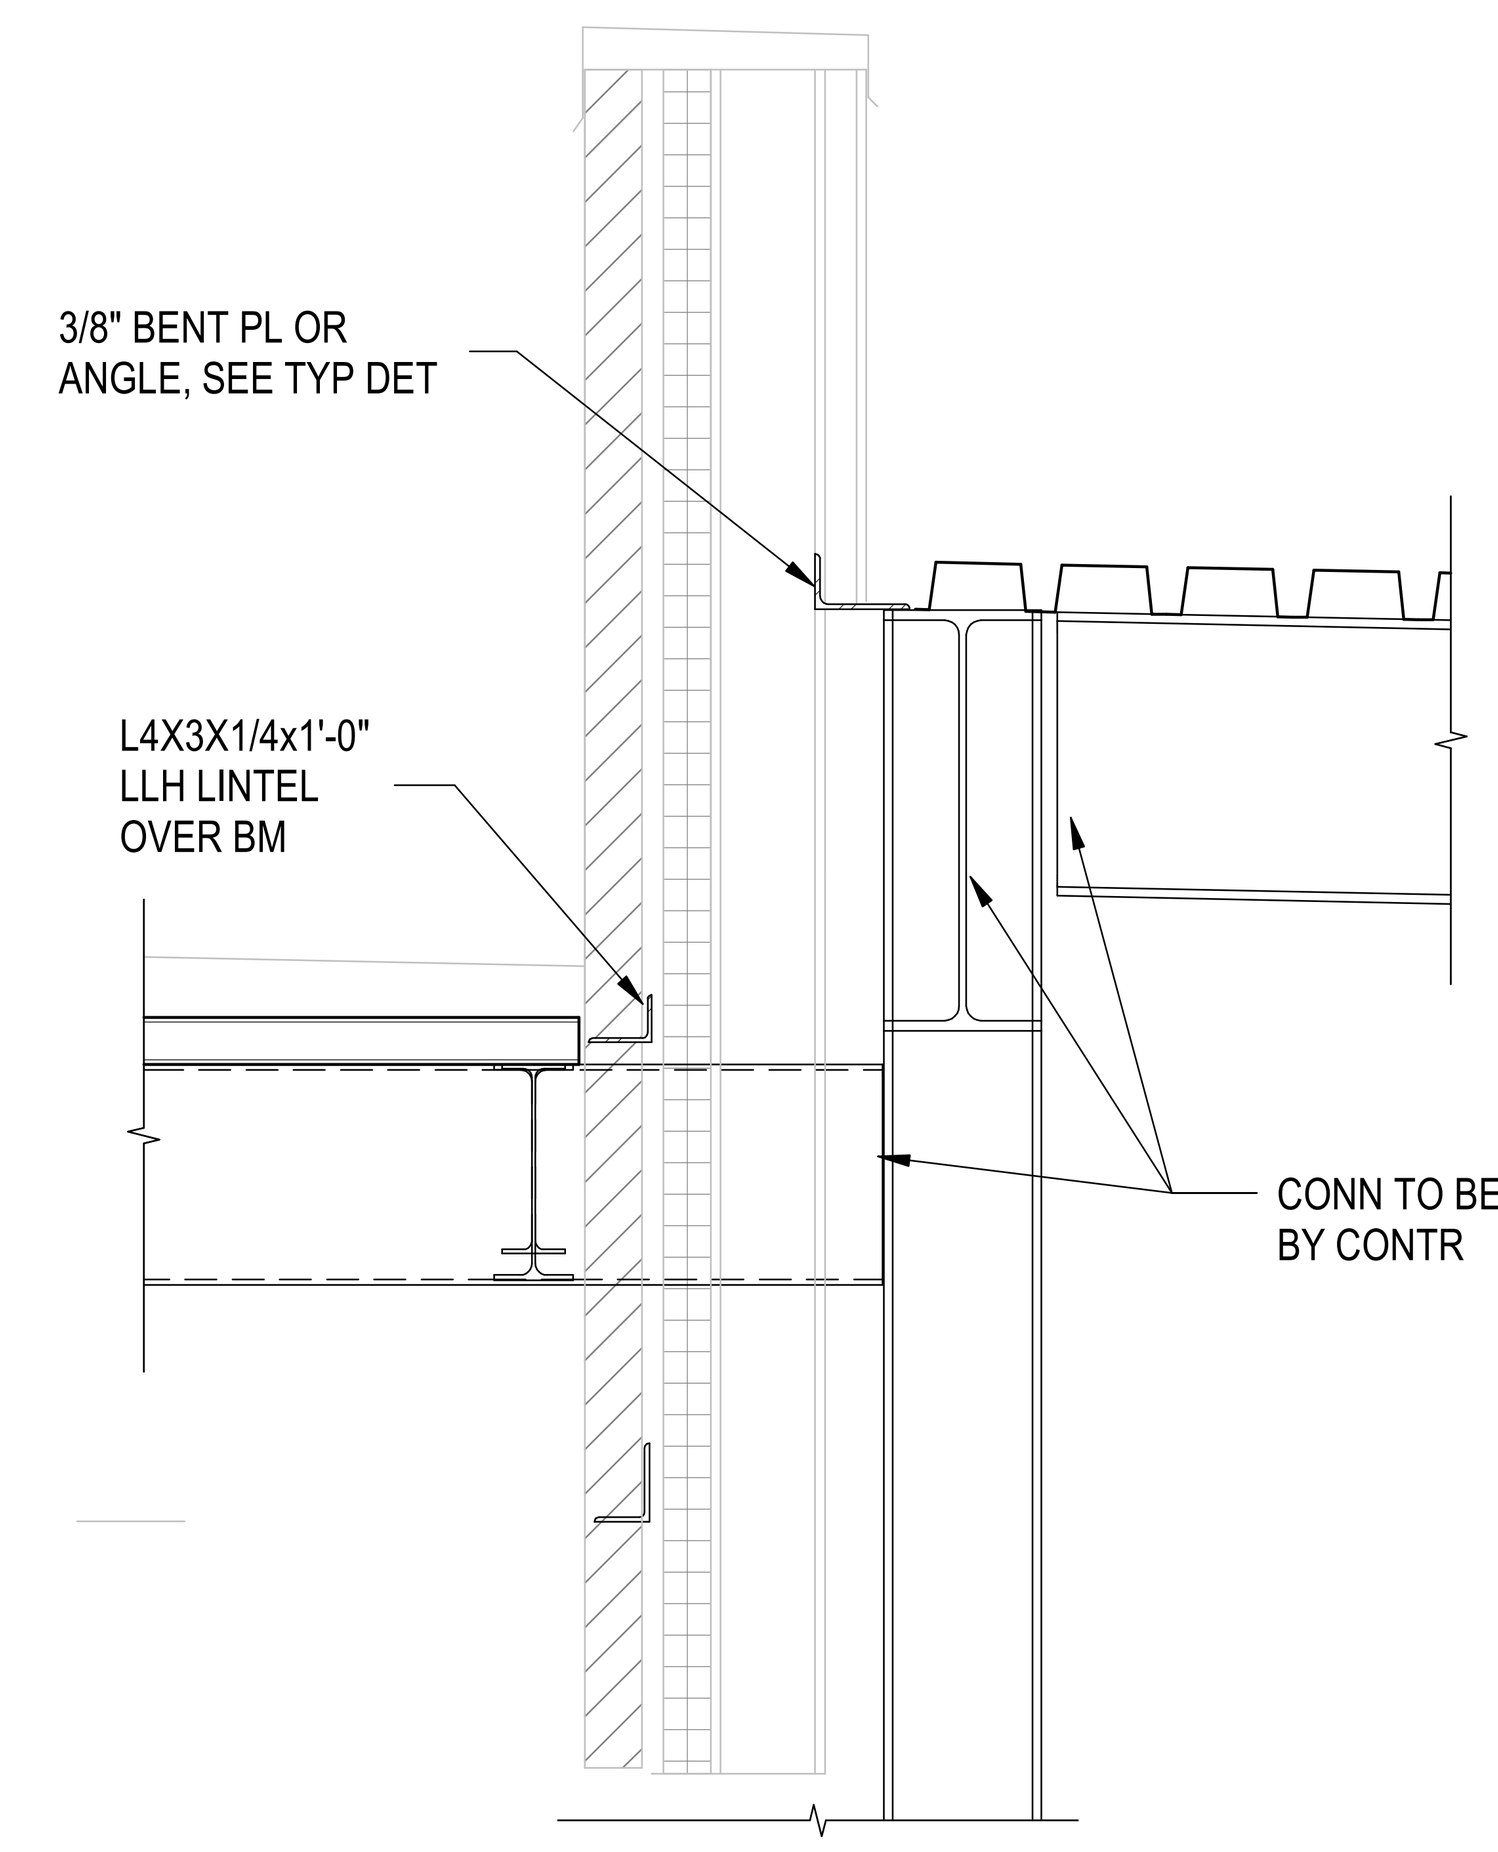

SECTION 3 S-321
SCALE: 3/4" = 1'-0"

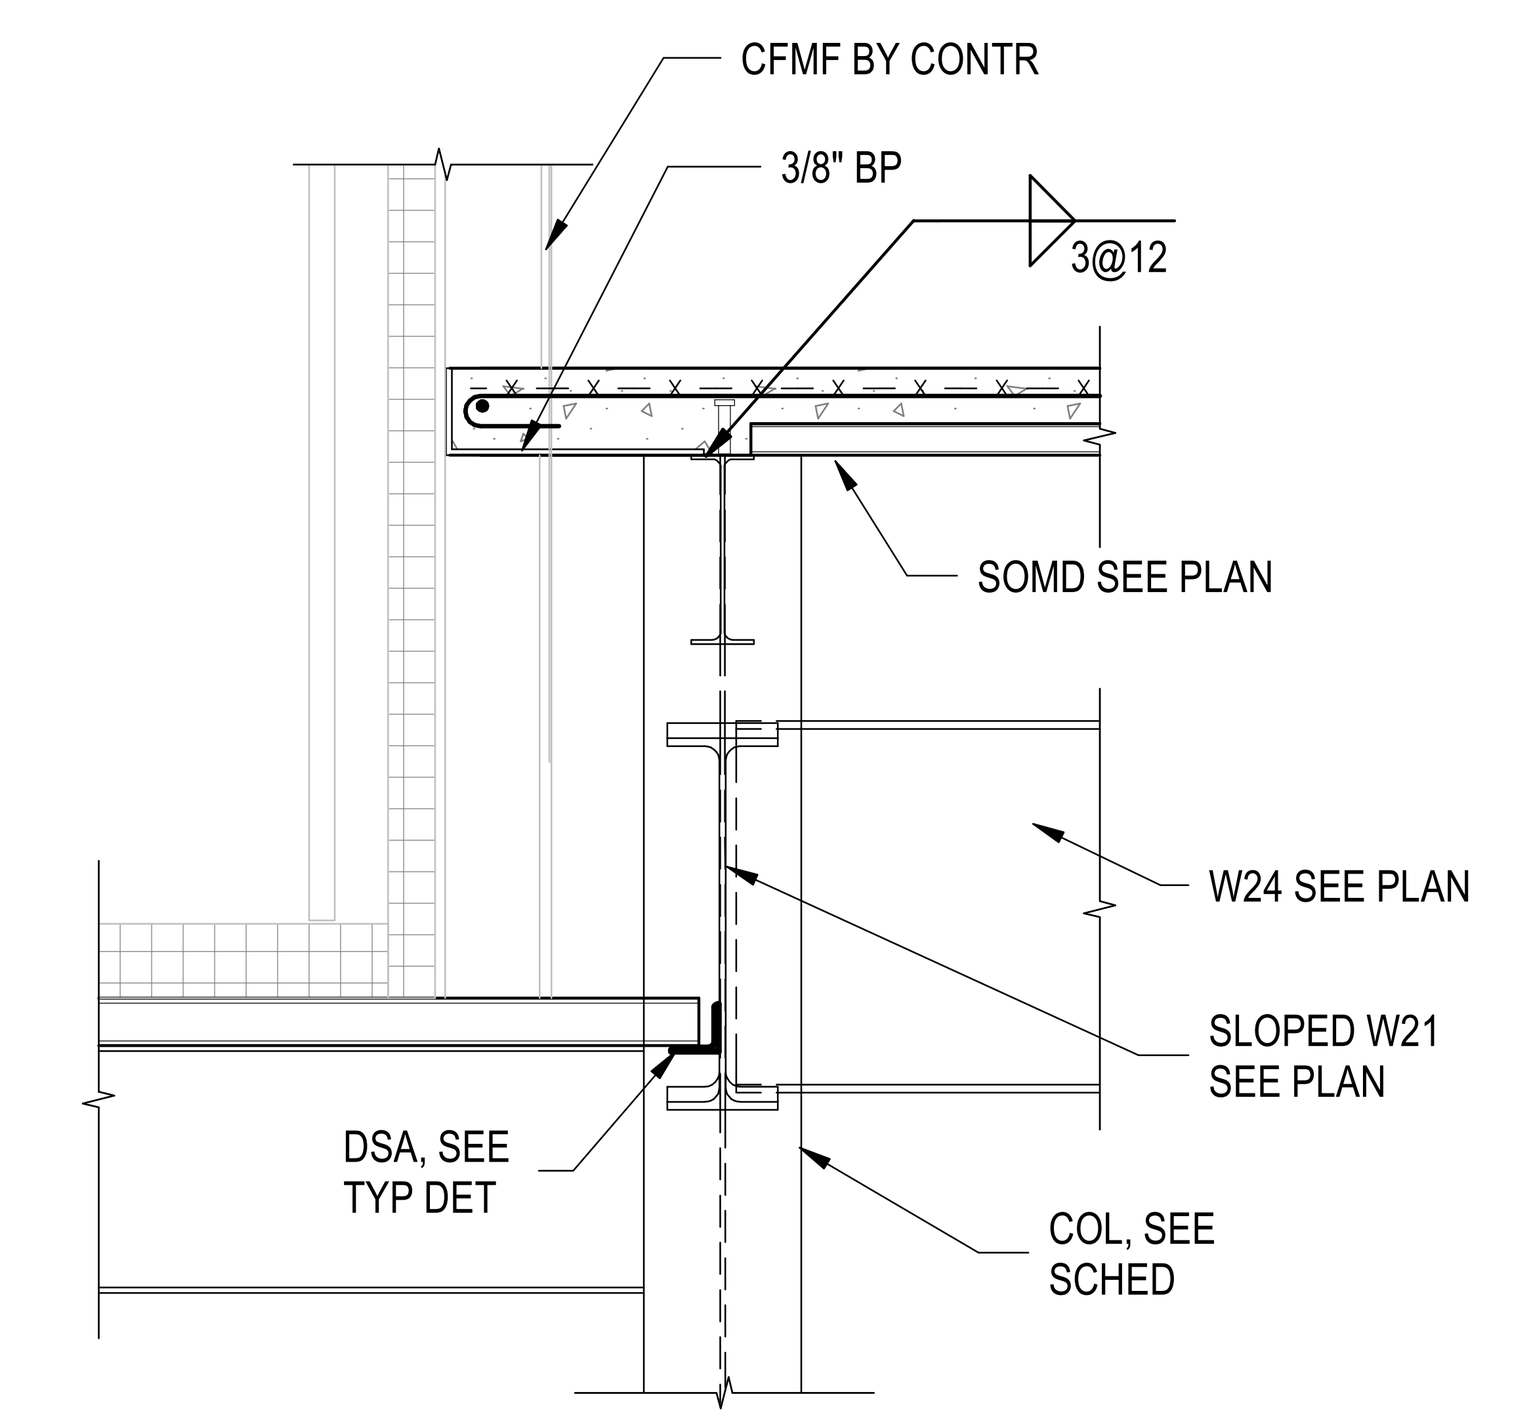

SECTION 4 S-321
SCALE: 3/4" = 1'-0"

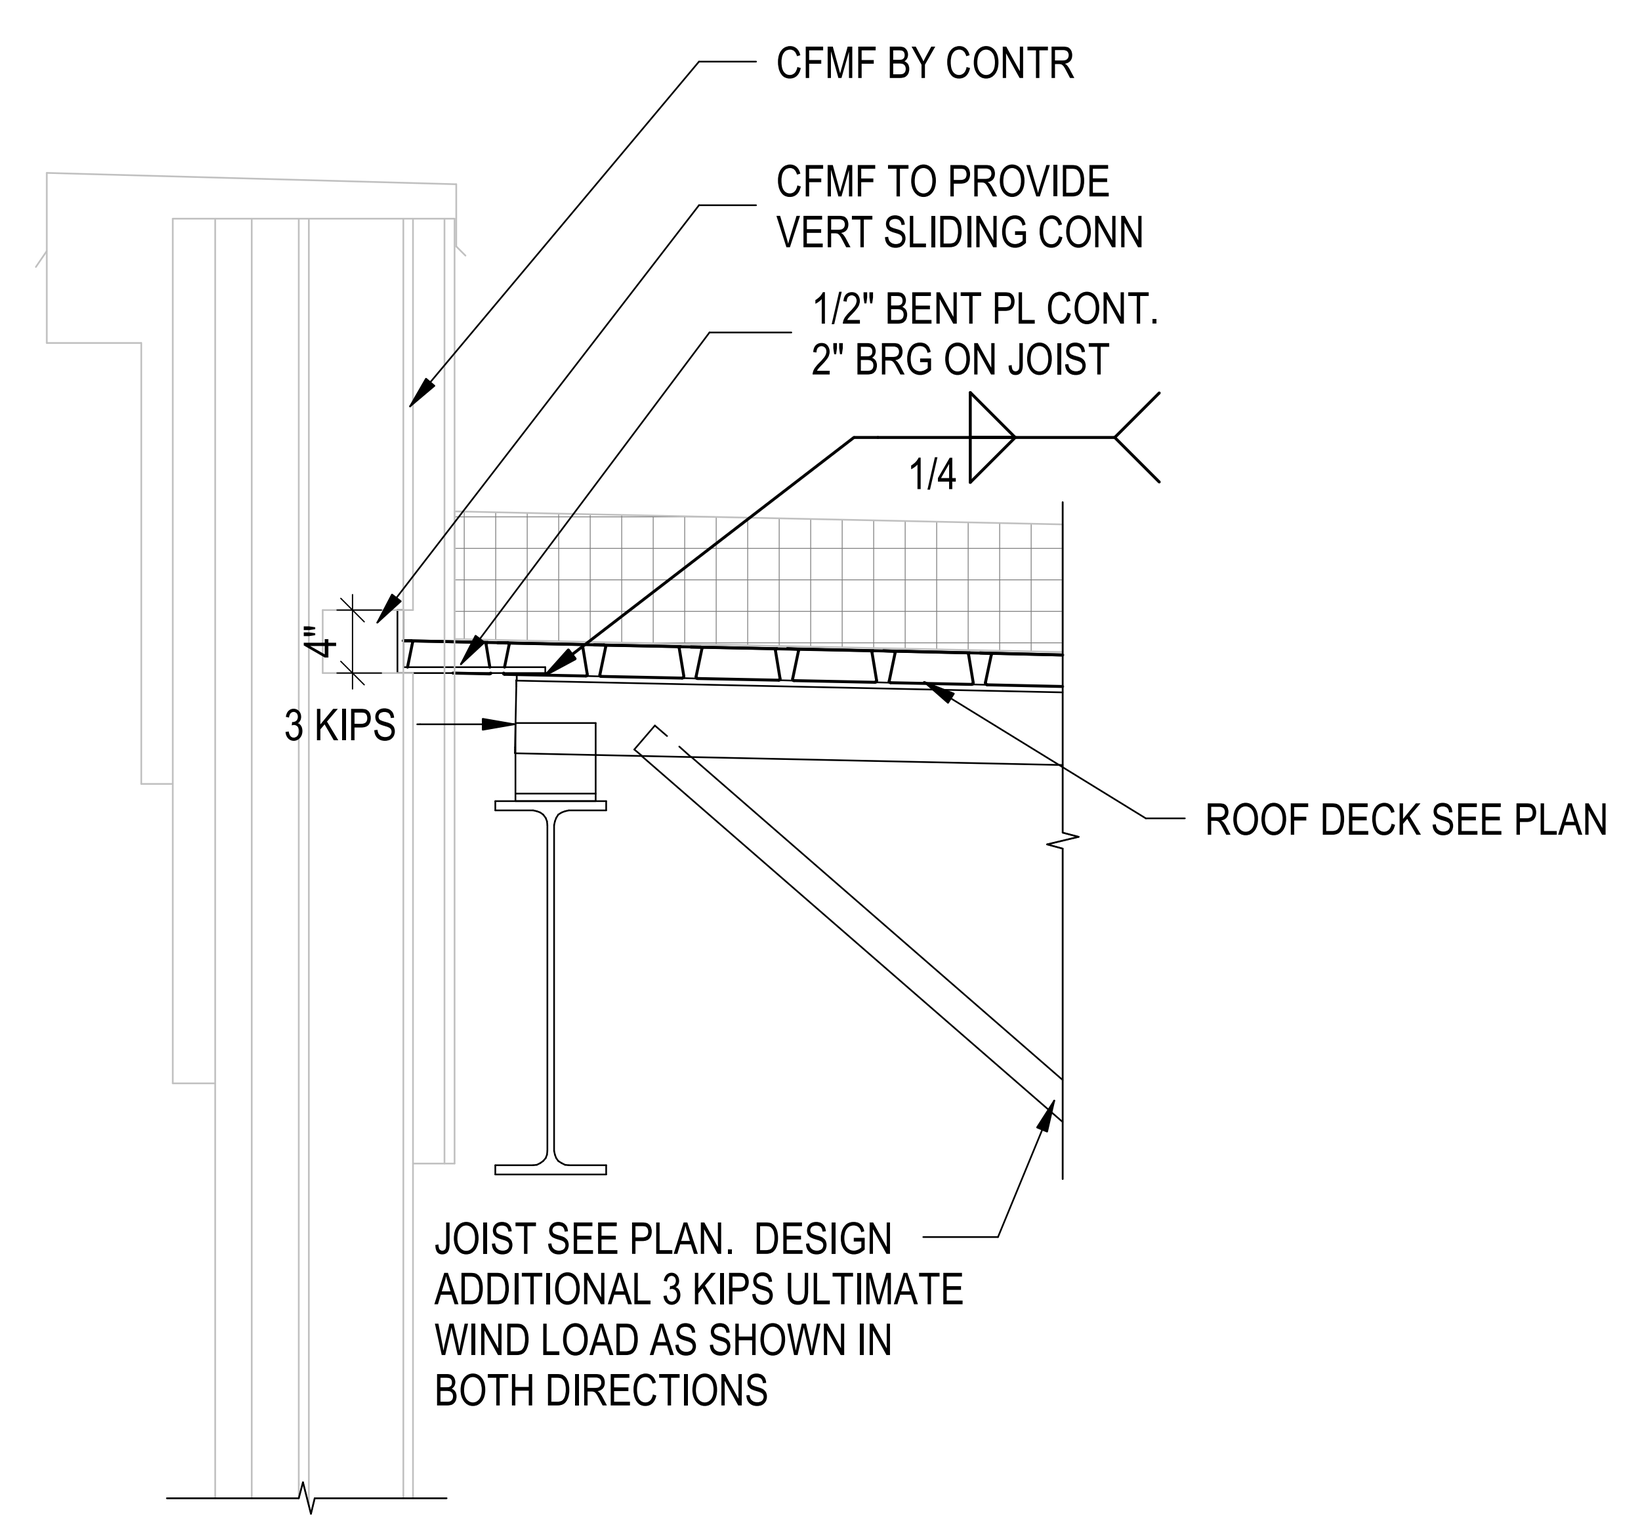

SECTION 5 S-321
SCALE: 3/4" = 1'-0"

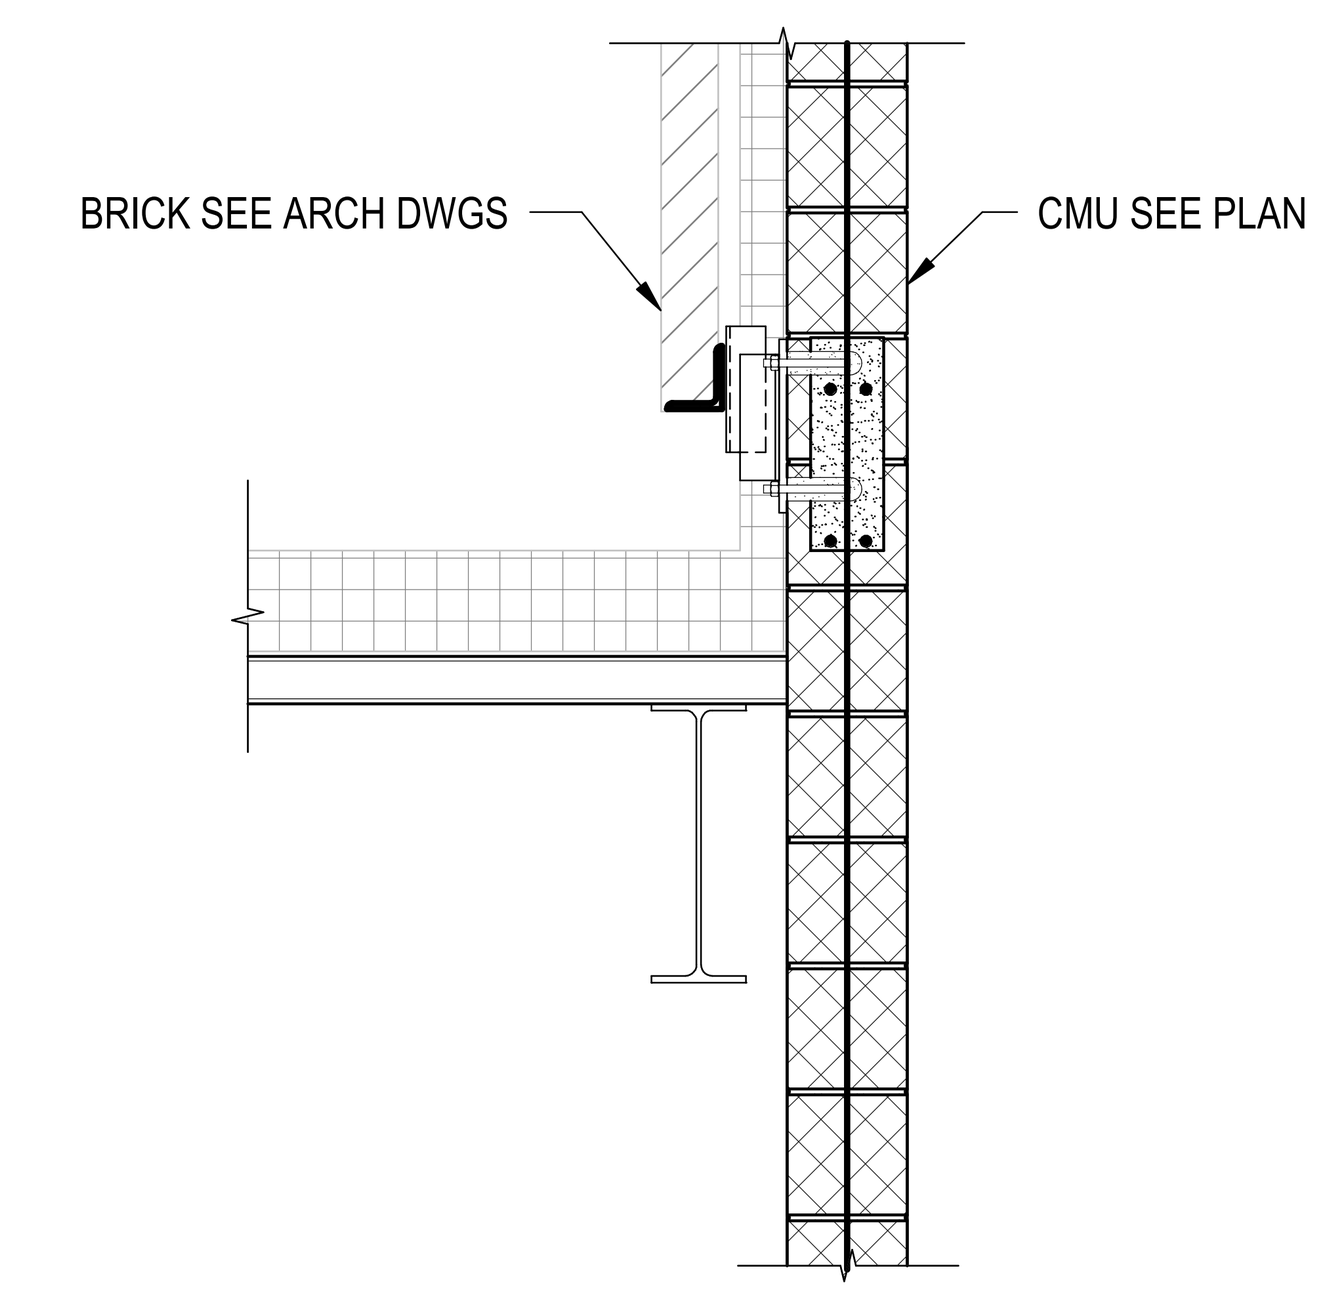

NOTE: SEE 6 / S-312 FOR BALANCE INFOR.

SECTION 6 S-321
SCALE: 3/4" = 1'-0"

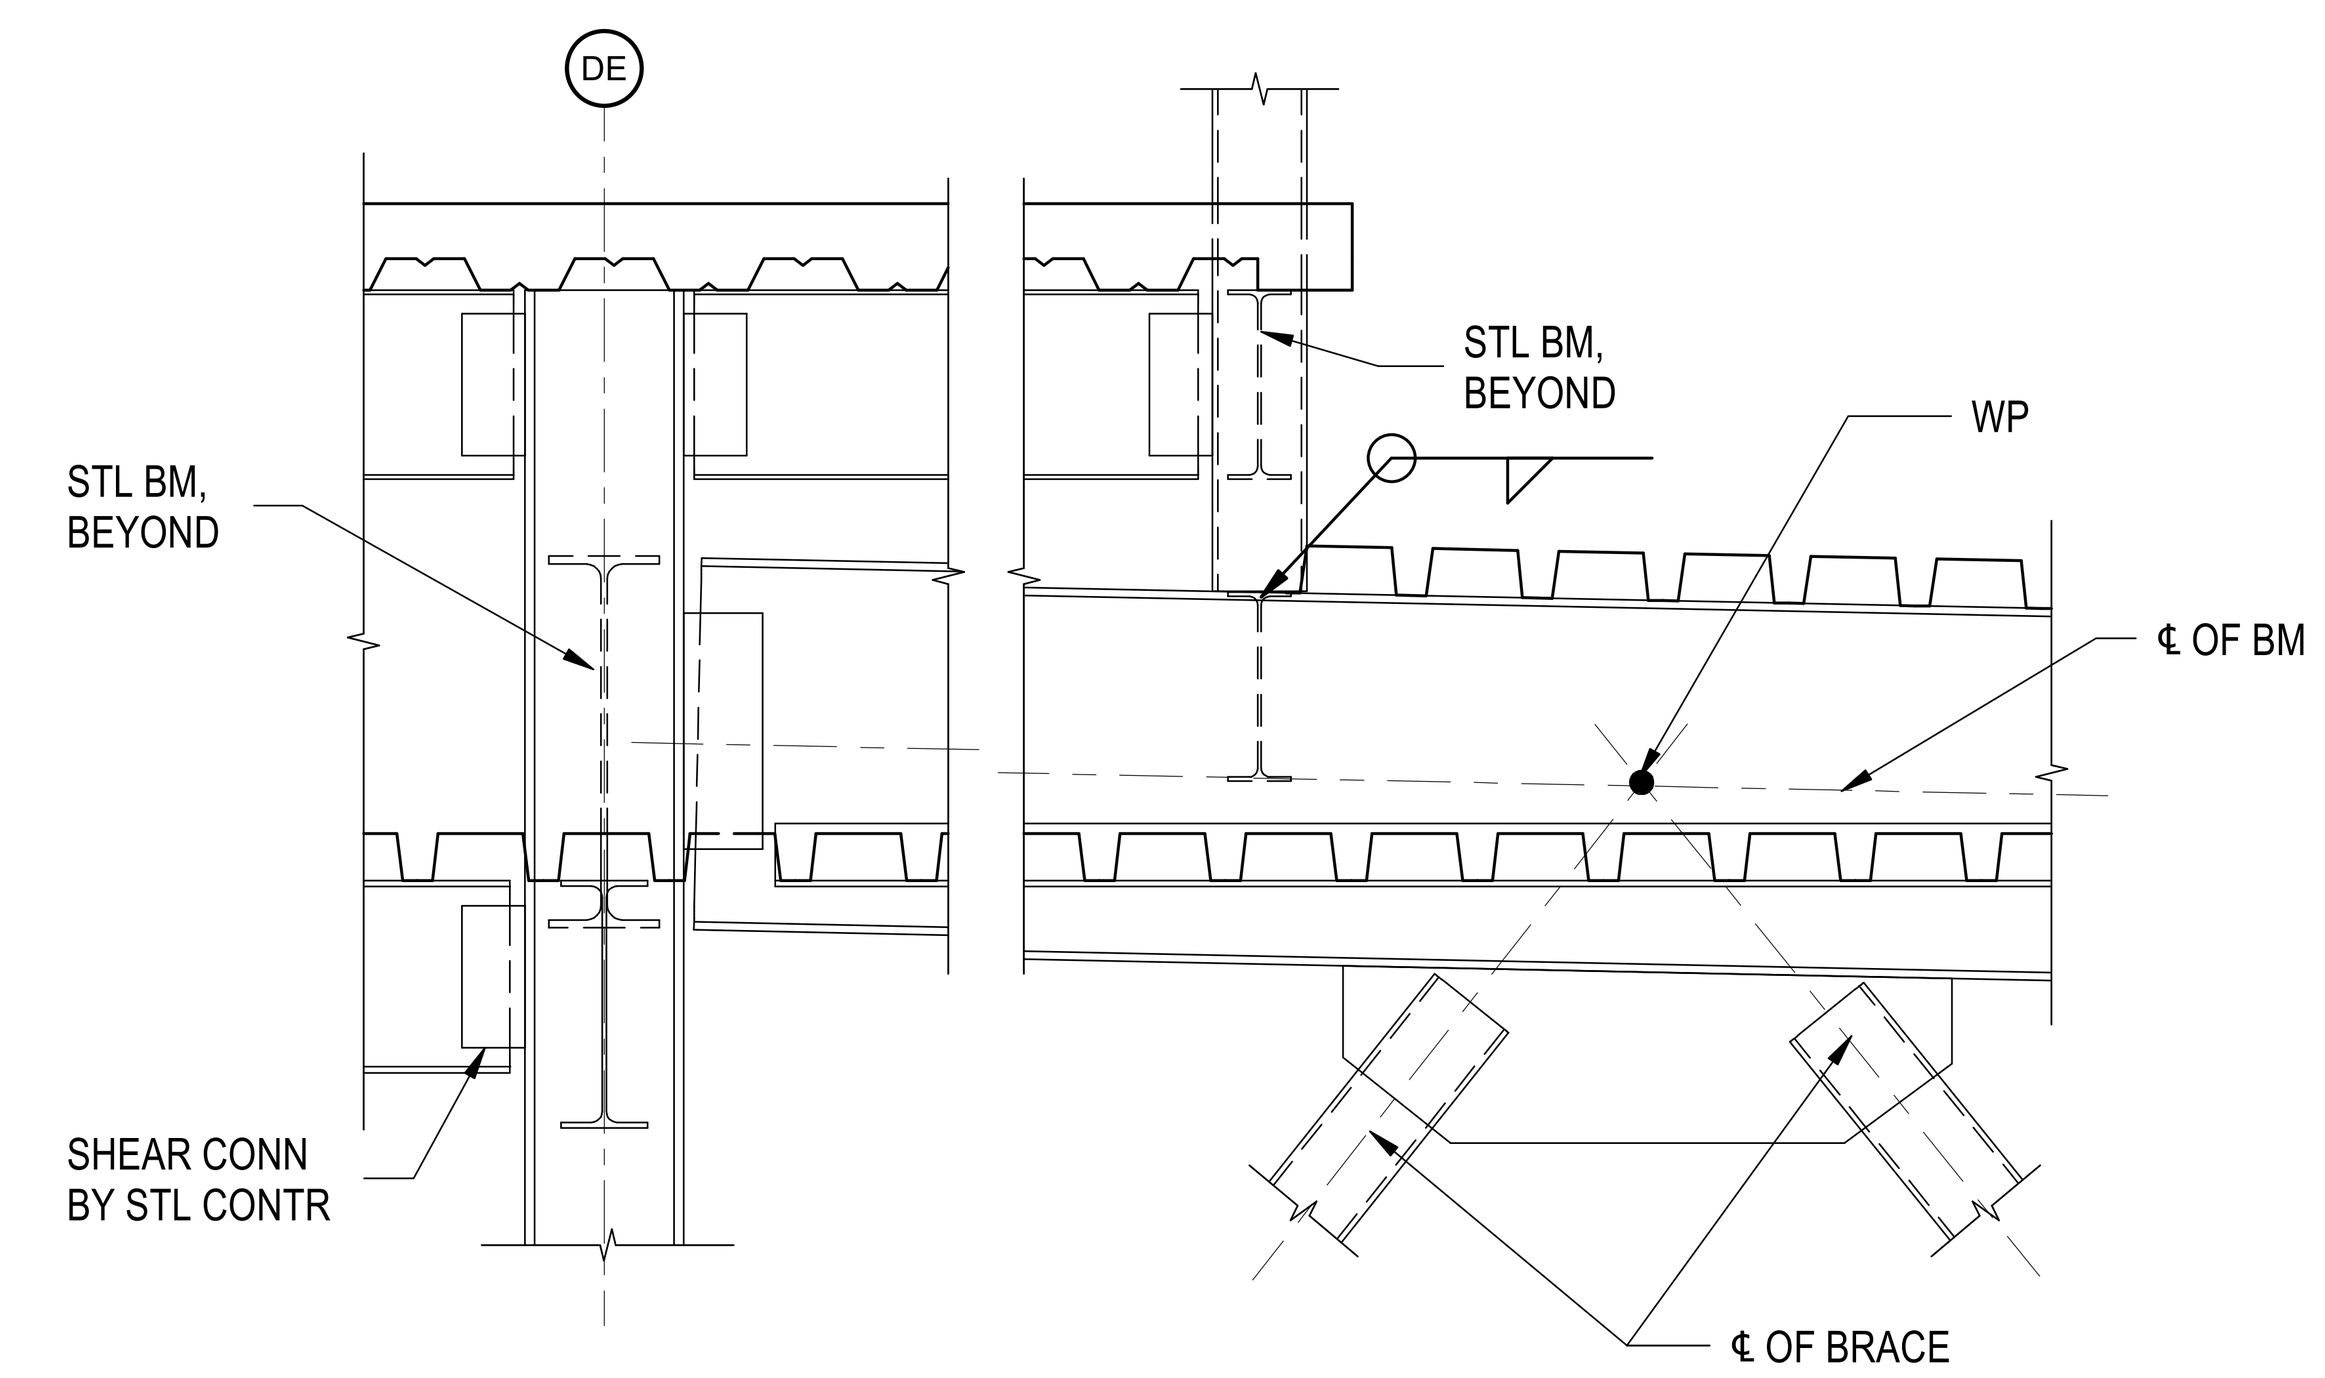

SECTION 7 S-321
SCALE: 3/4" = 1'-0"

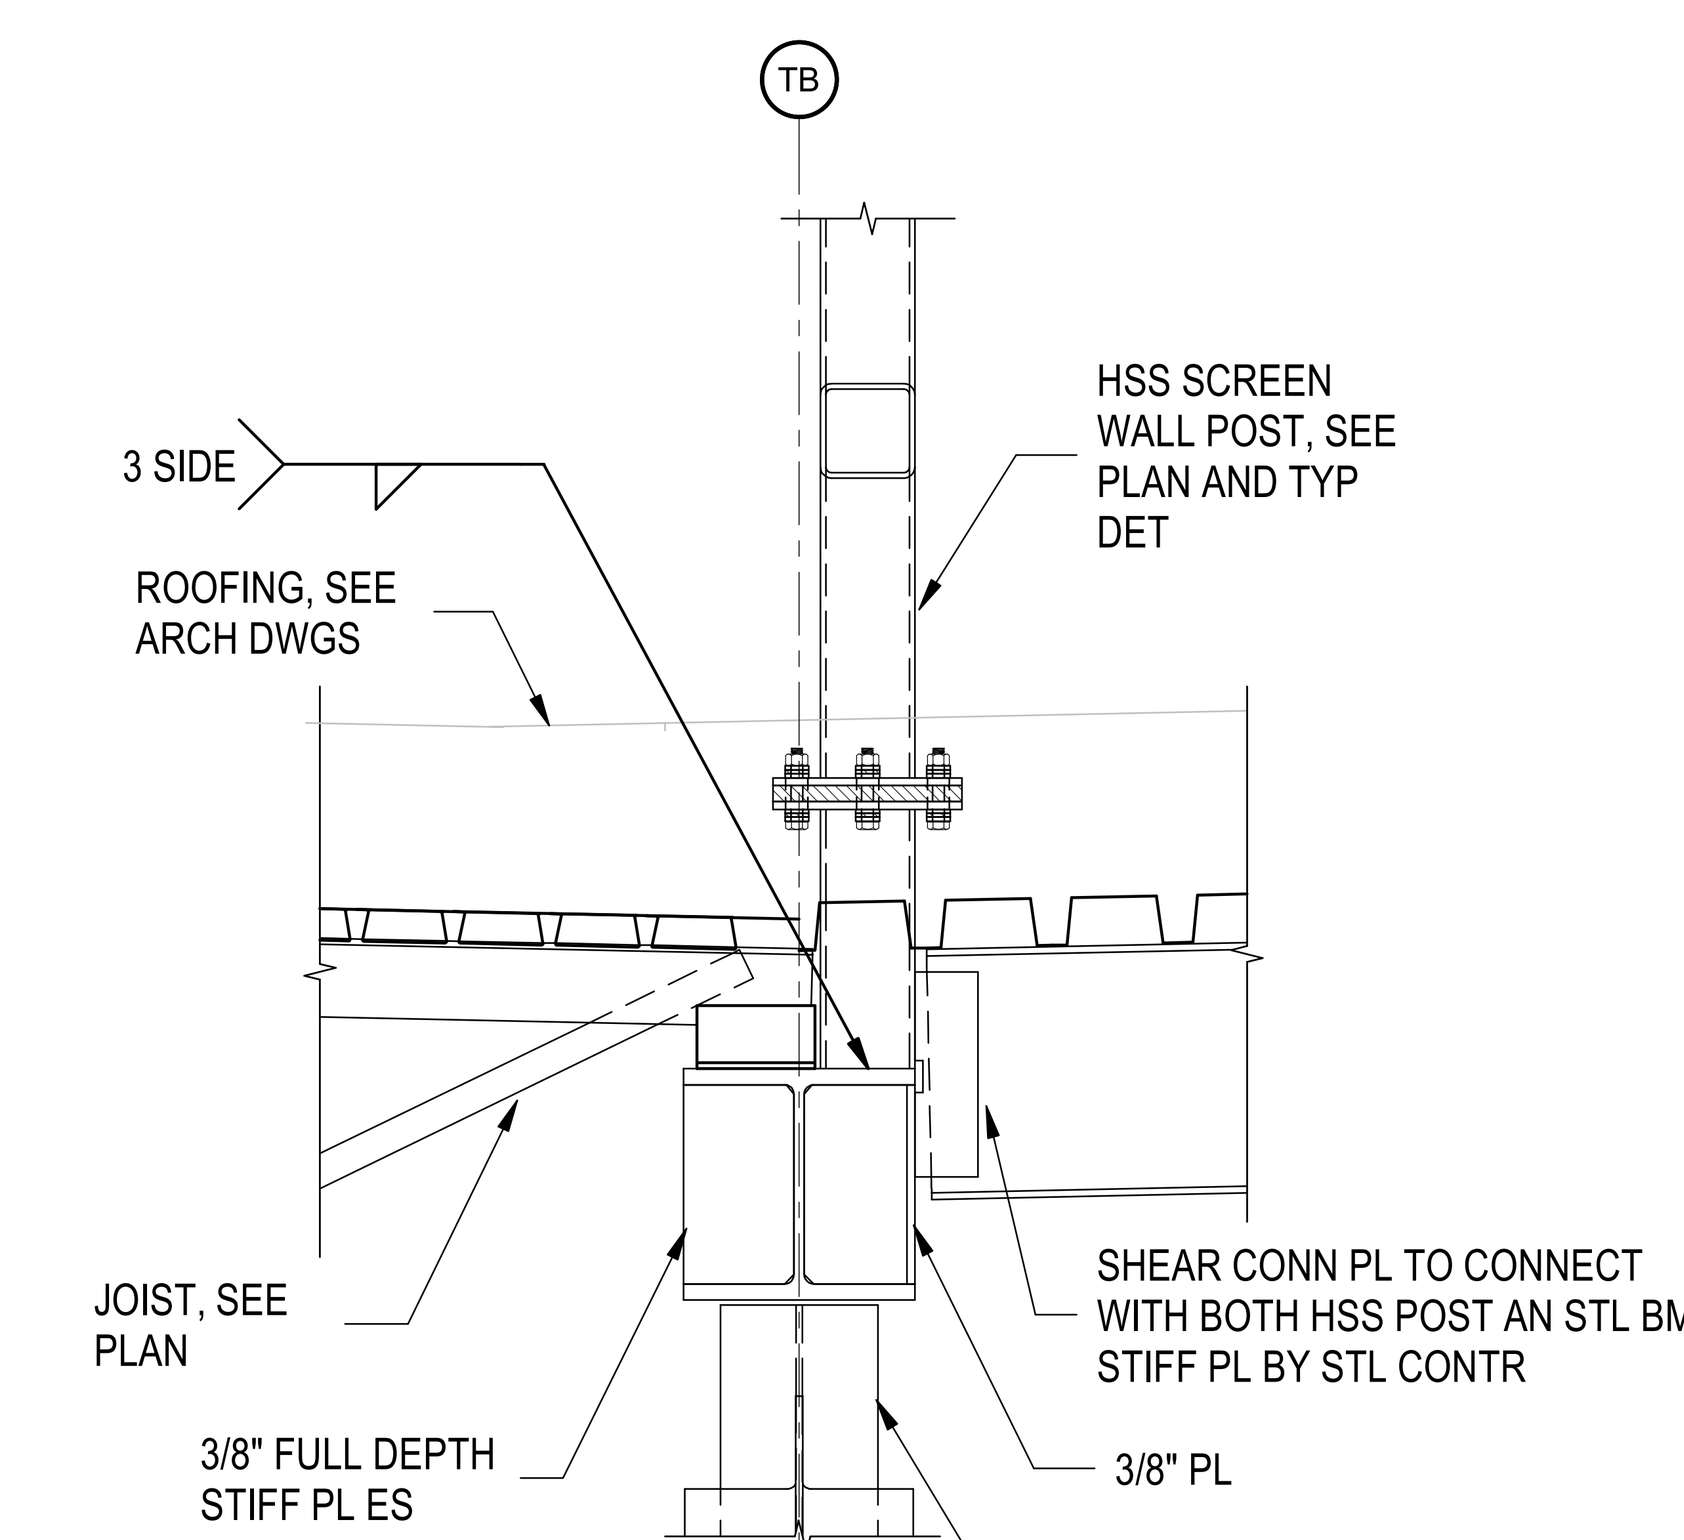

SECTION 8 S-321
SCALE: 3/4" = 1'-0"

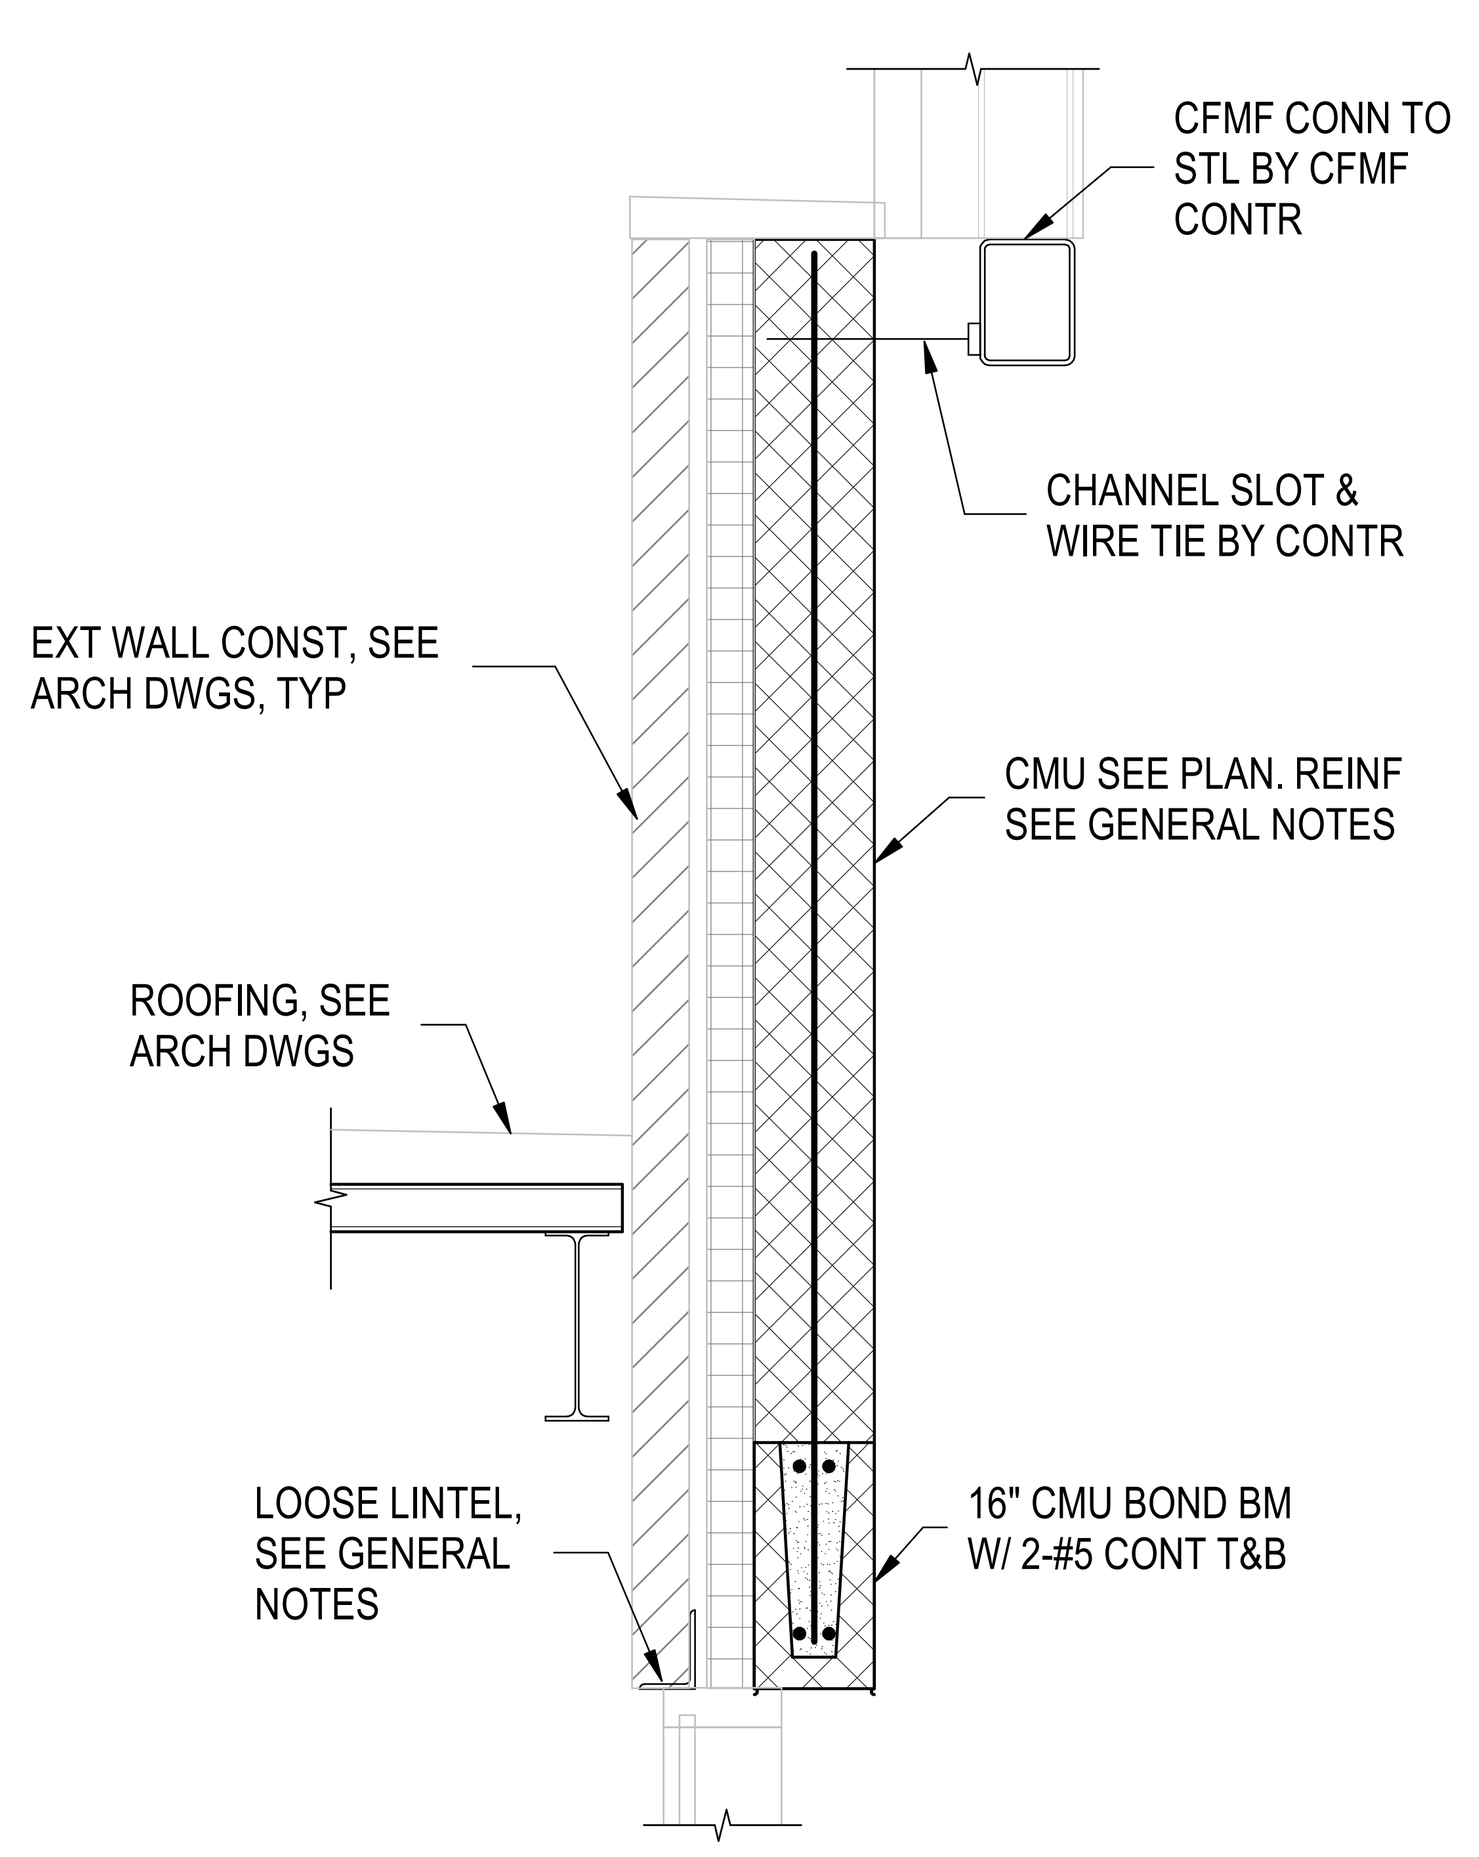

SECTION 9 S-321
SCALE: 3/4" = 1'-0"

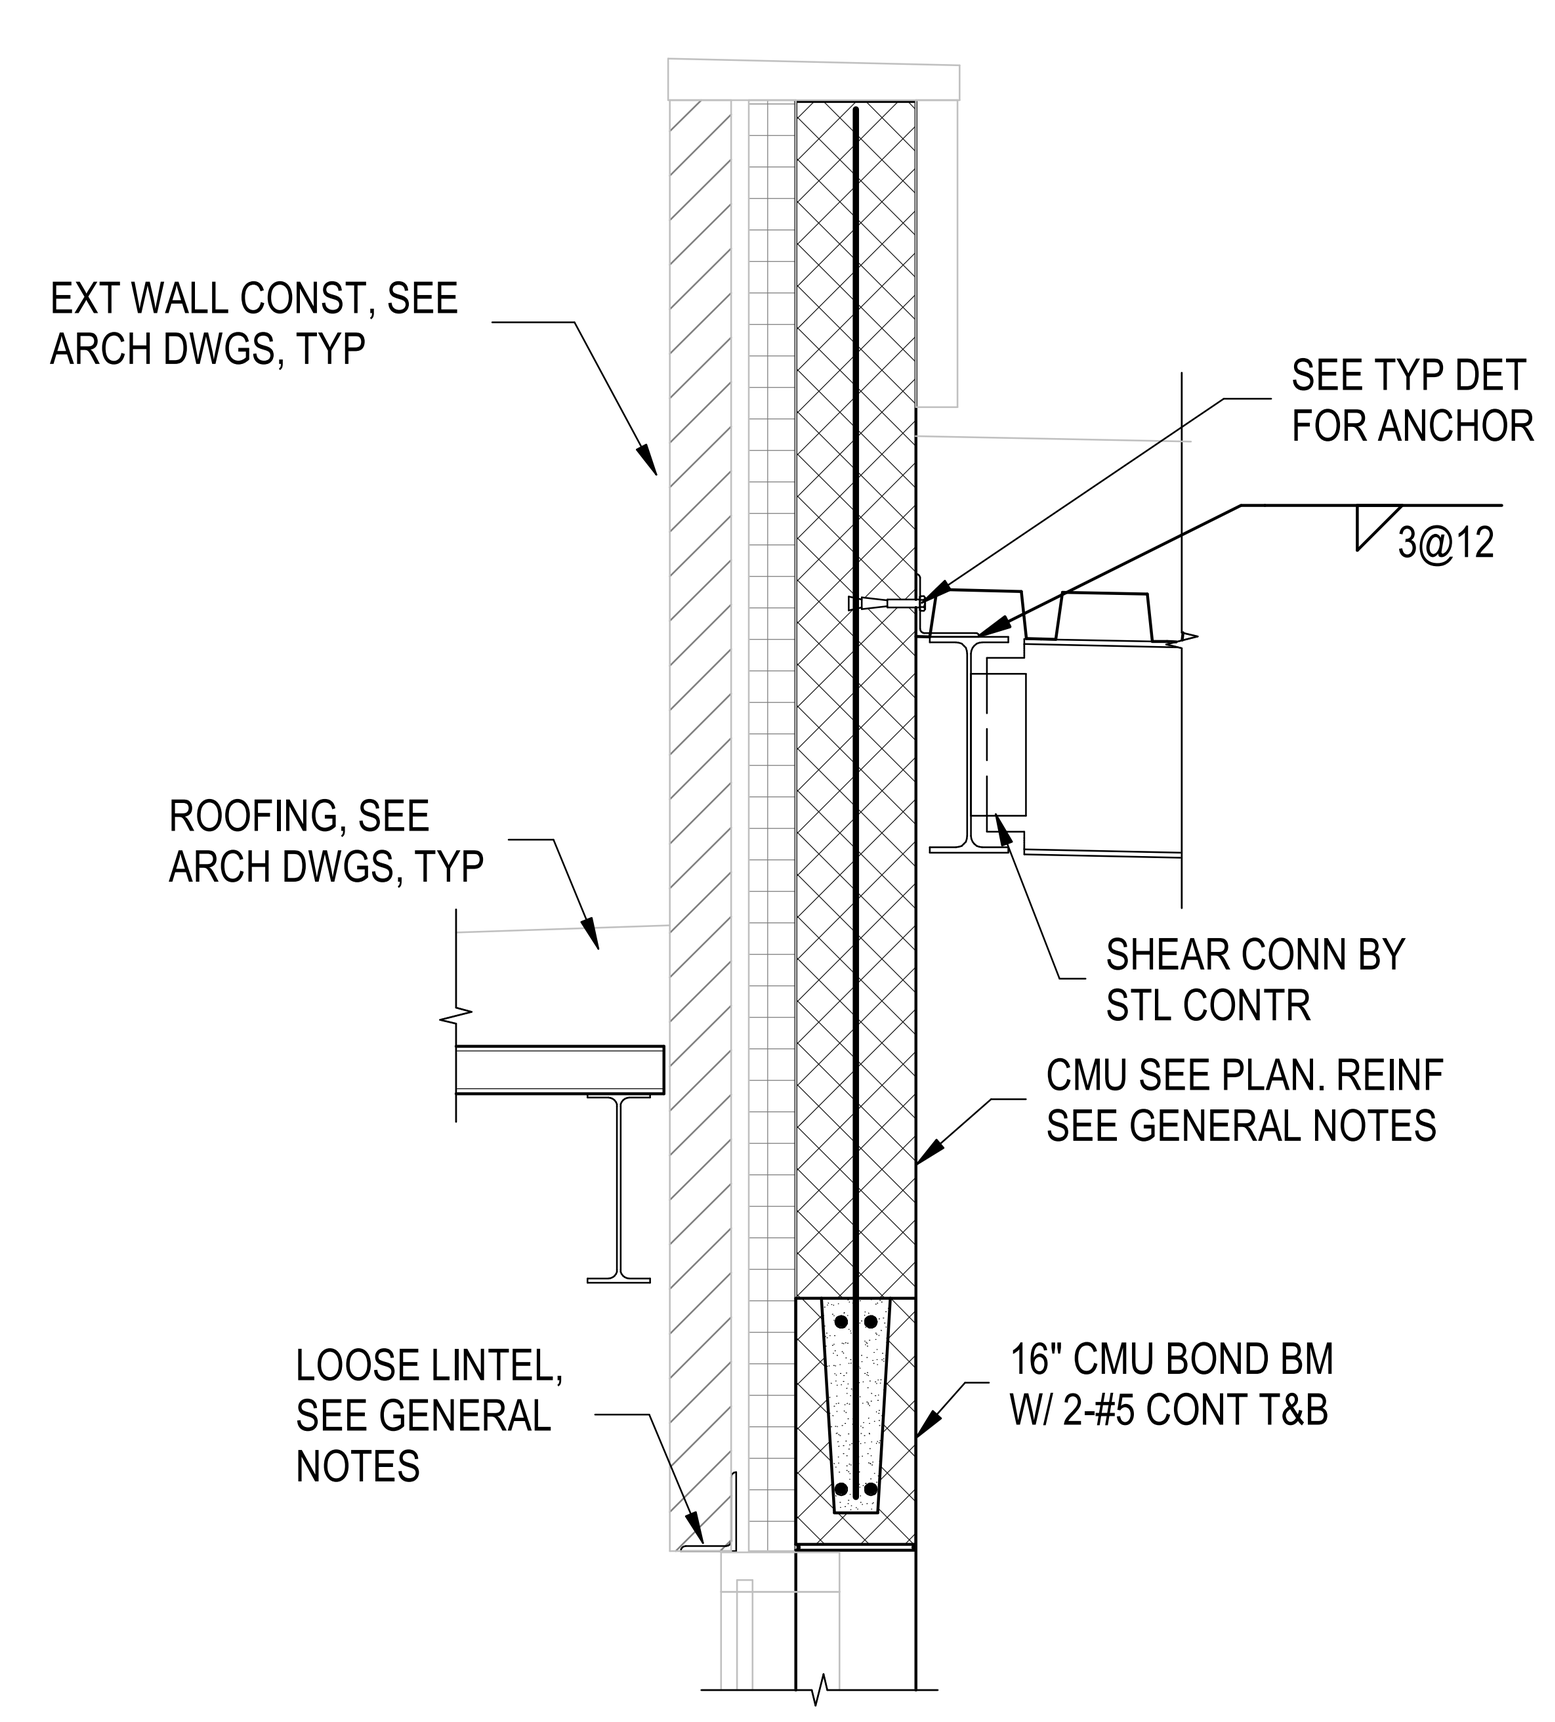

SECTION 10 S-321
SCALE: 3/4" = 1'-0"

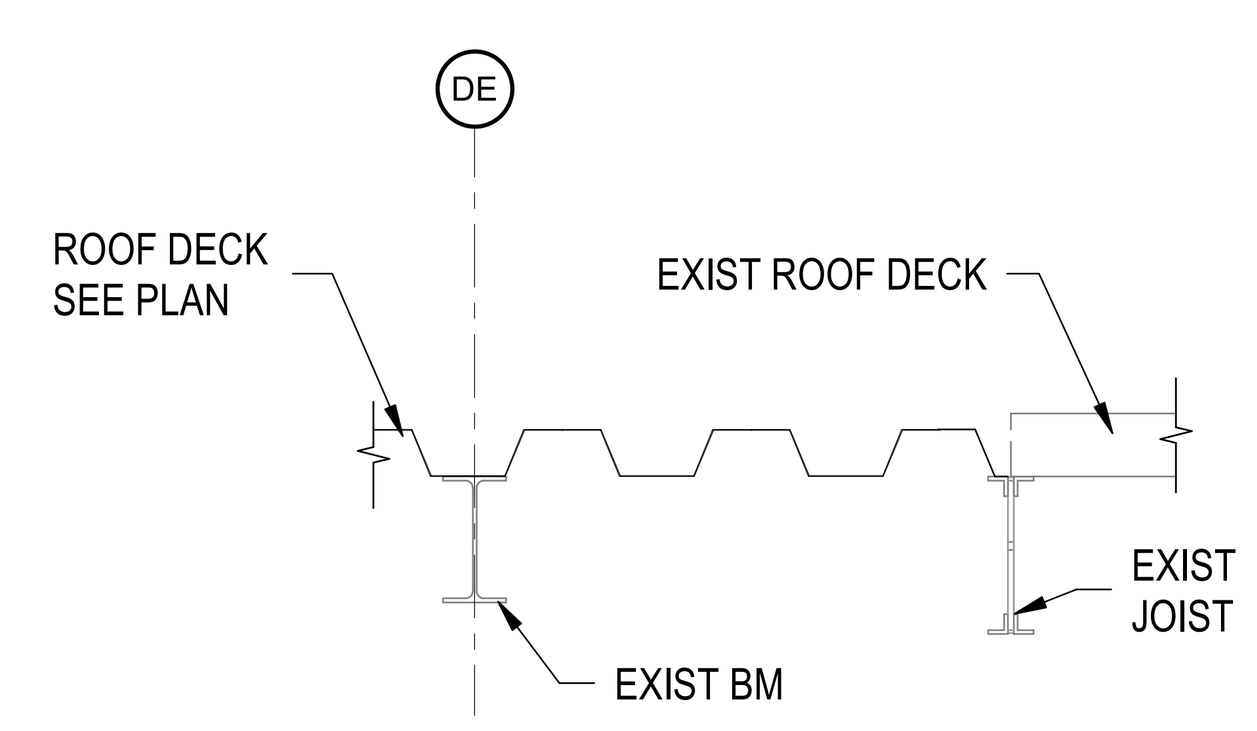

SECTION 11 S-321
SCALE: 3/4" = 1'-0"

NO.	DATE	ISSUE
A	09/30/2025	Permit
	10/29/2025	BID SET

0' 4" 8" 1' 2' 3'
SCALE : 3/4" = 1'-0"

SEAL

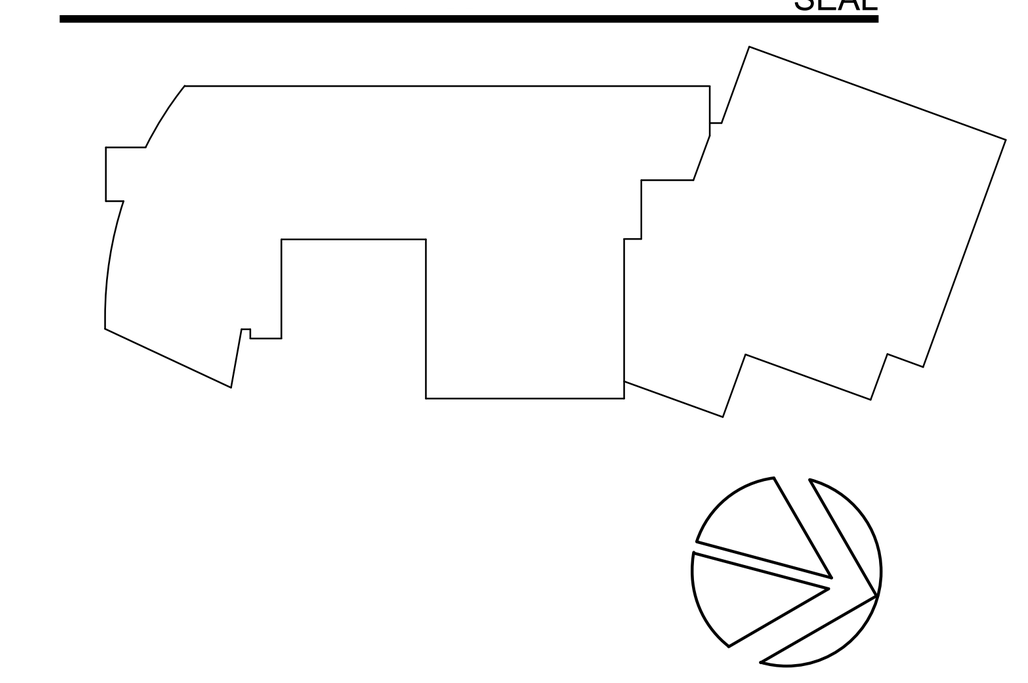

KEY PLAN

PERKINS EASTMAN
One Thomas Circle NW, Suite 200
Washington, DC 20005
T: +1 202 861 1325
F: +1 202 861 1326

Owner:
Sidwell Friends School
3825 Wisconsin Ave NW, Washington DC 20016

Construction Manager:
Advanced Project Management, Inc (APM)
4530 Walney Rd, Ste 202, Chantilly, VA 20151

Civil / Site:
Bowman Consulting Group, Ltd
888 17th St NW, Suite 510, Washington, DC 20006

Landscape:
Natural Resources Design, Inc (NRD)
1009 Shepherd Street NE, Washington, DC 20017

Structural:
Yun Associates LLC
1050 Connecticut Ave NW, Suite 500, Washington, DC 20036

MEP / FP / Lighting:
CMTA Inc
220 Lexington Green Circle, Suite 600, Lexington, KY 40503

AV / IT / Telecom / Security:
Educational Systems Planning (ESP)
2448 Holly Avenue, Suite 302, Annapolis, MD 21401

Food Service
Nyikos-Garcia Foodservice Design, Inc
7146 Starmount Way, New Market, MD 21774

Accessibility Consultant:
Galbo Wolf LLC
4410 Massachusetts Ave NW, #240, Washington, DC 20016

Acoustics:
Polysonics Corp
555 Hospital Drive, Warrenton, VA 20186

Building Envelope Consultant:
Sustainable Building Partners LLC
2701 Prosperity Ave, Suite 105, Fairfax, VA 22031

Code Consultant:
Campbell Code Consulting LLC
7834 Taggart Ct, Elkridge, MD 21075

Specifications:

PROJECT TITLE:

SIDWELL FRIENDS NEW LOWER SCHOOL AT DC CAMPUS

3825 WISCONSIN AVE NW
WASHINGTON, DC 20016

PROJECT No: 2025008

DRAWING TITLE:

SECTIONS

SCALE: 3/4" = 1'-0"

S-321

BID SET
10/29/2025

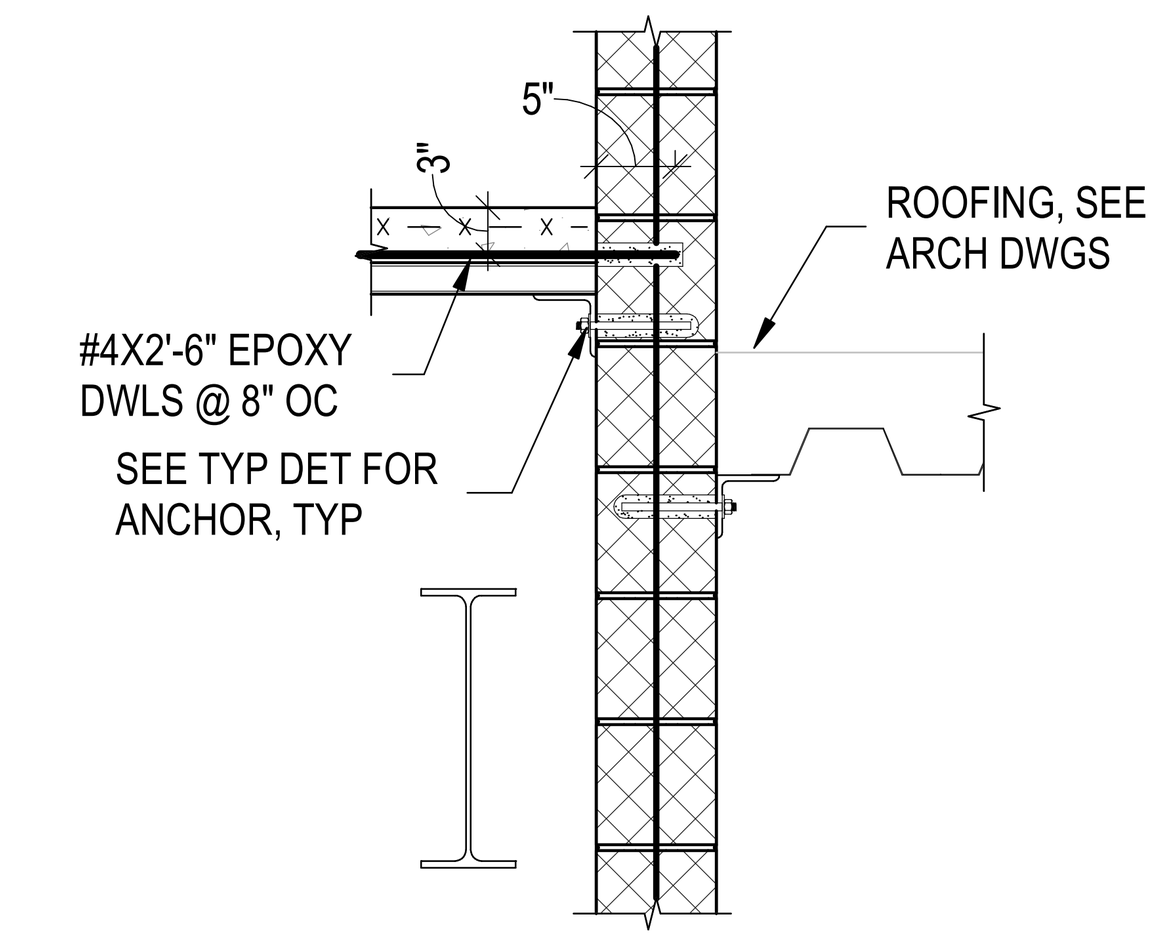

SECTION 1 S-322
SCALE: 3/4" = 1'-0"

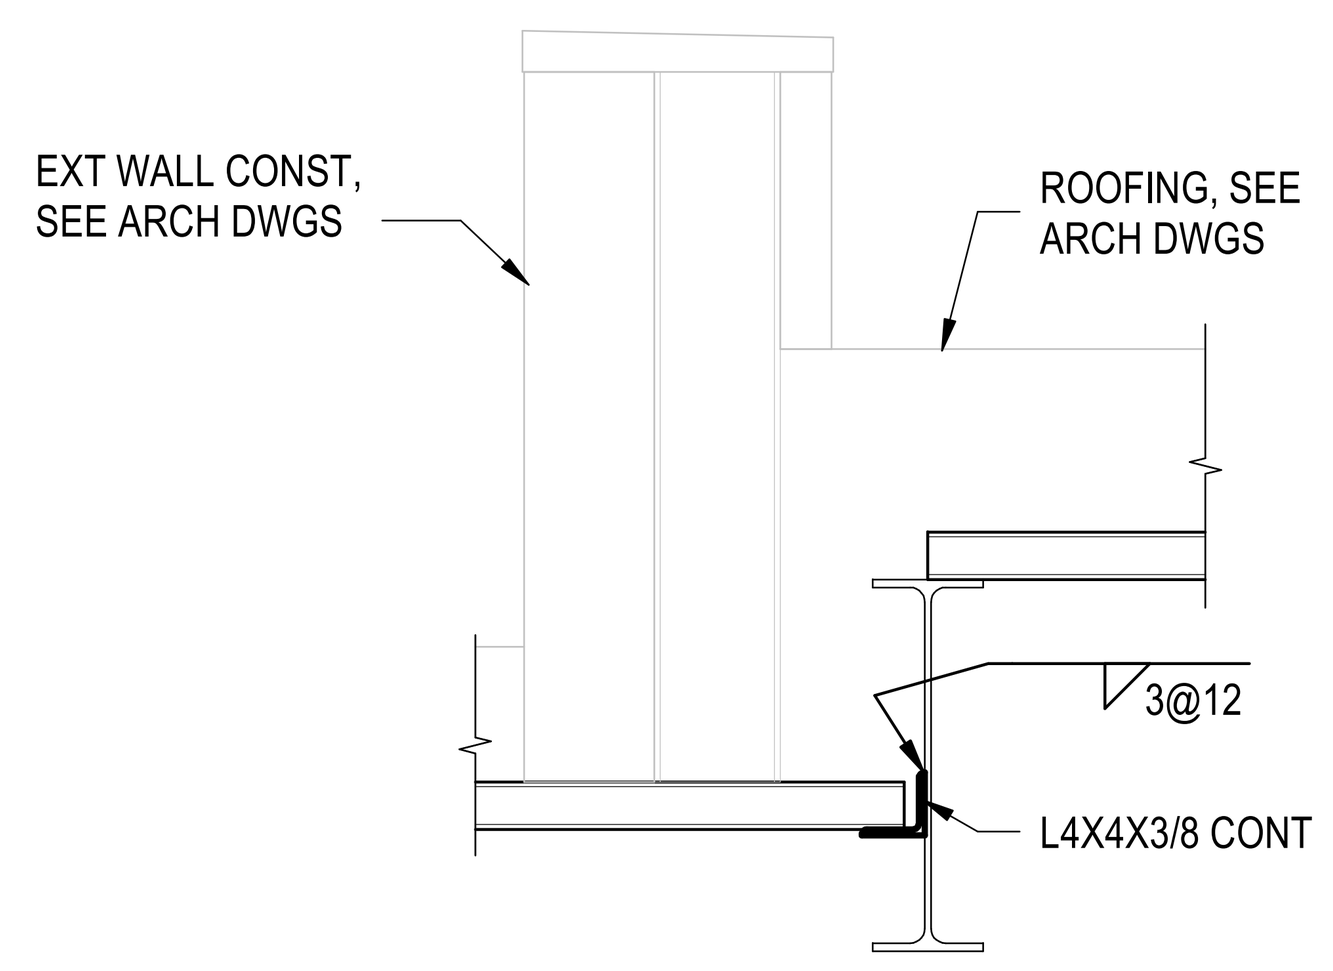

SECTION 2 S-322
SCALE: 3/4" = 1'-0"

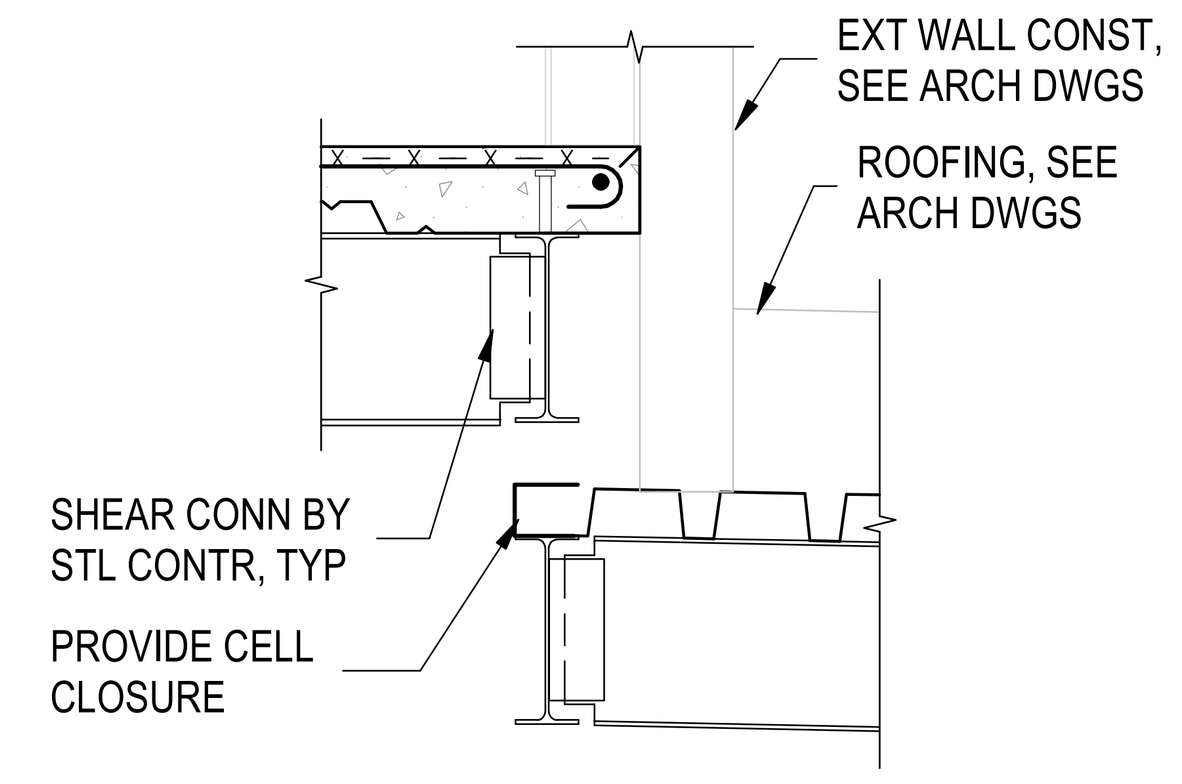

SECTION 3 S-322
SCALE: 3/4" = 1'-0"

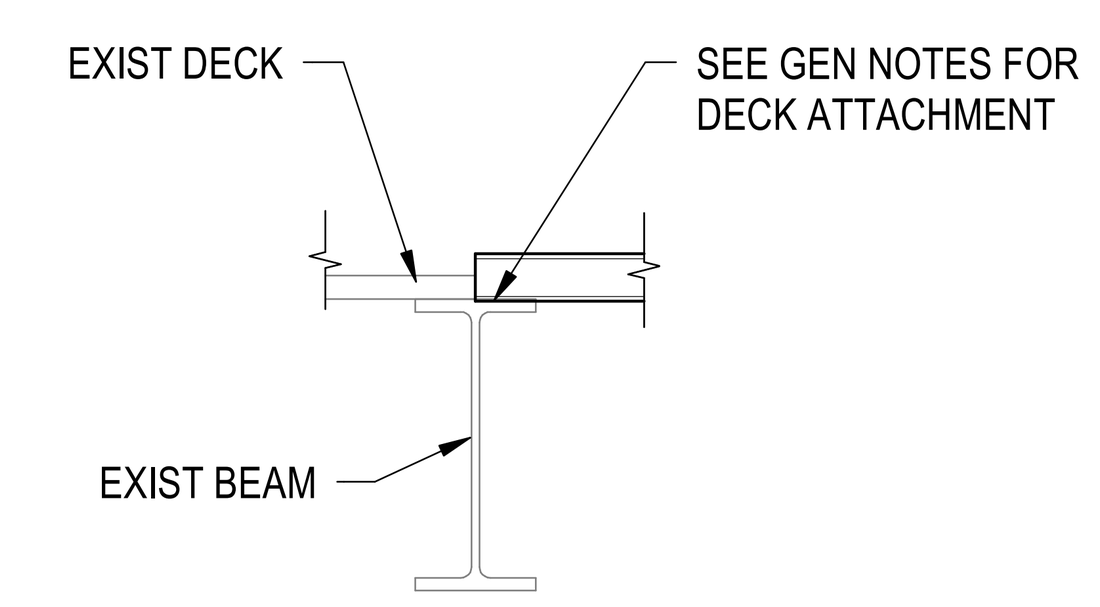

SECTION 4 S-322
SCALE: 3/4" = 1'-0"

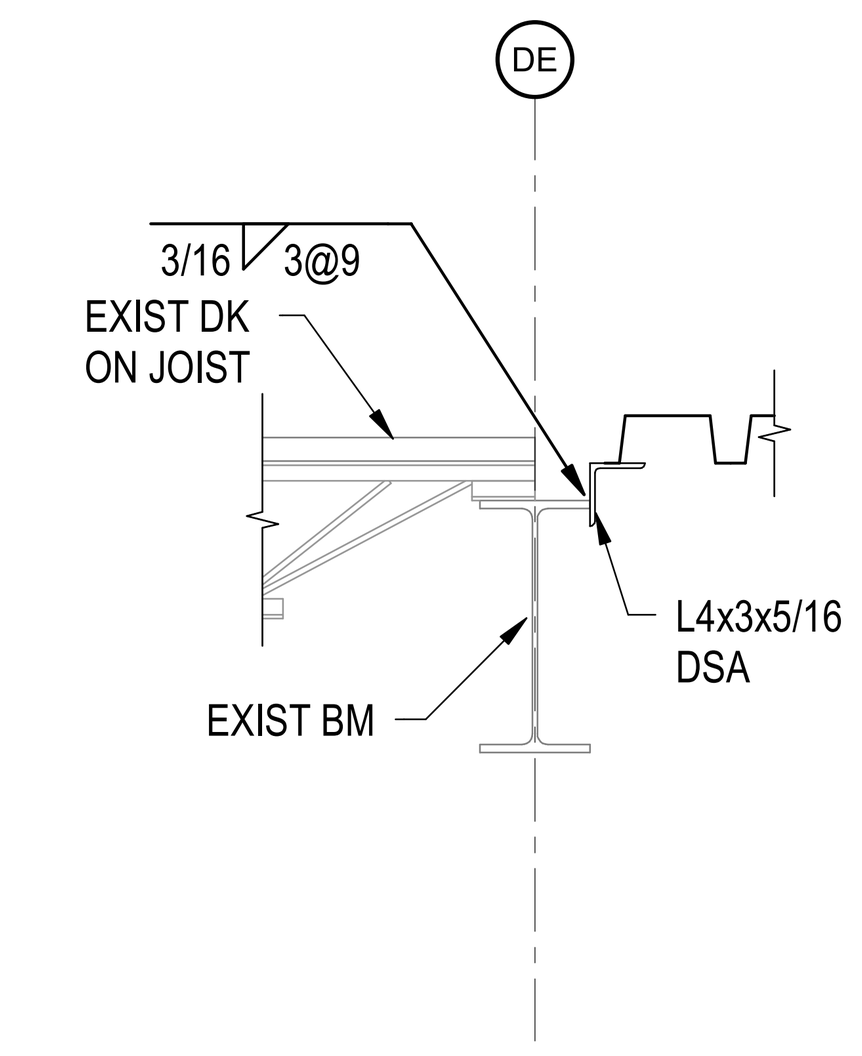

SECTION 5 S-322
SCALE: 3/4" = 1'-0"

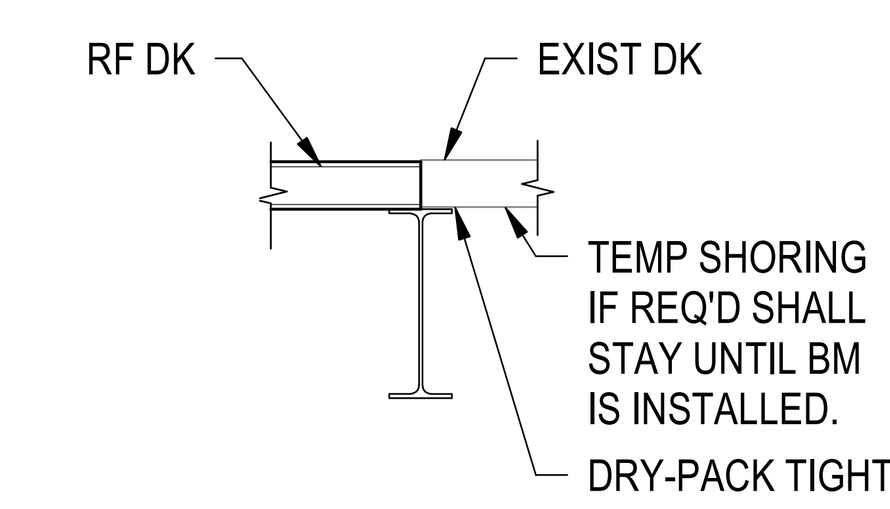

SECTION 6 S-322
SCALE: 3/4" = 1'-0"

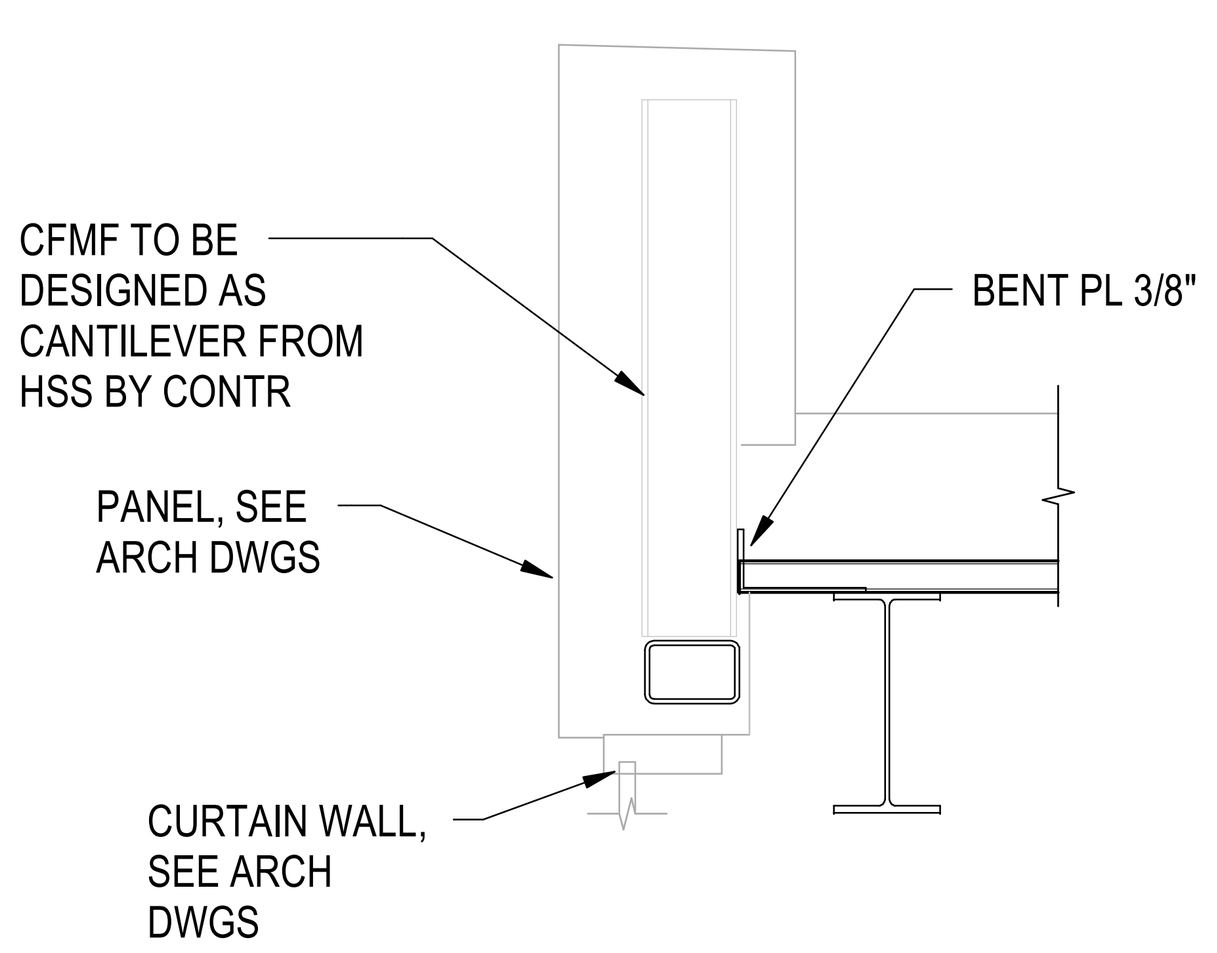

SECTION 7 S-322
SCALE: 3/4" = 1'-0"

NO.	DATE	ISSUE
A	09/30/2025	Permit
	10/29/2025	BID SET

0' 4' 8' 16' 24'
SCALE : 1/8" = 1'-0"

SEAL

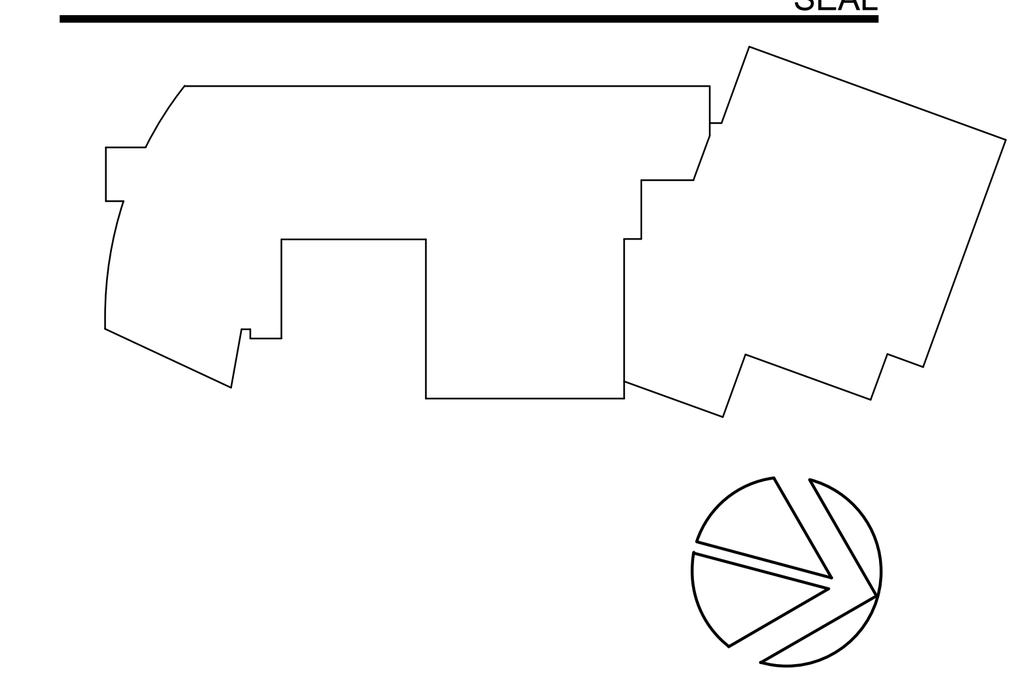

KEY PLAN

PERKINS EASTMAN
One Thomas Circle NW, Suite 200
Washington, DC 20005
T: +1 202 861 1325
F: +1 202 861 1326

Owner:
Sidwell Friends School
3825 Wisconsin Ave NW, Washington DC 20016

Construction Manager:
Advanced Project Management, Inc (APM)
4530 Walney Rd, Ste 202, Chantilly, VA 20151

Civil / Site:
Bowman Consulting Group, Ltd
888 17th St NW, Suite 510, Washington, DC 20006

Landscape:
Natural Resources Design, Inc (NRD)
1009 Shepherd Street NE, Washington, DC 20017

Structural:
Yun Associates LLC
1050 Connecticut Ave NW, Suite 500, Washington, DC 20036

MEP / FP / Lighting:
CMTA Inc
220 Lexington Green Circle, Suite 600, Lexington, KY 40503

AV / IT / Telecom / Security:
Educational Systems Planning (ESP)
2448 Holly Avenue, Suite 302, Annapolis, MD 21401

Food Service
Nyikos-Garcia Foodservice Design, Inc
7146 Starmount Way, New Market, MD 21774

Accessibility Consultant:
Galbo Wolf LLC
4410 Massachusetts Ave NW, #240, Washington, DC 20016

Acoustics:
Polysonics Corp
555 Hospital Drive, Warrenton, VA 20186

Building Envelope Consultant:
Sustainable Building Partners LLC
2701 Prosperity Ave, Suite 105, Fairfax, VA 22031

Code Consultant:
Campbell Code Consulting LLC
7834 Taggart Ct, Elkridge, MD 21075

Specifications:

PROJECT TITLE:

SIDWELL FRIENDS NEW LOWER SCHOOL AT DC CAMPUS

3825 WISCONSIN AVE NW
WASHINGTON, DC 20016

PROJECT No: 2025008

DRAWING TITLE:

SECTIONS

SCALE: 3/4" = 1'-0"

S-322

BID SET
10/29/2025

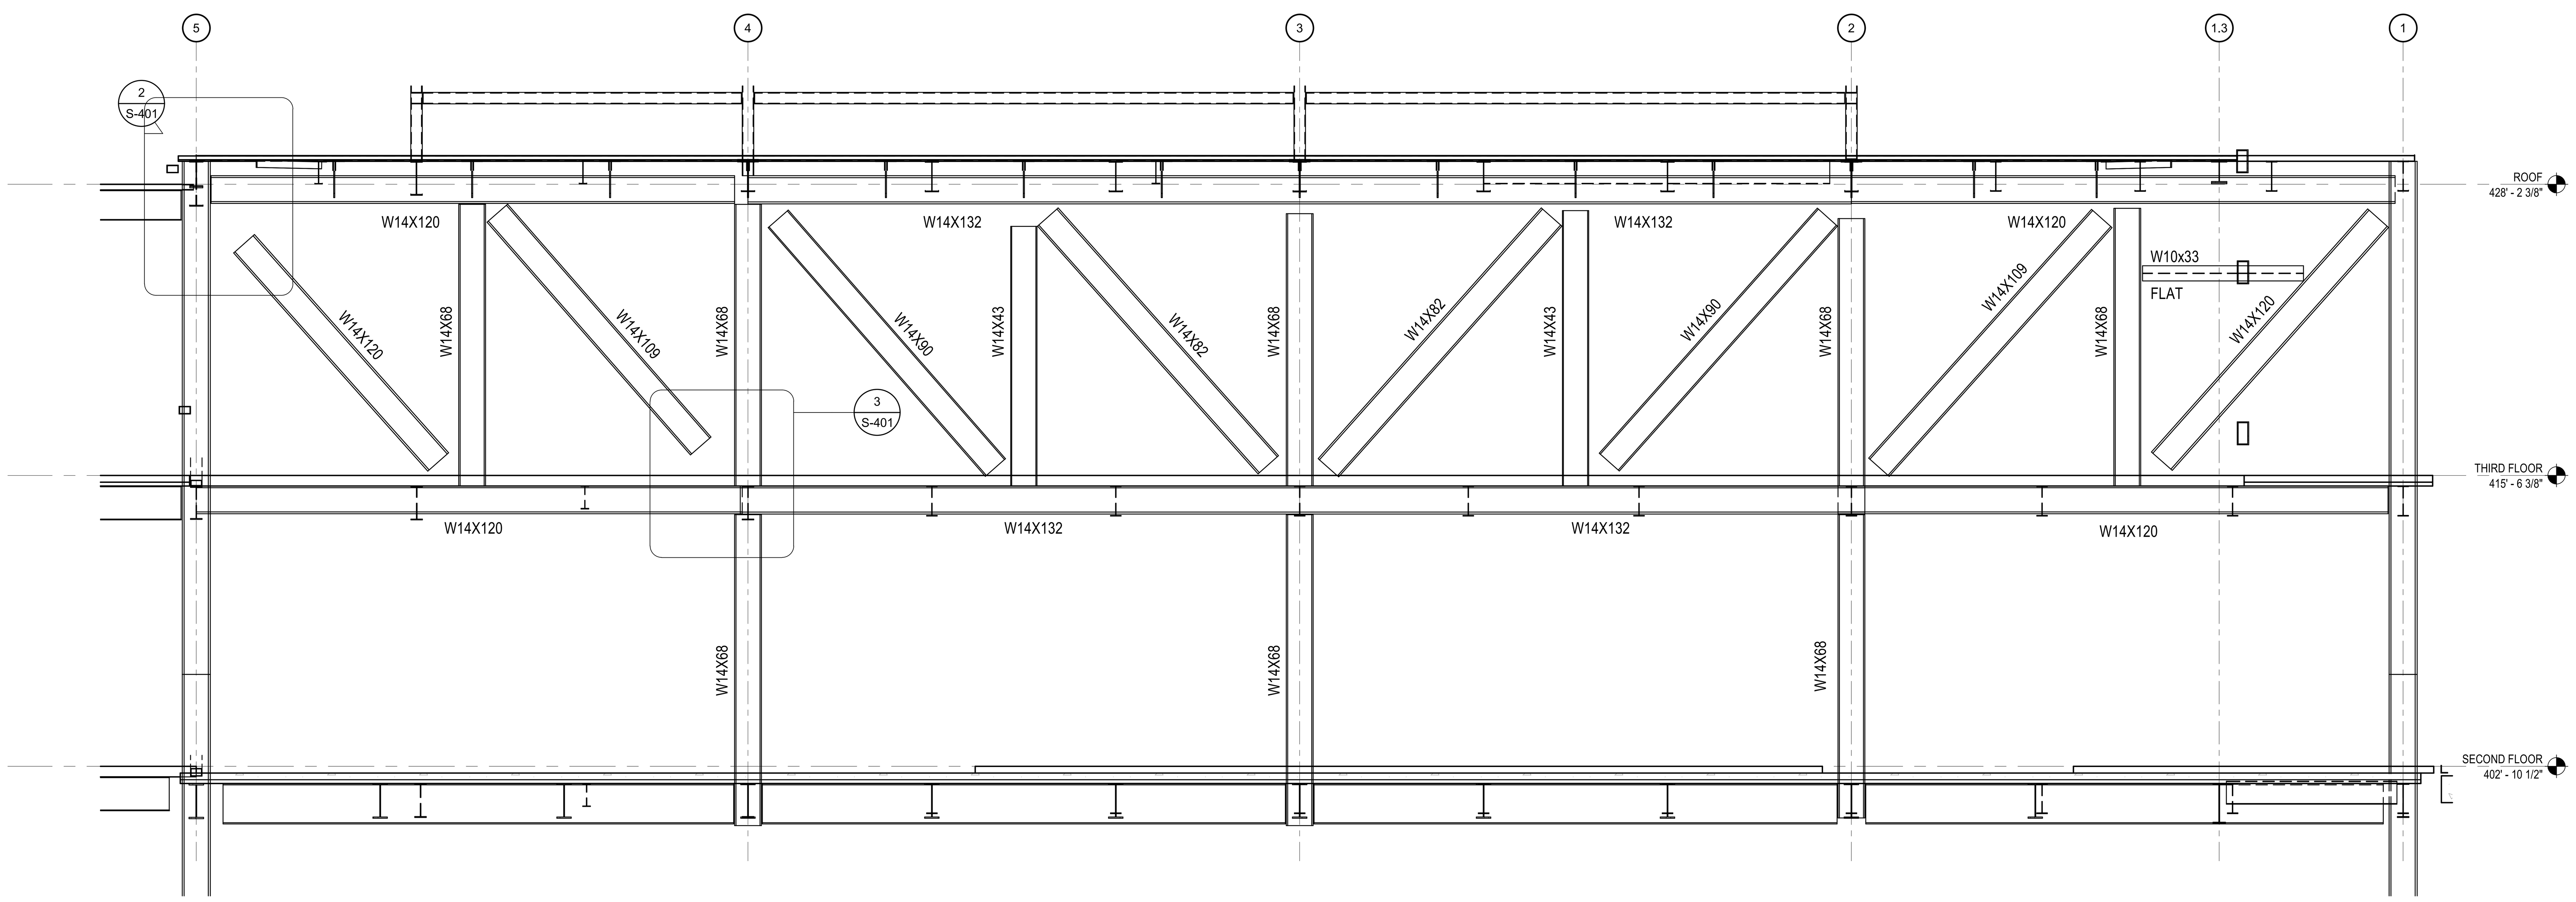

ELEVATION 1 S-401

SCALE: 1/4" = 1'-0"

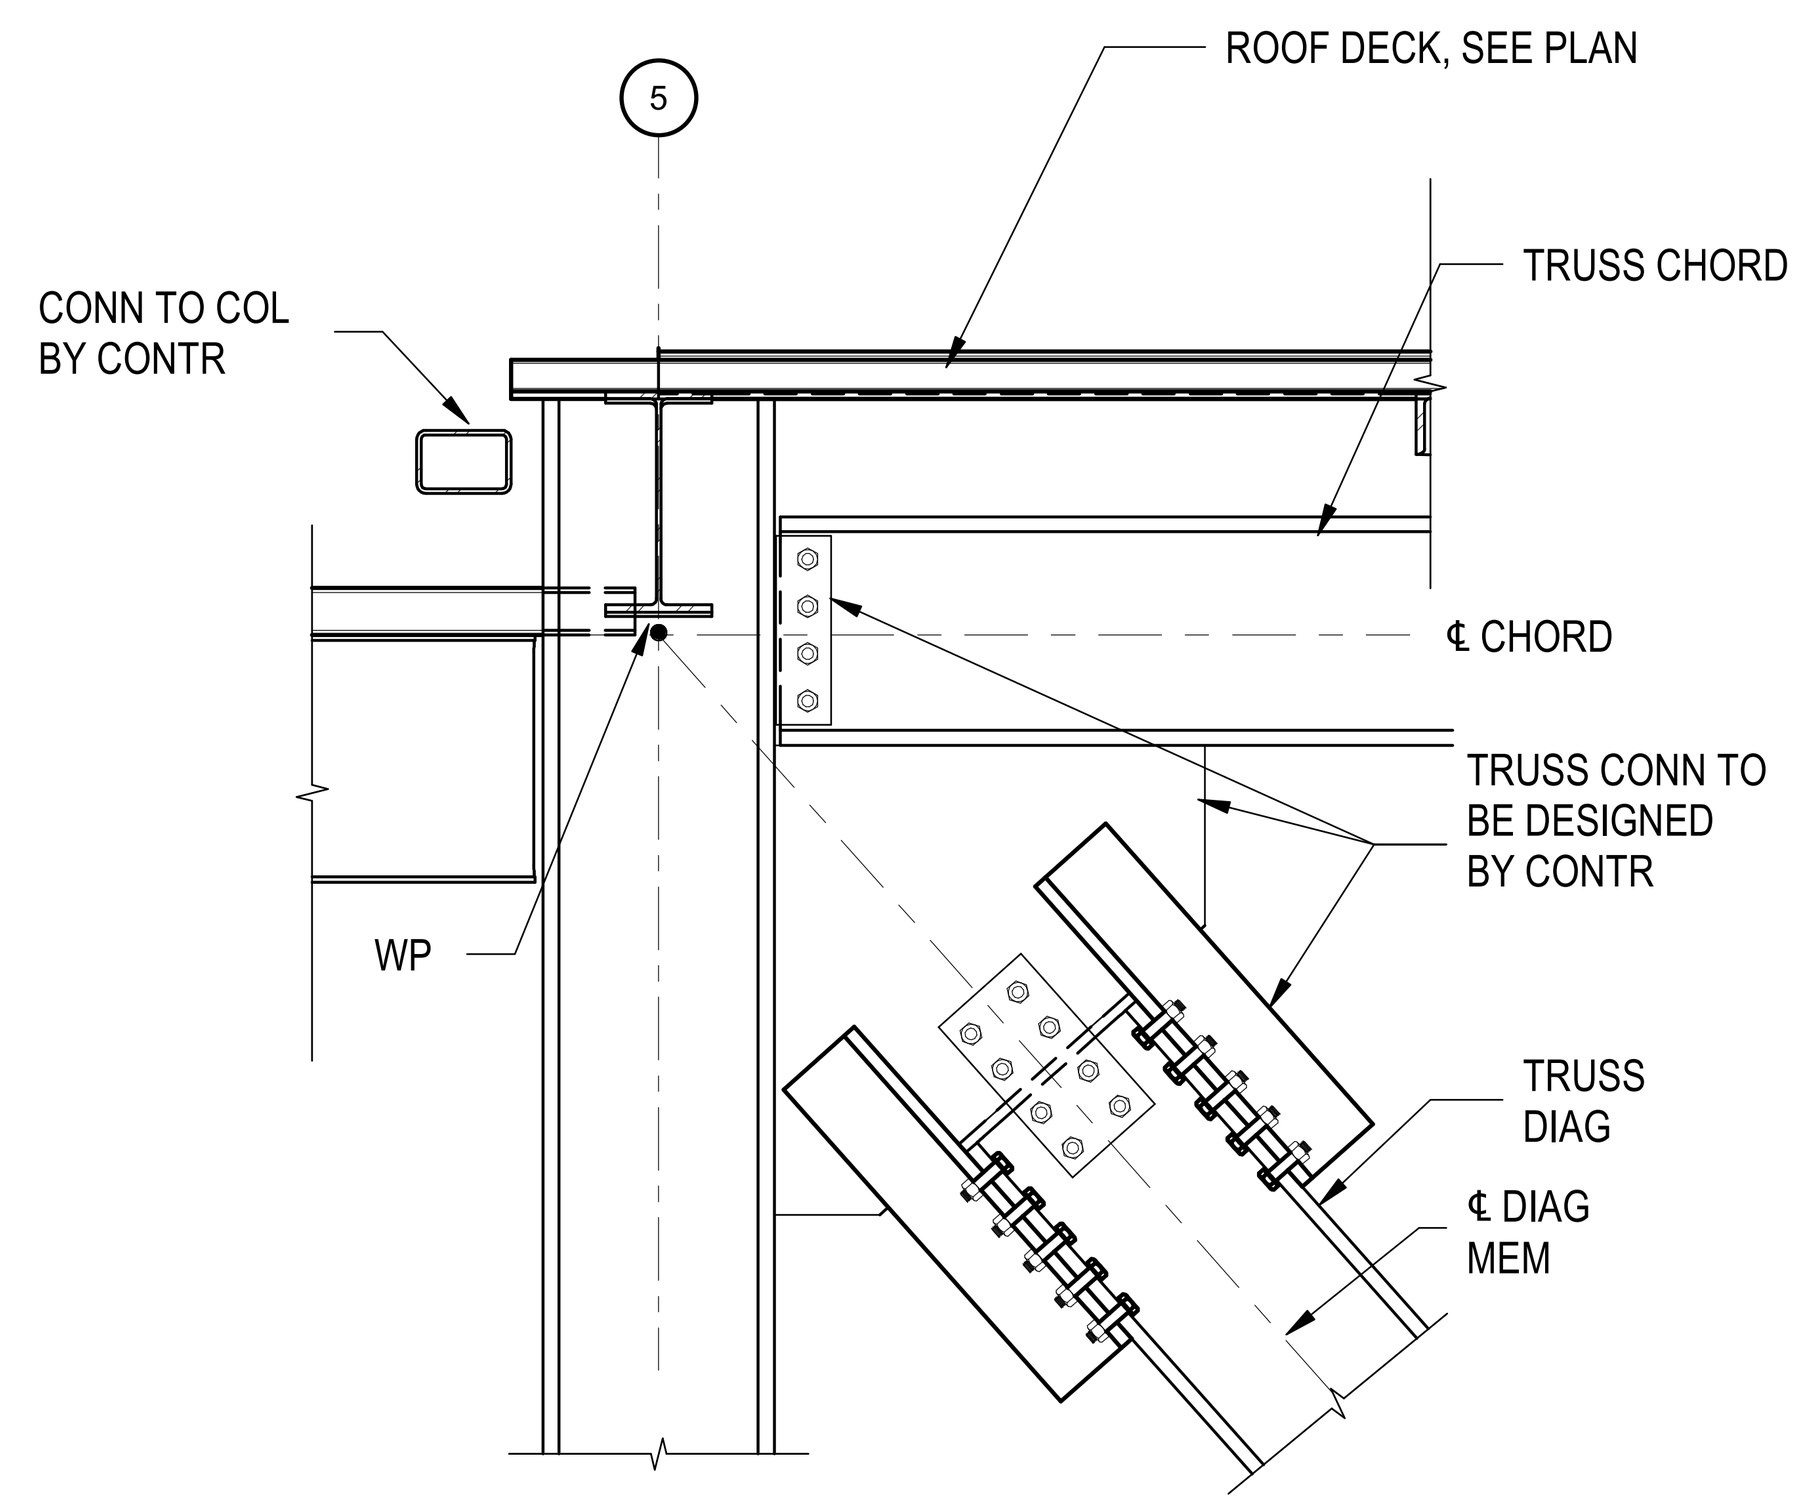

DETAIL 2 S-401

SCALE: 3/4" = 1'-0"

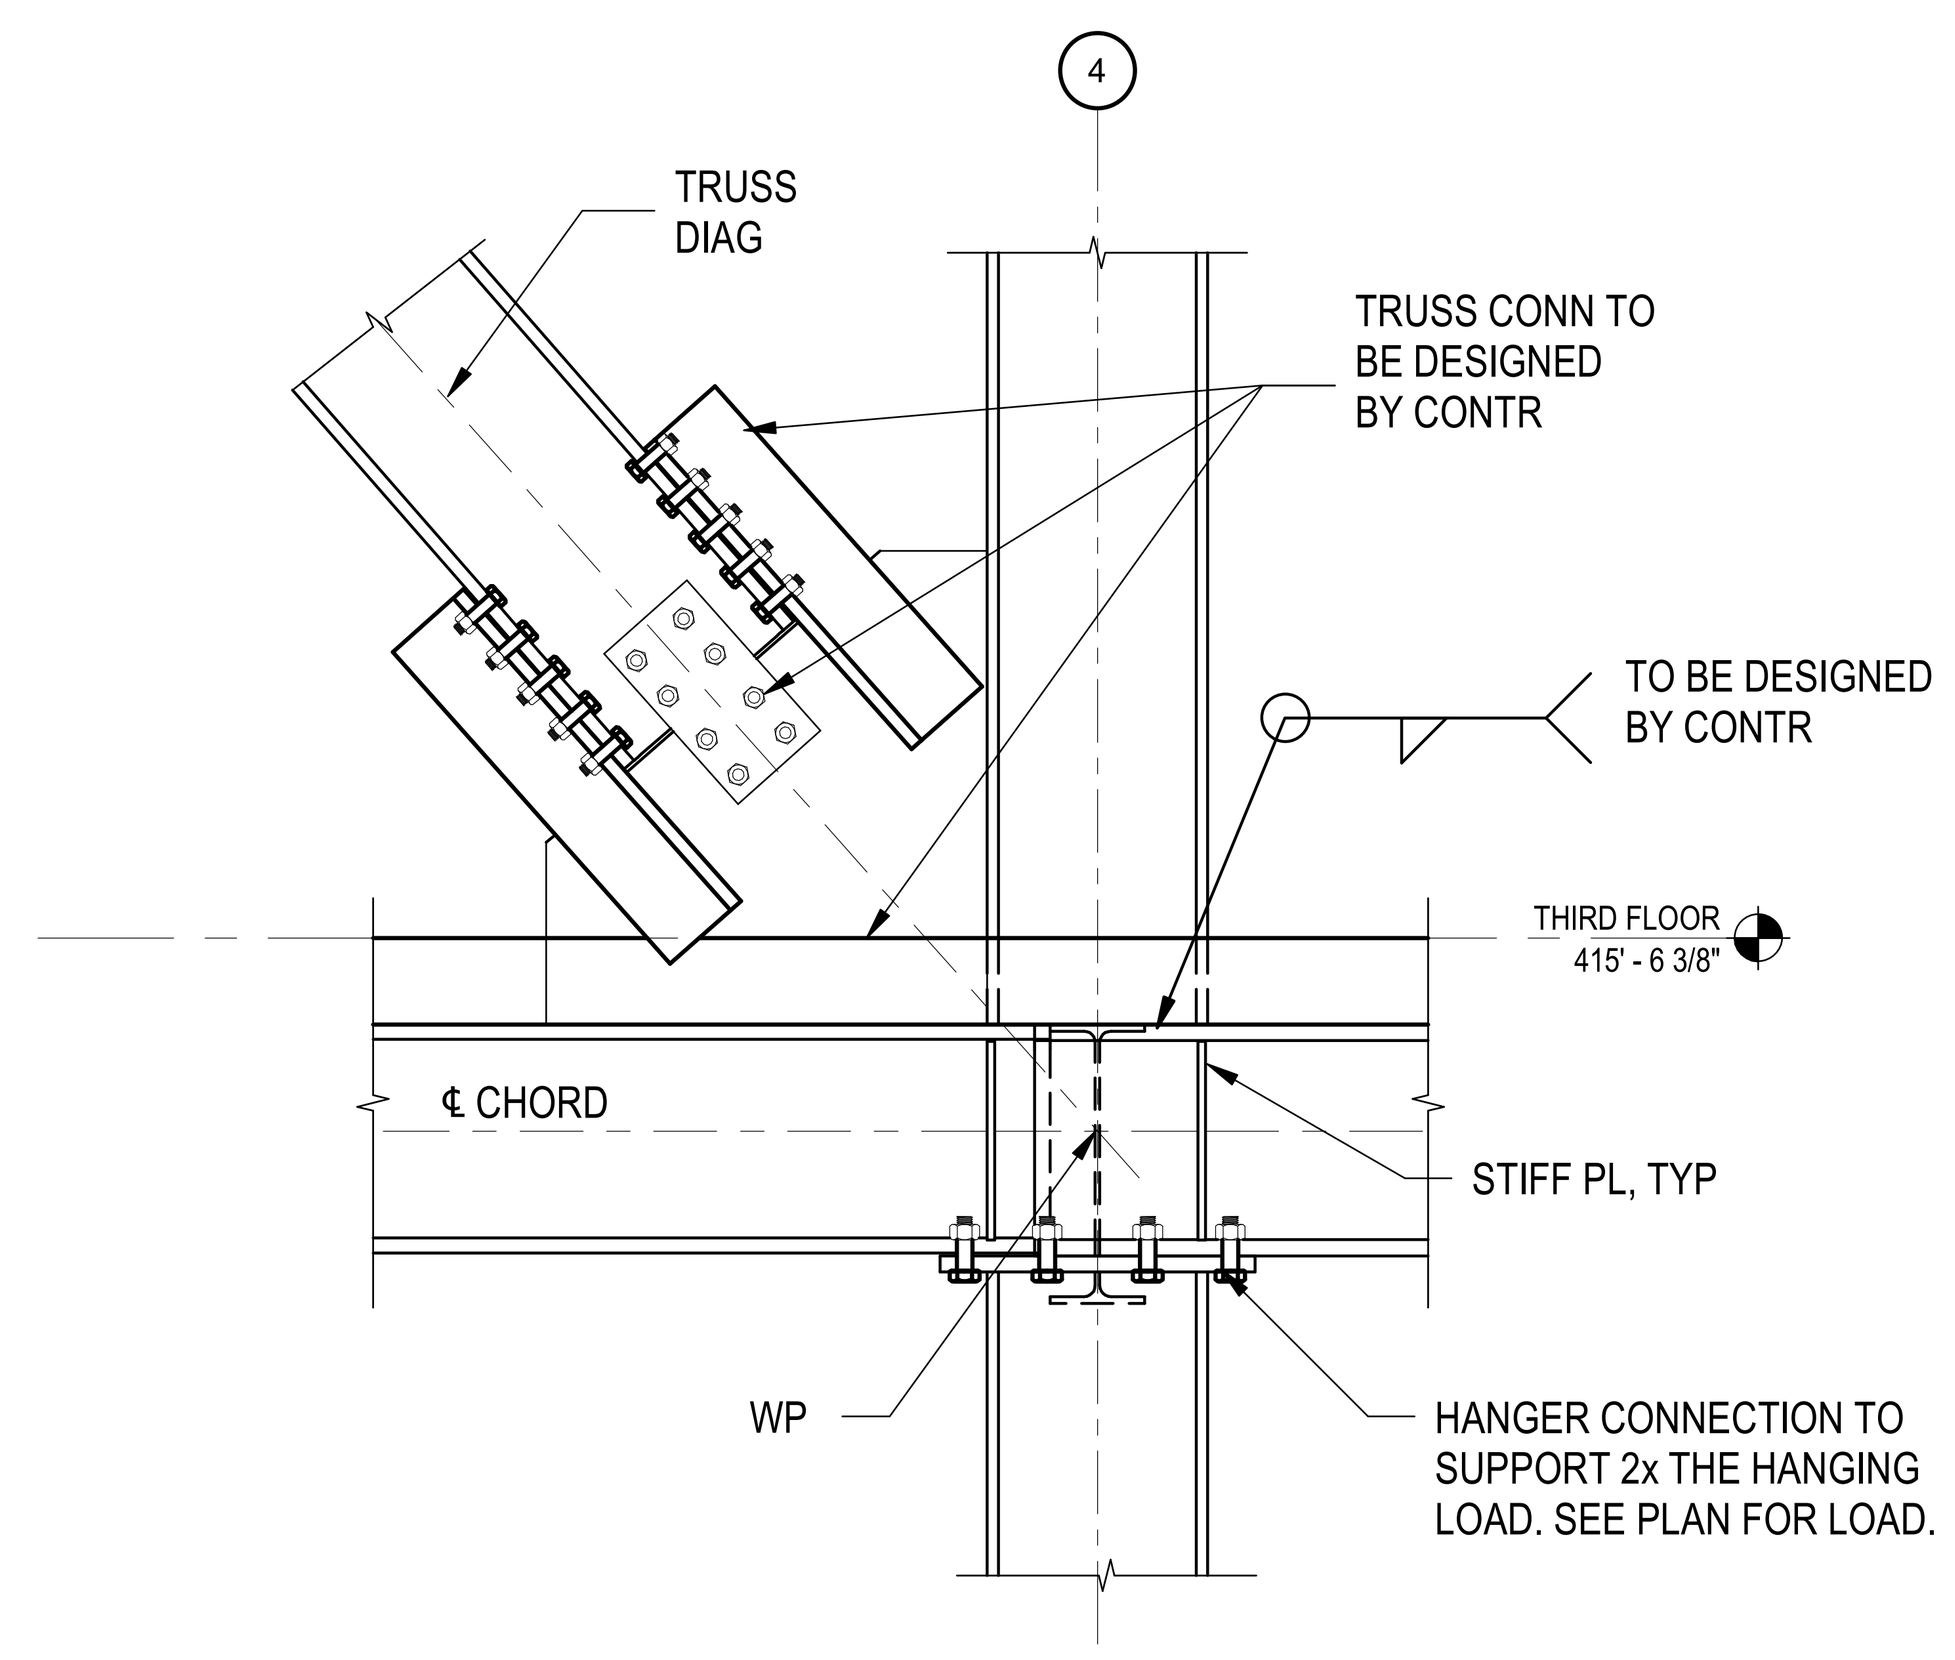

DETAIL 3 S-401

SCALE: 3/4" = 1'-0"

NOTES:

1. CONTRACTOR HAS THE OPTION TO SPLICE THE TRUSS AS NEEDED FOR ERECTION. SPLICE SHALL OCCUR NEAR GRID LINES 2 OR 4.

Autodesk Docs://Sidwell Lower School/Sidwell Lower School_ST_R24.rvt
10/28/2025 10:15:45 AM

NO.	DATE	ISSUE
A	09/30/2025	Permit
	10/29/2025	BID SET

0' 2' 4' 8' 12'
SCALE : 1/4" = 1'-0"

SEAL

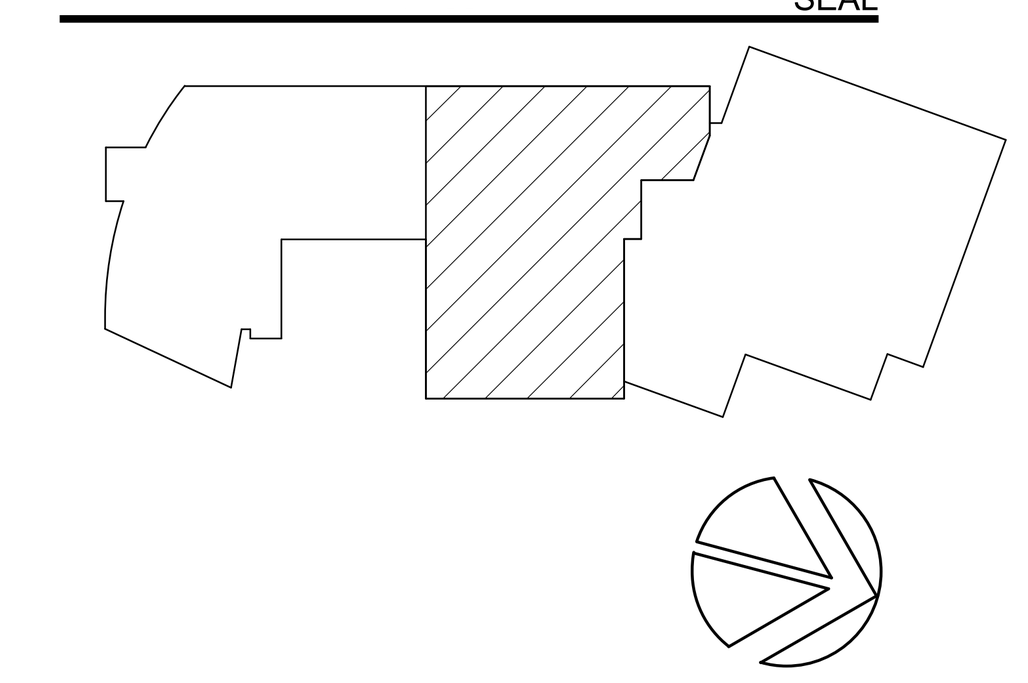

KEY PLAN

PERKINS — EASTMAN
One Thomas Circle NW, Suite 200
Washington, DC 20005
T. +1 202 861 1325
F. +1 202 861 1326

Owner:
Sidwell Friends School
3825 Wisconsin Ave NW, Washington DC 20016

Construction Manager:
Advanced Project Management, Inc (APM)
4530 Walney Rd, Ste 202, Chantilly, VA 20151

Civil / Site:
Bowman Consulting Group, Ltd
888 17th St NW, Suite 510, Washington, DC 20006

Landscape:
Natural Resources Design, Inc (NRD)
1009 Shepherd Street NE, Washington, DC 20017

Structural:
Yun Associates LLC
1050 Connecticut Ave NW, Suite 500, Washington, DC 20036

MEP / FP / Lighting:
CMTA Inc
220 Lexington Green Circle, Suite 600, Lexington, KY 40503

AV / IT / Telecom / Security:
Educational Systems Planning (ESP)
2448 Holly Avenue, Suite 302, Annapolis, MD 21401

Food Service
Nyikos-Garcia Foodservice Design, Inc
7146 Starmount Way, New Market, MD 21774

Accessibility Consultant:
Galbo Wolf LLC
4410 Massachusetts Ave NW, #240, Washington, DC 20016

Acoustics:
Polysonics Corp
555 Hospital Drive, Warrenton, VA 20186

Building Envelope Consultant:
Sustainable Building Partners LLC
2701 Prosperity Ave, Suite 105, Fairfax, VA 22031

Code Consultant:
Campbell Code Consulting LLC
7834 Taggart Ct, Elkridge, MD 21075

Specifications:

PROJECT TITLE:

SIDWELL FRIENDS NEW LOWER SCHOOL AT DC CAMPUS

3825 WISCONSIN AVE NW
WASHINGTON, DC 20016

PROJECT No: 2025008

DRAWING TITLE:

ELEVATIONS

SCALE: As indicated

S-401

BID SET
10/29/2025

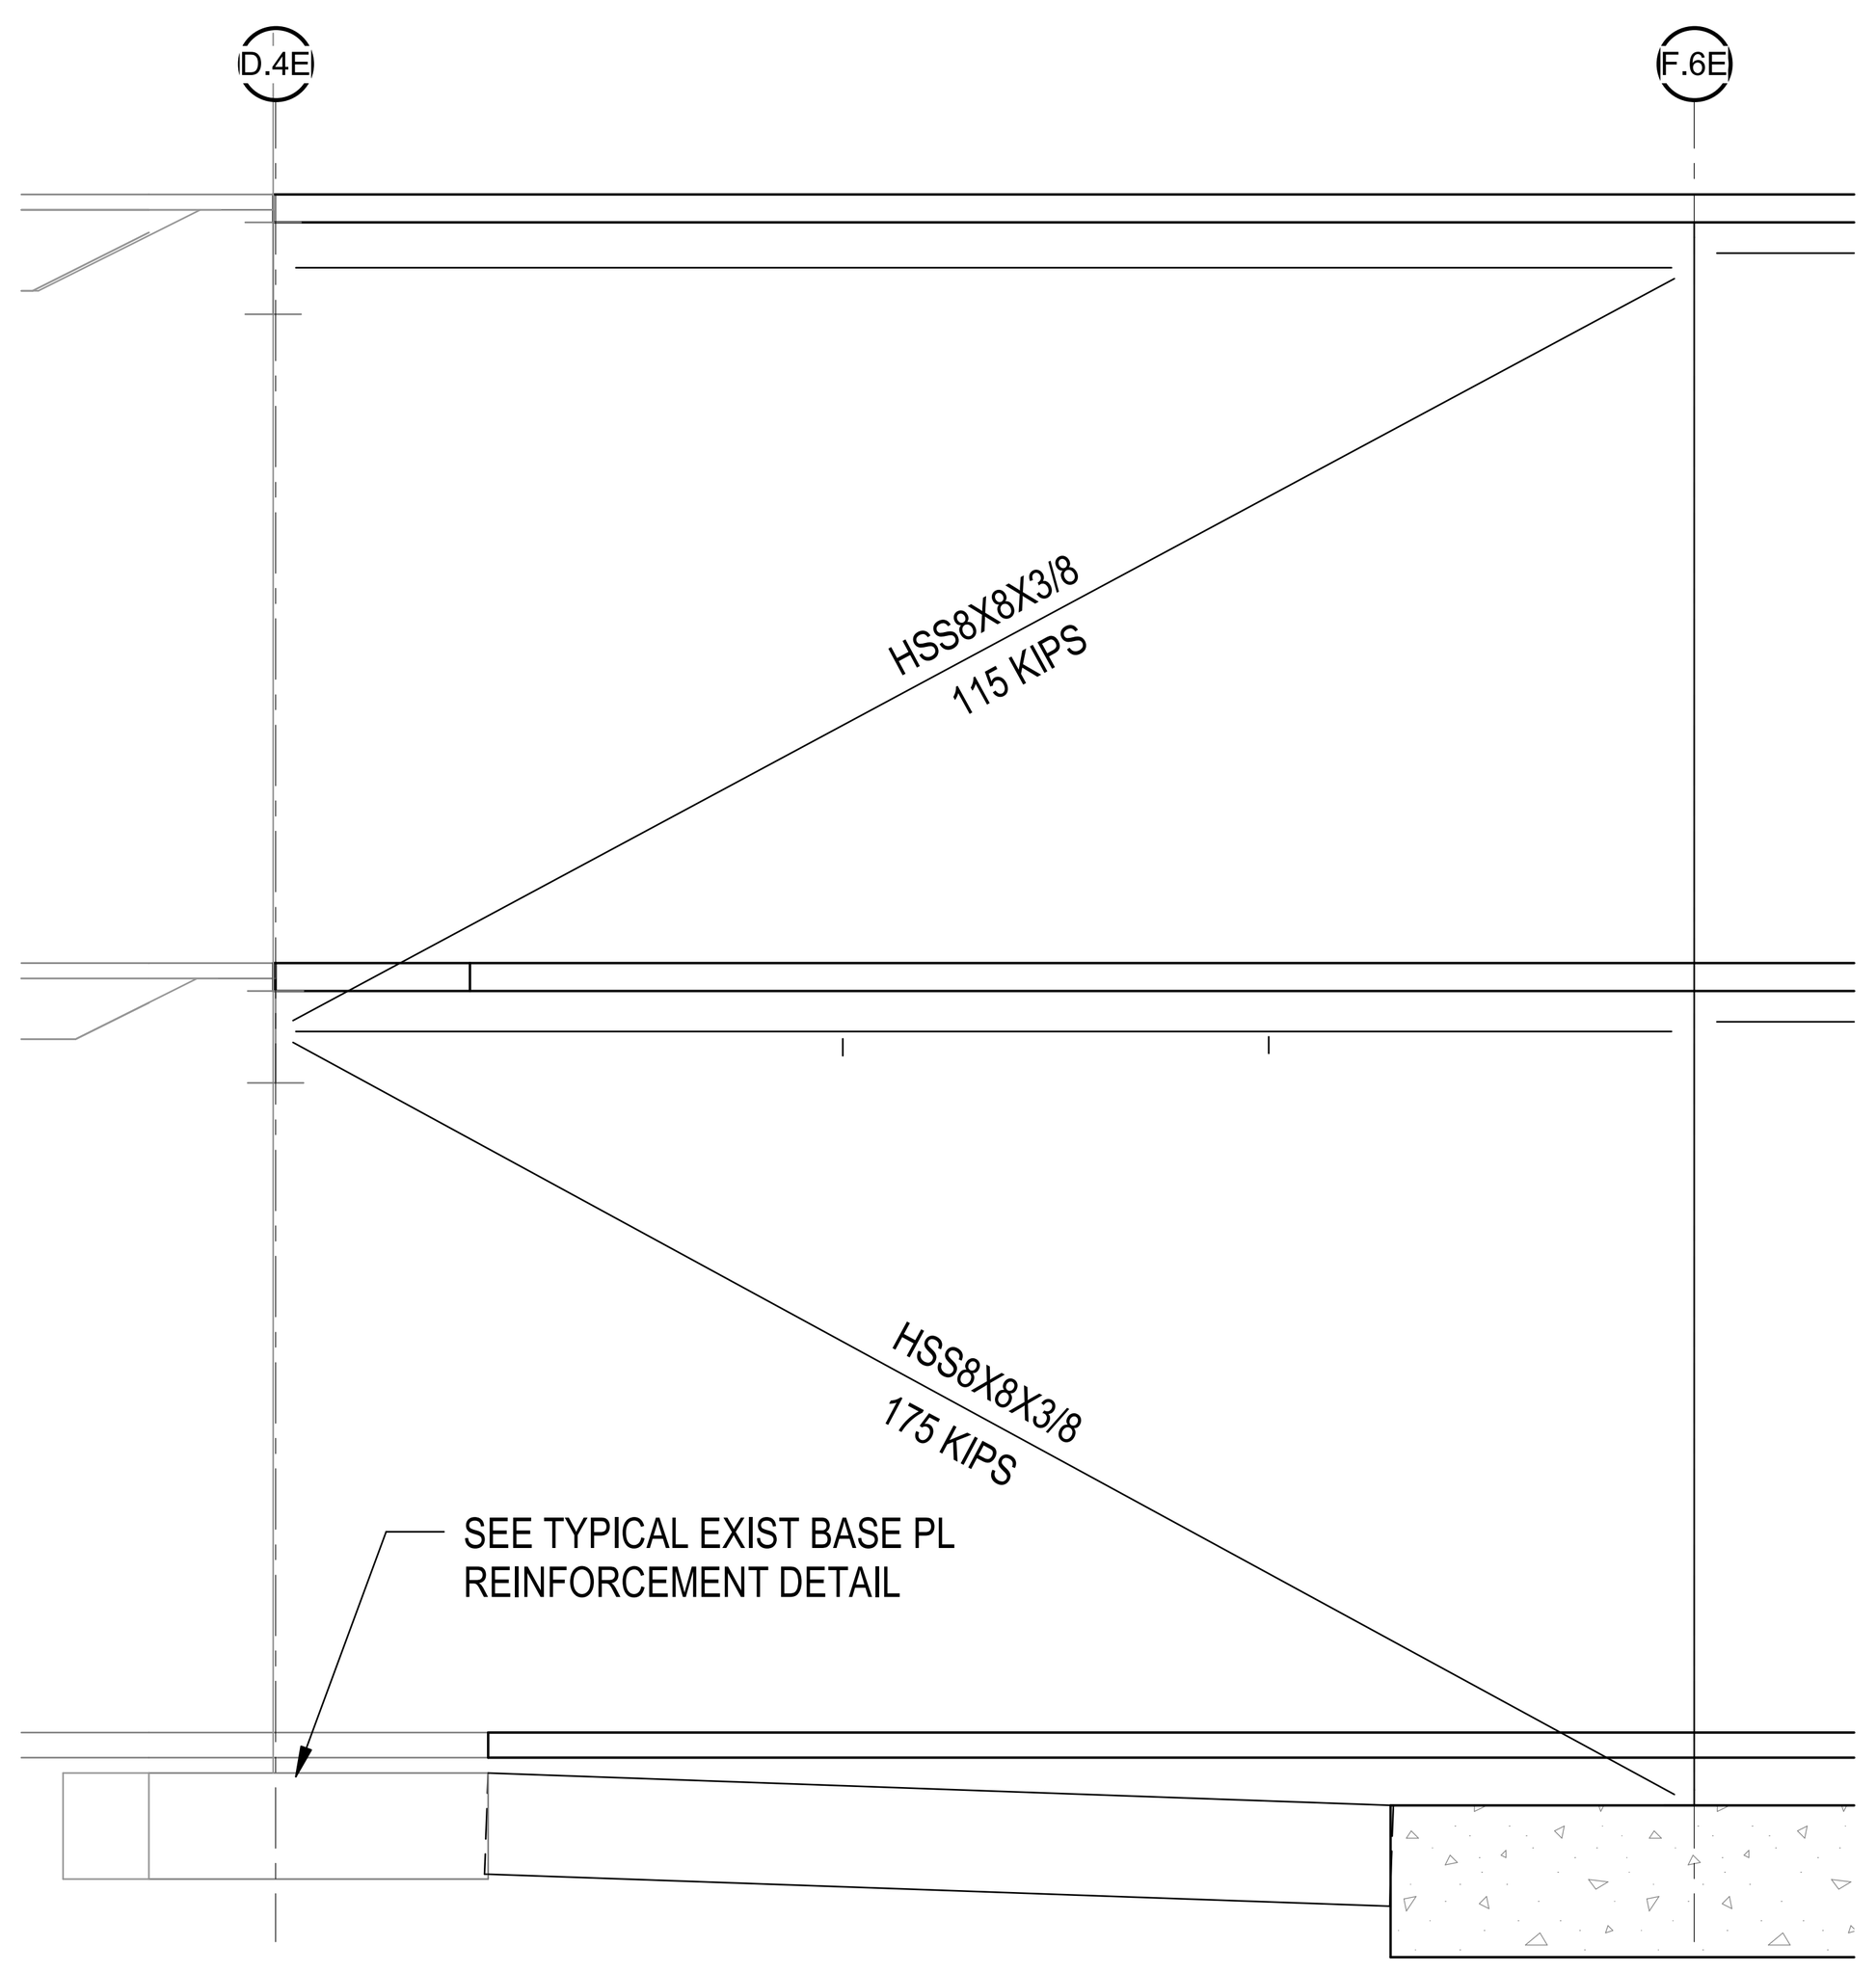

ELEVATION 1
S-402
SCALE: 1/4" = 1'-0"

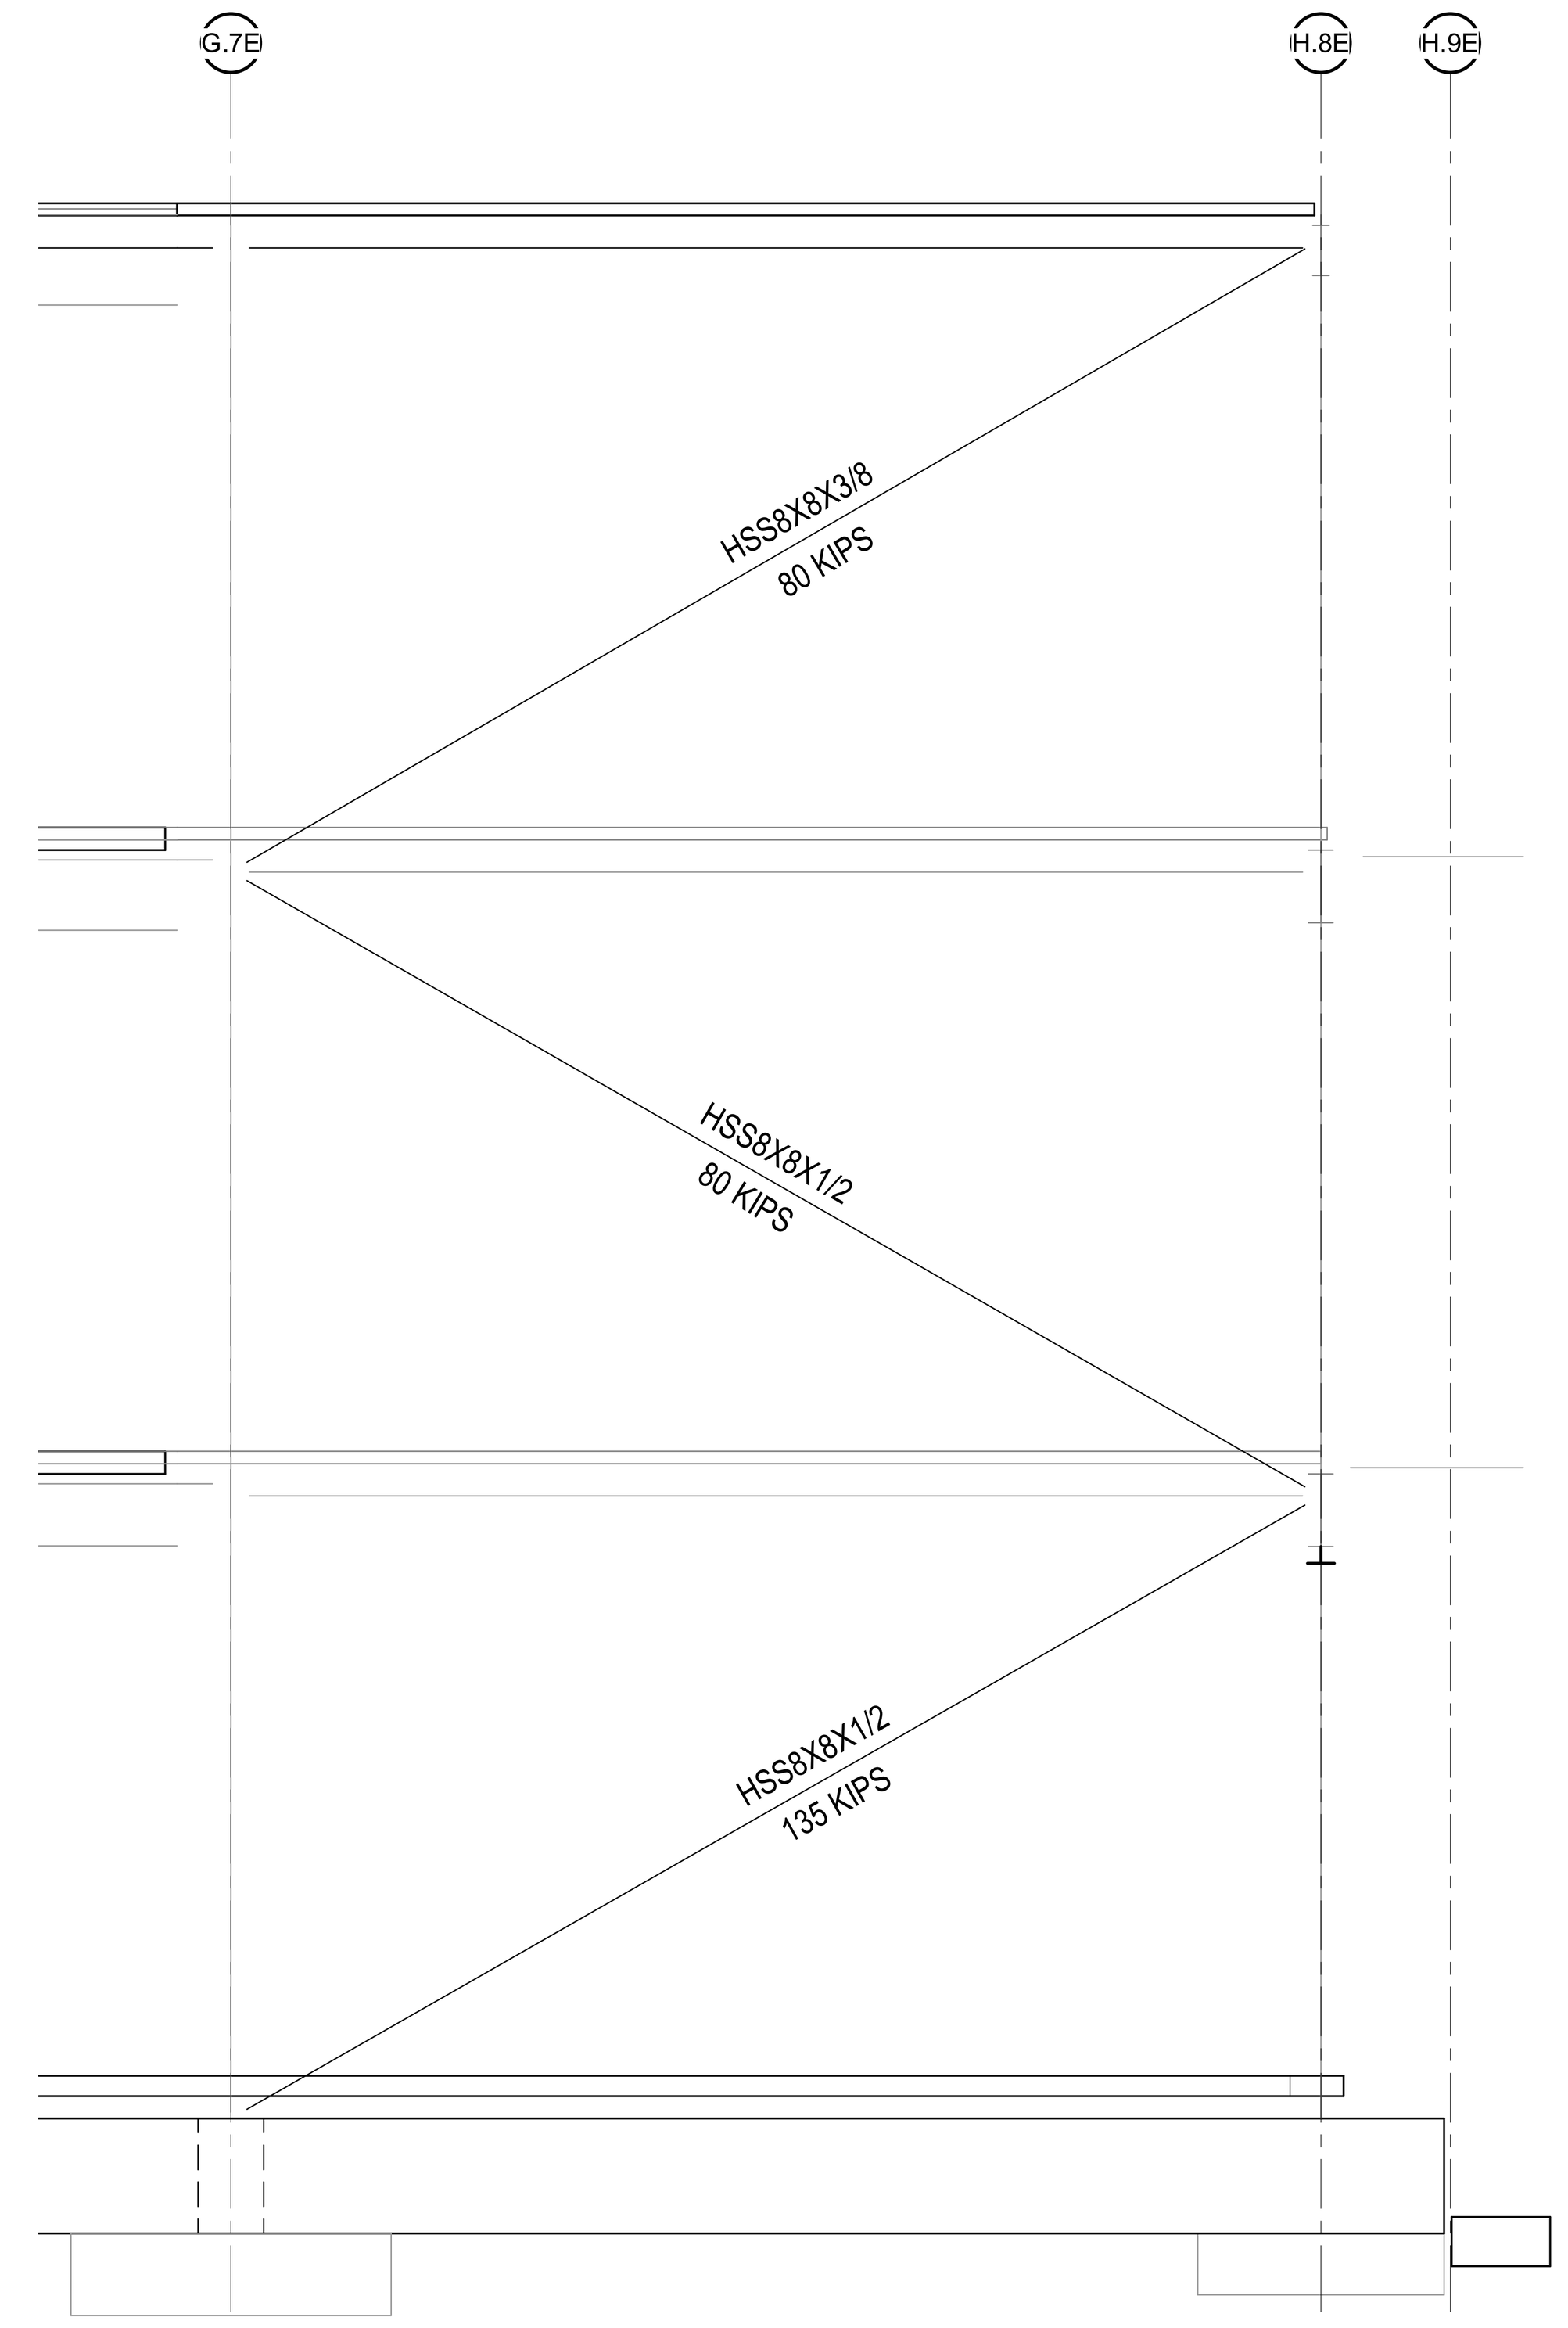

ELEVATION 2
S-402
SCALE: 1/4" = 1'-0"

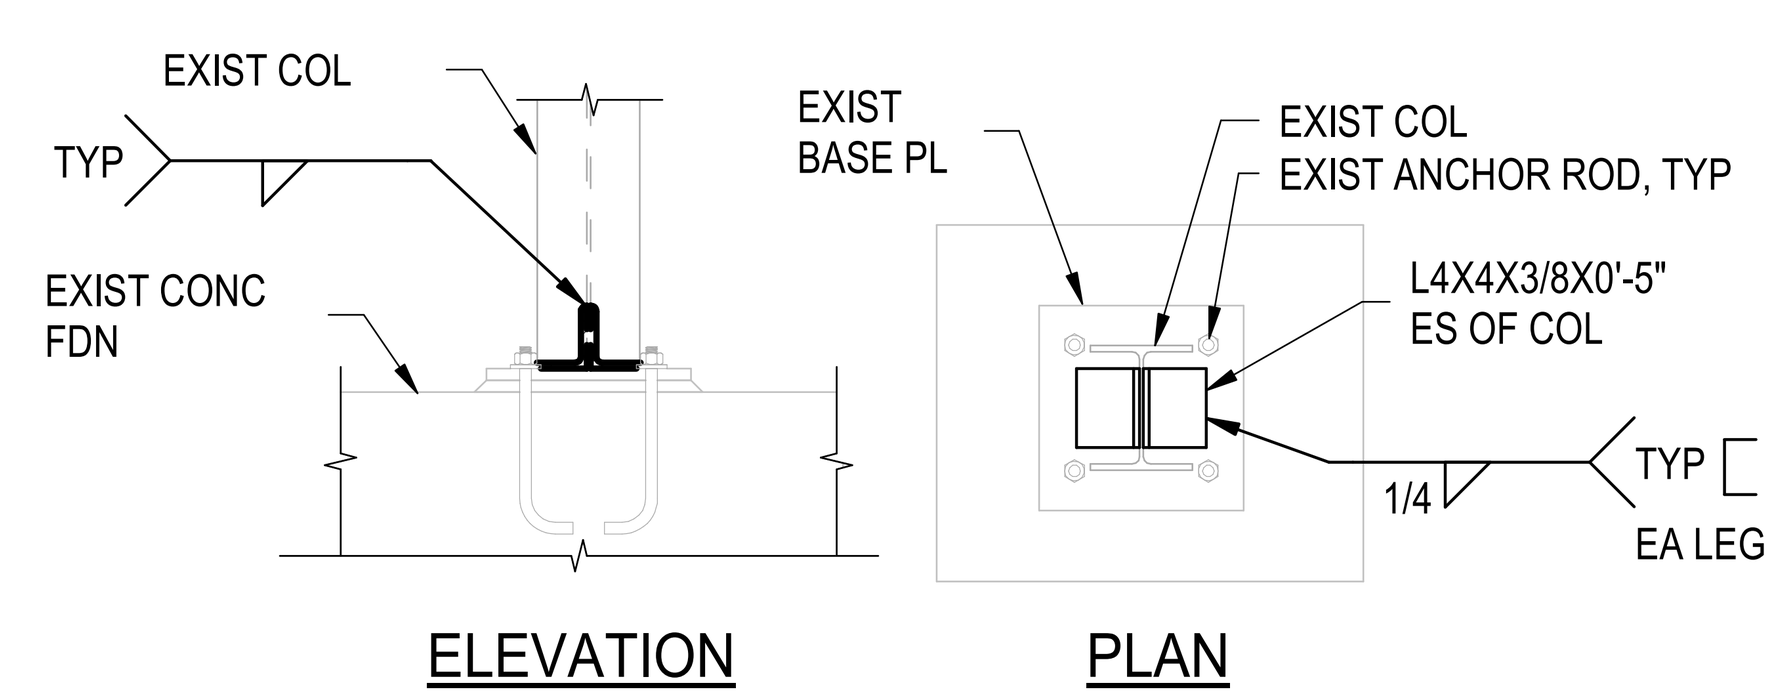

TYPICAL EXIST BASE PL REINFORCEMENT DETAIL

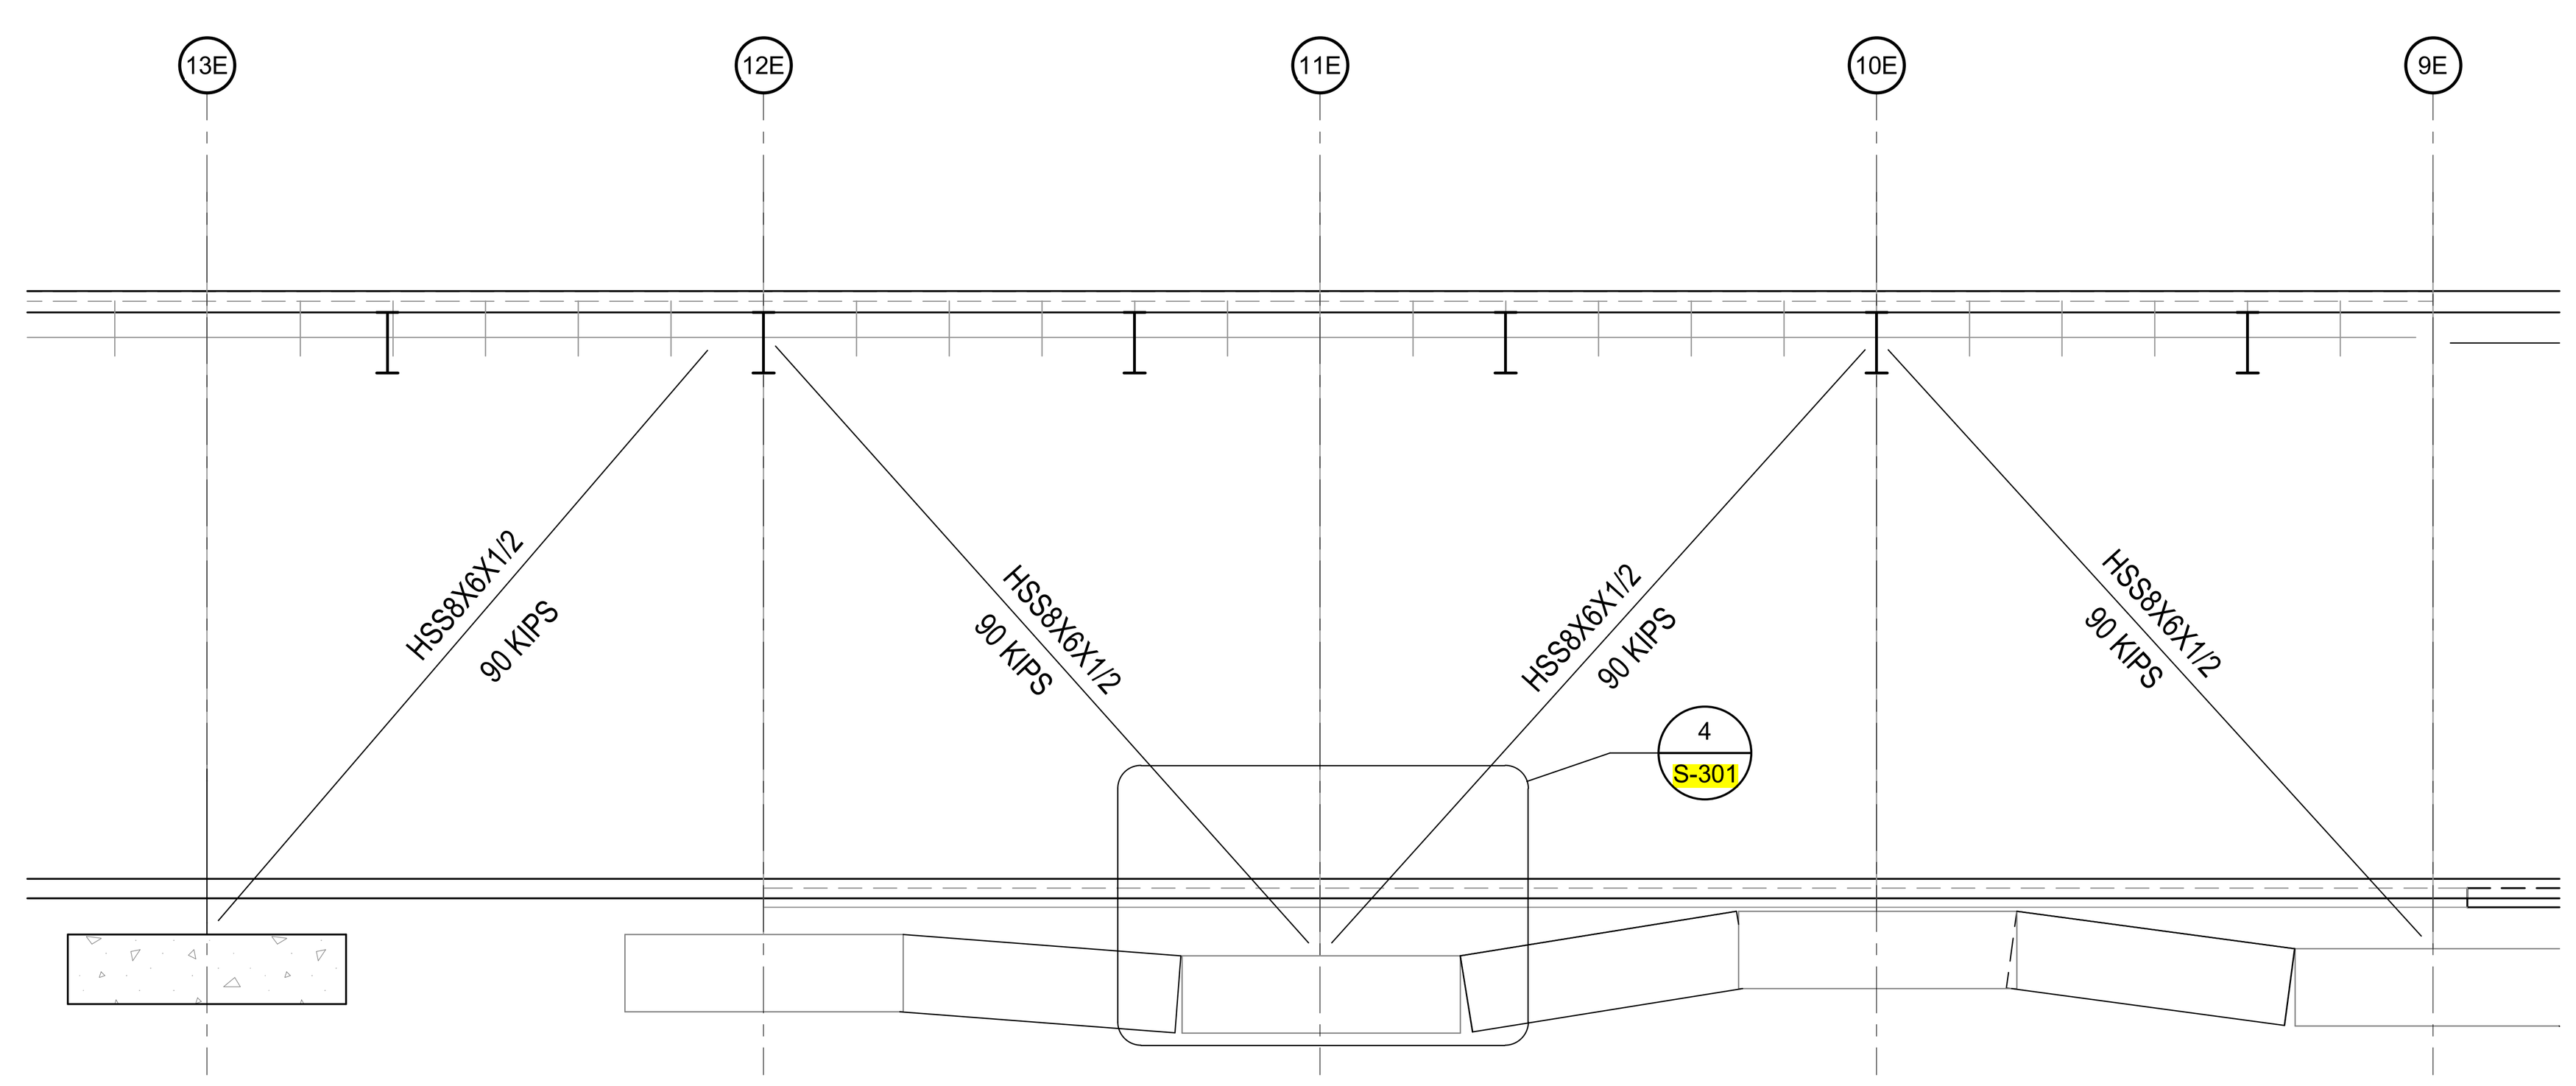

ELEVATION 4
S-402
SCALE: 1/4" = 1'-0"

NO.	DATE	ISSUE
A	09/30/2025	Permit
	10/29/2025	BID SET

0' 4' 8' 16' 24'
SCALE : 1/8" = 1'-0"

SEAL

KEY PLAN

PERKINS EASTMAN
One Thomas Circle NW, Suite 200
Washington, DC 20005
T: +1 202 861 1325
F: +1 202 861 1326

Owner:
Sidwell Friends School
3825 Wisconsin Ave NW, Washington DC 20016

Construction Manager:
Advanced Project Management, Inc (APM)
4530 Walney Rd, Ste 202, Chantilly, VA 20151

Civil / Site:
Bowman Consulting Group, Ltd
888 17th St NW, Suite 510, Washington, DC 20006

Landscape:
Natural Resources Design, Inc (NRD)
1009 Shepherd Street NE, Washington, DC 20017

Structural:
Yun Associates LLC
1050 Connecticut Ave NW, Suite 500, Washington, DC 20036

MEP / FP / Lighting:
CMTA Inc
220 Lexington Green Circle, Suite 600, Lexington, KY 40503

AV / IT / Telecom / Security:
Educational Systems Planning (ESP)
2448 Holly Avenue, Suite 302, Annapolis, MD 21401

Food Service
Nyikos-Garcia Foodservice Design, Inc
7146 Starmount Way, New Market, MD 21774

Accessibility Consultant:
Galbo Wolf LLC
4410 Massachusetts Ave NW, #240, Washington, DC 20016

Acoustics:
Polysonics Corp
555 Hospital Drive, Warrenton, VA 20186

Building Envelope Consultant:
Sustainable Building Partners LLC
2701 Prosperity Ave, Suite 105, Fairfax, VA 22031

Code Consultant:
Campbell Code Consulting LLC
7834 Taggart Ct, Elkridge, MD 21075

Specifications:

PROJECT TITLE:
SIDWELL FRIENDS NEW LOWER SCHOOL AT DC CAMPUS

3825 WISCONSIN AVE NW
WASHINGTON, DC 20016

PROJECT No: 2025008

DRAWING TITLE:
ELEVATIONS

SCALE: As indicated

S-402

BID SET
10/29/2025

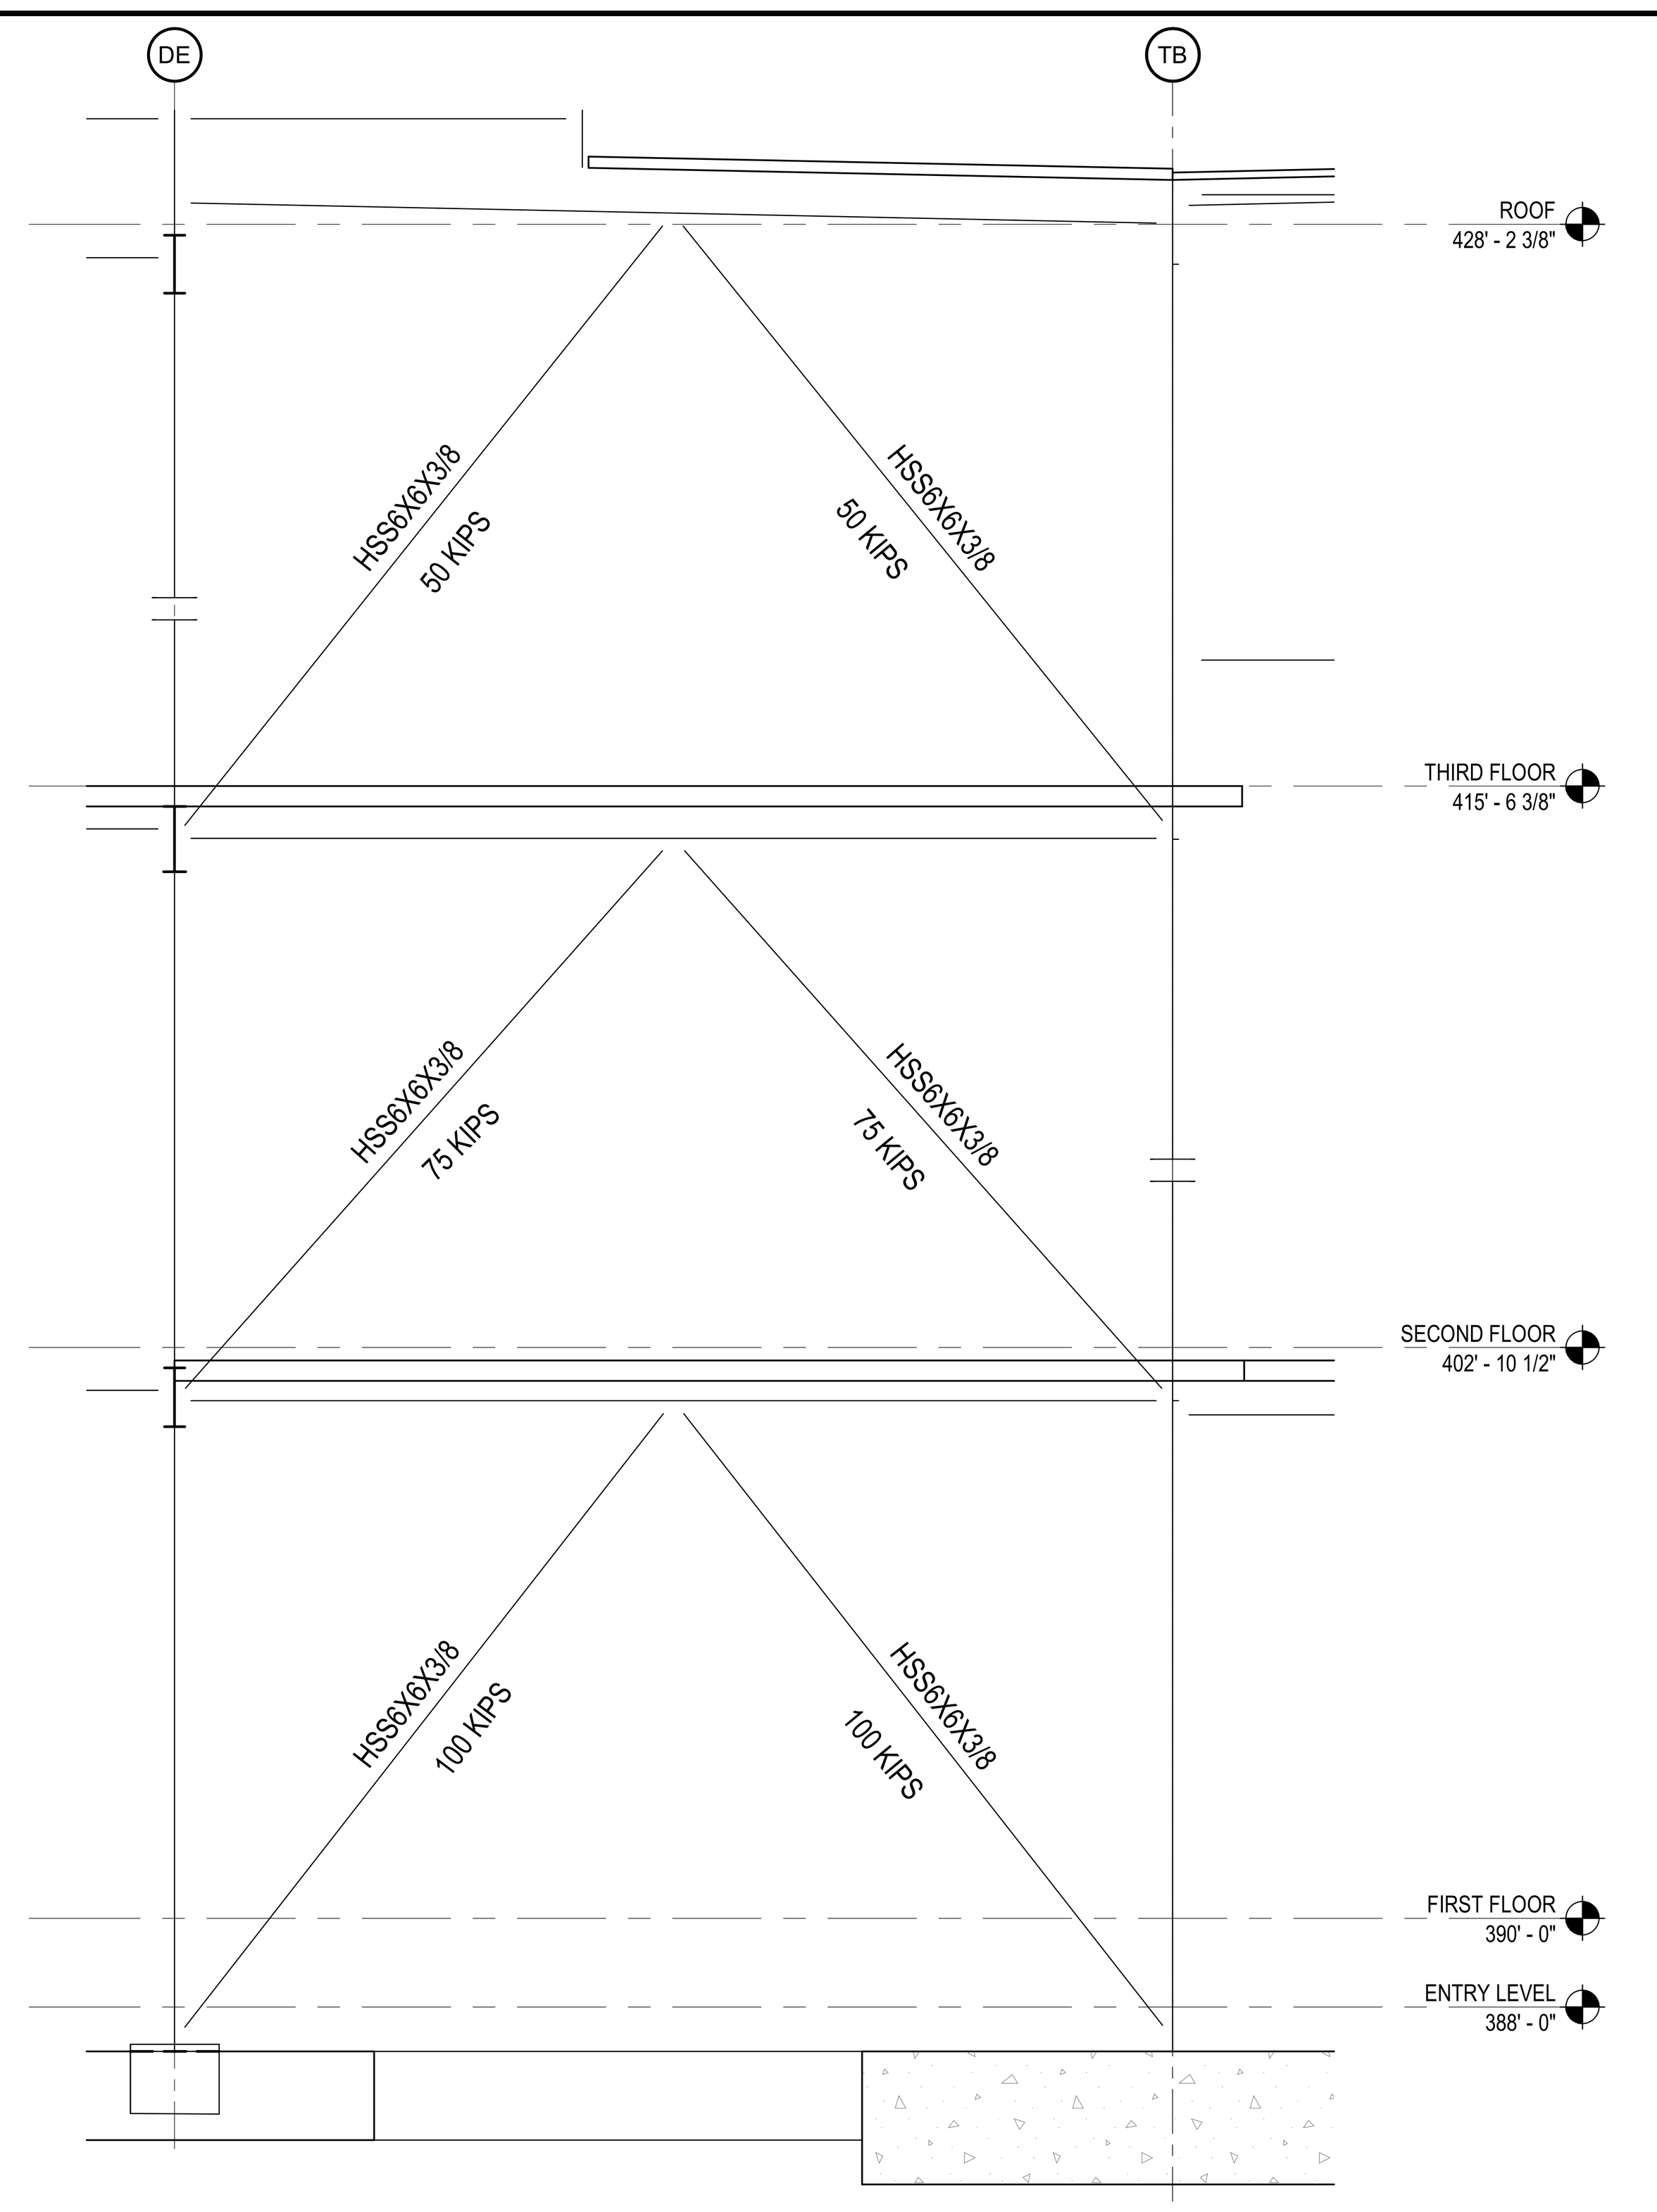

ELEVATION 1
SCALE: 1/4" = 1'-0" S-403

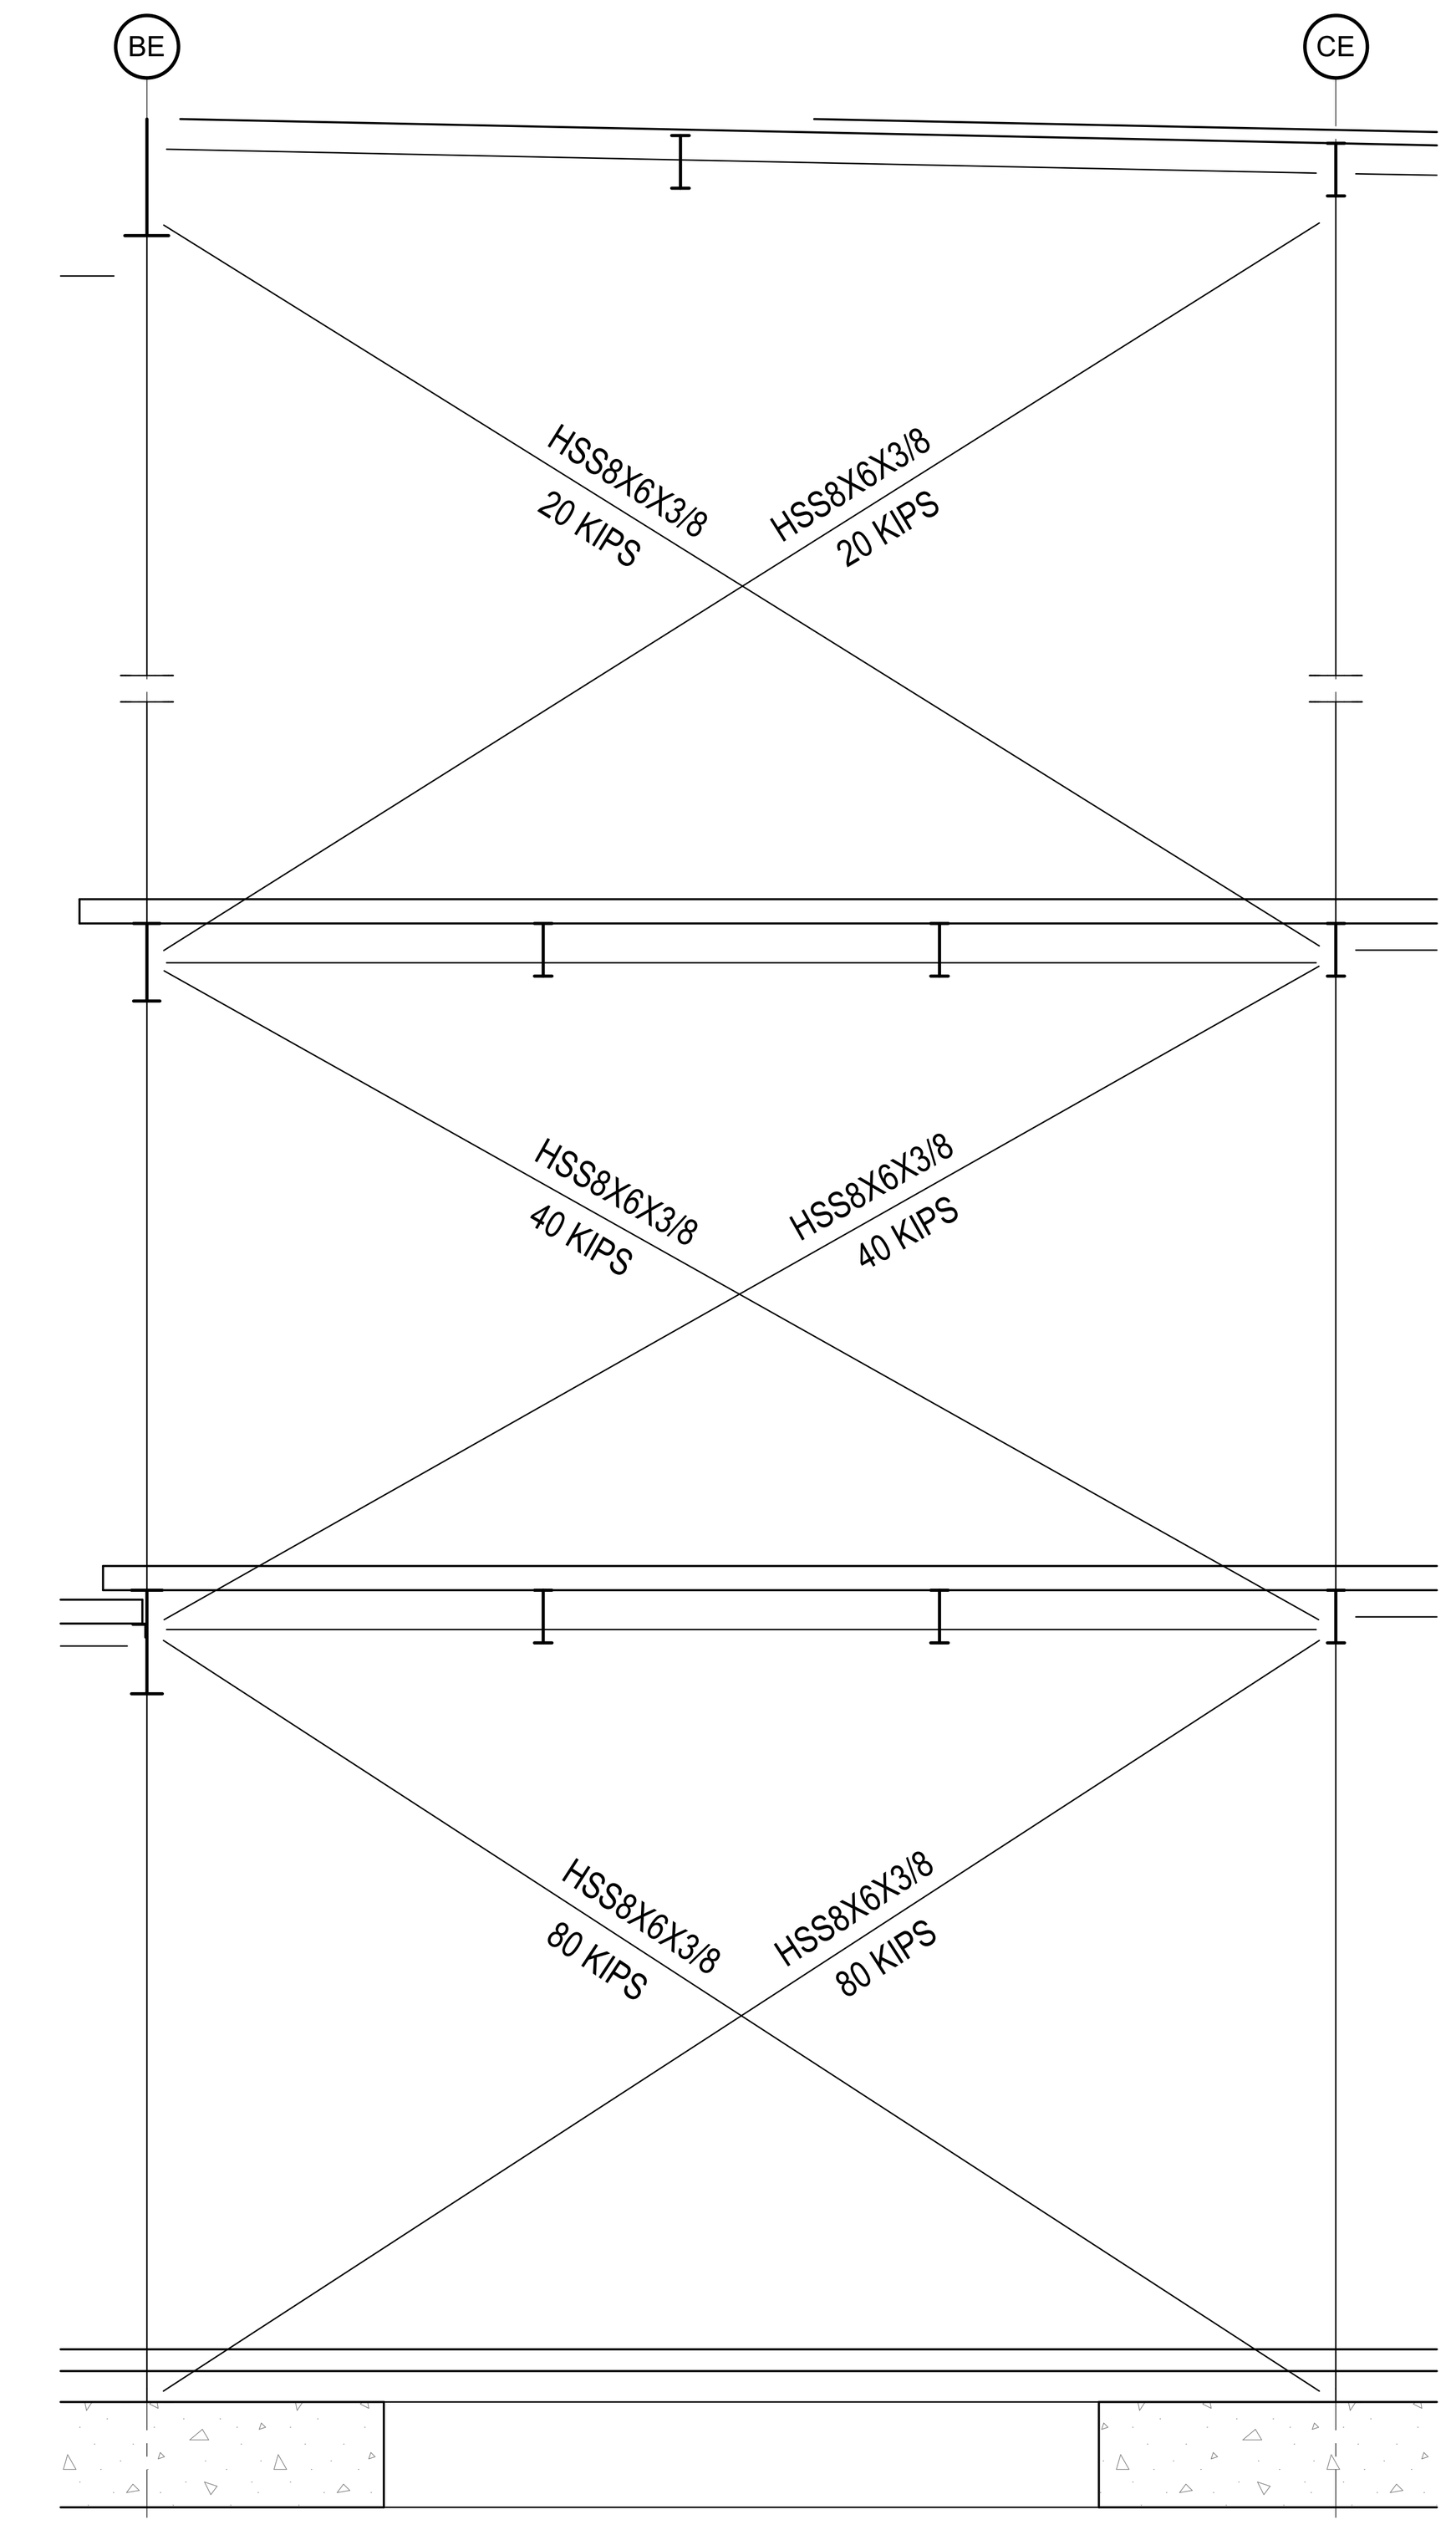

ELEVATION 2
SCALE: 1/4" = 1'-0" S-403

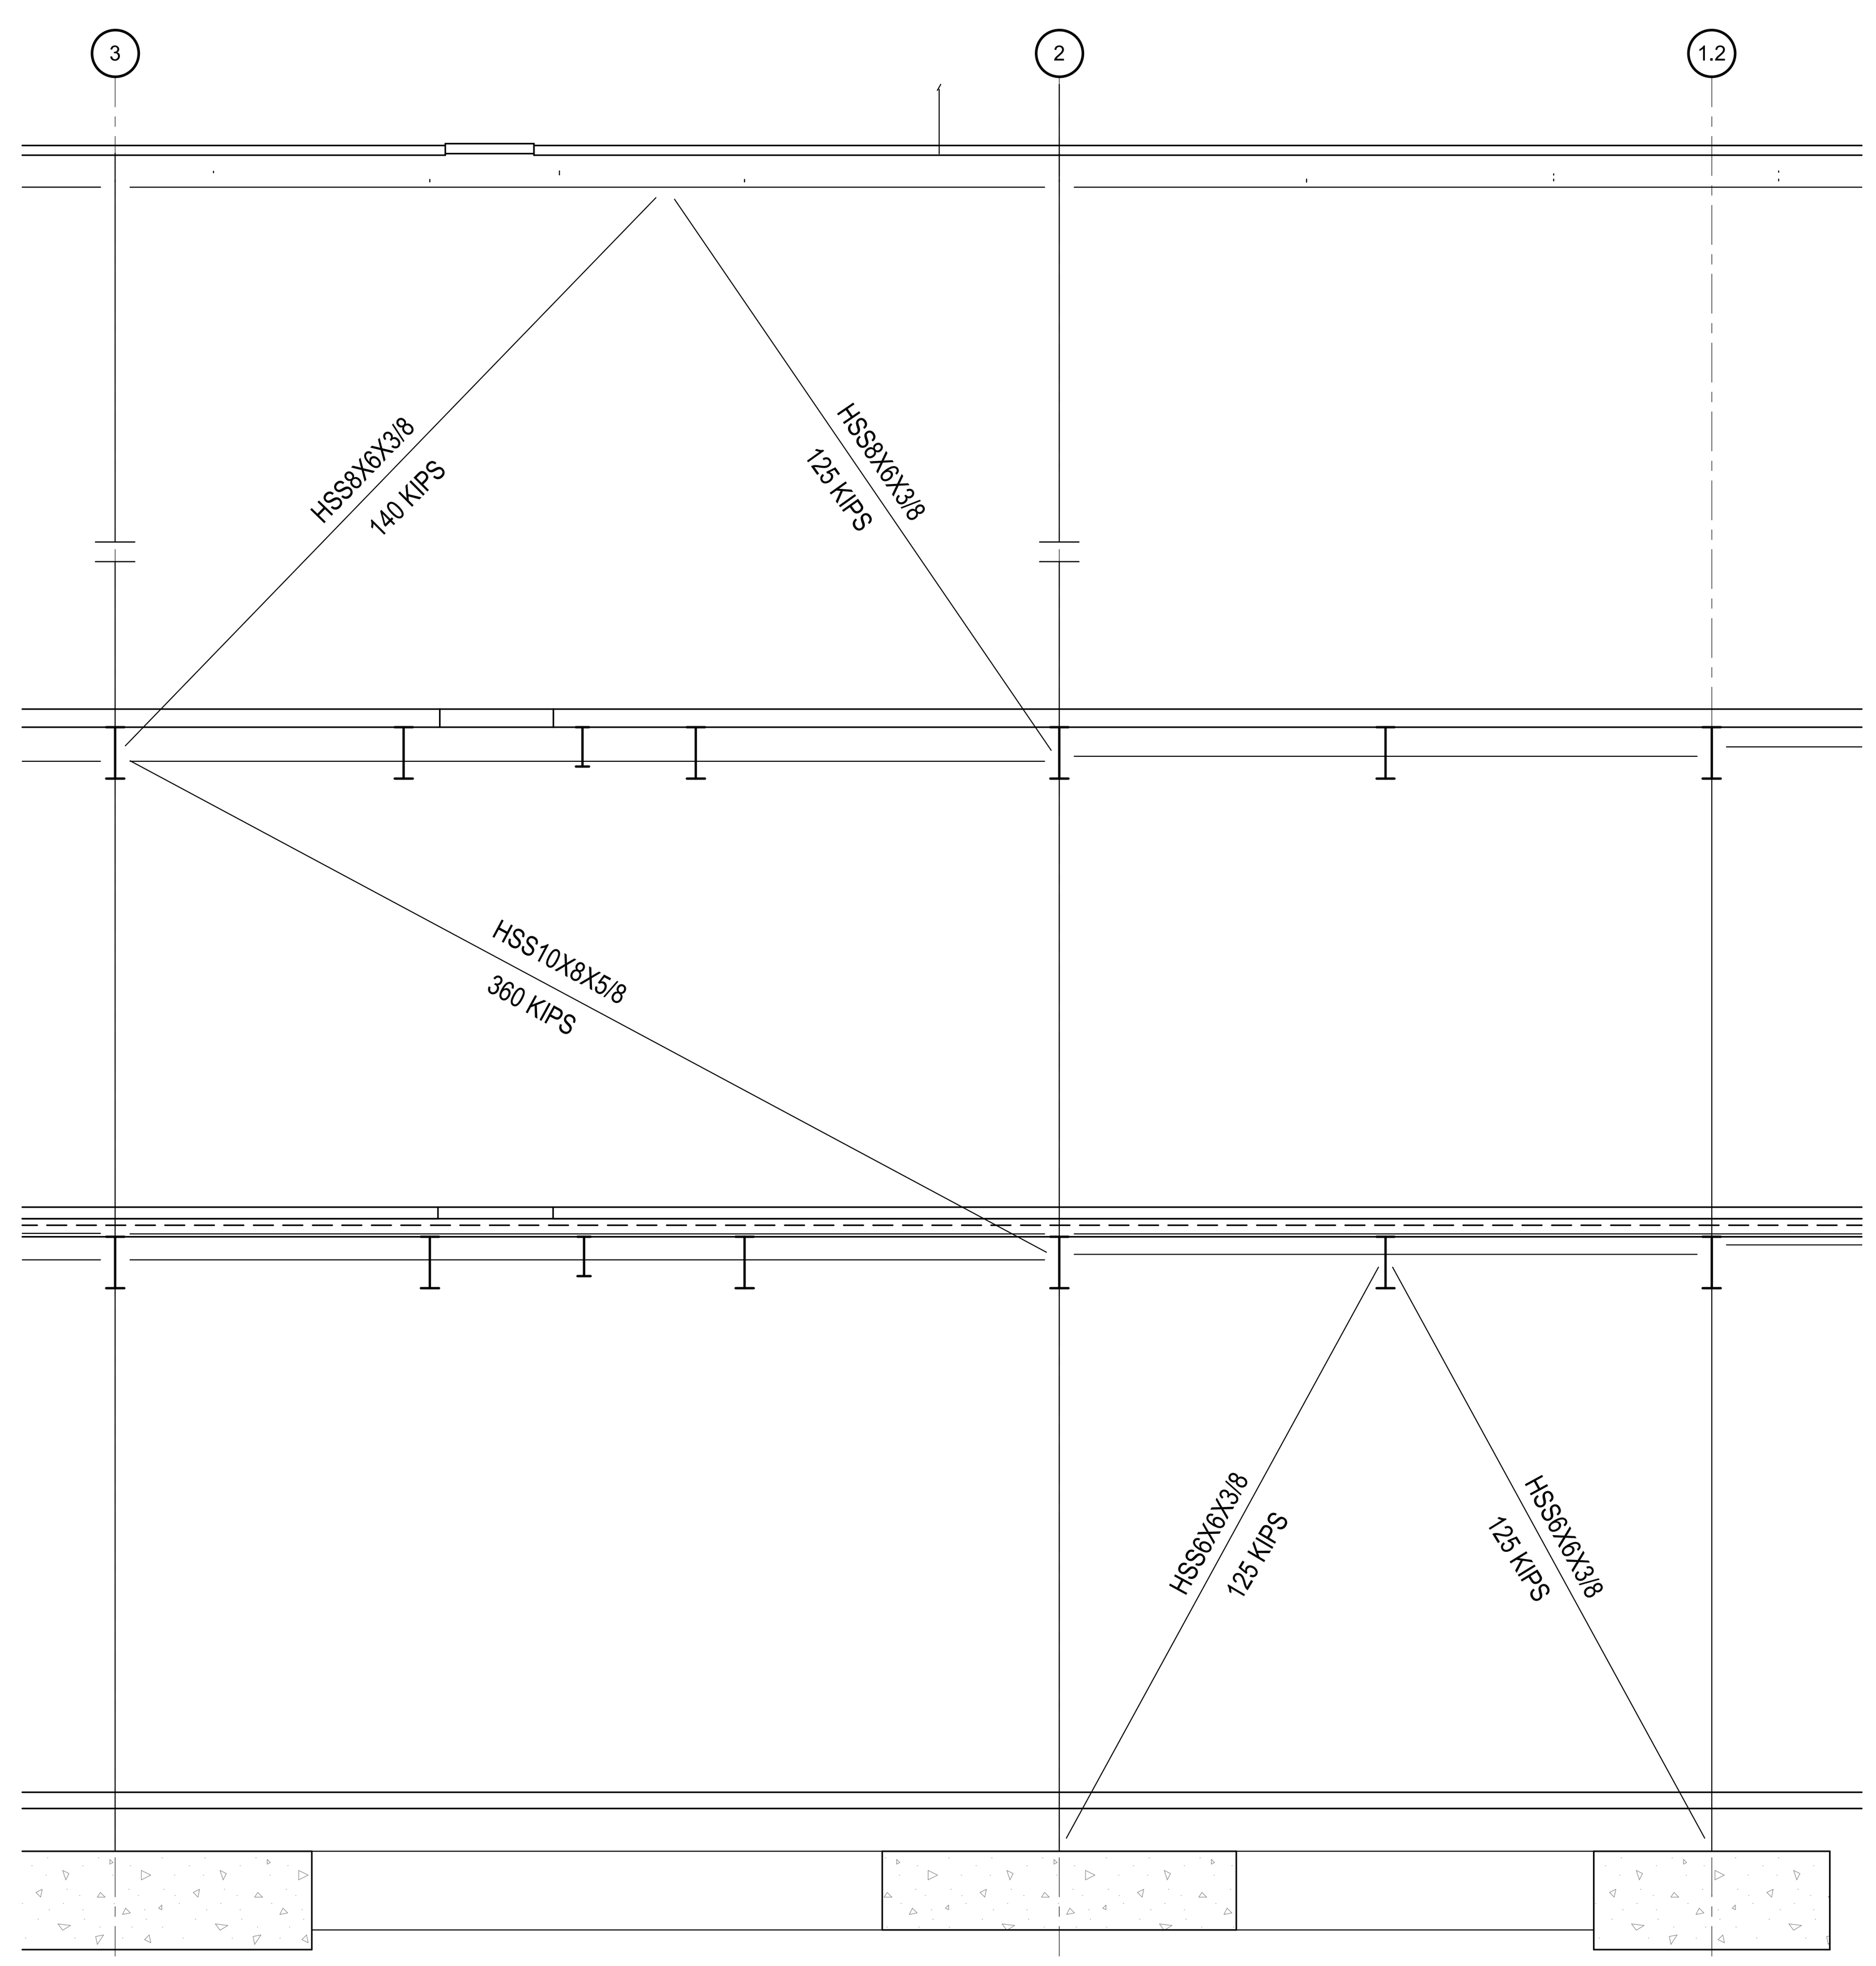

ELEVATION 3
SCALE: 1/4" = 1'-0" S-403

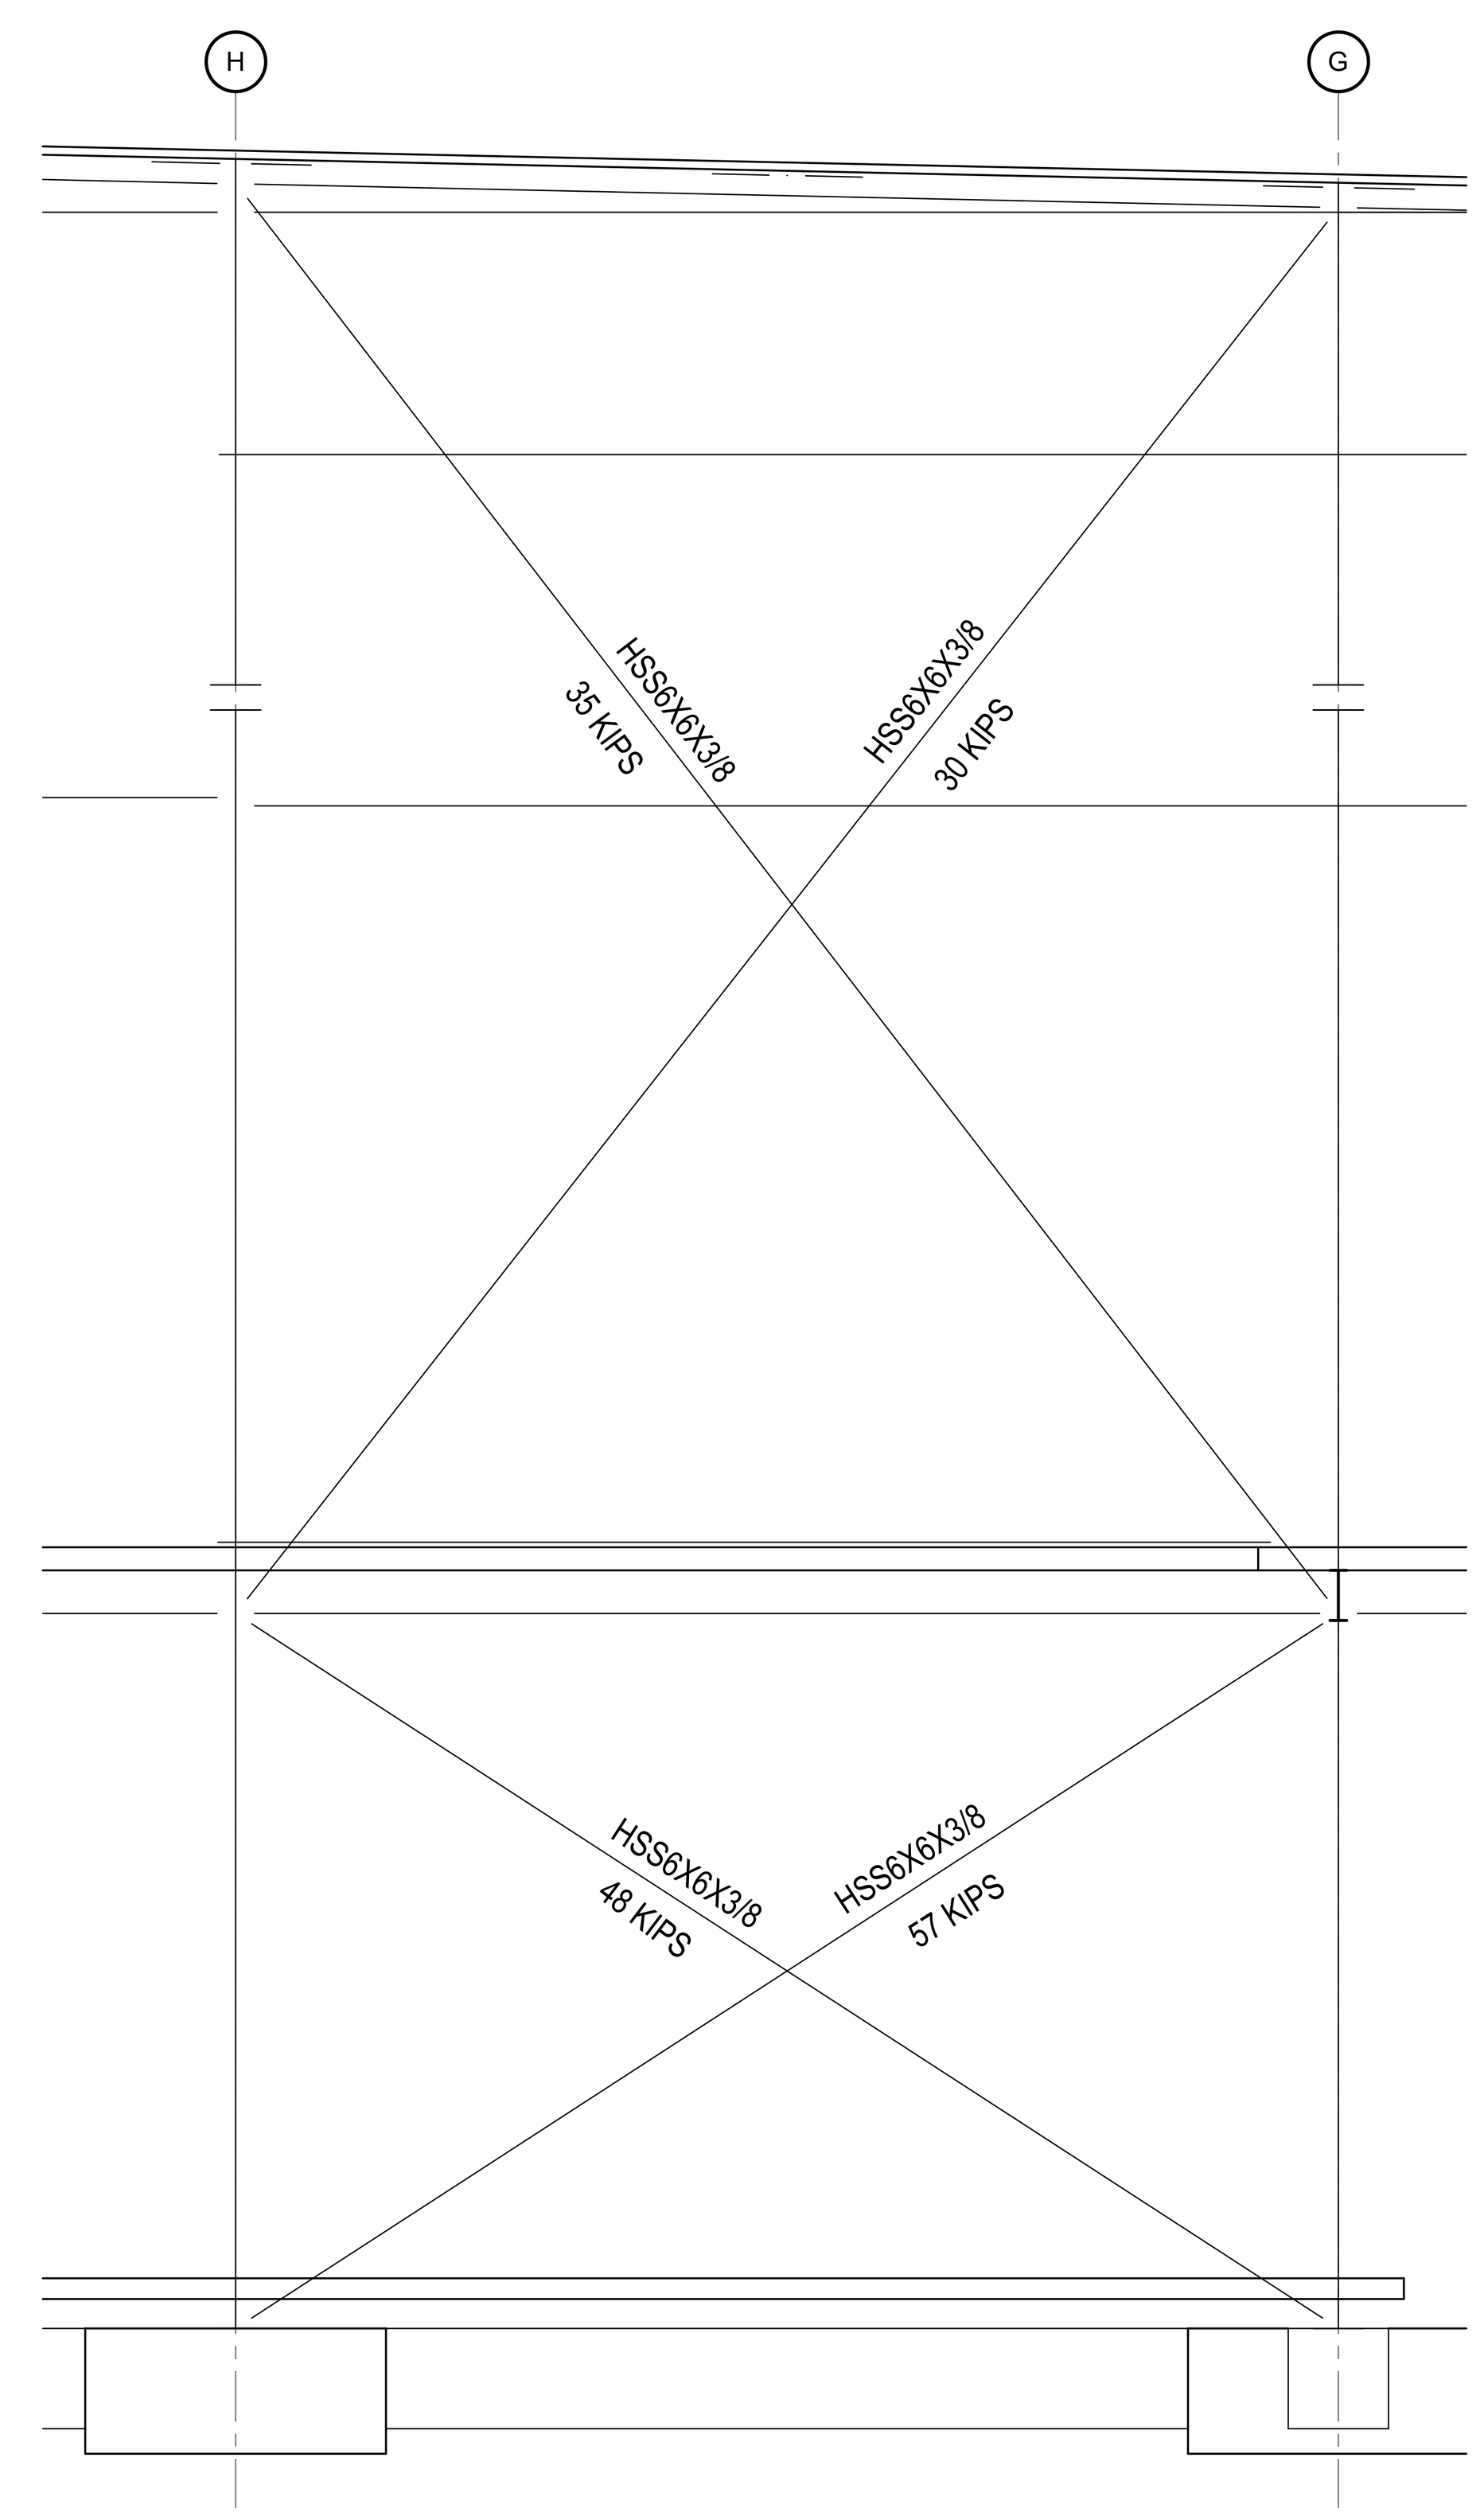

ELEVATION 4
SCALE: 1/4" = 1'-0" S-403

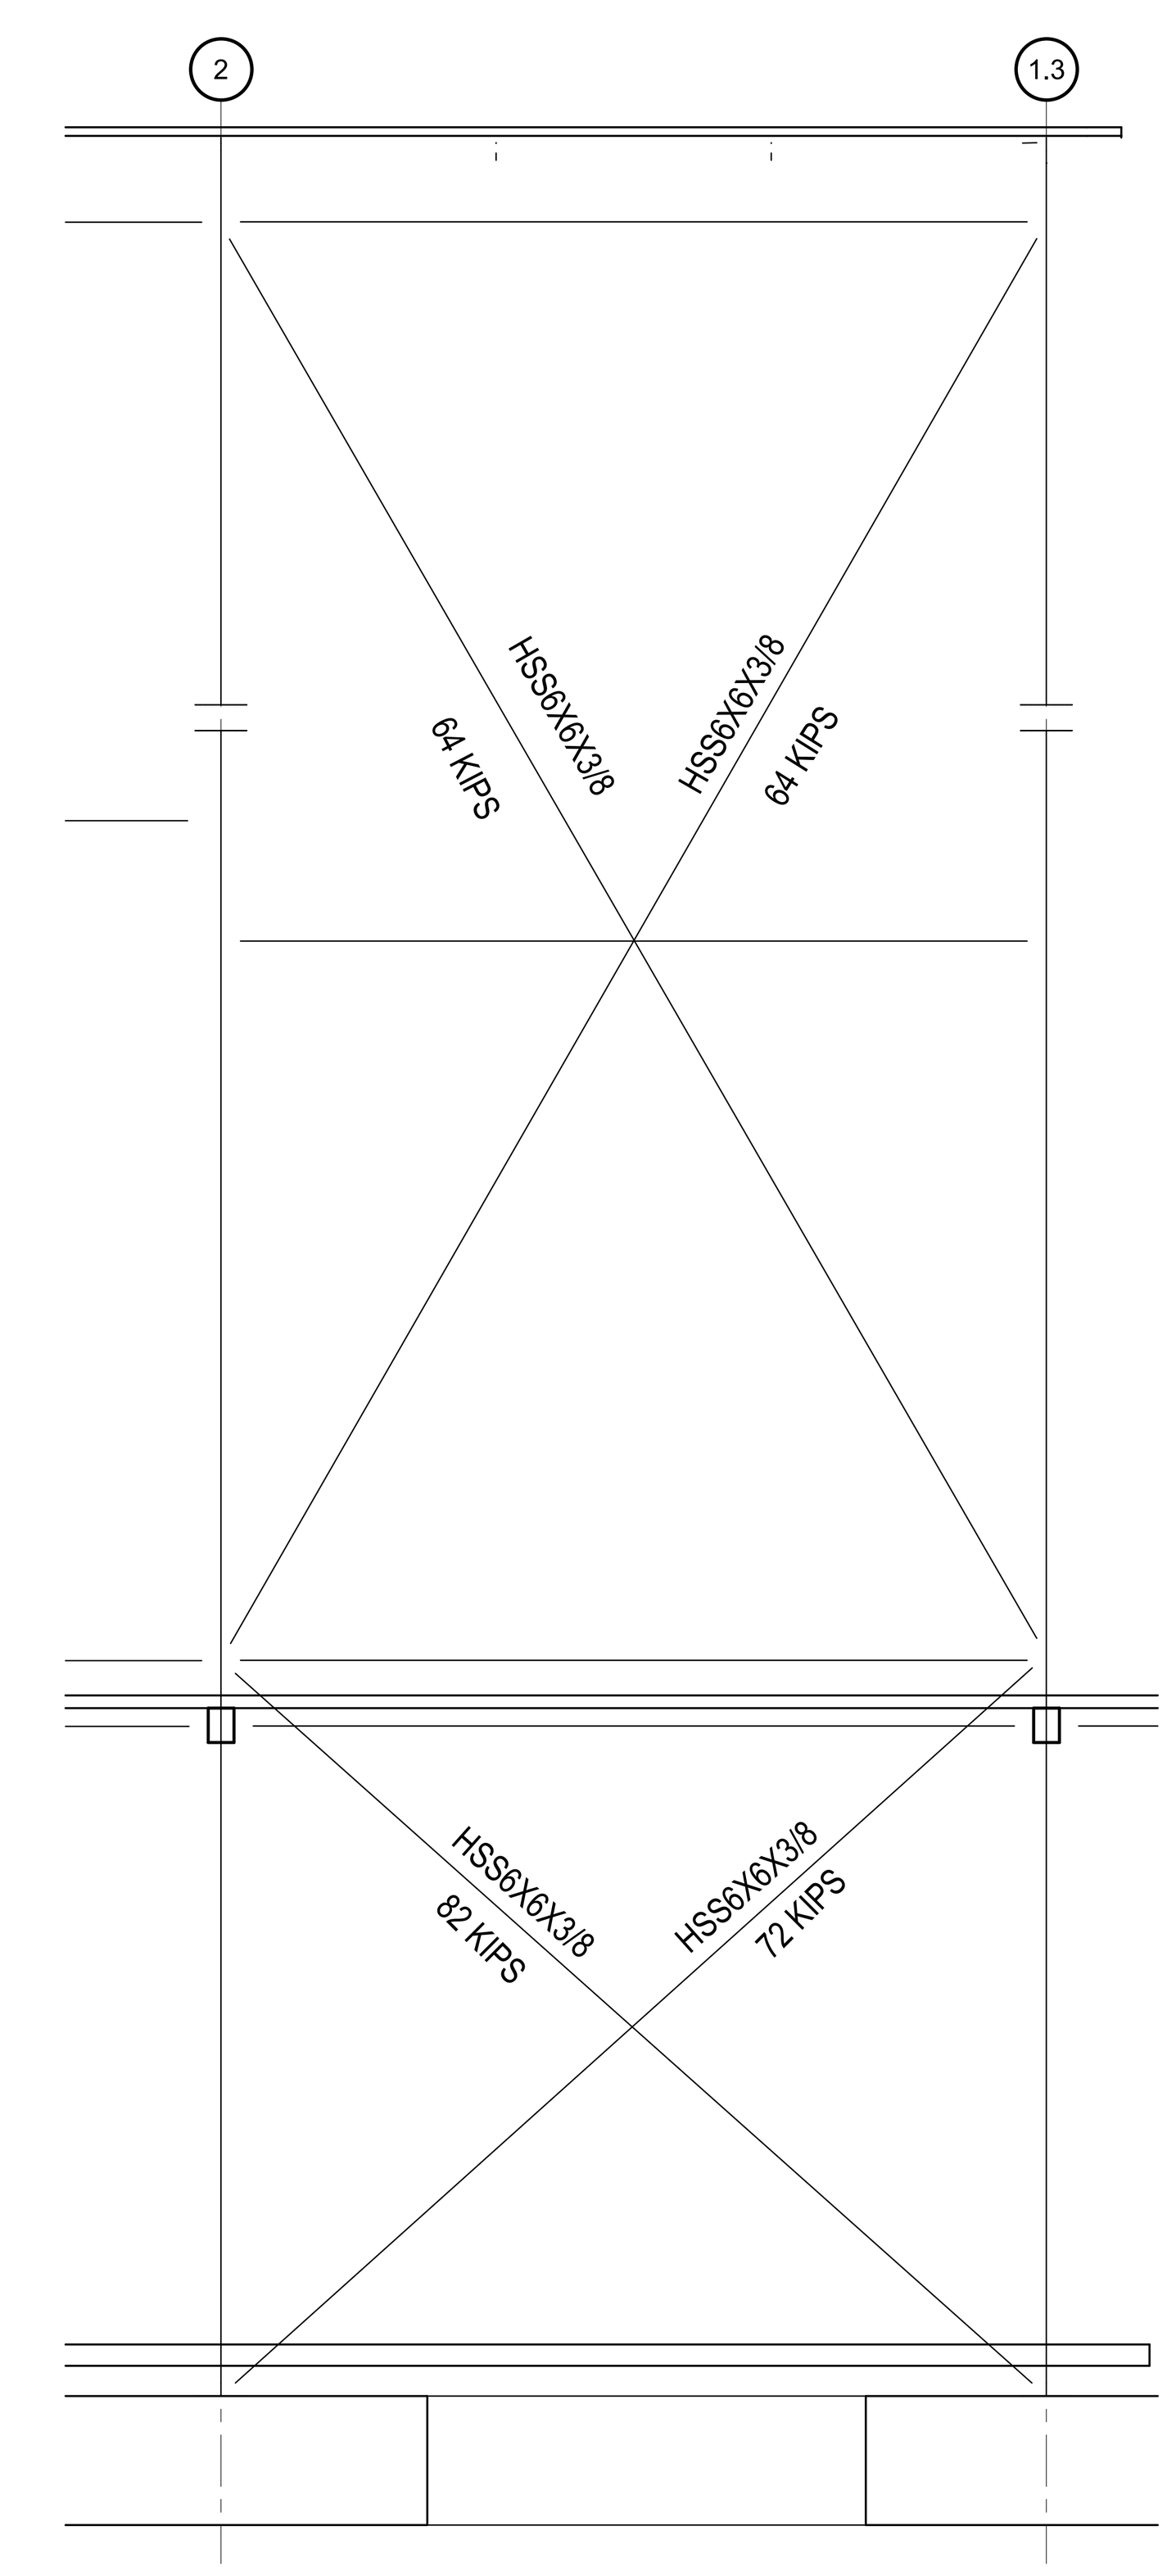

ELEVATION 5
SCALE: 1/4" = 1'-0" S-403

NO.	DATE	ISSUE
A	09/30/2025	Permit
	10/29/2025	BID SET

0' 2' 4' 8' 12'
SCALE : 1/4" = 1'-0"

SEAL

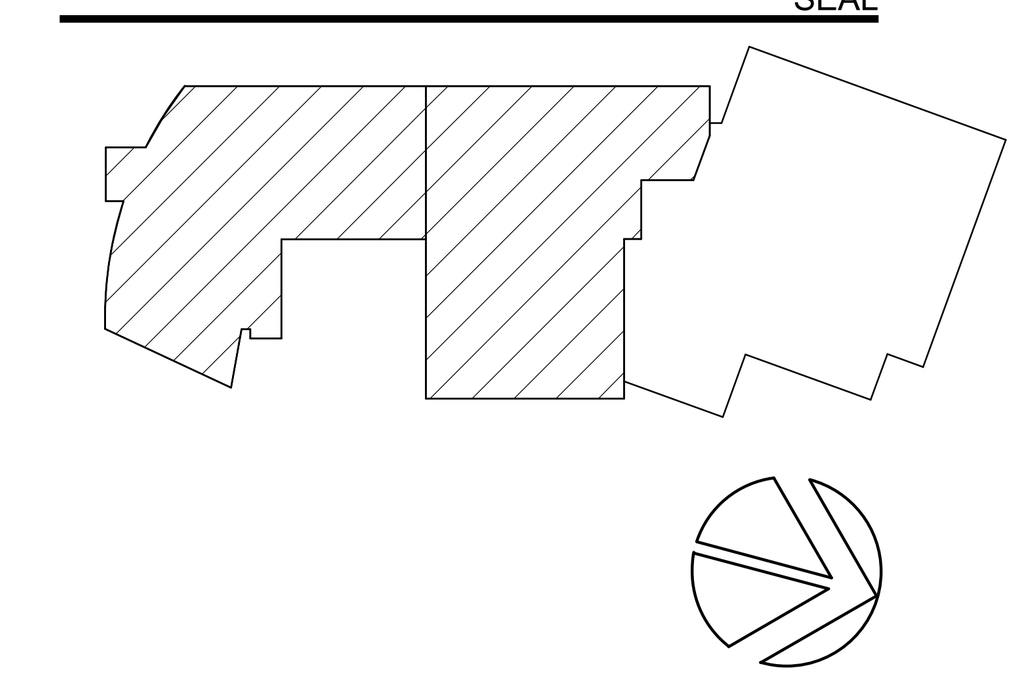

KEY PLAN

PERKINS EASTMAN
One Thomas Circle NW, Suite 200
Washington, DC 20005
T: +1 202 861 1325
F: +1 202 861 1326

Owner:
Sidwell Friends School
3825 Wisconsin Ave NW, Washington DC 20016

Construction Manager:
Advanced Project Management, Inc (APM)
4530 Walney Rd, Ste 202, Chantilly, VA 20151

Civil / Site:
Bowman Consulting Group, Ltd
888 17th St NW, Suite 510, Washington, DC 20006

Landscape:
Natural Resources Design, Inc (NRD)
1009 Shepherd Street NE, Washington, DC 20017

Structural:
Yun Associates LLC
1050 Connecticut Ave NW, Suite 500, Washington, DC 20036

MEP / FP / Lighting:
CMTA Inc
220 Lexington Green Circle, Suite 600, Lexington, KY 40503

AV / IT / Telecom / Security:
Educational Systems Planning (ESP)
2448 Holly Avenue, Suite 302, Annapolis, MD 21401

Food Service
Nyikos-Garcia Foodservice Design, Inc
7146 Starmount Way, New Market, MD 21774

Accessibility Consultant:
Galbo Wolf LLC
4410 Massachusetts Ave NW, #240, Washington, DC 20016

Acoustics:
Polysonics Corp
555 Hospital Drive, Warrenton, VA 20186

Building Envelope Consultant:
Sustainable Building Partners LLC
2701 Prosperity Ave, Suite 105, Fairfax, VA 22031

Code Consultant:
Campbell Code Consulting LLC
7834 Taggart Ct, Elkridge, MD 21075

Specifications:

PROJECT TITLE:

SIDWELL FRIENDS NEW LOWER SCHOOL AT DC CAMPUS

3825 WISCONSIN AVE NW
WASHINGTON, DC 20016

PROJECT No: 2025008

DRAWING TITLE:

ELEVATIONS

SCALE: 1/4" = 1'-0"

S-403

BID SET
10/29/2025

Autodesk Docs://Sidwell Lower School/Sidwell Lower School_ST_R24.rvt
10/28/2025 10:21:15 AM

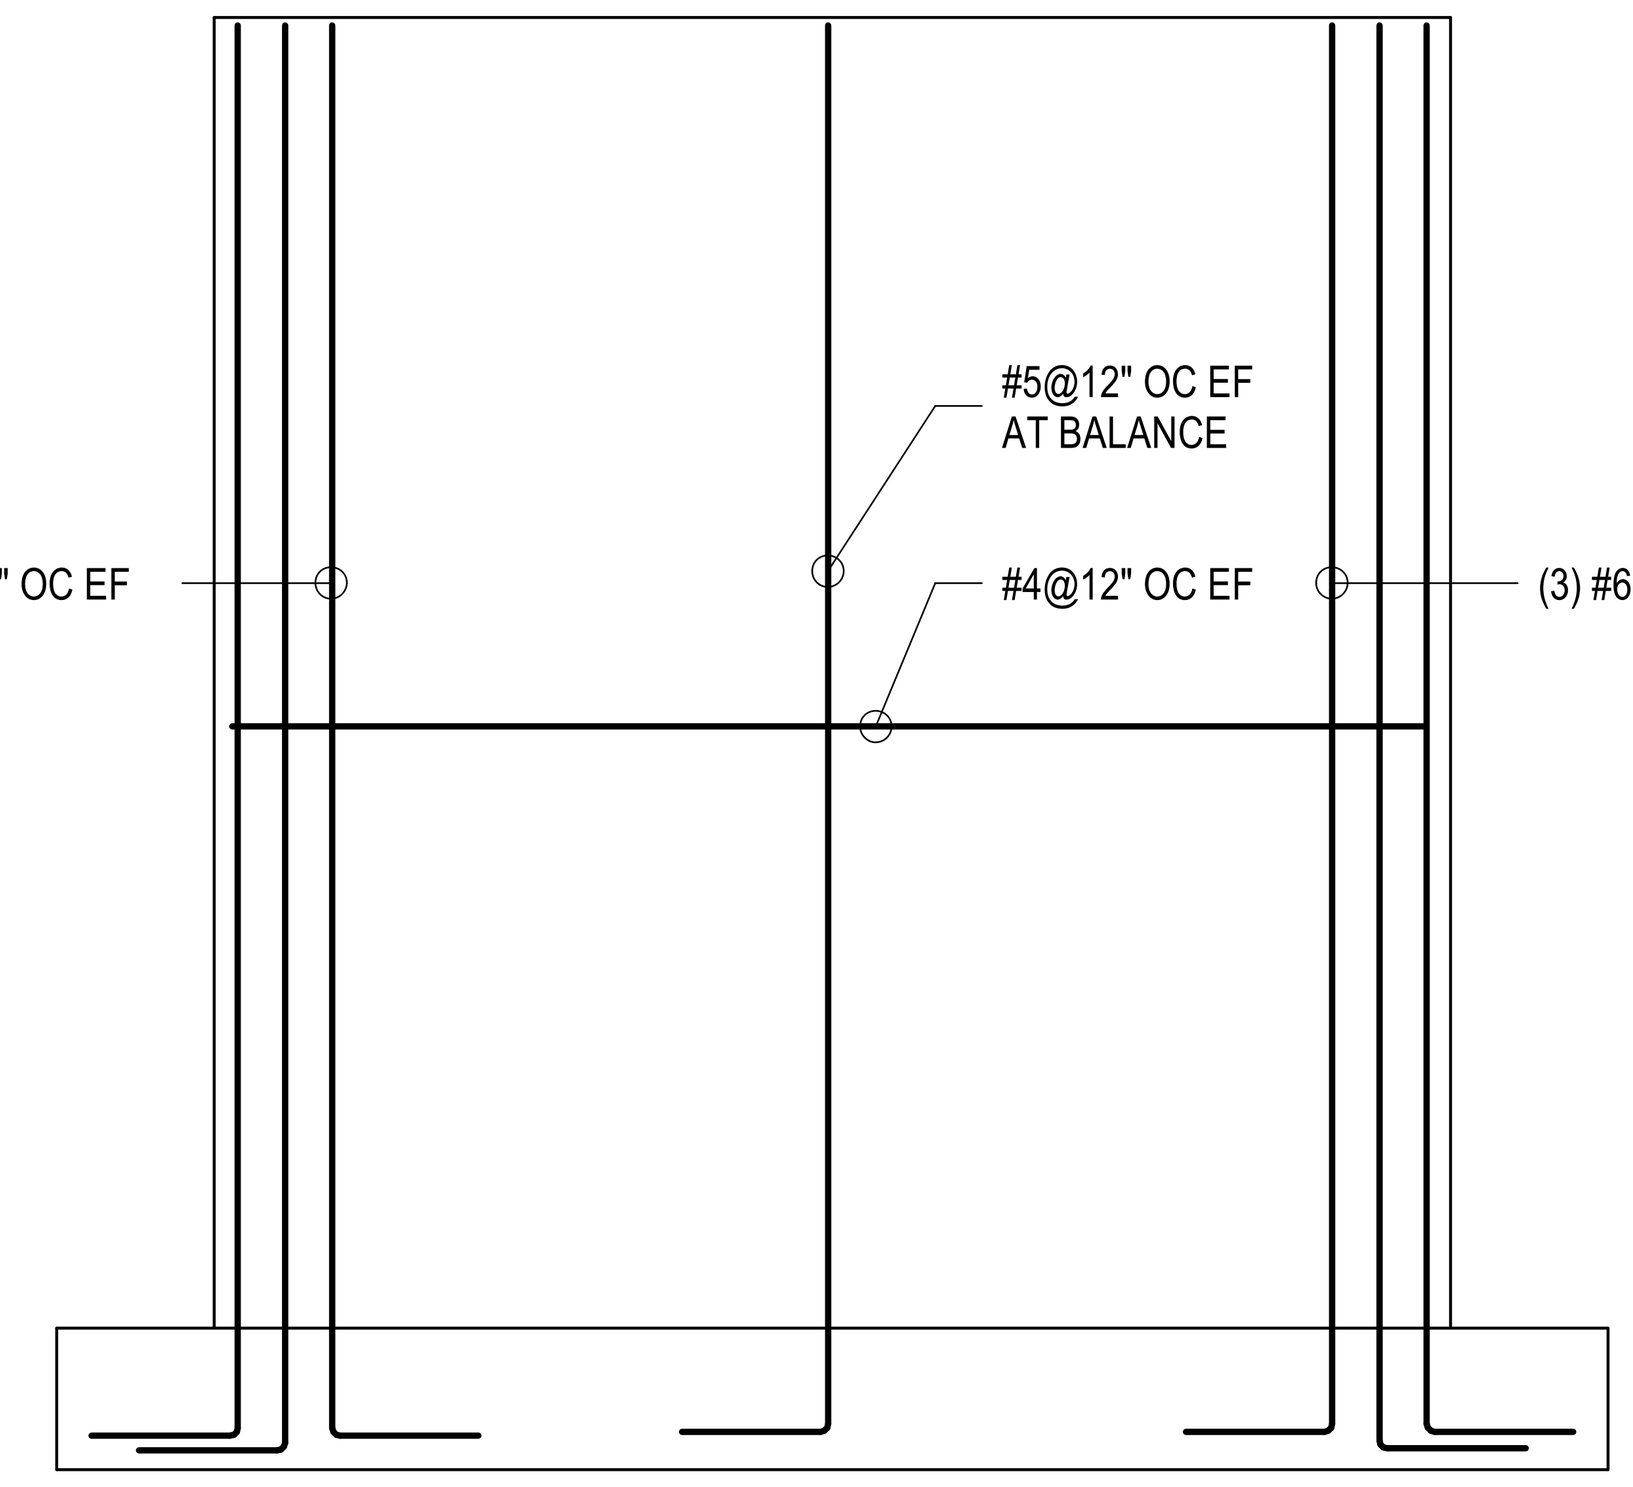

SW-1 ELEVATION

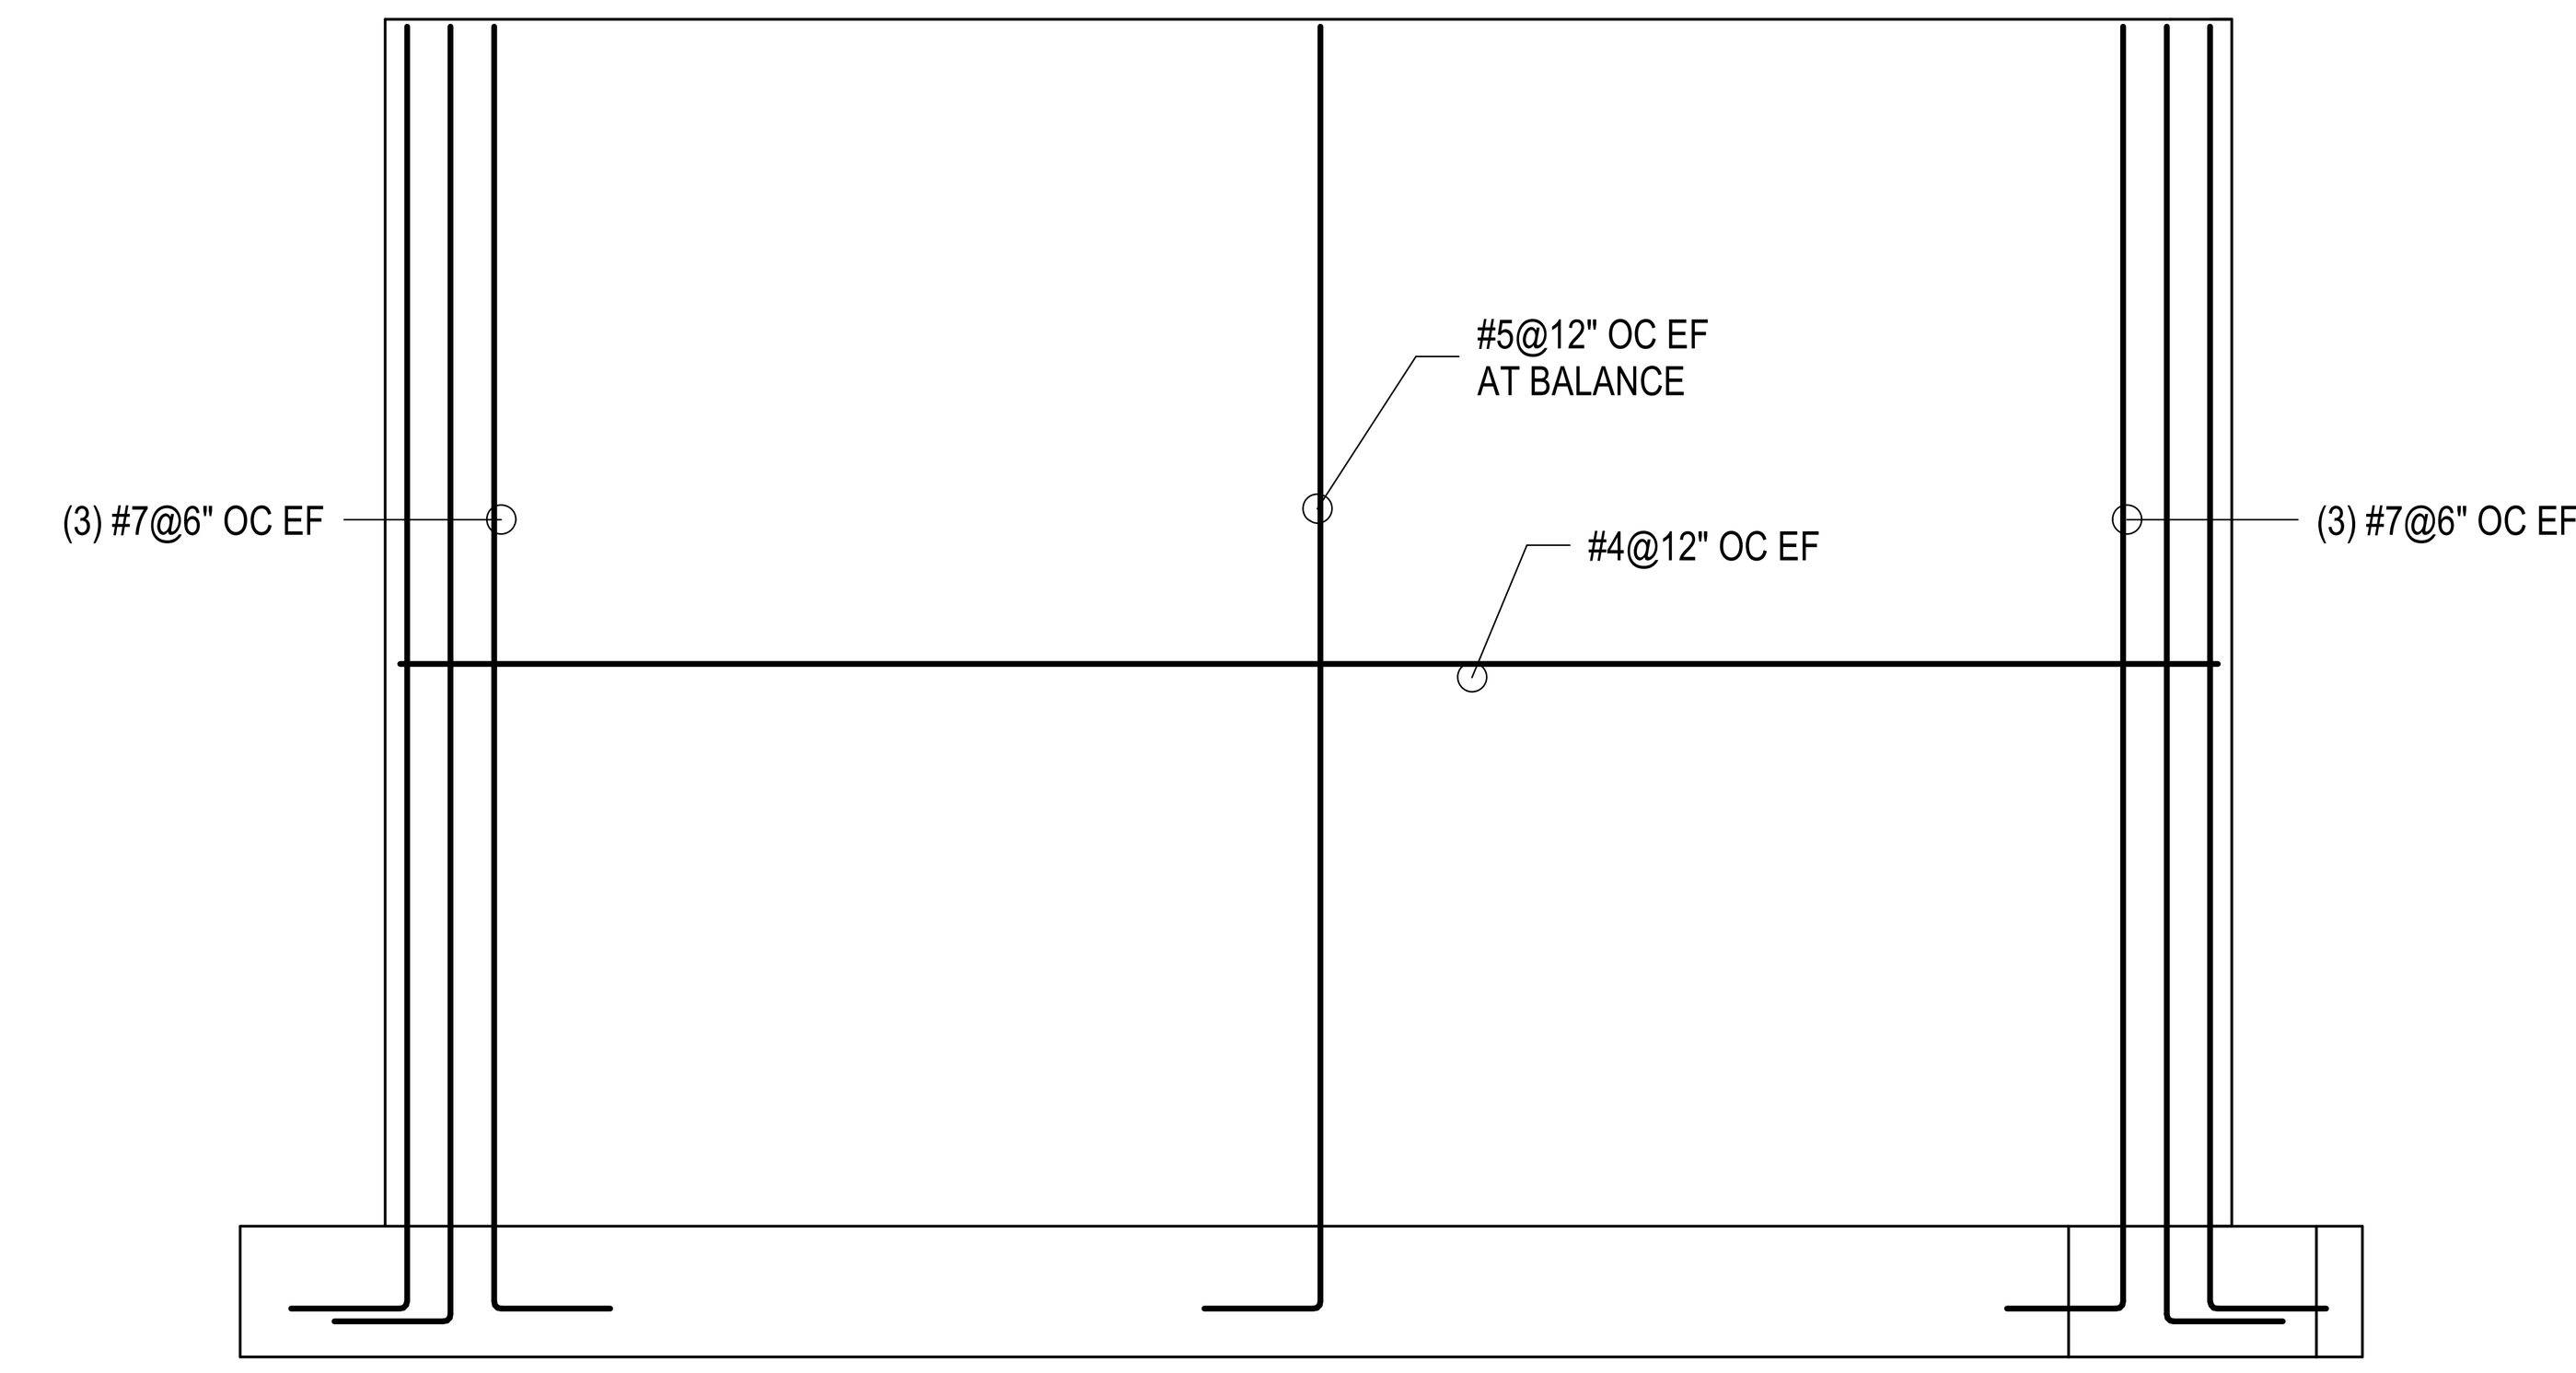

SW-2 ELEVATION

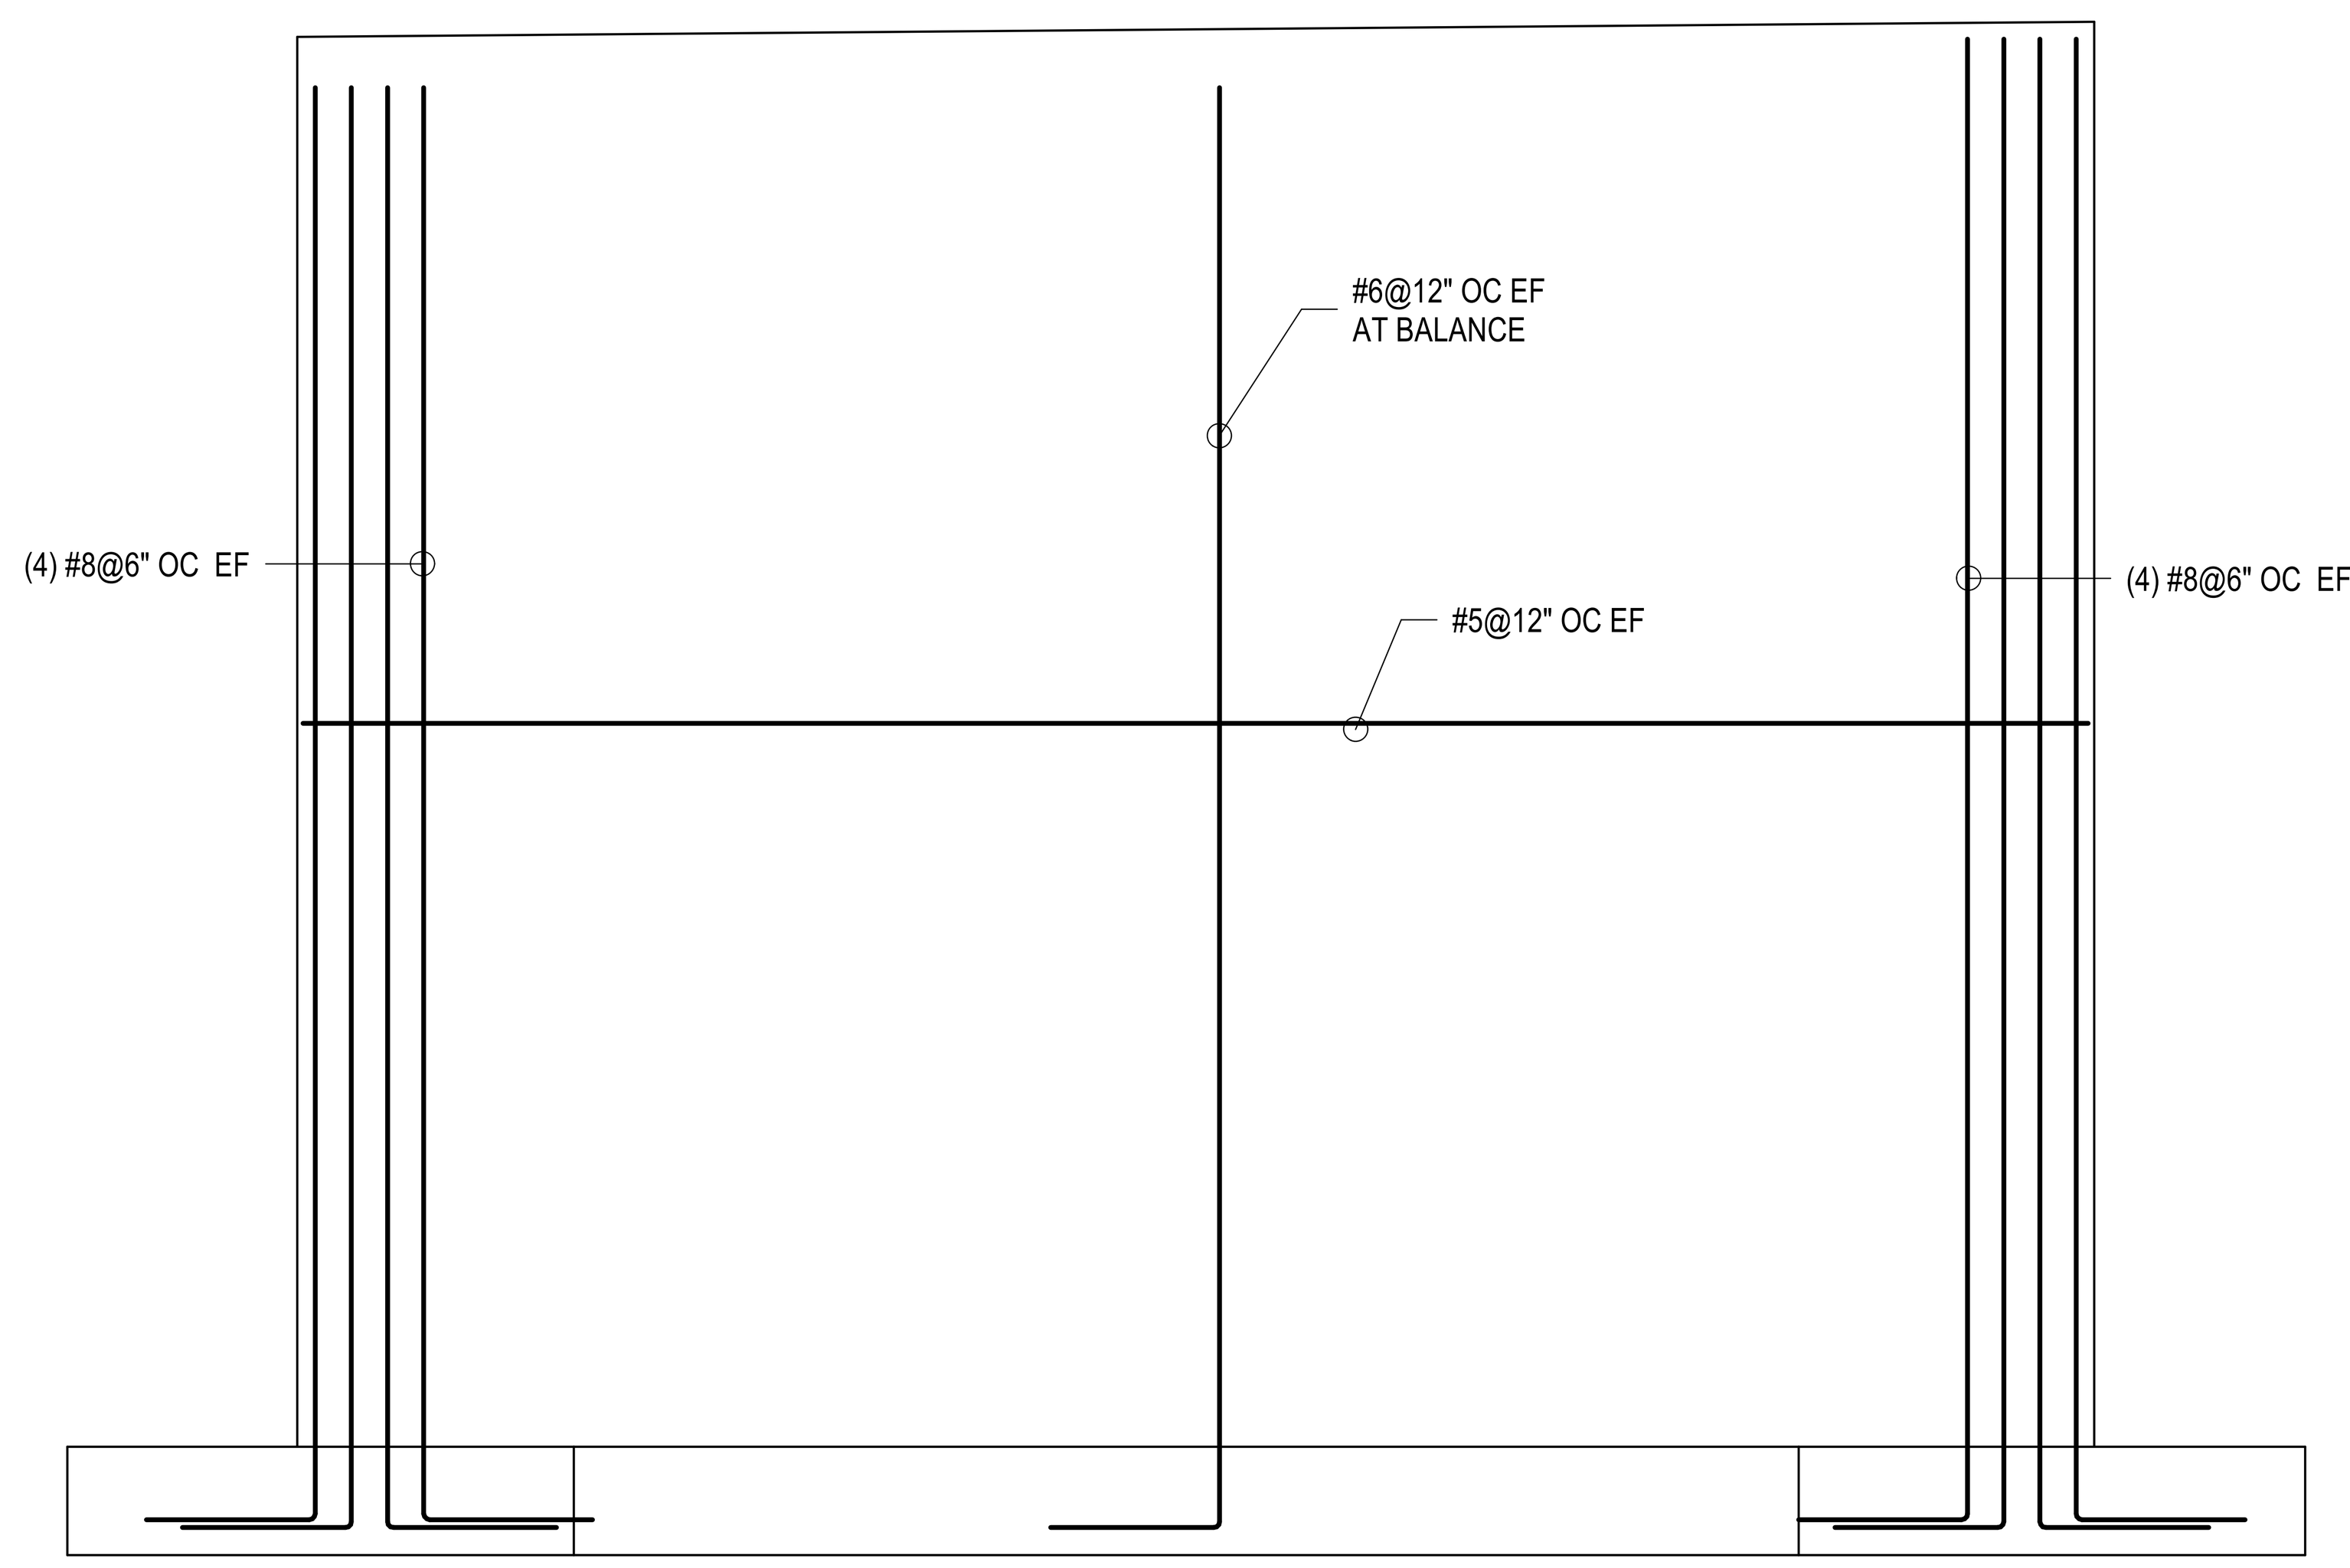

SW-3 ELEVATION

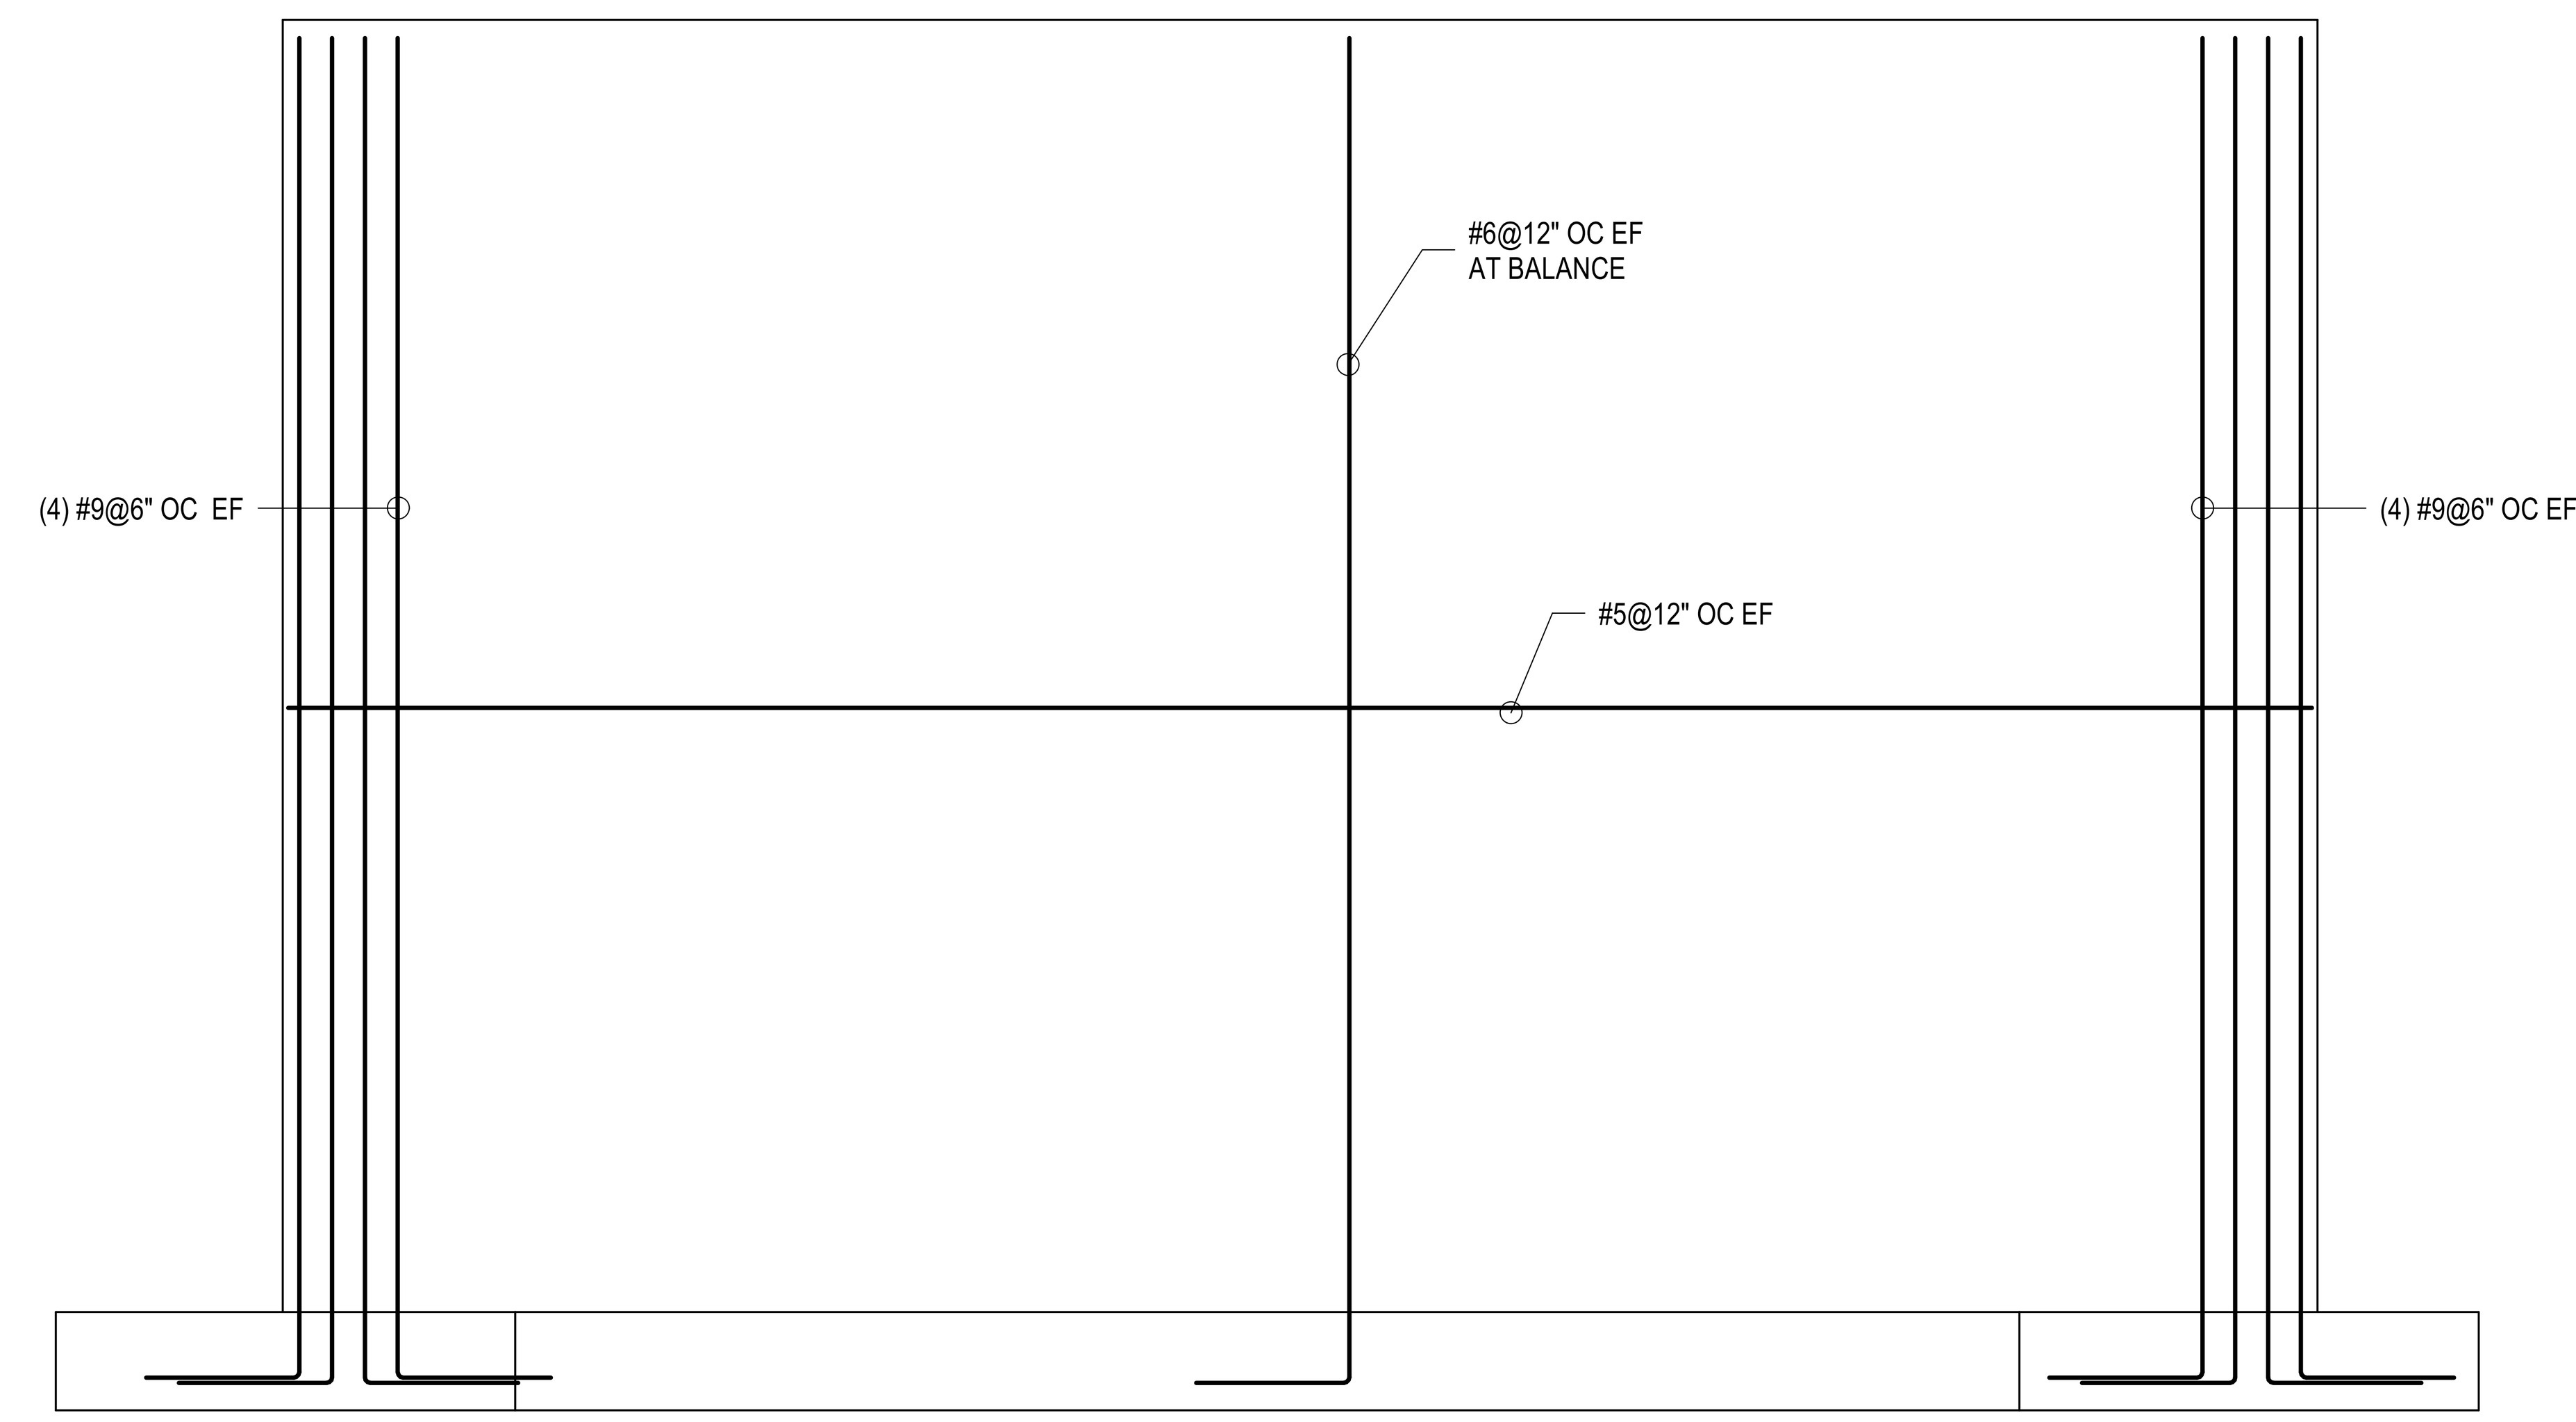

SW-4 ELEVATION

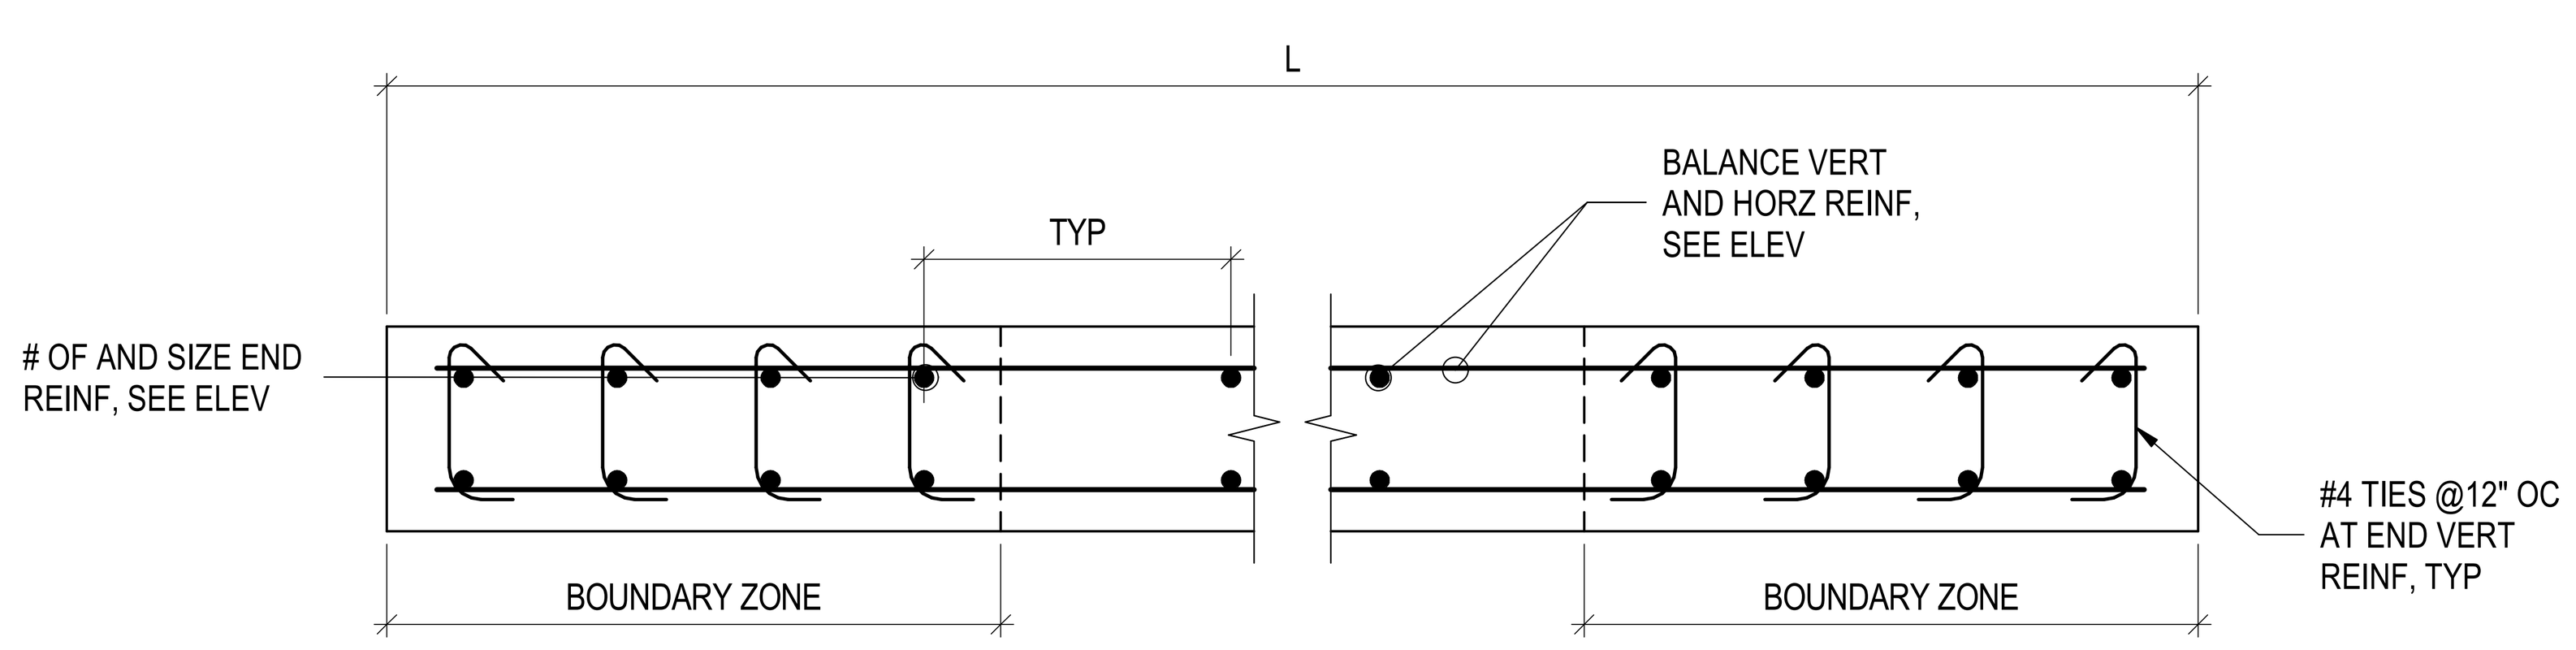

TYPICAL SHEAR WALL REINFORCING DETAIL

Autodesk Docs://Sidwell Lower School/Sidwell Lower School_ST_R24.rvt
10/28/2025 10:15:51 AM

NO.	DATE	ISSUE
A	09/30/2025	Permit
	10/29/2025	BID SET

SEAL

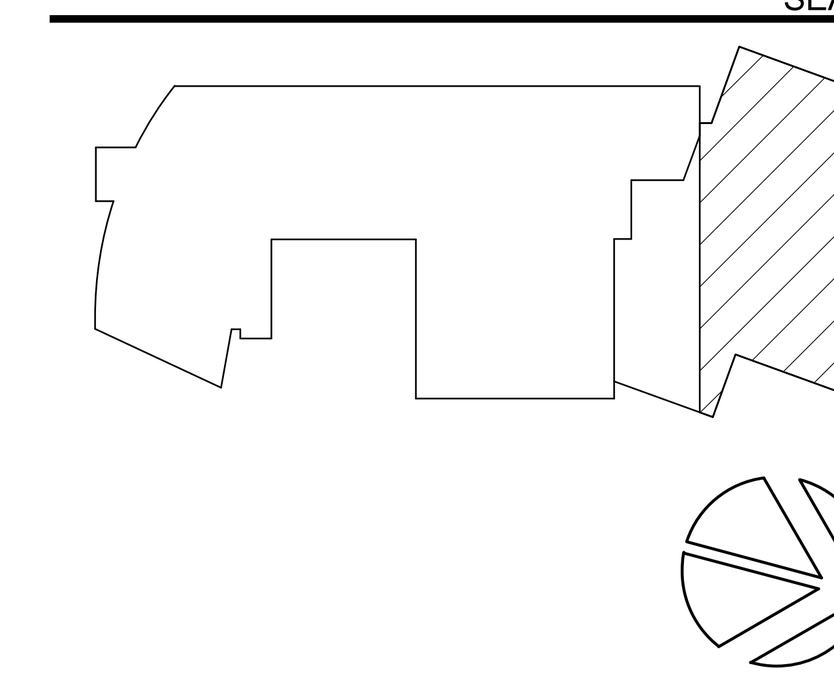

KEY PLAN

PERKINS EASTMAN
One Thomas Circle NW, Suite 200
Washington, DC 20005
T: +1 202 861 1325
F: +1 202 861 1326

Owner:
Sidwell Friends School
3825 Wisconsin Ave NW, Washington DC 20016

Construction Manager:
Advanced Project Management, Inc (APM)
4530 Walney Rd, Ste 202, Chantilly, VA 20151

Civil / Site:
Bowman Consulting Group, Ltd
888 17th St NW, Suite 510, Washington, DC 20006

Landscape:
Natural Resources Design, Inc (NRD)
1009 Shepherd Street NE, Washington, DC 20017

Structural:
Yun Associates LLC
1050 Connecticut Ave NW, Suite 500, Washington, DC 20036

MEP / FP / Lighting:
CMTA Inc
220 Lexington Green Circle, Suite 600, Lexington, KY 40503

AV / IT / Telecom / Security:
Educational Systems Planning (ESP)
2448 Holly Avenue, Suite 302, Annapolis, MD 21401

Food Service
Nyikos-Garcia Foodservice Design, Inc
7146 Starmount Way, New Market, MD 21774

Accessibility Consultant:
Galbo Wolf LLC
4410 Massachusetts Ave NW, #240, Washington, DC 20016

Acoustics:
Polysonics Corp
555 Hospital Drive, Warrenton, VA 20186

Building Envelope Consultant:
Sustainable Building Partners LLC
2701 Prosperity Ave, Suite 105, Fairfax, VA 22031

Code Consultant:
Campbell Code Consulting LLC
7834 Taggart Ct, Elkridge, MD 21075

Specifications:

PROJECT TITLE:

SIDWELL FRIENDS
NEW LOWER SCHOOL
AT DC CAMPUS

3825 WISCONSIN AVE NW
WASHINGTON, DC 20016

PROJECT No: 2025008

DRAWING TITLE:

ELEVATIONS

SCALE: As indicated

S-404

BID SET
10/29/2025

Column Locations	E-1	E-2	E-3	E-4	E-5	E.1-10E	E.1-12E	E.1-13.9E	E.4-5	F.6E-17.5E	G-1	G-1.3	G-2	G-3	G-4	G-5	G.6E-14E
Unfactored Reaction (kips)	620	137	142	134	710	125	125	95	20	110	25	135	145	145	145	175	95
Base Plate Size	2"x24"x24"				2"x24"x24"	1"x16"x16"	1"x16"x16"	1"x16"x16"		1"x16"x16" *	3/4"x18"x18"	1"x20"x20"	1 1/4"x18"x18"	1 1/4"x18"x18"	1 1/4"x18"x18"	1"x20"x20"	1"x16"x16"

Column Locations	H-1.3	H-2	H-3	H-4	H-5	H.9E-13.7E	J-1.3	J-2	J-3	J-4	J-5	J1-16.5	J1-17.4	AE-1	AE-2
Unfactored Reaction (kips)	85	110	130	130	115	35	135	250	290	210	125	35	35	35	65
Base Plate Size	3/4"x20"x20"	1"x18"x18"	1 1/4"x18"x18"	1 1/4"x18"x18"	1"x20"x20"	3/4"x14"x14"	1"x20"x20" *	1 1/4"x20"x20" *	1 1/4"x20"x20" *	1 1/4"x20"x20"	1"x20"x20"	3/4"x16"x16"	3/4"x16"x16"	3/4"x16"x16"	3/4"x16"x16"

Column Locations	AE-3	AE-4	AE-5	BE-1.4	BE-2	BE-3	BE-4	BE-4.4	BE-5	CE-1.4	CE-5	DE-1	DE-1.2	DE-2	DE-3	DE-4	DE-5
Unfactored Reaction (kips)	65	65	50	140	195	250	185	95	180	110	150	125	83	400	380	290	250
Base Plate Size	3/4"x16"x16"	3/4"x16"x16"	3/4"x16"x16"	1 1/4"x18"x18" *	1 1/2"x18"x18"	1 1/2"x18"x18"	1 1/2"x18"x18"	1"x18"x18"	1 1/4"x18"x18" *	1"x18"x18" *	1 1/4"x18"x18" *	1 1/4"x18"x18"	1"x18"x18" *	1 3/4"x18"x18" *	1 3/4"x18"x18"	1 1/2"x18"x18"	1 1/2"x18"x18" *

ROOF 428' - 2 3/8"
THIRD FLOOR 415' - 6 3/8"
SECOND FLOOR 402' - 10 1/2"
FIRST FLOOR 390' - 0"

COLUMN SCHEDULE NOTES:

1. SEE PLANS FOR COLUMN ORIENTATION.
2. SEE "TYPICAL COLUMN BASE PLATE DETAIL" FOR ANCHOR ROD LAYOUTS. USE FOUR ANCHOR RODS LAYOUT UNO.
3. "T" STANDS FOR TENSION COLUMN. USE EIGHT ANCHOR RODS LAYOUT PER "TYPICAL COLUMN BASE PLATE DETAIL"
4. * SEE "TYPICAL BRACE TO CONCRETE SLAB / COLUMN DETAIL" FOR ANCHOR ROD LAYOUT.

NO.	DATE	ISSUE
A	09/30/2025	Permit
	10/29/2025	BID SET

SEAL

KEY PLAN

PERKINS EASTMAN
One Thomas Circle NW, Suite 200
Washington, DC 20005
T: +1 202 861 1325
F: +1 202 861 1326

Owner:
Sidwell Friends School
3825 Wisconsin Ave NW, Washington DC 20016

Construction Manager:
Advanced Project Management, Inc (APM)
4530 Walney Rd, Ste 202, Chantilly, VA 20151

Civil / Site:
Bowman Consulting Group, Ltd
888 17th St NW, Suite 510, Washington, DC 20006

Landscape:
Natural Resources Design, Inc (NRD)
1009 Shepherd Street NE, Washington, DC 20017

Structural:
Yun Associates LLC
1050 Connecticut Ave NW, Suite 500, Washington, DC 20036

MEP / FP / Lighting:
CMTA Inc
220 Lexington Green Circle, Suite 600, Lexington, KY 40503

AV / IT / Telecom / Security:
Educational Systems Planning (ESP)
2448 Holly Avenue, Suite 302, Annapolis, MD 21401

Food Service
Nyikos-Garcia Foodservice Design, Inc
7146 Starmount Way, New Market, MD 21774

Accessibility Consultant:
Galbo Wolf LLC
4410 Massachusetts Ave NW, #240, Washington, DC 20016

Acoustics:
Polysonics Corp
555 Hospital Drive, Warrenton, VA 20186

Building Envelope Consultant:
Sustainable Building Partners LLC
2701 Prosperity Ave, Suite 105, Fairfax, VA 22031

Code Consultant:
Campbell Code Consulting LLC
7834 Taggart Ct, Elkridge, MD 21075

Specifications:

PROJECT TITLE:
SIDWELL FRIENDS NEW LOWER SCHOOL AT DC CAMPUS
3825 WISCONSIN AVE NW
WASHINGTON, DC 20016

PROJECT No: 2025008

DRAWING TITLE:
STEEL COLUMN SCHEDULE

SCALE: 1/8" = 1'-0"

S-501

BID SET
10/29/2025

TENNIS DECK 409' - 6"																				TENNIS DECK 409' - 6"
SECOND FLOOR 402' - 10 1/2"																				SECOND FLOOR 402' - 10 1/2"
FIRST FLOOR 390' - 0"	24"Ø 8-#8	24"Ø 8-#8	24"Ø 8-#8	24"Ø 8-#8	24"Ø 8-#8	24"Ø 8-#8	24"Ø 8-#8	24"Ø 8-#8	14X14 10-#7 2	24"Ø 8-#8	24"Ø 8-#8	24"Ø 8-#8	24"Ø 8-#10	24"Ø 8-#8	24"Ø 8-#8	24"Ø 8-#8	24"Ø 8-#8	24"Ø 8-#8	24"Ø 8-#8	FIRST FLOOR 390' - 0"
FEB FLOOR 375' - 0"																				FEB FLOOR 375' - 0"
UNFACTORED REACTION (KIPS)	127	78 2	131 2	107 2	50 2	217 2	154 2	35 2	77 2	156 2	95	168	170 2	91	237	198 2	313	227 2	102 2	
Column Locations	E.6-T4	T1-TF	T2-TD	T3-TB	T3-TC	T4-TE	T4-TU	T4-TV	T5-TA	T6-TB	T6-TH	T6-TJ	T6-TK.2	T7-TG	T7-TM	T7.3-TS	T8-TK.1	T9-TR	T9-TU	

TENNIS DECK 409' - 6"																TENNIS DECK 409' - 6"
SECOND FLOOR 402' - 10 1/2"																SECOND FLOOR 402' - 10 1/2"
FIRST FLOOR 390' - 0"	24"Ø 8-#8	24"Ø 8-#8	24"Ø 8-#8	24"Ø 8-#8	24"Ø 8-#8	24"Ø 8-#8	24"Ø 8-#8	24"Ø 8-#8	24"Ø 8-#8	24"Ø 8-#8	24"Ø 8-#8	24"Ø 8-#8	24"Ø 8-#8	24"Ø 8-#8	24"Ø 8-#8	FIRST FLOOR 390' - 0"
FEB FLOOR 375' - 0"																FEB FLOOR 375' - 0"
UNFACTORED REACTION (KIPS)	239	215	253	128	174	266	299	351	357	68	194	252	300	320	174	
Column Locations	T10-TK.1	T10-TM	T10-TQ	T10-TT	T11-TT	T12-TG	T12-TJ	T12-TK	T12-TN	T13-TT	T14-TP	T15-TG	T15-TJ	T15-TL	T15-TP	

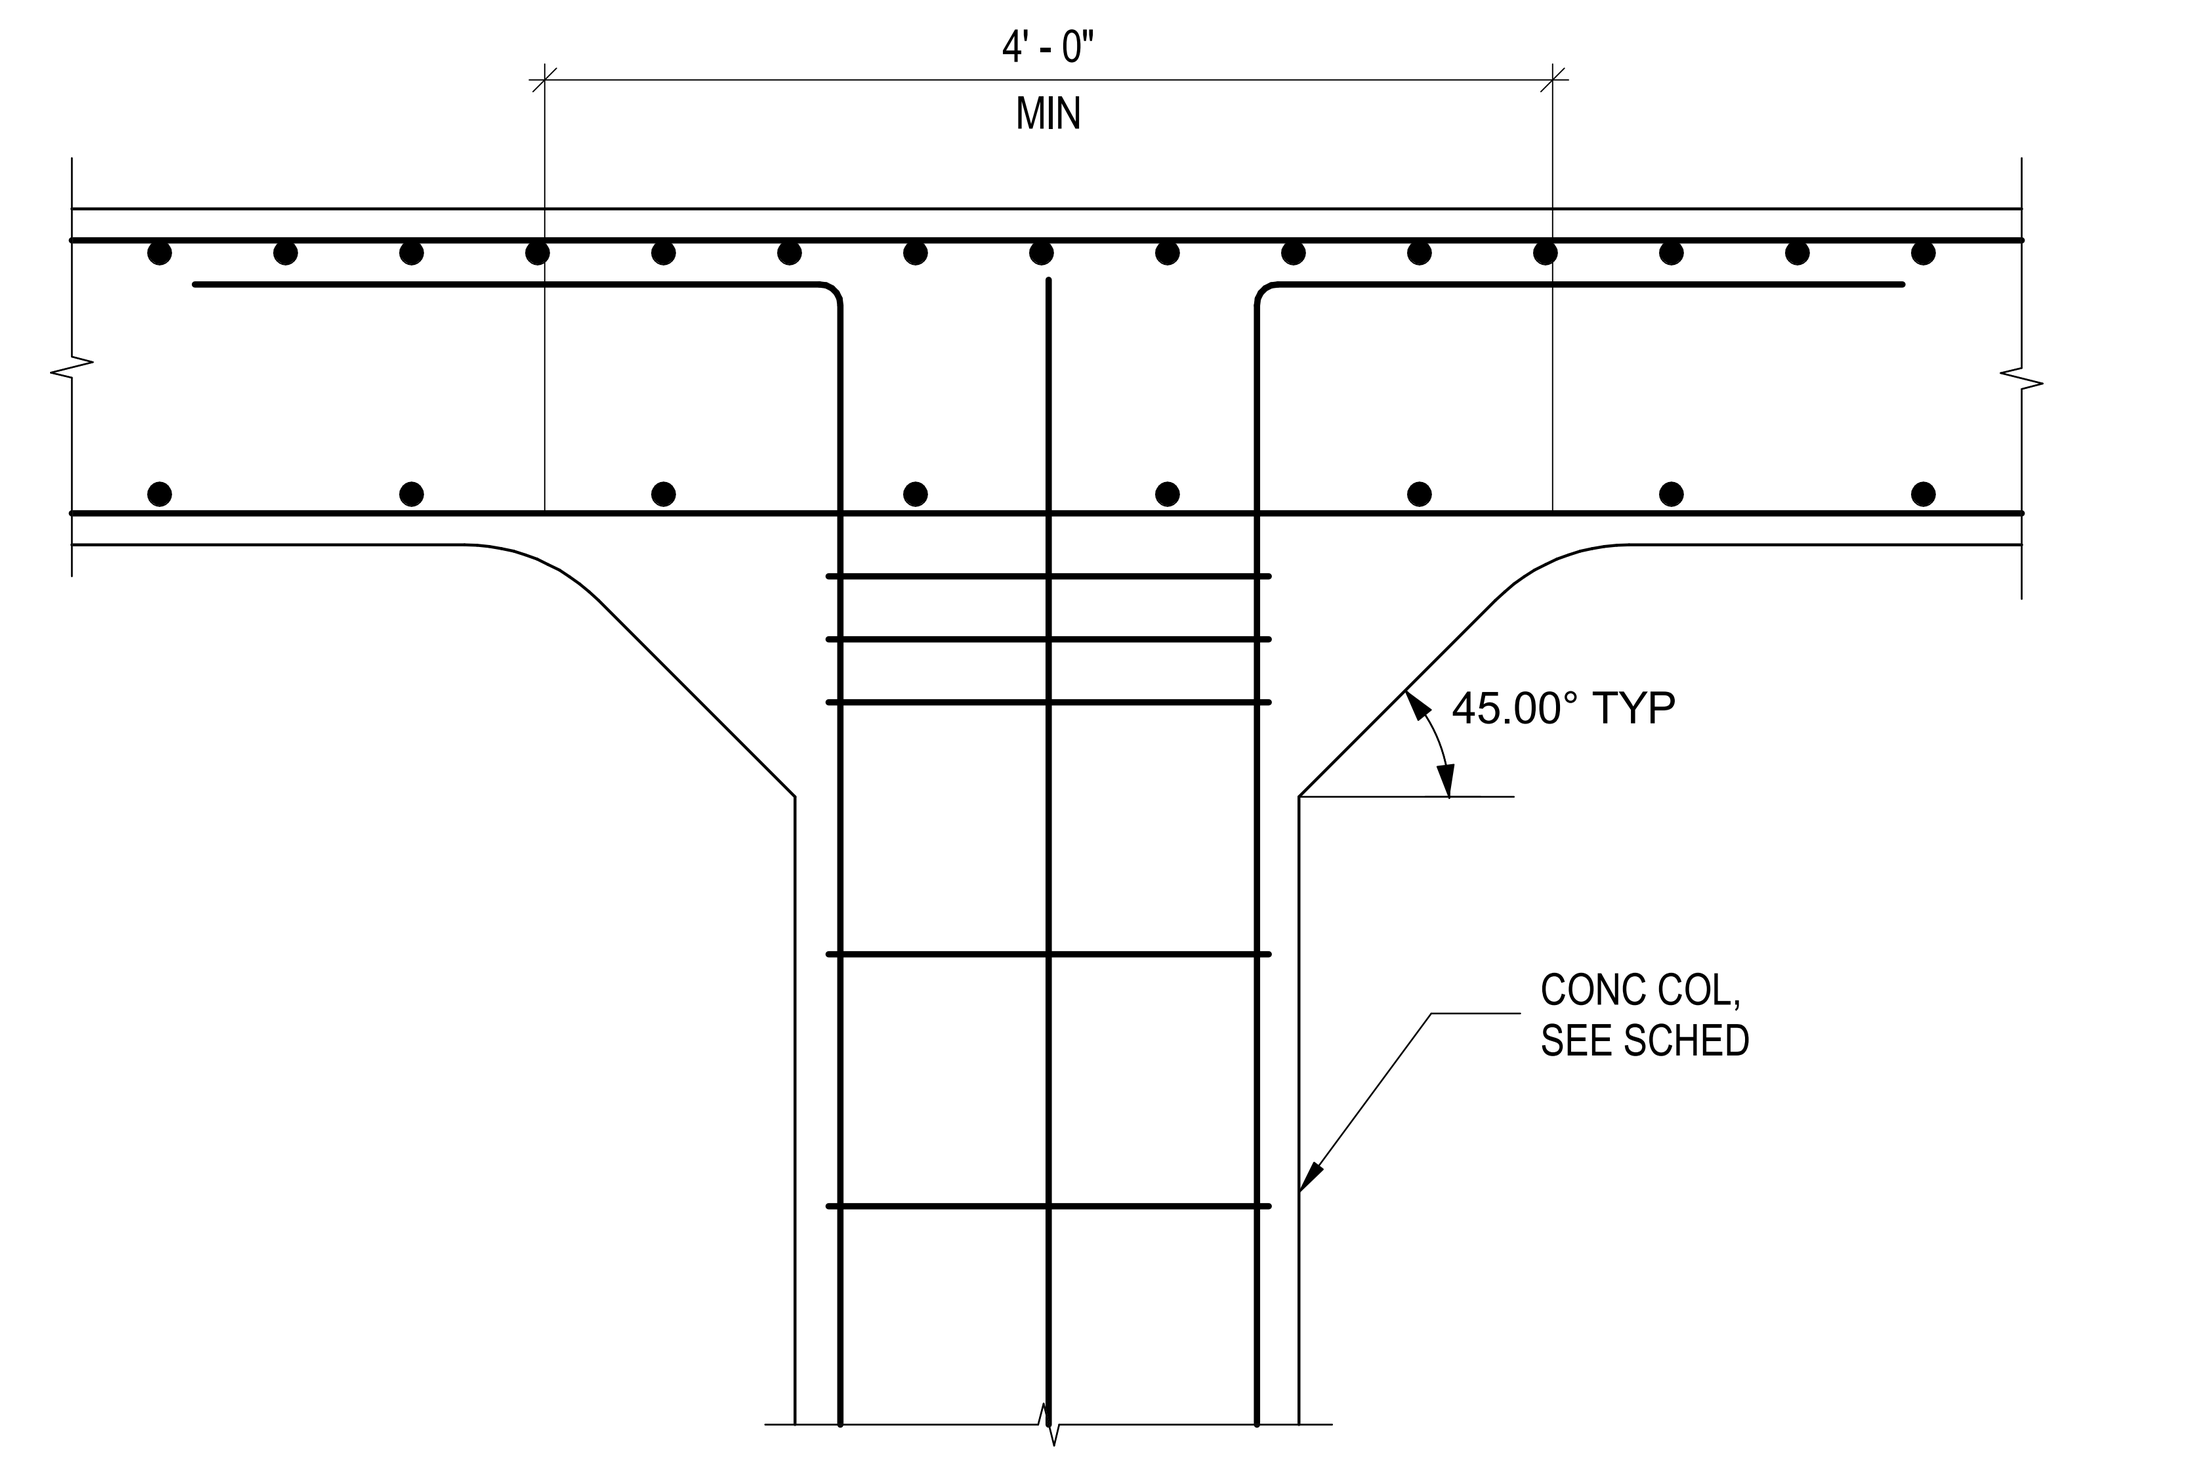

TYPICAL HEAD OF COLUMN UNDER TENNIS COURT SLAB DETAIL

NO.	DATE	ISSUE
A	09/30/2025	Permit
	10/29/2025	BID SET
2	11/17/2025	BID ADDENDUM 2

SEAL

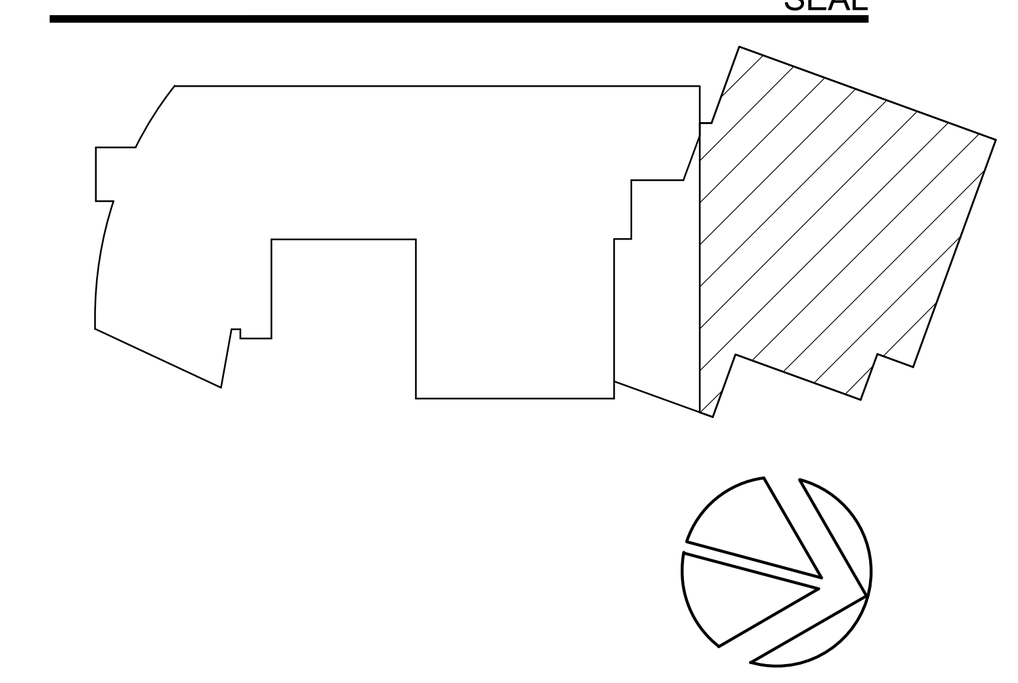

KEY PLAN

PERKINS EASTMAN
One Thomas Circle NW, Suite 200
Washington, DC 20005
T: +1 202 861 1325
F: +1 202 861 1326

Owner:
Sidwell Friends School
3825 Wisconsin Ave NW, Washington DC 20016

Construction Manager:
Advanced Project Management, Inc (APM)
4530 Walney Rd, Ste 202, Chantilly, VA 20151

Civil / Site:
Bowman Consulting Group, Ltd
888 17th St NW, Suite 510, Washington, DC 20006

Landscape:
Natural Resources Design, Inc (NRD)
1009 Sheperd Street NE, Washington, DC 20017

Structural:
Yun Associates LLC
1050 Connecticut Ave NW, Suite 500, Washington, DC 20036

MEP / FP / Lighting:
CMTA Inc
220 Lexington Green Circle, Suite 600, Lexington, KY 40503

AV / IT / Telecom / Security:
Educational Systems Planning (ESP)
2448 Holly Avenue, Suite 302, Annapolis, MD 21401

Food Service
Nyikos-Garcia Foodservice Design, Inc
7146 Starmount Way, New Market, MD 21774

Accessibility Consultant:
Galbo Wolf LLC
4410 Massachusetts Ave NW, #240, Washington, DC 20016

Acoustics:
Polysonics Corp
555 Hospital Drive, Warrenton, VA 20186

Building Envelope Consultant:
Sustainable Building Partners LLC
2701 Prosperity Ave, Suite 105, Fairfax, VA 22031

Code Consultant:
Campbell Code Consulting LLC
7834 Taggart Ct, Elkridge, MD 21075

Specifications:

PROJECT TITLE:

SIDWELL FRIENDS NEW LOWER SCHOOL AT DC CAMPUS

3825 WISCONSIN AVE NW
WASHINGTON, DC 20016

PROJECT No: 2025008

DRAWING TITLE:

CONCRETE COLUMN SCHDULE

SCALE: As indicated

S-502

ISSUED FOR BID
10/29/2025

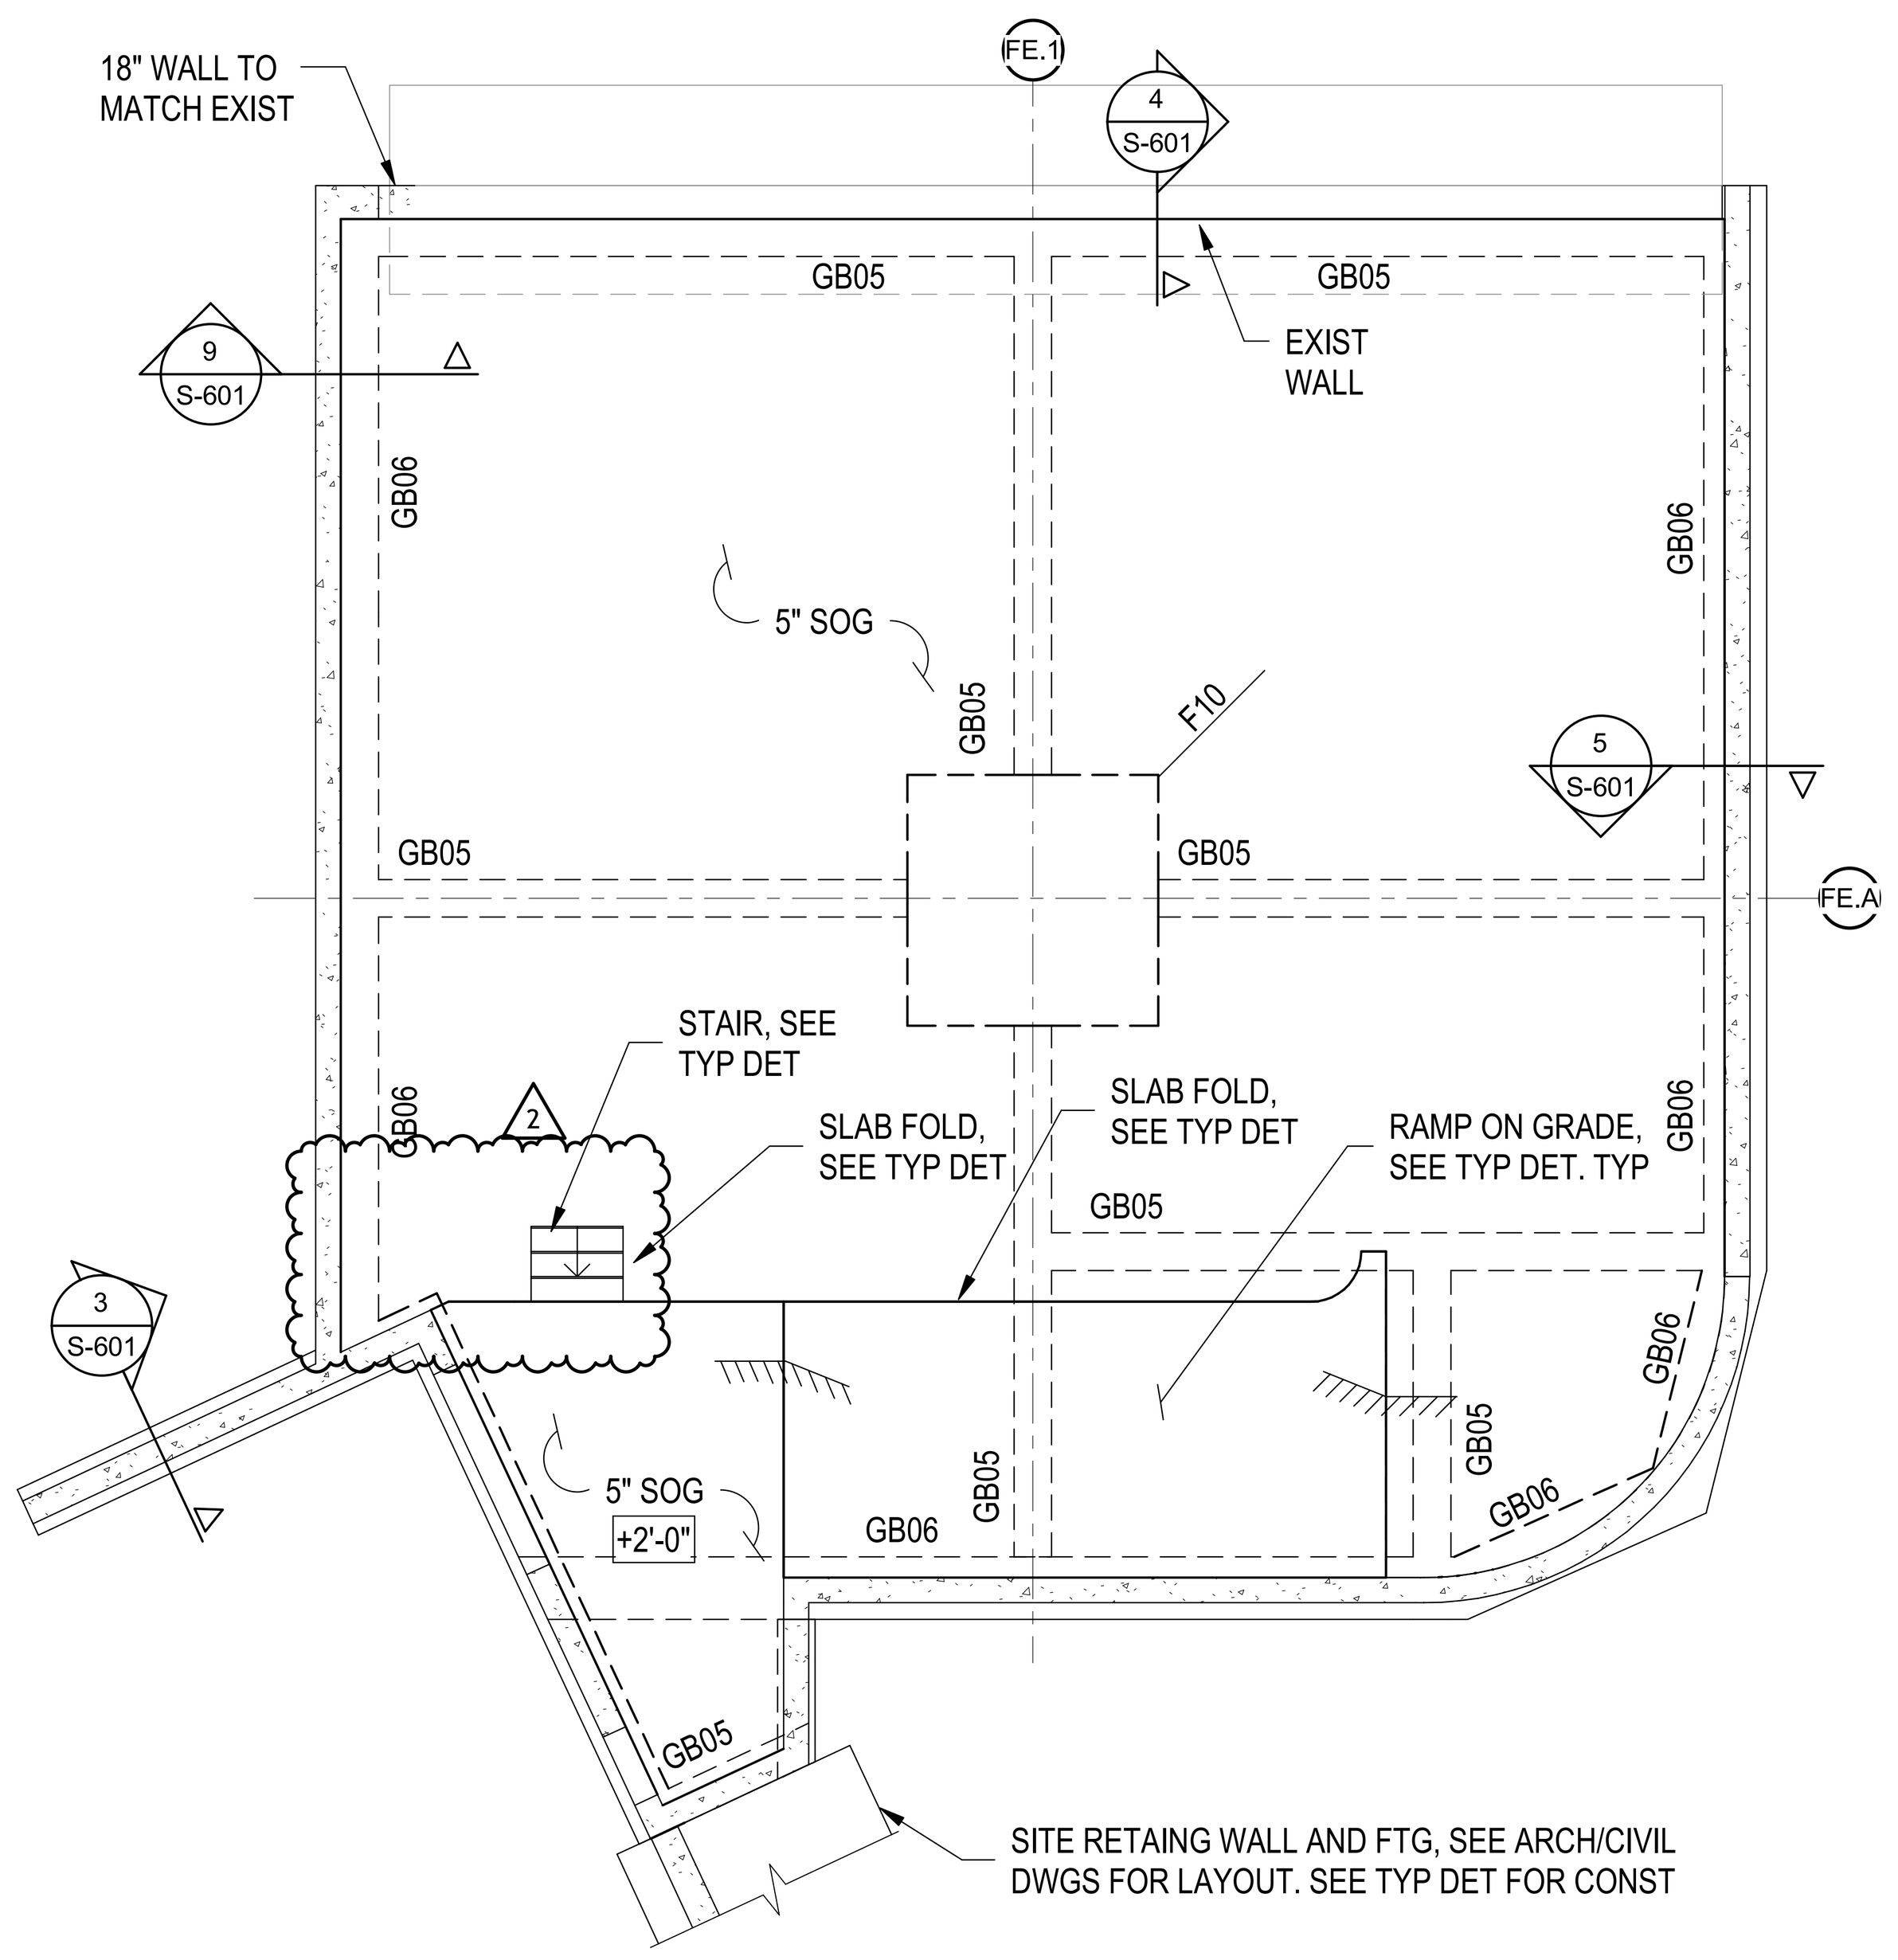

1 **FOUNDATION AND FIRST FLOOR FRAMING PLAN - FEB**
1/8" = 1'-0"

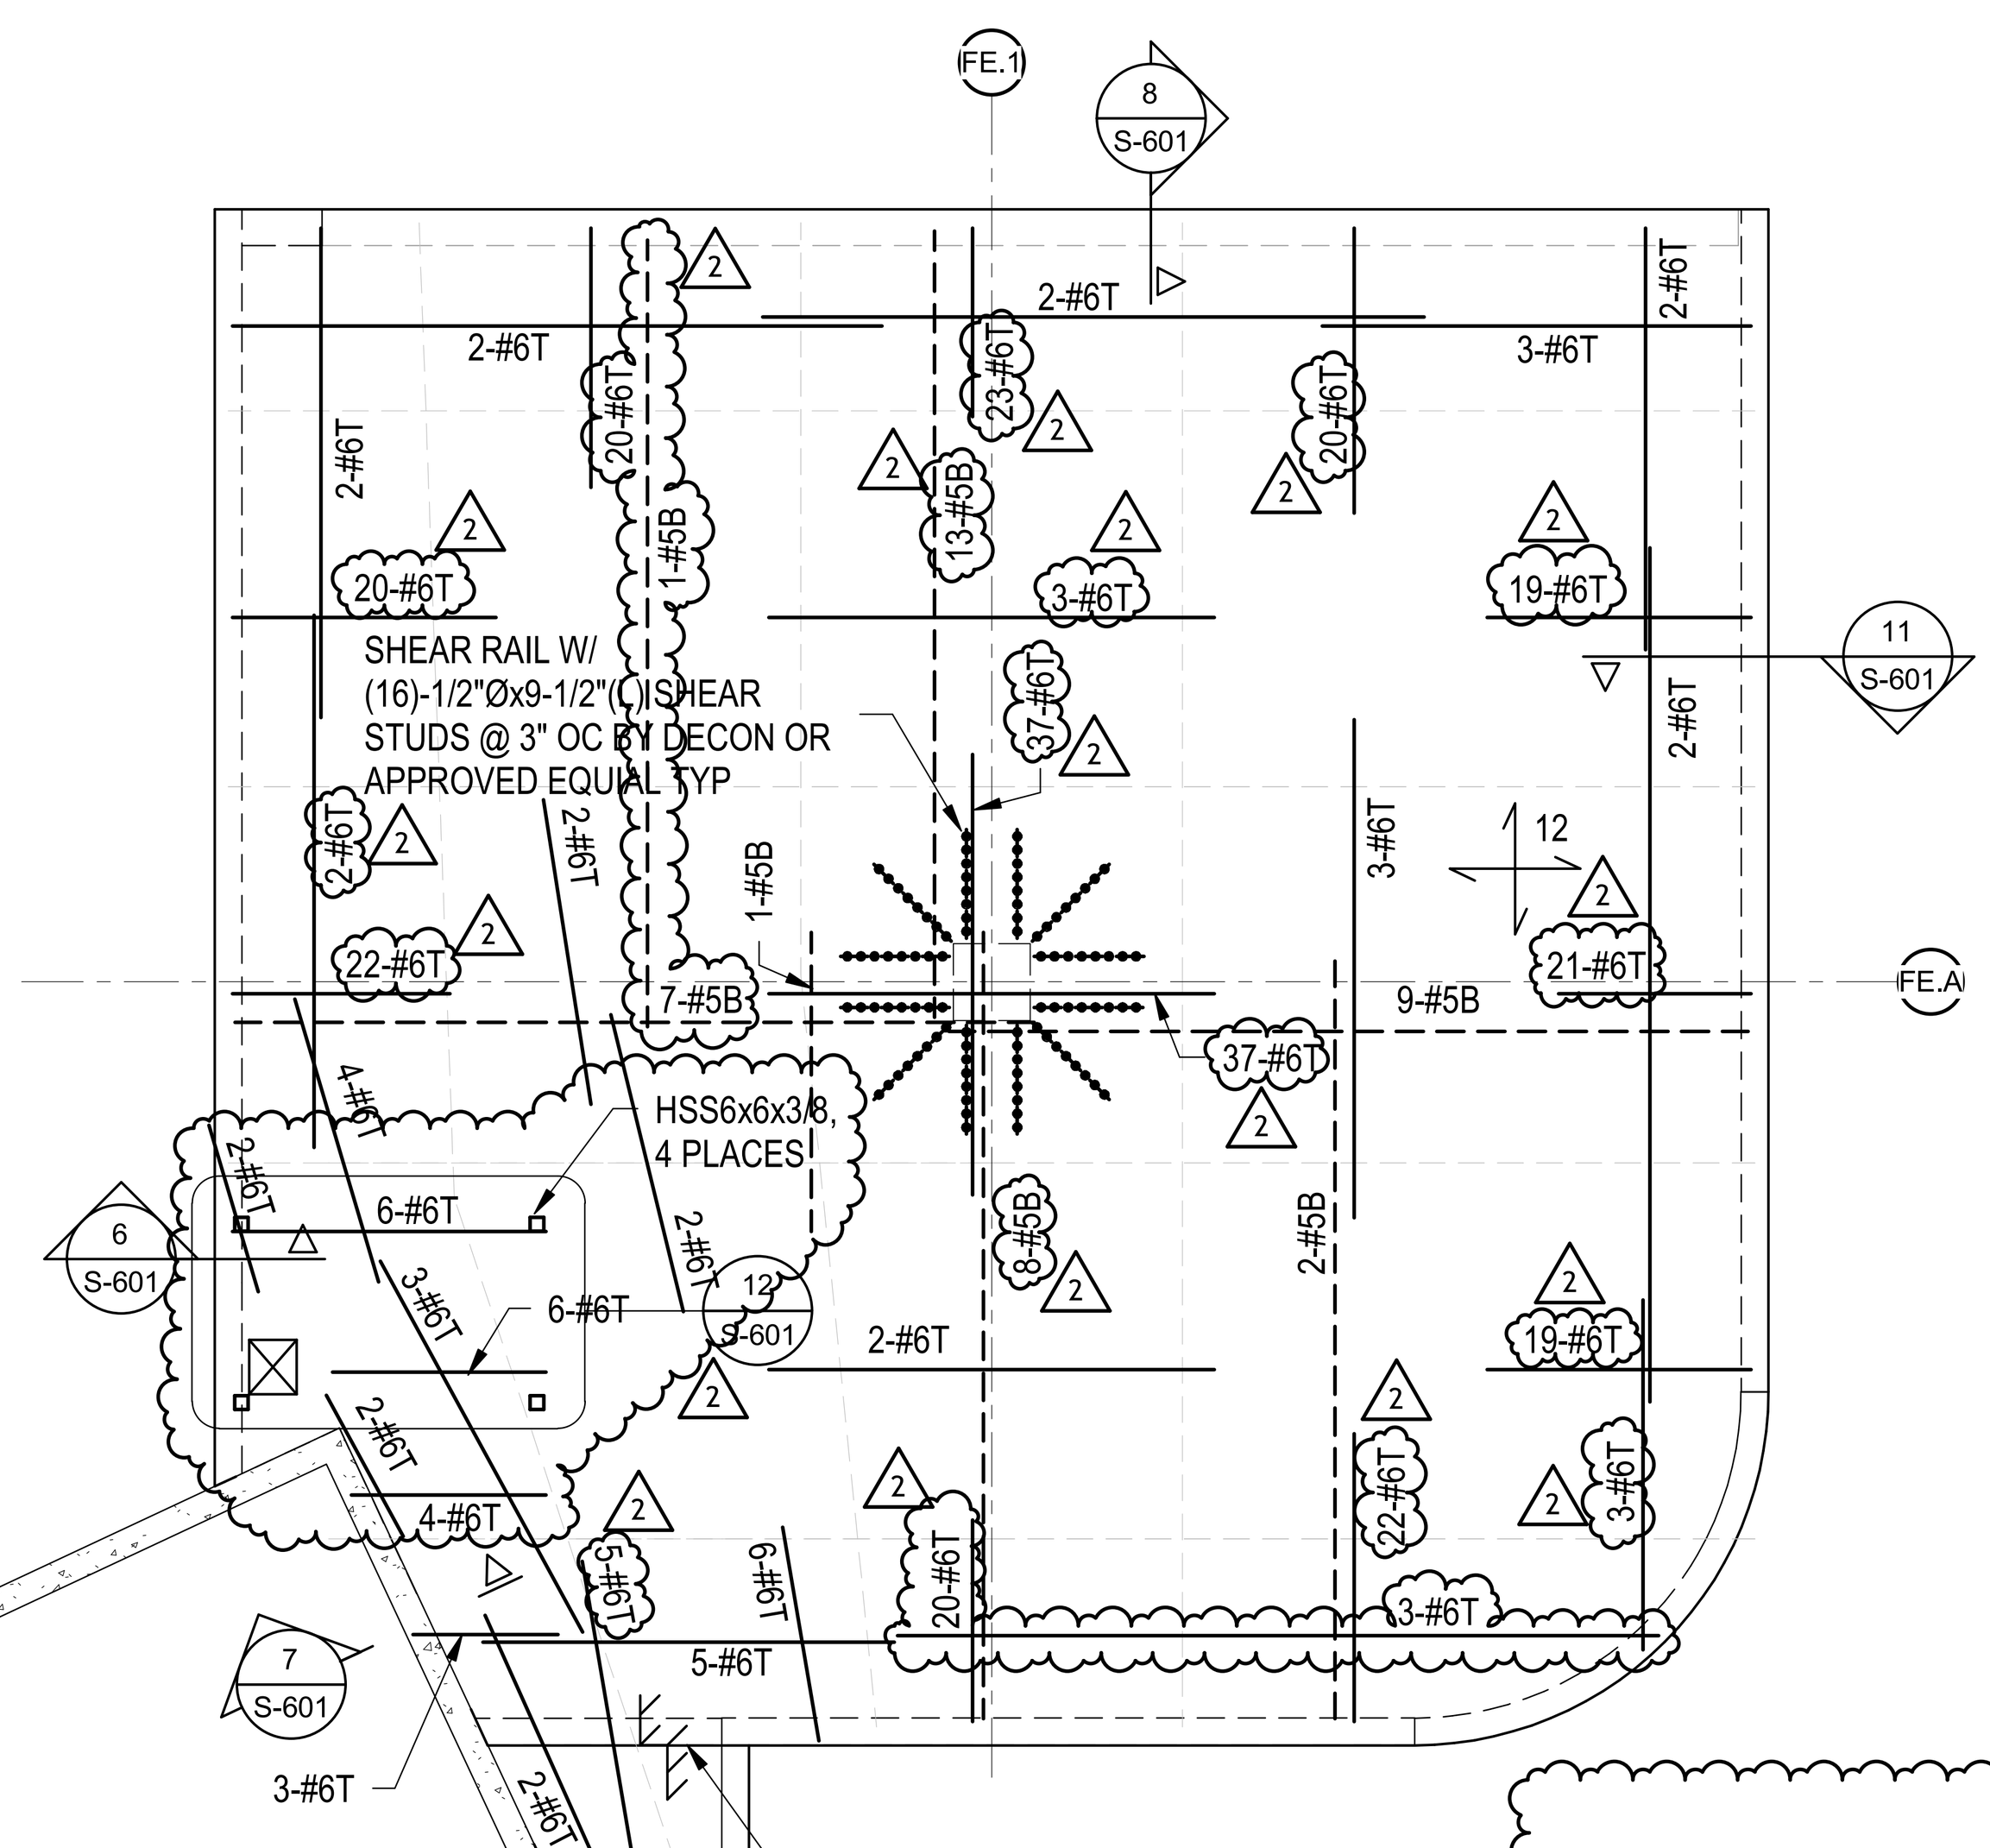

2 **ROOF FRAMING PLAN - FEB**
1/8" = 1'-0"

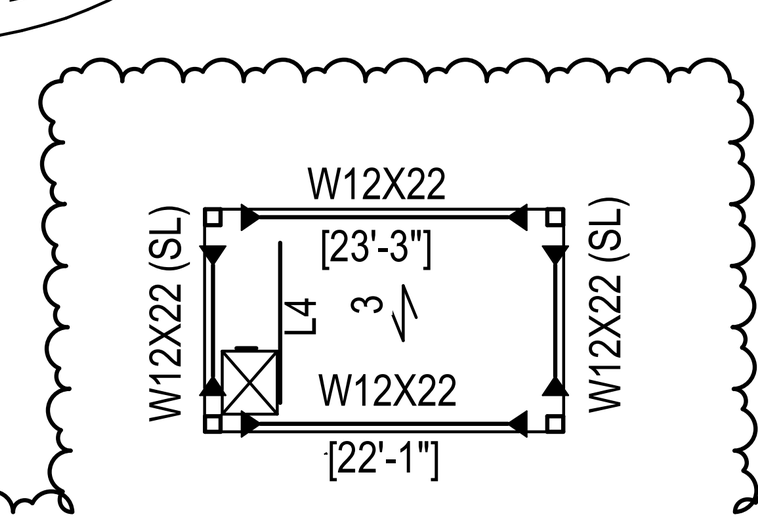

12 **SHED ROOF PART FRAMING PLAN - FEB**
1/8" = 1'-0"

FEB FRAMING PLAN NOTES:

1. REFERENCE ELEVATION IS 375'-0", UNO THUS $\boxed{\text{+/-X'-X"}}$ ON PLAN RELATIVE TO REFERENCE ELEVATION. SEE ARCH DWGS FOR SLOPE OF SLAB AND CONTROL POINT ELEVATION.
2. SLAB ON GRADE SHALL BE 5" NORMAL WEIGHT CONCRETE WITH 6x6 - W2.9xW2.9 WWF. SEE TYPICAL DETAIL FOR SUBGRADE CONSTRUCTION.
3. SEE S-111 FOR FOUNDATION NOTES.
4. 12 STAND FOR 12" THICK CONCRETE SLAB WITH #5@12" OC BOTTOM MAT. ADDITONAL REINFORCING ARE SHOWN ON PLAN.
   3 STANDS FOR SPAN DIRECTION OF 3" THICK 19-GAGE ROOF DECK. 2
   L4 STANDS FOR L4X4X3/8 2
5. REBAR NOTED WITH "T" STANDS FOR TOP BARS AND NOTED WITH "B" STANDS FOR BOTTOM BARS. ADDITIONAL REINFORCING SHOWN IN PLAN SUCH AS 6-#6T STANDS FOR 6 #6 BARS AT TOP SPACED EVENLY WITHIN THE RESPECTIVE COLUMN STRIP OR MIDDLE STRIP.
6. SEE ARCHITECTURAL DRAWINGS FOR GRID LINE DIMENSIONS AND OTHER DIMENSIONS THAT LOCATE ITEMS SUCH AS EDGE OF SLABS, OPENINGS, DEPRESSIONS AND CURBS.

GRADE BEAM SCHEDULE - FEB

TYPE	WIDTH	DEPTH	TOP	BOTTOM	SIDE	STIRRUPS	VERT TIES	HORZ TIES
GB05	1' - 6"	1' - 6"	(3) #6	(3) #6	(1) #6 ES	#4@12" OC	NONE	NONE
GB06	2' - 6"	1' - 6"	(3) #8	(3) #8	(2) #8 ES	8#4@6" OC EE, BAL @12" OC	NONE	(1) 8#4@6" OC EE, BAL @12" OC

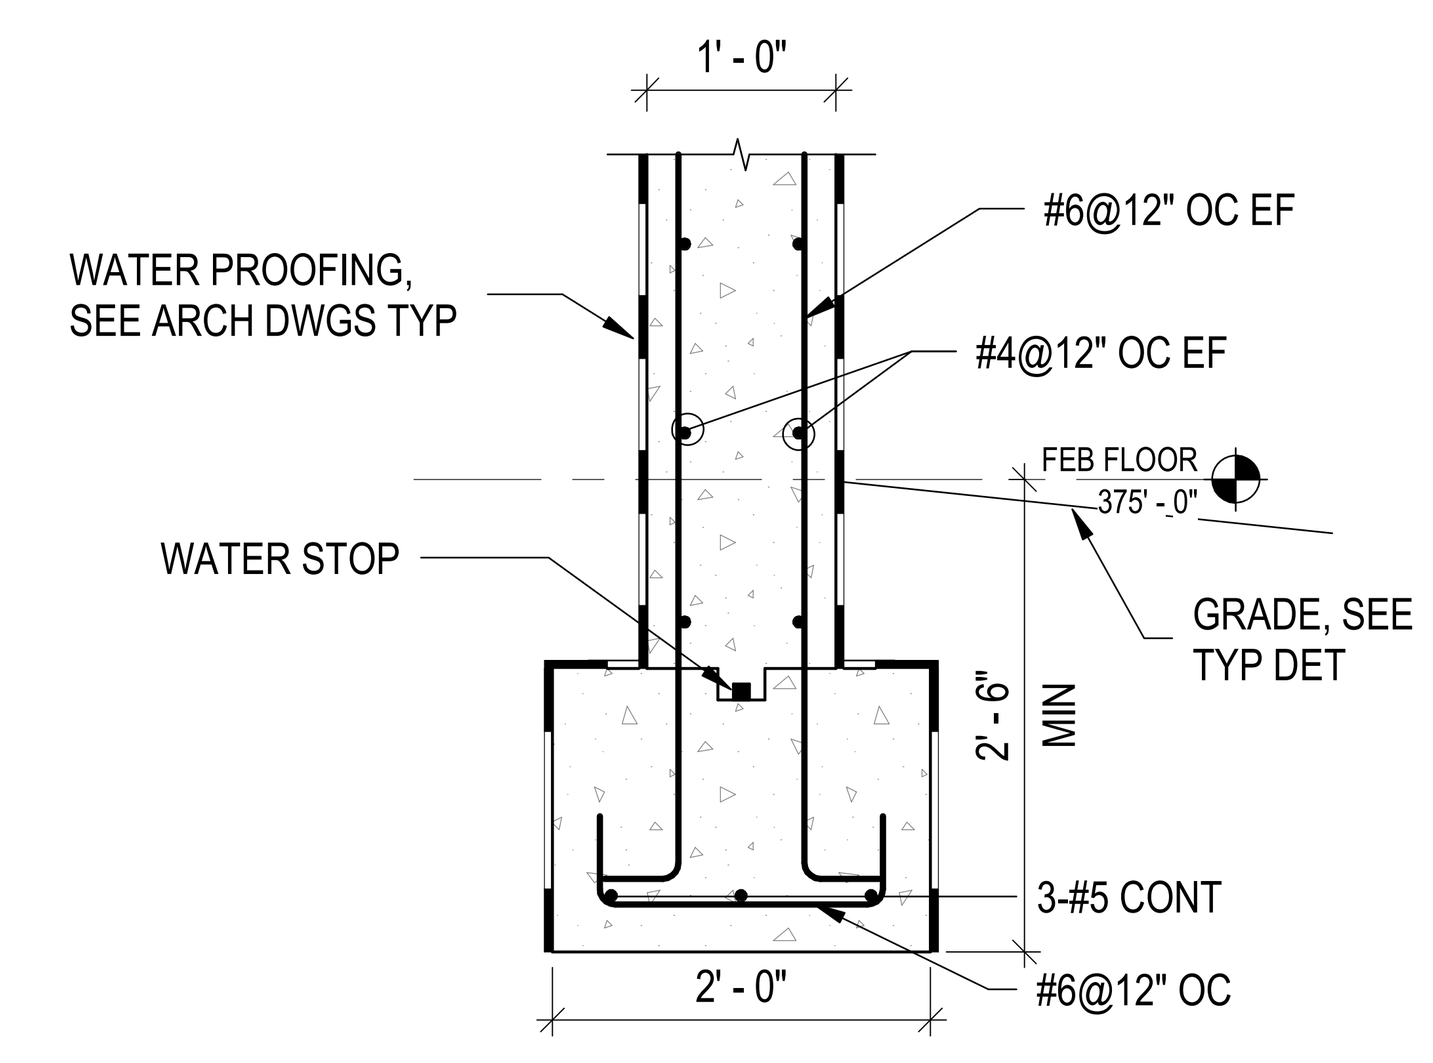

SECTION 3 / S-601
SCALE: 3/4" = 1'-0"

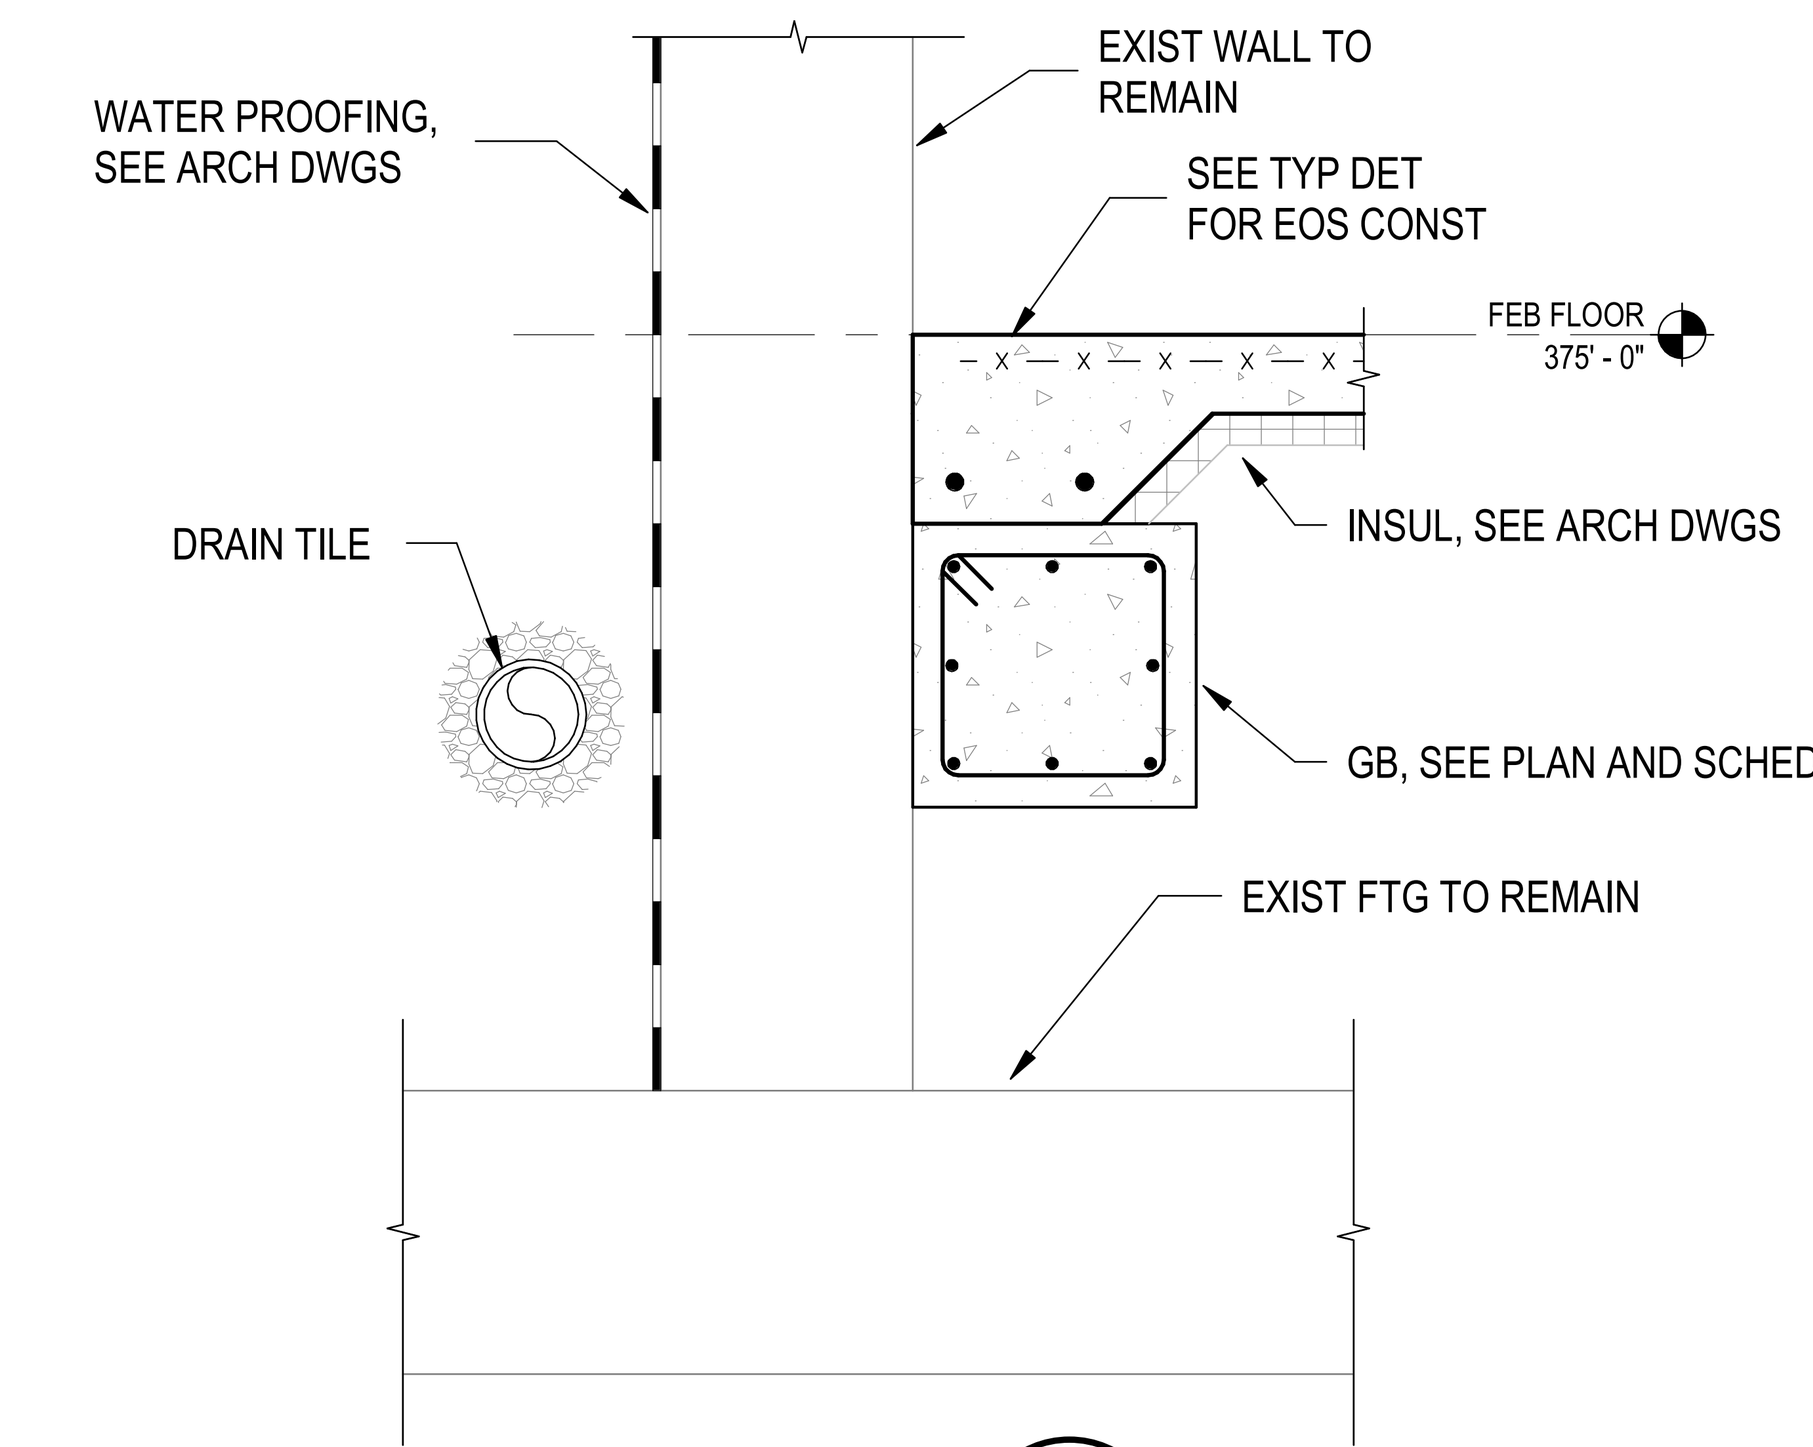

SECTION 4 / S-601
SCALE: 3/4" = 1'-0"

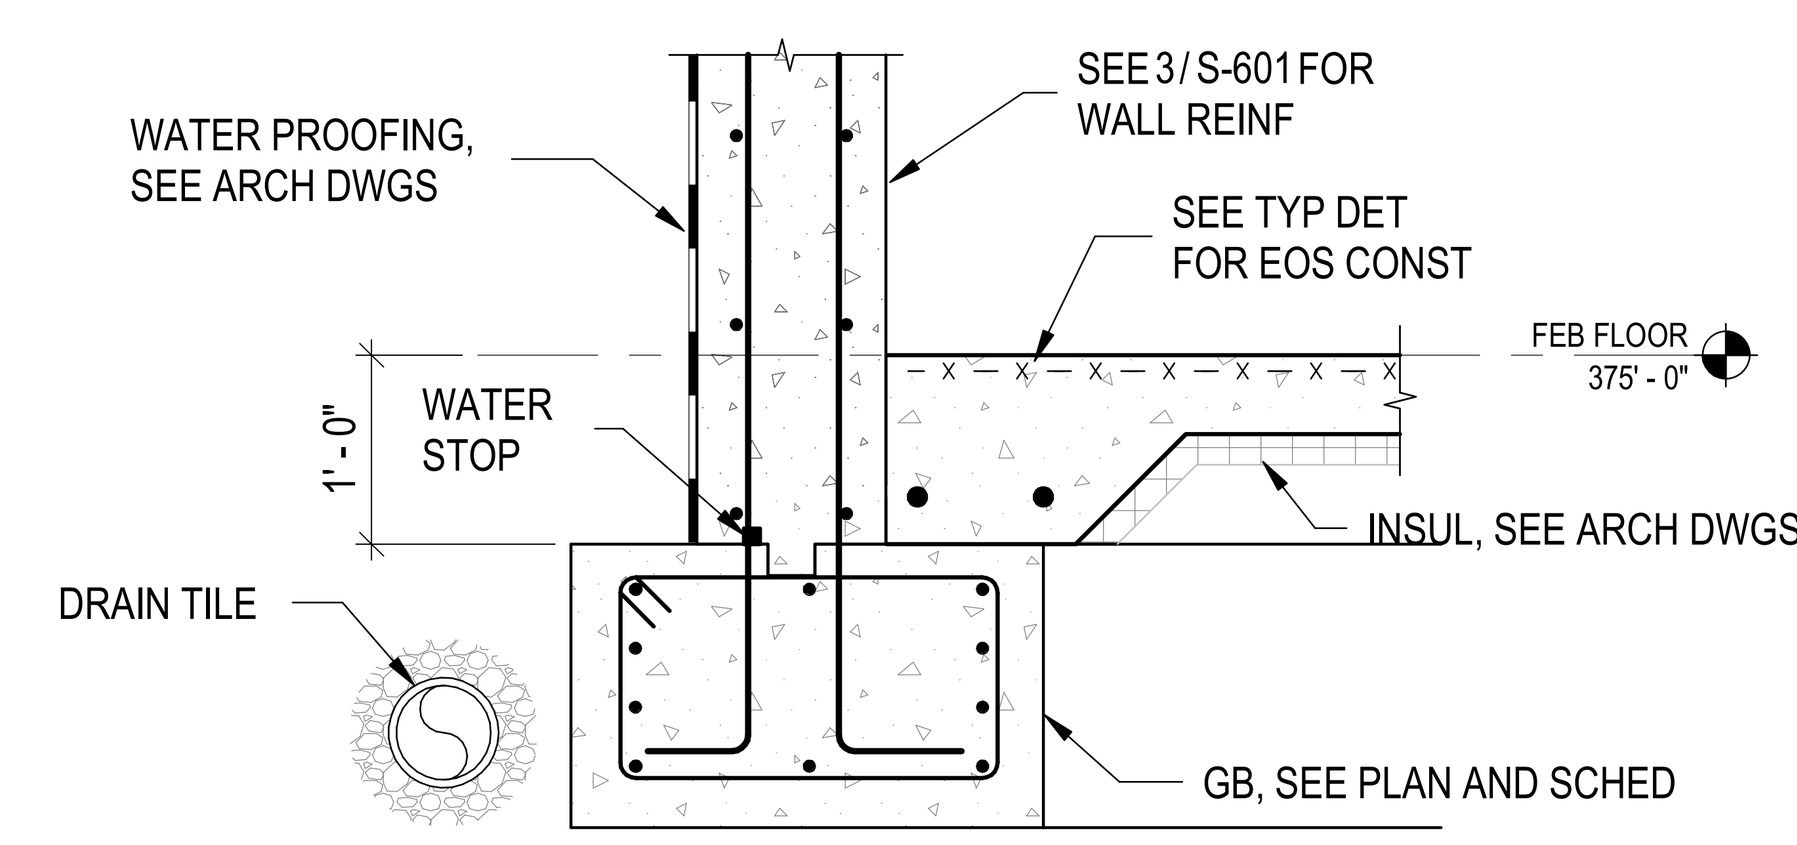

SECTION 5 / S-601
SCALE: 3/4" = 1'-0"

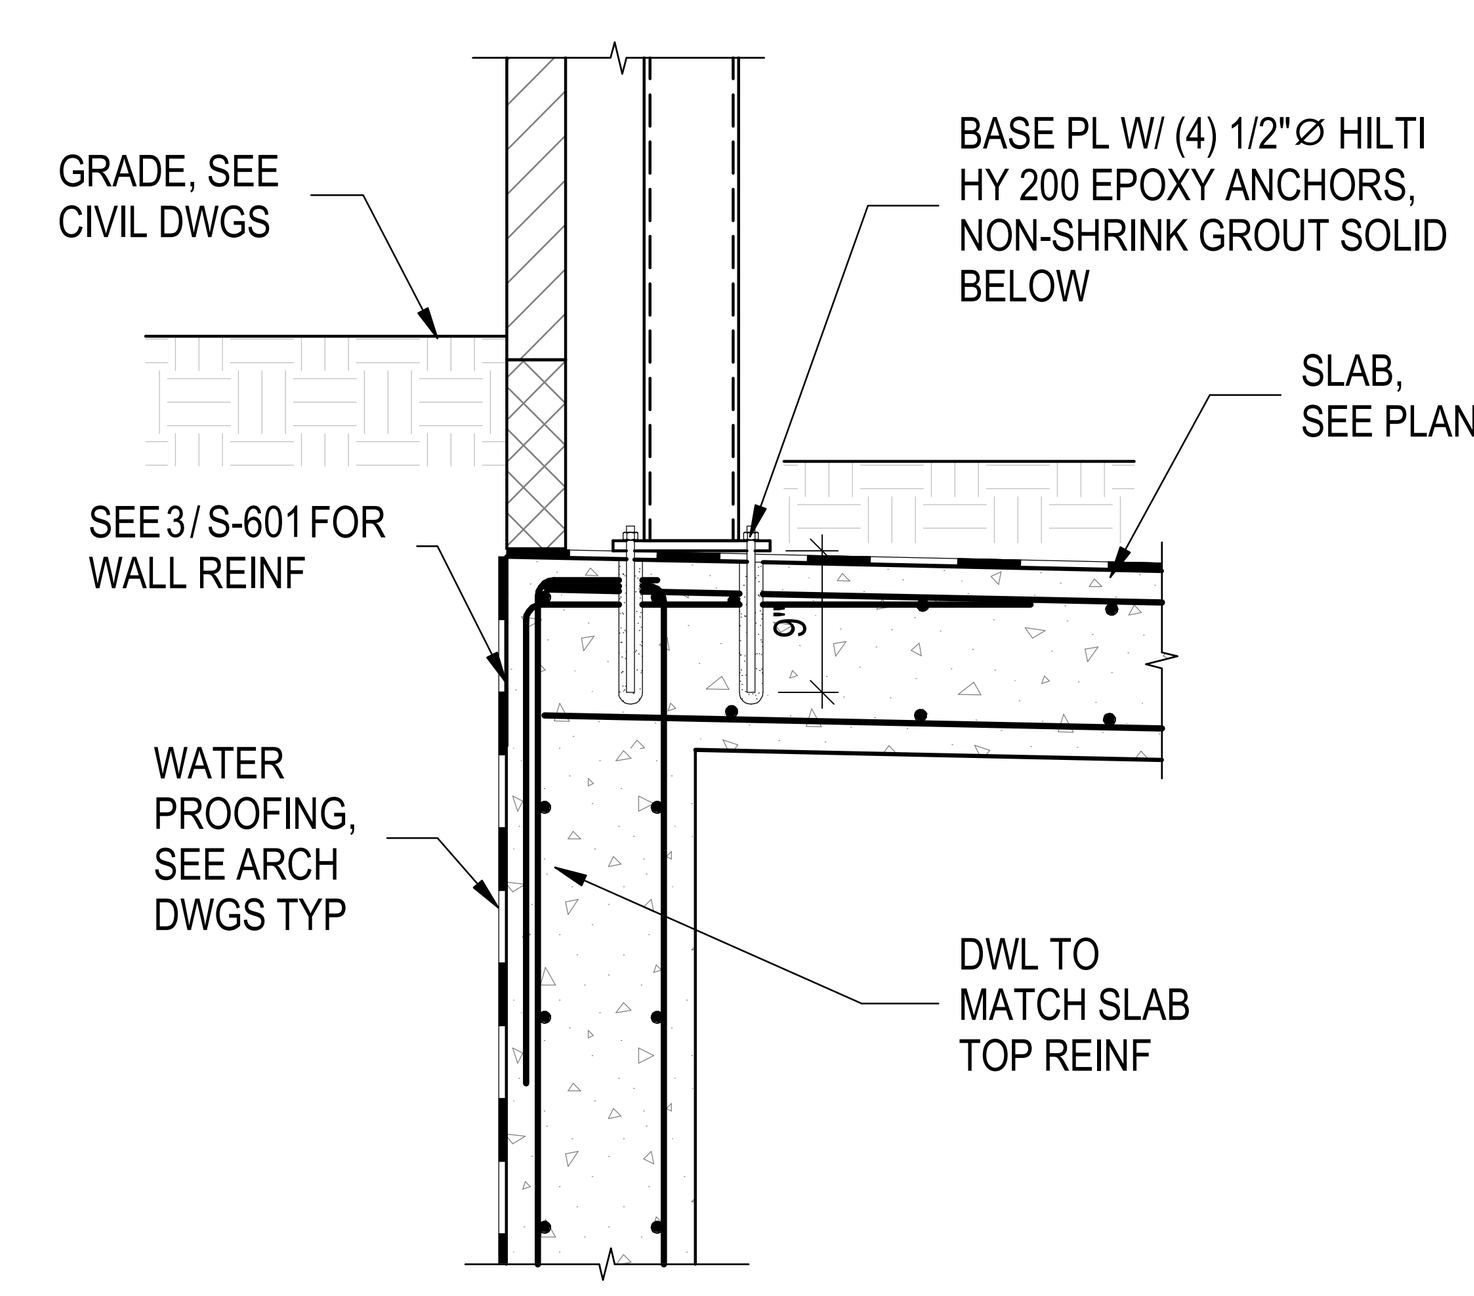

SECTION 6 / S-601
SCALE: 3/4" = 1'-0"

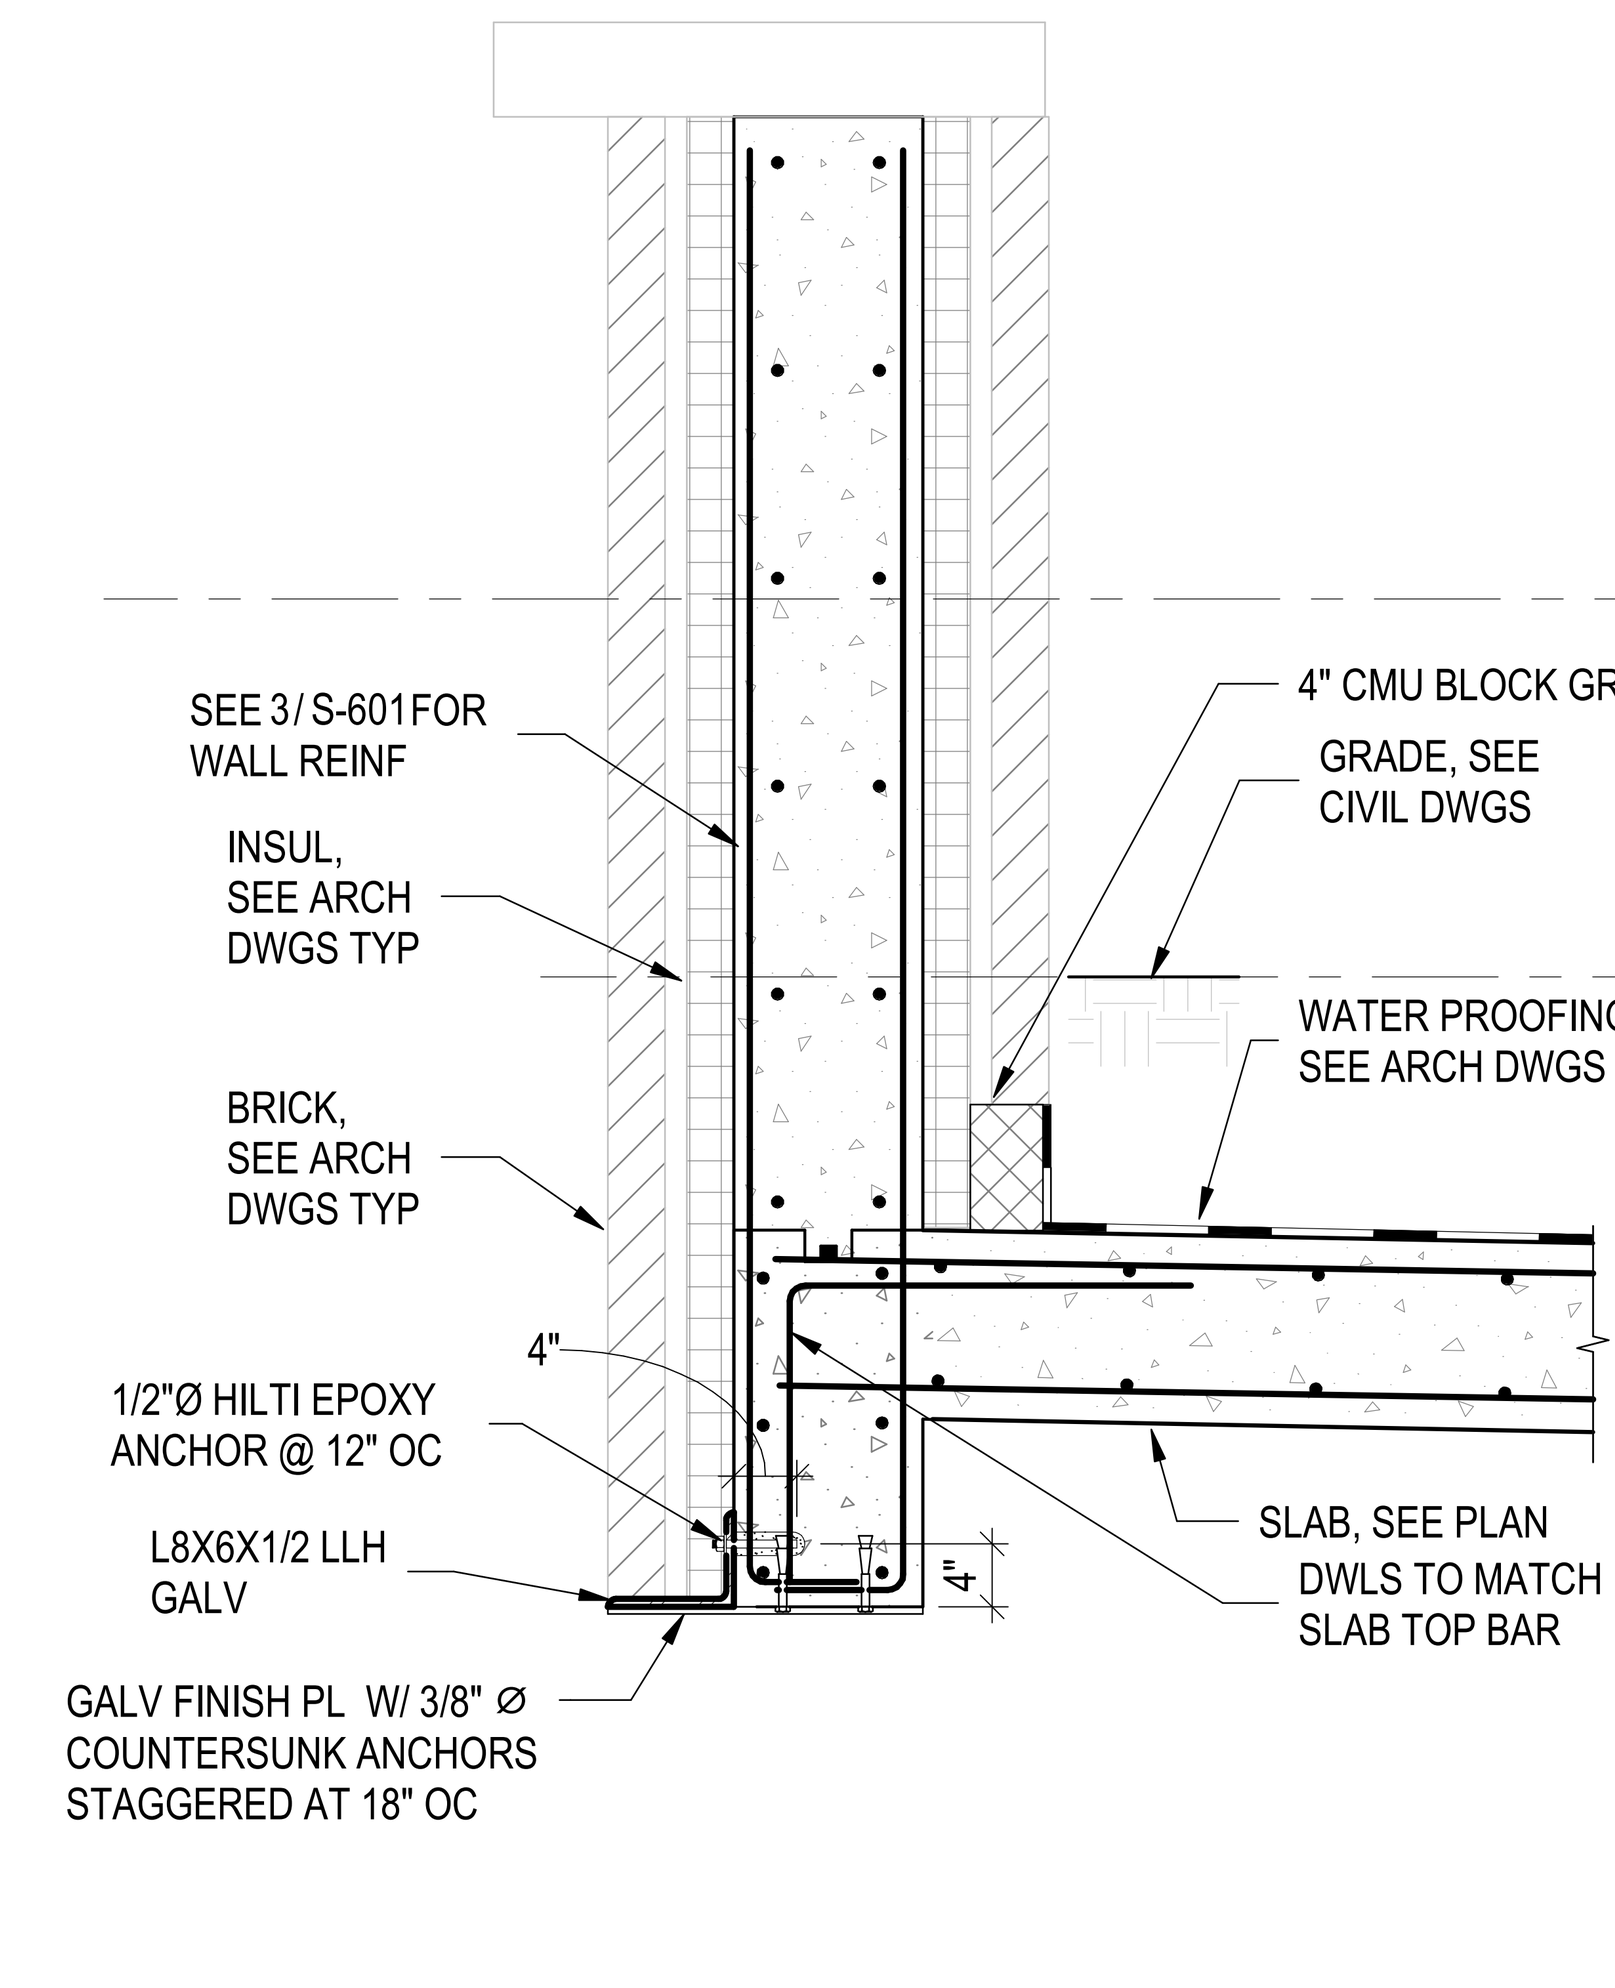

SECTION 7 / S-601
SCALE: 3/4" = 1'-0"

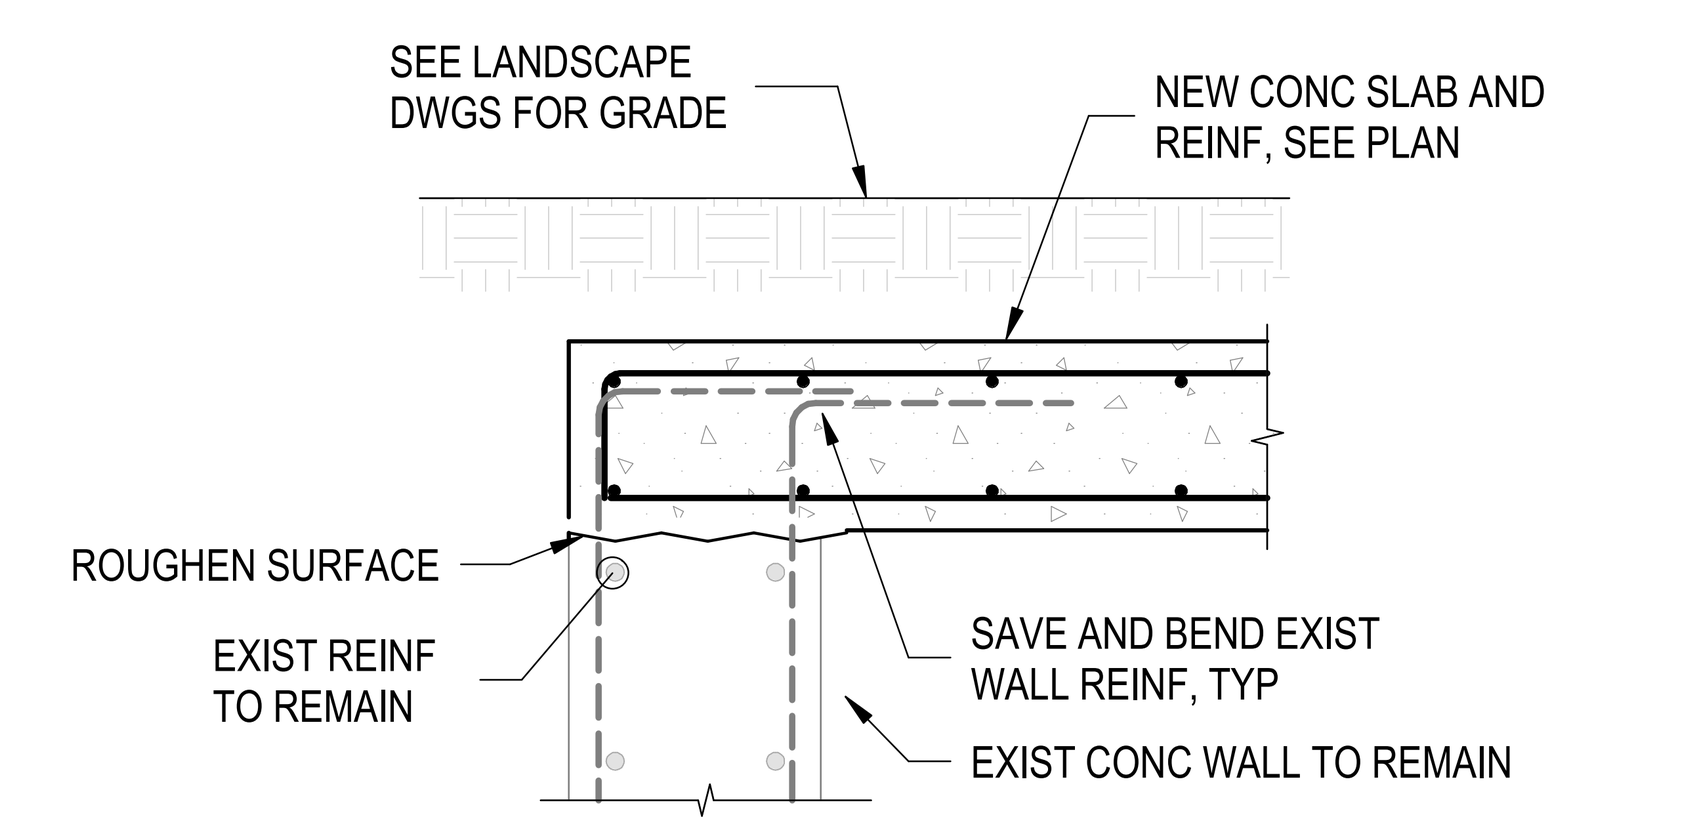

SECTION 8 / S-601
SCALE: 3/4" = 1'-0"

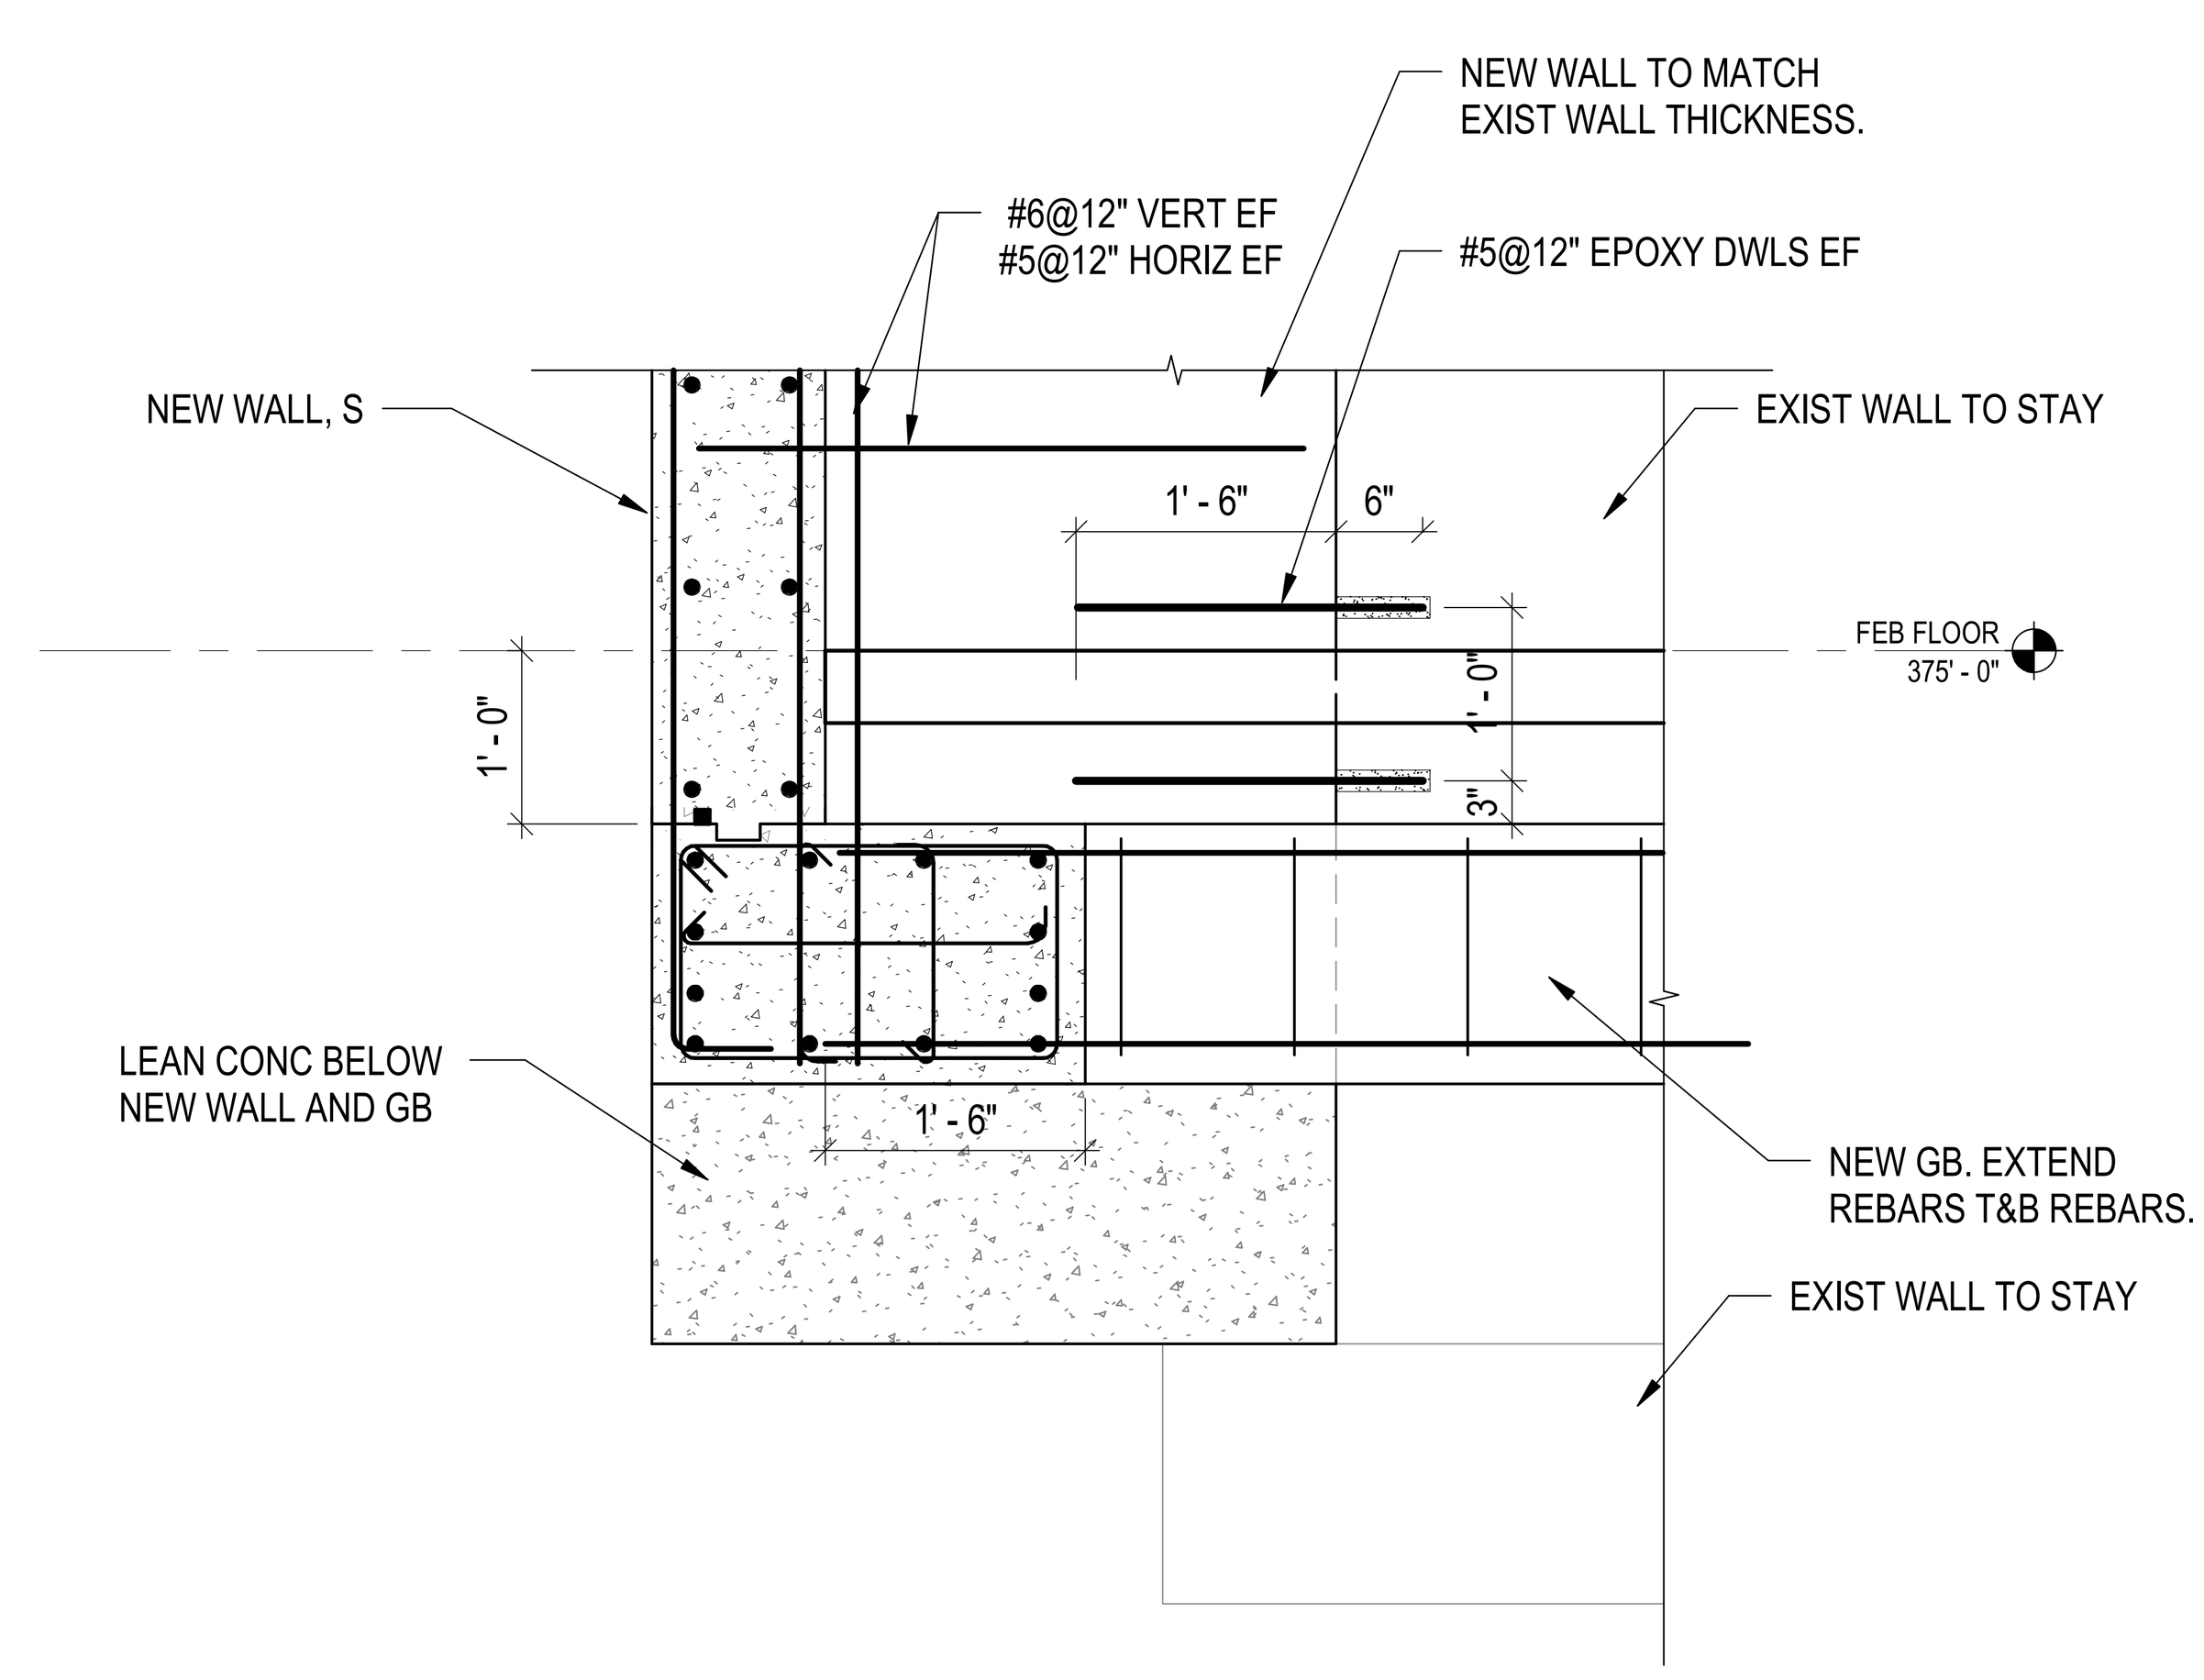

SECTION 9 / S-601
SCALE: 3/4" = 1'-0"

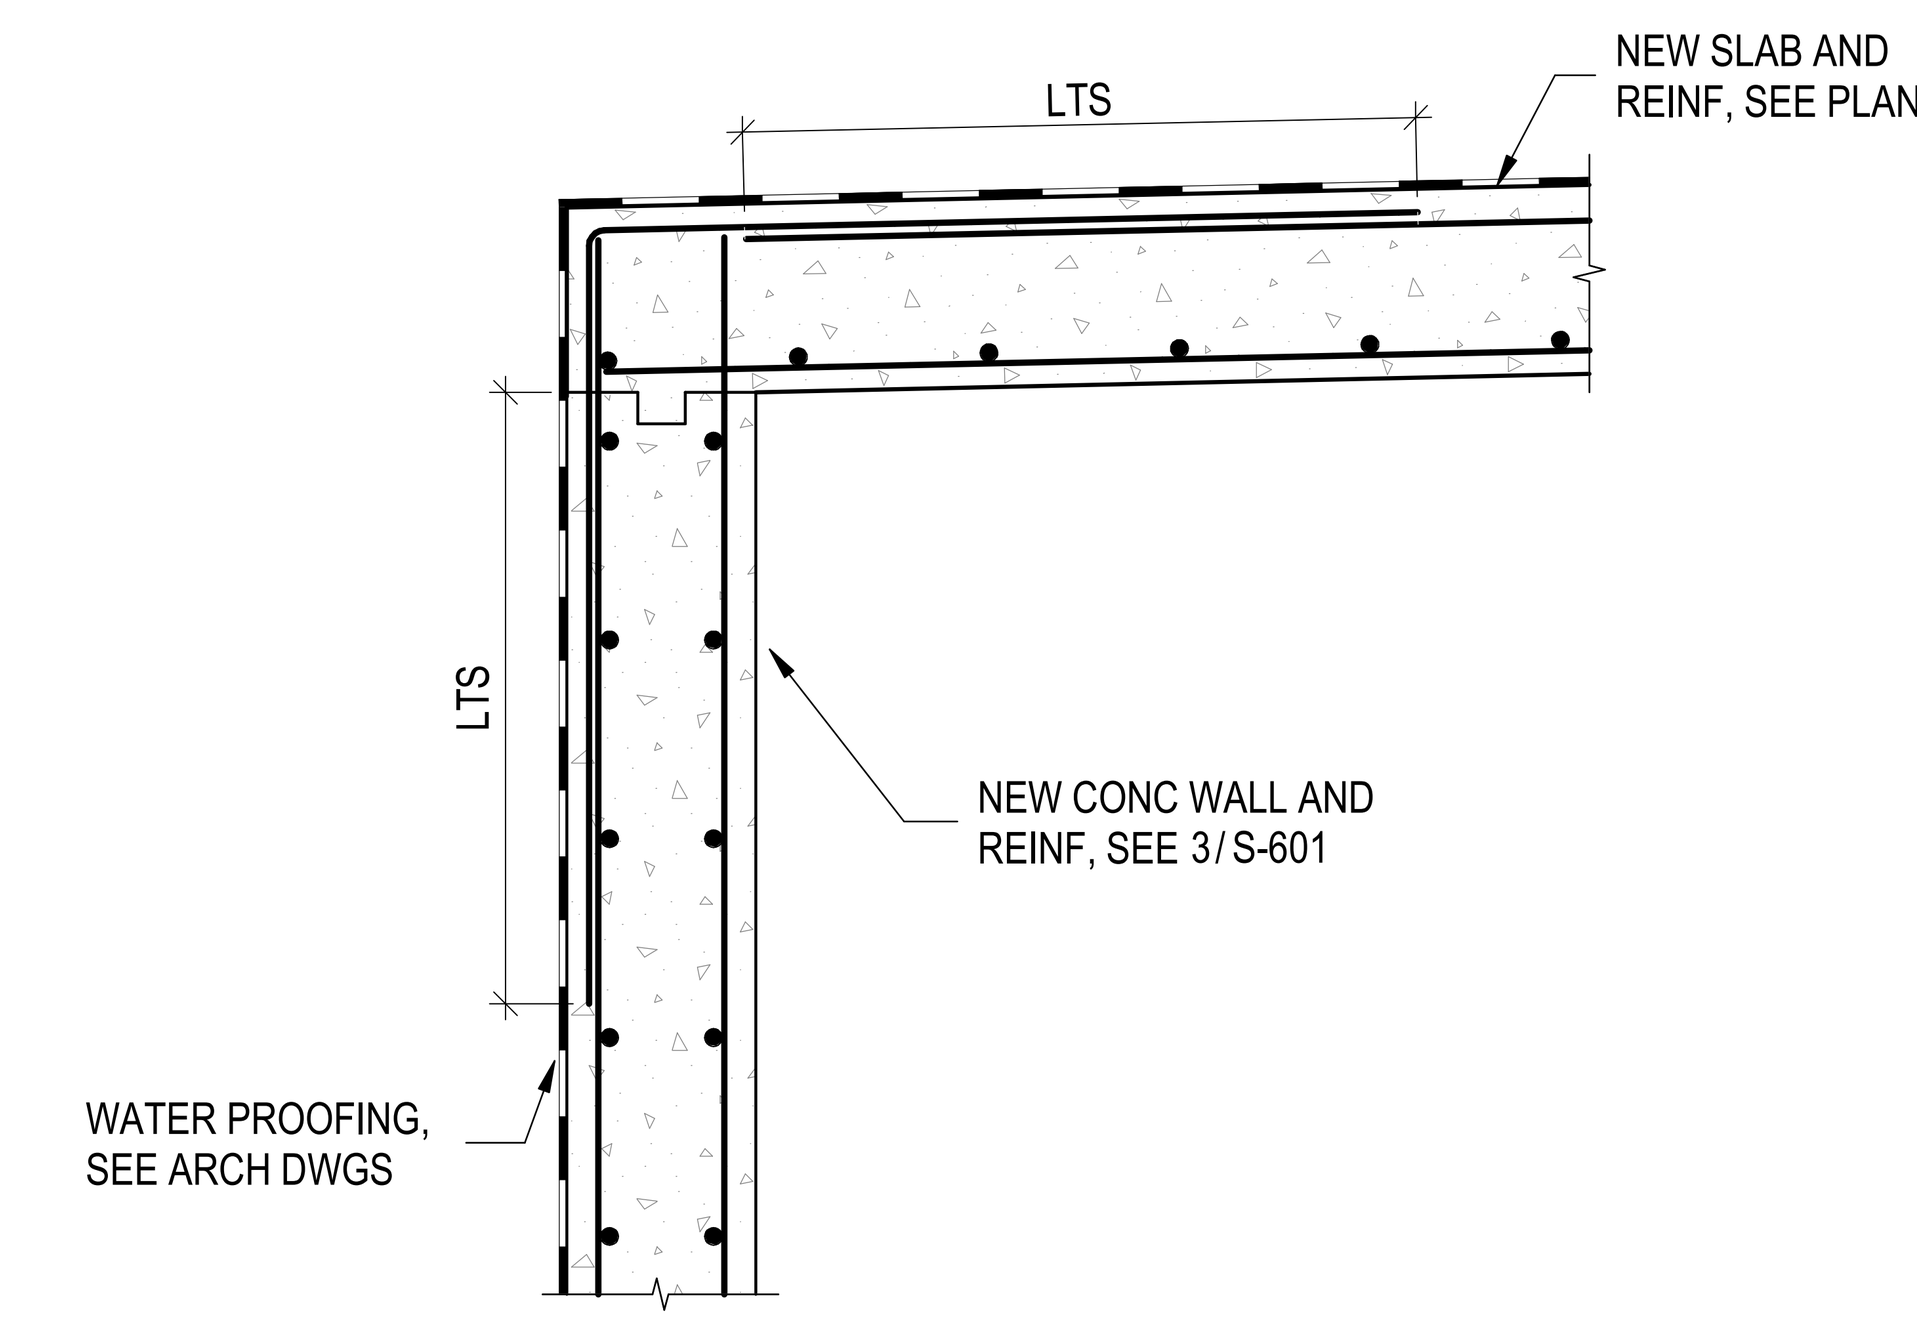

SECTION 11 / S-601
SCALE: 3/4" = 1'-0"

NO.	DATE	ISSUE
	10/29/2025	BID SET
	11/11/2025	PERMIT
1	11/12/2025	BID ADDENDUM 1
2	11/17/2025	BID ADDENDUM 2

0' 4' 8' 16' 24'
SCALE : 1/8" = 1'-0"

SEAL



PERKINS EASTMAN
One Thomas Circle NW, Suite 200
Washington, DC 20005
T. +1 202 861 1325
F. +1 202 861 1326

Owner:
Sidwell Friends School
3825 Wisconsin Ave NW, Washington DC 20016

Construction Manager:
Advanced Project Management, Inc (APM)
4530 Walney Rd, Ste 202, Chantilly, VA 20151

Civil / Site:
Bowman Consulting Group, Ltd
888 17th St NW, Suite 510, Washington, DC 20006

Landscape:
Natural Resources Design, Inc (NRD)
1009 Shepherd Street NE, Washington, DC 20017

Structural:
Yun Associates LLC
1050 Connecticut Ave NW, Suite 500, Washington, DC 20036

MEP / FP / Lighting:
CMTA Inc
220 Lexington Green Circle, Suite 600, Lexington, KY 40503

AV / IT / Telecom / Security:
Educational Systems Planning (ESP)
2448 Holly Avenue, Suite 302, Annapolis, MD 21401

Food Service
Nyikos-Garcia Foodservice Design, Inc
7146 Starmount Way, New Market, MD 21774

Accessibility Consultant:
Galbo Wolf LLC
4410 Massachusetts Ave NW, #240, Washington, DC 20016

Acoustics:
Polysonics Corp
555 Hospital Drive, Warrenton, VA 20186

Building Envelope Consultant:
Sustainable Building Partners LLC
2701 Prosperity Ave, Suite 105, Fairfax, VA 22031

Code Consultant:
Campbell Code Consulting LLC
7834 Taggart Ct, Elkridge, MD 21075

Specifications:

PROJECT TITLE:

SIDWELL FRIENDS NEW LOWER SCHOOL AT DC CAMPUS

3825 WISCONSIN AVE NW
WASHINGTON, DC 20016

PROJECT No: 2025008

DRAWING TITLE:

FEB FOUNDATION AND ROOF FRAMING PLANS, SECTIONS AND DETAILS

SCALE: As indicated

S-601

ISSUED FOR BID
10/29/2025