

Autodesk Docs://PGCPS-P3_8 Building 20250001_P3_st_Springhills_R25.rvt
4/2/2026 4:28:07 PM

GENERAL

THE CONTRACTOR SHALL COMPLY WITH ALL APPLICABLE FEDERAL AND STATE CODES, STANDARDS, REGULATIONS AND LAWS.

IN THE CASE OF CONFLICTS BETWEEN THE NOTES, DETAILS AND SPECIFICATIONS, THE MOST STRINGENT REQUIREMENTS SHALL GOVERN.

THE CONTRACTOR SHALL NOT MAKE ANY DEVIATIONS FROM THE DESIGN DOCUMENTS WITHOUT THE WRITTEN APPROVAL OF THE ENGINEER OF RECORD.

STRUCTURAL DRAWINGS SHALL BE USED IN CONJUNCTION WITH CONTRACT DOCUMENTS RELATED TO OTHER TRADES. THE CONTRACTOR SHALL REVIEW,COORDINATE AND NOTIFY AE OF ANY CONFLICTS PRIOR TO COMMENCING WORK.

TYPICAL DETAILS MAY NOT BE INDICATED ON THE PLANS, BUT STILL APPLY. WORK NOT INDICATED ON A PART OF THE DRAWINGS BUT IS REASONABLY IMPLIED TO BE SIMILAR TO THAT SHOWN AT SIMILAR LOCATIONS AND SHALL BE REPEATED AND INCLUDED IN THE PROJECT. THE CONTRACTOR HAS THE OPTION TO SUBMIT ALTERNATE DETAILS WITH SIGNED AND SEALED CALCULATIONS TO THE ENGINEER OF RECORD FOR APPROVAL PRIOR TO PROCEEDING WITH WORK.

THE STRUCTURE WAS ANALYZED AND DESIGNED BY THE ENGINEER OF RECORD, CONSIDERING ITS COMPLETED STATE ONLY. THE CONTRACTOR SHALL MAINTAIN THE STABILITY OF THE BUILDING DURING CONSTRUCTION AND ANY TEMPORARY ERECTION BRACING SHALL REMAIN IN PLACE UNTIL ALL PERMANENT SYSTEMS HAVE BEEN COMPLETELY INSTALLED AND REACH THEIR DESIGN STRENGTH.

THE CONTRACTOR SHALL CONSIDER ALL ASPECTS OF CONSTRUCTION SEQUENCING, CONSIDERATIONS SHALL INCLUDE BUT NOT BE LIMITED TO STEEL ERECTION AND CONCRETE PLACEMENT, CRANE REQUIREMENTS, TEMPORARY SHORING, BRACING/STRENGTHENING, TEMPORARY CONSTRUCTION LOADS, SAFETY PROCEDURES, TEMPERATURE CHANGE, AND MOISTURE EFFECTS.

REFER TO ARCHITECTURAL, MECHANICAL, ELECTRICAL, CIVIL, ELEVATOR, OR OTHER SPECIALTY ENGINEERING DRAWINGS FOR DIMENSIONS NOT SHOWN, INCLUDING BUT NOT LIMITED TO: SIZE AND LOCATION OF CURBS, EQUIPMENT HOUSEKEEPING PADS, WALL AND FLOOR OPENINGS, BLOCKOUTS, FLOOR DEPRESSIONS, SUMPS, DRAINS, ANCHOR BOLTS, EMBEDDED ITEMS, ARCHITECTURAL TREATMENT, ETC. THE CONTRACTOR SHALL VERIFY DIMENSIONS AND RESOLVE DISCREPANCIES OR CONFLICTS PRIOR TO CONSTRUCTION.

APPLICABLE CODES AND STANDARDS

BUILDING CODE	MARYLAND BUILDING PERFORMANCE STANDARDS WITH PRINCE GEORGE COUNTY AMENDMENTS
IBC 2018	INTERNATIONAL CODE COUNCIL, "INTERNATIONAL BUILDING CODE", 2018 EDITION
ACI 318-14	AMERICAN CONCRETE INSTITUTE, "BUILDING CODE REQUIREMENTS FOR STRUCTURAL CONCRETE," 2014 EDITION
AISC 341-16	AMERICAN INSTITUTE OF STEEL CONSTRUCTION, "SEISMIC PROVISIONS FOR STRUCTURAL STEEL BUILDINGS," 2016 EDITION
AISC 360-16	AMERICAN INSTITUTE OF STEEL CONSTRUCTION, "SPECIFICATION FOR STRUCTURAL STEEL BUILDINGS," 2016 EDITION
AISI S100-16	AMERICAN IRON AND STEEL INSTITUTE, "NORTH AMERICAN SPECIFICATION FOR THE DESIGN OF COLD FORMED STEEL STRUCTURAL MEMBERS," 2016 EDITION
ANSI/SDI C-2017	STEEL DECK INSTITUTE, " STANDARD FOR COMPOSITE STEEL FLOOR DECK - SLABS"
ANSI/SDI RD-2017	STEEL DECK INSTITUTE, " STANDARD FOR STEEL ROOF DECK"
ASCE 7-16	AMERICAN SOCIETY OF CIVIL ENGINEERS, "MINIMUM DESIGN LOADS FOR BUILDINGS AND OTHER STRUCTURES," 2016 EDITION
ASTM	AMERICAN SOCIETY FOR TESTING AND MATERIALS
AWS A2.4:2012	AMERICAN WELDING SOCIETY, "STANDARD SYMBOLS FOR WELDING, BRAZING, AND NONDESTRUCTIVE EVALUATION," 2012 EDITION
AWS D1.1:2015	AMERICAN WELDING SOCIETY, "STRUCTURAL WELDING CODE - STEEL," 2015 EDITION
AWS D1.3:2008	AMERICAN WELDING SOCIETY, "STRUCTURAL WELDING CODE - SHEET STEEL," 2008 EDITION
AWS D1.4:2011	AMERICAN WELDING SOCIETY, "STRUCTURAL WELDING CODE - REINFORCING STEEL," 2011 EDITION
AWS D1.8:2016	AMERICAN WELDING SOCIETY, "STRUCTURAL WELDING CODE - SEISMIC SUPPLEMENT," 2016 EDITION
RCSC	RESEARCH COUNCIL ON STRUCTURAL CONNECTIONS, "SPECIFICATION FOR STRUCTURAL JOINTS USING HIGH STRENGTH BOLTS," 2014 EDITION
SJI 100-15	STANDARD SPECIFICATION FOR OPEN WEB JOISTS
TMS 402/602-16	THE MASONRY SOCIETY, "BUILDING CODE REQUIREMENTS AND SPECIFICATION FOR MASONRY STRUCTURES."
ALL CONSTRUCTION SHALL BE IN ACCORDANCE WITH THE BUILDING CODE	

STRUCTURAL DESIGN DATA

LIVE LOADS:	REFER TO LOADING PLANS ON SHEET S-003.
ROOF LIVE LOAD:	20 PSF
SNOW LOADS:	SNOW LOADING AND SNOW DRIFT LOADING SHALL BE IN ACCORDANCE WITH THE BUILDING CODE. GROUND SNOW LOAD: IMPORTANCE FACTOR: SNOW EXPOSURE FACTOR: THERMAL FACTOR: SLOPE FACTOR: CALCULATED FLAT ROOF SNOW LOAD: COUNTY MINIMUM FLAT ROOF SNOW LOAD: DRIFT SURCHARGE LOAD: WIDTH OF SNOW DRIFT:
WIND LOADS:	WIND PRESSURE SHALL BE IN ACCORDANCE WITH THE BUILDING CODE. BASIC WIND SPEED (3-SECOND GUST): ALLOWABLE STRESS DESIGN WIND SPEED: RISK CATEGORY: EXPOSURE CATEGORY: INTERNAL PRESSURE COEFFICIENT: MWFRS DESIGN WIND PRESSURE (ULTIMATE): SECOND FLOOR: ROOF: COMPONENTS AND CLADDING WIND PRESSURE:

DESIGN WIND PRESSURE FOR COMPONENTS AND CLADDING (ULTIMATE DESIGN PSF)												
ROOF ZONE	EFFECTIVE WIND AREA, FT²											
	≤ 10	20	50	100	200	≥ 500						
1'	+16	-35	+16	-35	+16	-35	+16	-32	+16	-25		
1	+16	-61	+16	-58	+16	-51	+16	-48	+16	-45	+16	-38
2	+38	-81	+37	-74	+34	-68	+32	-65	+32	-58	+29	-51
3	+38	-81	+37	-74	+34	-68	+32	-65	+32	-58	+29	-51
WALL ZONE	EFFECTIVE WIND AREA, FT²											
	≤ 10	20	50	100	200	≥ 500						
4	+38	-42	+37	-40	+34	-38	+32	-35	+32	-35	+29	-32
5	+38	-51	+37	-48	+34	-43	+32	-40	+32	-37	+29	-32
NOTES: 1. POSITIVE AND NEGATIVE SIGNS SIGNIFY PRESSURE ACTING TOWARD AND AWAY FROM SURFACE, RESPECTIVELY. 2. BUILDING ZONES ARE DEFINED IN ASCE 7-16.												

SEISMIC LOADS:	SEISMIC LOADING SHALL BE IN ACCORDANCE WITH THE BUILDING CODE. RISK CATEGORY: IMPORTANCE FACTOR: SITE CLASS: SEISMIC DESIGN CATEGORY: MAPPED SPECTRAL ACCELERATION PARAMETERS: SITE COEFFICIENTS: DESIGN SPECTRAL ACCELERATION PARAMETERS: SEISMIC LOAD RESISTANCE SYSTEM:
	III I _s = 1.25 D B S _s = 0.133 S ₁ = 0.043 F _p = 1.6 F _r = 2.4 S _{DS} = 0.142 S _{D1} = 0.069 ORDINARY REINFORCED MASONRY SHEAR WALL AND ORDINARY STEEL BRACED FRAME C _s = 0.088 R = 2 EQUIVALENT LATERAL FORCE PART A PART B 155 KIPS 410 KIPS
FLOOD LOAD:	NOT APPLICABLE. PROJECT LOCATION NOT IN FLOOD HAZARD AREAS.
RAIN LOAD:	RAIN LOAD INTENSITY: i = 3.43 IN/HR
STORY DRIFT:	WIND DRIFT: SEISMIC DRIFT: H/400 H/100

BUILDING ELEMENTS INCLUDING EXTERIOR CLADDING, STAIRS, ELEVATORS, AND MISCELLANEOUS METALS; MECHANICAL/ELECTRICAL/PLUMBING SYSTEM SUPPORTS; INTERIOR METAL STUD FRAMING; AND ANY OTHER ELEMENTS AS REQUIRED BY THE BUILDING CODE SHALL BE DESIGNED TO ACCOMMODATE THE PRIMARY STRUCTURE STORY DRIFTS.

FOUNDATIONS AND SLAB ON GRADE

REFER TO THE GEOTECHNICAL REPORT PREPARED BY KIM ENGINEERING, INC, DATED FEBRUARY 28, 2024, AND ADDENDUM NO. 1, DATED SEPTEMBER 8, 2025, FOR ALL GEOTECHNICAL REQUIREMENTS AND ANTICIPATED CONDITIONS AT AND BELOW GRADE. REFER TO THE GEOTECHNICAL REPORT, CONTRACT DRAWINGS AND SPECIFICATIONS FOR EXCAVATION, BACKFILL, STRUCTURAL FILL, BASE MATERIAL AND COMPACTION REQUIREMENTS.

FOUNDATION FOR THE BUILDING STRUCTURE SHALL CONSIST OF SPREAD FOOTING OR STRIP FOOTING ON NATURAL SOIL OR COMPACTED STRUCTURAL FILL APPROVED BY THE GEOTECHNICAL ENGINEER WITH A 2,500 PSF ALLOWABLE BEARING CAPACITY. TOTAL SETTLEMENT SHALL BE LESS THAN 1" AND DIFFERENTIAL TO BE LESS THAN 1/2". ALLOWABLE BEARING CAPACITY FOR SITE RETAINING WALLS SHALL BE 2,000 PSF.

CONCRETE SLAB ON GRADE SHALL BE PLACED ON PREPARED BASE COURSE OVER NEW STRUCTURAL FILL OR ON APPROVED EXISTING NATURAL SOIL. SEE THE GEOTECHNICAL REPORT FOR ADDITIONAL INFORMATION. BASE COURSE SHALL CONSIST OF CRUSHED AGGREGATE COMPACTED TO THE RECOMMENDATIONS OF THE GEOTECHNICAL ENGINEER. REFER TO THE PLANS AND DETAILS FOR OTHER REQUIREMENTS. REFER TO THE ARCHITECT AND GEOTECHNICAL ENGINEER FOR VAPOR BARRIER AND UNDER-SLAB DRAINAGE REQUIREMENTS.

ALL FILL PLACED TO SUPPORT SLABS ON GRADE, BEHIND PERMANENT WALLS, AND AROUND ALL DRAINS SHALL CONSIST OF WELL GRADED, GRANULAR MATERIAL PER THE SPECIFICATIONS. SOILS USED FOR STRUCTURAL FILL SHALL BE APPROVED BY THE GEOTECHNICAL ENGINEER. STRUCTURAL FILL SHALL BE PLACED ON SOUND NATIVE MATERIAL. PROOF-ROLL OUT AREAS THAT PROVIDE SUPPORT FOR PERMANENT STRUCTURES. AREAS THAT ARE EXCESSIVELY YIELDING, AS DETERMINED BY THE CONTINUOUS OBSERVATION OF THE GEOTECHNICAL ENGINEER, SHALL BE OVEREXCAVATED AND REPLACED WITH STRUCTURAL FILL.

THE DESIGN PRESSURES FOR SUBGRADE WALLS ARE BASED ON A "DRAINED" CONDITION. SEE CIVIL AND MECHANICAL DRAWINGS FOR SUBGRADE DRAINAGE SYSTEM. SEE GEOTECHNICAL REPORT FOR COMPACTION REQUIREMENTS AT SUBGRADE WALLS. SUBGRADE WALLS AND SUPPORTING SLABS SHALL HAVE ATTAINED THEIR FULL CONCRETE STRENGTH BEFORE PLACING ANY BACKFILL. THE CONTRACTOR SHALL PROVIDE TEMPORARY BRACES FOR WALLS IF BACKFILL IS PLACED BEFORE WALLS AND SLABS ACHIEVE FULL CONCRETE STRENGTH.

CONCRETE

MIXING, BATCHING, TRANSPORTING, PLACING, AND CURING OF ALL CONCRETE, AND SELECTION OF CONCRETE MATERIALS, SHALL CONFORM TO ACI 301, "SPECIFICATIONS FOR STRUCTURAL CONCRETE," EXCEPT AS NOTED BELOW. PROPORTIONS OF AGGREGATE TO CEMENTITIOUS PASTE SHALL BE SUCH AS TO PRODUCE A DENSE, WORKABLE MIX THAT CAN BE PLACED WITHOUT SEGREGATION OR EXCESS FREE SURFACE WATER.

MIX DESIGNS SHALL BE SUBMITTED TO THE ARCHITECT AND APPROVED PRIOR TO USE. SELECTION OF CONCRETE MIX PROPORTIONS SHALL BE IN ACCORDANCE WITH ACI 301. MIX PROPORTIONS SHALL MEET OR EXCEED THE REQUIREMENTS WHERE THE CONCRETE IS USED.

THE CEMENTITIOUS MATERIAL CONTENT SHALL BE ADEQUATE FOR THE SPECIFIED REQUIREMENTS FOR STRENGTH, WATER-CEMENT RATIO, DURABILITY, AND FINISHABILITY.

ALL CONCRETE USED IN HORIZONTAL SURFACES EXPOSED TO THE WEATHER SHALL CONTAIN AN ACCEPTABLE ADMIXTURE TO PRODUCE AIR-ENTRAINED CONCRETE WITH TOTAL AIR CONTENT AS NOTED IN THE CONCRETE MIX SPECIFICATION.

MAXIMUM CURED UNIT WEIGHT OF LIGHTWEIGHT CONCRETE SHALL BE 110 PCF PLUS OR MINUS 3 PCF AND THAT OF NORMAL WEIGHT CONCRETE SHALL BE 145 PCF.

IN ADDITION TO ANY CAMBER NOTED IN THE STRUCTURAL DRAWINGS, CONCRETE FORMWORK SHALL BE CAMBERED TO COMPENSATE FOR FORM SAG UNDER WET CONCRETE LOAD. CAMBERS OF LESS THAN 1/8 INCH MAY BE NEGLECTED.

FLOOR SLABS SHALL BE CONSTRUCTED TO THE THICKNESS SHOWN ON THE STRUCTURAL DRAWINGS. REFER TO THE SPECIFICATIONS FOR FLOOR TOLERANCES. THE CONTRACTOR SHALL INCLUDE THE QUANTITIES OF THE ADDED CONCRETE DUE TO THE STEEL DECK DEFLECTION.

ALL CONSTRUCTION JOINTS IN SLABS, BEAMS, AND WALLS SHALL BE IN ACCORDANCE WITH THE TYPICAL DETAILS. INTENTIONAL ROUGHENING WHERE NOTED AS AN ALTERNATE SHALL OCCUR BY SAND BLASTING OR CHIPPING HAMMER TO EXPOSE THE AGGREGATE EMBEDDED IN THE PREVIOUS POUR SO THAT IT PROTRUDES AND HAS A MINIMUM AMPLITUDE OF 1/4 INCH. ALL CONSTRUCTION JOINT SURFACES SHALL BE CLEANED AND LAITANCE REMOVED. IMMEDIATELY BEFORE NEW CONCRETE IS PLACED, THE JOINTS SHALL BE: WETTED AND STANDING WATER REMOVED.

ALL CONSTRUCTION JOINTS FOR SLABS ON DECK SHALL BE IN ACCORDANCE WITH THE TYPICAL DETAILS.

ALL CONSTRUCTION, CONTROL, AND ISOLATION JOINTS FOR SLABS ON GRADE SHALL BE IN ACCORDANCE WITH THE TYPICAL DETAILS.

THE CONTRACTOR SHALL SUBMIT THE PROPOSED LOCATIONS OF JOINTS TO THE ENGINEER FOR ACCEPTANCE BEFORE STARTING CONSTRUCTION. PROVIDE JOINTS AT LOCATIONS SPECIFICALLY NOTED ON THE ARCHITECTURAL OR STRUCTURAL DRAWINGS.

WHERE REQUIRED BY THE ARCHITECT, CONCRETE TOPPING SLABS WITH A MINIMUM THICKNESS OF 3 INCHES AND MAXIMUM THICKNESS OF 7 INCHES SHALL BE CONSTRUCTED IN ACCORDANCE WITH THE ARCHITECTURAL DETAILS. TYPICAL TOPPING SLABS SHALL BE REINFORCED WITH WELDED WIRE FABRIC, WWF 4 X 4 - W4.0 X W4.0 UNLESS NOTED OTHERWISE. TOPPINGS SHALL HAVE CONTROL JOINTS AT 10'-0" ON CENTER MAXIMUM EACH WAY UNLESS NOTED OTHERWISE.

REFER TO THE ARCHITECTURAL DRAWINGS FOR ALL CONCRETE DIMENSIONS NOT SHOWN ON THE STRUCTURAL DRAWINGS. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO DEVELOP DETAILED SLAB EDGE AND CONCRETE OUTLINE DRAWINGS BASED ON THE ARCHITECTURAL, STRUCTURAL, AND MEP DRAWINGS. THE DETAILED EDGE AND OUTLINE DRAWINGS SHALL BE SUBMITTED FOR REVIEW. SUBMITTED DRAWINGS SHALL CONTAIN ALL CONCRETE CURBS, FORM OUTLINES, AND EMBEDDED ITEMS. DIMENSIONS AND OUTLINES DEVELOPED BY THE CONTRACTOR MAY VARY FROM THOSE SHOWN BY THE ARCHITECT AND ENGINEER AS NECESSARY BASED ON THE DEPENDENCY ON ADJACENT MATERIALS THAT ARE DETERMINED BY THE CONTRACTOR AND/OR SUPPLIER (EXTERIOR CLADDING, ELEVATOR EQUIPMENT, FINAL MEP SHAFT SIZES, ETC.). CONCRETE OUTLINES SHALL BE ADJUSTED AS NECESSARY TO ACCOUNT FOR CONSTRUCTION METHODS AND FOR SLAB SHRINKAGE. THE CONCRETE OUTLINE DEVELOPED BY THE CONTRACTOR SHALL NOT MATERIALLY ALTER THE DESIGN INTENT SHOWN IN THE STRUCTURAL DRAWINGS.

EXCEPT AS DETAILED ON STRUCTURAL DRAWINGS, NO CONCRETE FOOTINGS, BEAMS, OR GIRDERS SHALL BE SLEEVED FOR PIPING OR DUCTS, UNLESS APPROVED BY THE ENGINEER.

ANCHORAGE TO HARDENED CONCRETE SHALL INCLUDE MECHANICAL AND ADHESIVE ANCHORS OF SIZE, NUMBER, AND SPACING AS SHOWN ON THE DRAWINGS. HOLES SHALL BE DRILLED AND CLEANED AND ANCHORS SHALL BE INSTALLED IN STRICT ACCORDANCE WITH THE MANUFACTURER'S PUBLISHED INSTRUCTIONS AND AN APPROVED ICC-ES REPORT. INSPECTION AND TESTING SHALL BE PROVIDED IN ACCORDANCE WITH THE GENERAL NOTES AND THE APPROVED ICC-ES REPORT.

WHERE THE ANCHOR TYPE IS SPECIFIED ON THE DRAWINGS, SUBSTITUTION FOR A DIFFERENT TYPE OF ANCHORAGE (INCLUDING SUBSTITUTING FOR CAST-IN-PLACE ANCHORAGE) SHALL NOT BE PERMITTED WITHOUT PRIOR CONSENT OF THE ENGINEER.

UNLESS NOTED OTHERWISE, ANCHORS SHALL BE ASTM A36 THREADED RODS OR ASTM A615, GRADE 60 REINFORCING STEEL DOWELS. CONCRETE SHALL BE ASSUMED CRACKED UNLESS NOTED OTHERWISE.

WHEN EMBEDMENT IS NOTED ON THE DRAWINGS, THE ANCHOR EFFECTIVE EMBEDMENT DEPTH SHALL EQUAL OR EXCEED THE NOTED EMBEDMENT DEPTH. WHERE NO EMBEDMENT IS NOTED ON THE DRAWINGS, THE MINIMUM EFFECTIVE ANCHOR EMBEDMENT DEPTH SHALL BE 8 x ANCHOR DIAMETERS, MINIMUM DISTANCE TO THE NEAREST CONCRETE EDGE SHALL BE 12 x ANCHOR DIAMETERS, AND MINIMUM ANCHOR SPACING SHALL BE 8 x ANCHOR DIAMETERS.

STAINLESS STEEL ANCHORS SHALL BE USED AT ALL EXTERIOR LOCATIONS AND WHERE SPECIFICALLY INDICATED ON THE DRAWINGS. NO STEEL REINFORCEMENT SHALL BE CUT TO INSTALL ANCHORS.

HOLES SHALL BE DRILLED WITH ROTARY IMPACT HAMMER OR EQUIVALENT METHOD TO PRODUCE A HOLE WITH A ROUGH INSIDE SURFACE. CORE DRILLING LESSES NOT PERMITTED. THE ADHESIVE SHALL BE MIXED, APPLIED, AND CURED IN STRICT ACCORDANCE WITH THE MANUFACTURER'S PUBLISHED INSTALLATION INSTRUCTIONS IN THE ICC-ES REPORT. ALL PLACEMENT AND CURING SHALL BE CONDUCTED WITH CONCRETE AND AIR TEMPERATURES ABOVE 50 DEGREES FAHRENHEIT. ADHESIVE SHALL BE APPLIED ONLY TO CLEAN, DRY CONCRETE. POSITIVE PROTECTION SHALL BE PROVIDED SO THAT ANCHORS ARE NOT DISTURBED DURING THE CURING PERIOD. DEFECTIVE OR ABANDONED HOLES SHALL BE FILLED WITH NON-SHRINK GROUT OR AN INJECTABLE ADHESIVE MATCHING THE ADJACENT CONCRETE COMPRESSIVE STRENGTH. NOTIFY THE STRUCTURAL ENGINEER OF DEFECTIVE OR ABANDONED HOLES IN WALLS AND COLUMNS. THESE ELEMENTS MAY REQUIRE NON-SHRINK GROUT WITH A COMPRESSIVE MODULUS OF ELASTICITY MATCHING THAT OF THE ADJACENT CONCRETE.

POLYSTYRENE OR RIGID INSULATION PLACED BELOW CONCRETE SLABS SHALL CONSIST OF RIGID CELLULAR POLYSTYRENE CONFORMING TO ASTM D6817. POLYSTYRENE SHALL HAVE A MINIMUM COMPRESSIVE RESISTANCE OF 3.6 PSI AT 1 PERCENT DEFORMATION UNLESS NOTED OTHERWISE. SECURE POLYSTYRENE IN PLACE PER THE MANUFACTURER'S RECOMMENDATIONS. THE BLOCKS OF POLYSTYRENE SHALL BE PLACED TO OFFSET JOINTS 24 INCHES BETWEEN THE ADJACENT LAYERS.

AT THE CONTRACTOR'S OPTION, IN LIEU OF POLYSTYRENE CONFORMING TO ASTM D6817, PROVIDE POLYSTYRENE CONFORMING TO ASTM C578 TYPE XIV RATED FOR 40 PSI COMPRESSIVE RESISTANCE AT 10 PERCENT DEFORMATION WITH A MINIMUM THICKNESS OF 2 INCHES PER LAYER.

GROUT SHALL BE AN APPROVED NON-SHRINK CEMENTITIOUS GROUT CONTAINING NATURAL AGGREGATES DELIVERED TO THE JOB SITE IN FACTORY PREPACKAGED CONTAINERS REQUIRING ONLY THE ADDITION OF WATER. THE MINIMUM 28-DAY COMPRESSIVE STRENGTH SHALL BE AT LEAST 1,000 PSI HIGHER THAN THE SUPPORTING CONCRETE STRENGTH, UNLESS NOTED OTHERWISE. GROUT SHALL BE MIXED, APPLIED, AND CURED STRICTLY IN ACCORDANCE WITH THE MANUFACTURER'S INSTRUCTIONS. FOR GROUTING UNDER BASE PLATES, GROUT SHALL BE PROPORTIONED AS A FLOWABLE MIX. WHEN A FLOWABLE MIX DOES NOT PROVIDE THE REQUIRED STRENGTH OR WHEN A MINIMUM STRENGTH OF 10,000 PSI IS REQUIRED, AN EPOXY GROUT SHALL BE USED.

REINFORCING STEEL

REINFORCING BARS SHALL BE ASTM A 615/A 615M, GRADE 60, DEFORMED, LOW-ALLOY-STEEL REINFORCING BARS SHALL BE ASTM A 706/A 706M, DEFORMED. PLAIN-STEEL WELDED WIRE REINFORCEMENT SHALL BE ASTM A 185/A 185M, PLAIN, FABRICATED FROM AS-DRAWN STEEL WIRE INTO FLAT SHEETS. DEFORMED-STEEL WELDED WIRE REINFORCEMENT SHALL BE ASTM A 497/A 497M, FLAT SHEET.

REINFORCING STEEL SHALL BE DETAILED IN ACCORDANCE WITH ACI 315, "DETAILS AND DETAILING OF CONCRETE REINFORCEMENT." BARS SHALL BE SUPPORTED ON CHAIRS IN ACCORDANCE WITH THE CRSI MANUAL OF STANDARD PRACTICE. ALL REINFORCING BARS SHALL BE SECURELY TIED IN PLACE WITH #16 GAGE MIN ANNEALED BLACK WIRE. EPOXY-COATED REINFORCING BARS SHALL BE TIED WITH NYLON, EPOXY, OR PLASTIC-COATED TIE WIRE OR OTHER ACCEPTABLE MATERIALS. SHOP DRAWINGS, INCLUDING PLACING PLANS AND ELEVATIONS SHALL BE SUBMITTED TO, AND REVIEWED BY, THE ARCHITECT/ENGINEER BEFORE STARTING FABRICATION.

REINFORCING BARS SHALL BE LAP SPLICED FOR TENSION (L_s) UNLESS NOTED OTHERWISE ON THE DRAWINGS. #14 AND #18 BARS SHALL BE SPLICED USING MECHANICAL COUPLINGS INCLUDING SPLICES WITH SMALLER BARS. #14 AND #18 BARS SHALL NOT BE LAP SPLICED. AT THE CONTRACTOR'S OPTION, MECHANICAL COUPLINGS MAY BE USED FOR ANY BAR SIZE, PROVIDED A CURRENT ICC-ES REPORT DEMONSTRATES THAT THE PRODUCT CAN ACHIEVE A MINIMUM TENSILE STRENGTH OF 125 PERCENT OF THE SPECIFIED YIELD STRENGTH OF THE BAR. NO REINFORCING BARS SHALL BE SPLICED BY WELDING. SPLICE DEVICES SHALL HAVE A CURRENT ICC-ES REPORT THAT SHALL BE SUBMITTED TO THE ENGINEER FOR APPROVAL. HEADED BARS OR TERMINATORS SHALL BE PROVIDED WHERE INDICATED ON THE DRAWINGS OR AT THE CONTRACTOR'S OPTION FOR CONGESTED AREAS OF REINFORCEMENT ANCHORAGE SUBJECT TO THE ENGINEER'S APPROVAL. HEADED BARS OR TERMINATORS SHALL MEET THE REQUIREMENTS OF ACI 318 AND ASTM A970, AND HAVE A CURRENT ICC-ES REPORT.

WELDED WIRE FABRIC (WWF) SHALL BE ELECTRICALLY WELDED AND CONFORM TO ASTM A1064. LAP EDGES AND ENDS OF FABRIC A MINIMUM OF ONE MESH SPACING PLUS 2 INCHES, BUT NOT LESS THAN 6 INCHES. WELDED WIRE FABRIC SHALL BE SUPPORTED ON CHAIRS IN ACCORDANCE WITH THE CRSI MANUAL OF STANDARD PRACTICE. MINIMUM WWF IS 6w6-W2.9wW2.9, UNLESS NOTED OTHERWISE.

WELDING OR TACK WELDING OF REINFORCING BARS TO OTHER BARS OR TO PLATES, ANGLES, ETC. IS PROHIBITED, EXCEPT WHERE SPECIFICALLY APPROVED BY THE ENGINEER. WHERE WELDING IS APPROVED, IT SHALL BE DONE BY AWS CERTIFIED WELDERS USING E5018 OR APPROVED ELECTRODES. WELDING PROCEDURES SHALL CONFORM TO THE REQUIREMENTS OF AWS D1.4.

EPOXY COATED REINFORCING BARS SUPPORTED FROM FORMWORK SHALL REST ON COATED WIRE BAR SUPPORTS, OR ON BAR SUPPORTS MADE OF DIELECTRIC MATERIAL OR OTHER ACCEPTABLE MATERIALS. WIRE BAR SUPPORTS SHALL BE COATED WITH DIELECTRIC MATERIAL FOR A MINIMUM DISTANCE OF 2 INCHES FROM THE POINT OF CONTACT WITH THE EPOXY COATED REINFORCING BARS. REINFORCING BARS USED AS SUPPORT BARS SHALL BE EPOXY COATED.

MINIMUM CAST-IN-PLACE CONCRETE COVER OVER REINFORCING STEEL, UNLESS NOTED OTHERWISE, SHALL BE AS FOLLOWS:

CONCRETE CAST AGAINST EARTH:		
ALL BAR SIZES:	3	INCHES
CONCRETE EXPOSED TO EARTH OR WEATHER:		
#6 BAR OR LARGER:	2	INCHES
#5 BAR OR SMALLER:	1 1/2	INCHES
OTHER CONCRETE:		
SLABS:		
#14 AND #18 BARS:	1 1/2	INCHES
#11 BARS AND SMALLER:		
TOP BARS:	3/4	INCHES
BOTTOM BARS:	1	INCH
WALLS:		
#14 AND #18 BARS:	1 1/2	INCHES
#11 BARS AND SMALLER:	1	INCH
BEAMS AND COLUMNS, TIES, STIRRUPS, SPIRALS,		
ALL BAR SIZES:	1 1/2	INCHES

SPECIFIED CONCRETE COVER SHALL BE MAINTAINED TO ALL REINFORCEMENT AT CONCRETE REVEALS AND INSETS. SHOP DRAWINGS SHOWING CONCRETE REVEALS AND OTHER INSETS SHALL BE SUBMITTED FOR REVIEW.

STRUCTURAL STEEL

ALL STEEL SHALL CONFORM TO THE FOLLOWING:

W-SHAPES	ASTM A992, ASTM A913, ASTM A36,	Fy=50 KSI Fy=60 KSI Fy=36 KSI
----------	---------------------------------------	-------------------------------------

SQUARE OR RECTANGULAR STRUCTURAL TUBE (HSS)	ASTM A500, GRADE C	Fy=50 KSI
ROUND STRUCTURAL TUBE (HSS)	ASTM A500, GRADE C	Fy=46 KSI

STEEL PIPE DIAMETER LESS THAN OR EQUAL TO 12 INCHES	ASTM A53, TYPE E OR S GRADE B,	Fy=35 KSI
MATERIAL CALLED OUT ON PLANS AS (A36)	ASTM A36,	Fy=36 KSI
MATERIAL CALLED OUT ON PLANS AS (Fy=65 KSI)	ASTM A913,	Fy=65 KSI
ALL OTHER STEEL UNLESS NOTED OTHERWISE	ASTM A572, ASTM A588,	Fy=50 KSI Fy=50 KSI

ALL WORK SHALL BE IN ACCORDANCE WITH THE AISC SPECIFICATION. SHOP DRAWINGS SHALL BE SUBMITTED AND REVIEWED BY THE ARCHITECT/ENGINEER BEFORE COMMENCING FABRICATION. CONNECTION DESIGN SHALL MEET THE REQUIREMENTS OF THE AISC SPECIFICATIONS AND THE BUILDING CODE. CONNECTIONS SHALL BE CAPABLE OF RESISTING ALL LOADS LISTED ON THE DRAWINGS.

UNLESS SPECIFICALLY DETAILED COMPLETELY ON THE STRUCTURAL DRAWINGS, CONNECTION DETAILS SHOWN ILLUSTRATES THE GENERAL DESIGN AND DETAILING CRITERIA. THE CONTRACTOR SHALL RETAIN A STRUCTURAL ENGINEER LICENSED TO PERFORM THE WORK IN THE JURISDICTION WHERE THE PROJECT IS LOCATED, WHO SHALL DESIGN AND COMPLETE THE CONNECTIONS. SUBMIT STAMPED CALCULATIONS TO THE ARCHITECT FOR REVIEW AND APPROVAL PRIOR TO FABRICATION.

THE CONTRACTOR SHALL BE RESPONSIBLE FOR ALL ERECTION AIDS THAT INCLUDE, BUT ARE NOT LIMITED TO, ERECTION ANGLES, LIFT HOLES, AND OTHER AIDS.

ALL HIGH-STRENGTH BOLTS SHALL BE INSTALLED, TIGHTENED, AND INSPECTED IN ACCORDANCE WITH THE RCSC. BOLTS IN ALL CONNECTIONS MAY BE SNUG TIGHT UNLESS SPECIFICALLY CALLED OUT AS SLIP CRITICAL (SC).

WHERE CONNECTIONS ARE NOTED AS SNUG-TIGHT, THE CONTRACTOR MAY INSTALL PER THE CRITERIA FOR SNUG-TIGHT BOLTS. SLIP-CRITICAL CONNECTIONS SHALL USE LOAD INDICATOR WASHERS OR TENSION CONTROL BOLTS. ALL ASTM A307 BOLTS SHALL BE PROVIDED WITH LOCK WASHERS UNDER NUTS OR SELF-LOCKING NUTS. ALL BOLT HOLES SHALL BE STANDARD SIZE UNLESS NOTED OTHERWISE.

PROVIDE MINIMUM 16 KIPS OF FACTORED LOAD CAPACITY FOR SHEAR CONNECTIONS.
PROVIDE MINIMUM 3/8" THICK PLATE UNLESS OTHERWISE NOTED.

ALL CANTILEVERED MOMENT CONNECTIONS SHALL DEVELOP THE FULL TENSILE CAPACITIES OF THE CANTILEVERED BEAM. CANTILEVERED BEAM SIZE SHALL MATCH THE BACK SPAN UON.

ALL ENDS OF BEARING CONNECTIONS SHALL BE MILLED TO COMPLETE TRUE BEARING.

ALL STRUCTURAL STEEL NOT RECEIVING SPRAY-ON FIREPROOFING SHALL BE PRIMED. PARTS OF STRUCTURAL STEEL LEFT UNPAINTED BECAUSE OF FIELD WELDING OR BOLTING SHALL RECEIVE A FIELD APPLICATION OF METAL PROTECTION. ALL STEEL ELEMENTS IN CONCRETE OR MASONRY SHALL BE LEFT UNPAINTED.

ALL EXTERIOR STEEL, INCLUDING CONNECTIONS AND ANCHORS, SHALL BE HOT-DIP GALVANIZED UNLESS OTHERWISE CALLED OUT ON PLANS AND SECTIONS ON CONSTRUCTION DOCUMENTS.

THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE CONTROL OF ALL ERECTION PROCEDURES AND SEQUENCES AND THE USE OF SHOP AND/OR FIELD WELDS. ALL PARTIAL JOINT PENETRATION GROOVE WELD SIZES SHOWN ON THE DRAWINGS REFER TO EFFECTIVE THROAT THICKNESS. ALL WELDS SHALL BE MADE USING LOW HYDROGEN ELECTRODES WITH MINIMUM TENSILE STRENGTH PER AWS D1.1 (MINIMUM 70 KSI). LOW HYDROGEN SMAW ELECTRODES SHALL BE USED WITHIN 4 HOURS OF OPENING THEIR HERMETICALLY SEALED CONTAINERS, OR SHALL BE REBAKED PER AWS D1.1, SECTION 4.5. ELECTRODES SHALL BE REBAKED NO MORE THAN ONE TIME, AND ELECTRODES THAT HAVE BEEN WET SHALL NOT BE USED.

ALL WELDING SHALL BE PERFORMED IN STRICT ADHERENCE TO A WRITTEN WELDING PROCEDURE SPECIFICATION (WPS) PER AWS D1.1. ALL WELDING PARAMETERS SHALL BE WITHIN THE ELECTRODE MANUFACTURER'S RECOMMENDATIONS. WELDING PROCEDURES SHALL BE SUBMITTED TO THE OWNER'S TESTING AGENCY FOR REVIEW BEFORE STARTING FABRICATION OR ERECTION. COPIES OF THE WPS SHALL BE ON SITE AND AVAILABLE TO ALL WELDERS AND THE SPECIAL INSPECTOR.

ALL COMPLETE JOINT PENETRATION WELDS SHALL BE ULTRASONICALLY TESTED UPON COMPLETION OF THE CONNECTION. EXCEPT PLATE LESS THAN OR EQUAL TO 1/4 INCH THICK SHALL BE MAGNETIC PARTICLE TESTED. REDUCTION IN TESTING MAY BE MADE IN ACCORDANCE WITH THE BUILDING CODE WITH APPROVAL OF THE ENGINEER.

THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE JOINT PREPARATIONS AND WELDING PROCEDURES THAT INCLUDE, BUT ARE NOT LIMITED TO: REQUIRED ROOT OPENINGS; ROOT FACE DIMENSIONS; GROOVE ANGLES; BACKING BARS, COPELS, SURFACE ROUGHNESS VALUES, AND TAPERS AND TRANSITIONS OF UNEQUAL PARTS.

REFER TO ARCHITECTURAL PLANS FOR MINIMUM HOURLY VALUES OF STEEL FIRE PROTECTION FOR DETERMINING THE THICKNESS OF SPRAY APPLIED FIREPROOFING. THE STRUCTURAL FRAME CONSISTS OF COLUMNS AND GIRDERS, BEAMS, TRUSSES, AND SPANDELS HAVING DIRECT CONNECTIONS TO THE COLUMNS AND BRACING MEMBERS DESIGNED TO CARRY GRAVITY LOADS. FLOOR OR ROOF MEMBERS THAT HAVE NO CONNECTION TO COLUMNS SHALL BE CONSIDERED SECONDARY MEMBERS. ANCHOR RODS SHALL BE ASTM F1554 GRADE 36 WITH CLASS 2A THREADS, UNLESS NOTED OTHERWISE. FURNISH ANCHOR RODS PREFABRICATED WITH MATCHING DOUBLE HEAVY HEX NUTS JAMMED AT THE END EMBEDDED IN CONCRETE. FURNISH HARDENED PLATE WASHERS, LOCK WASHERS, AND MATCHING HEAVY HEX NUTS FOR SECURING THE BASE PLATE TO THE ANCHOR RODS. HOOKED ANCHOR RODS SHALL NOT BE USED EXCEPT WHERE NOTED. ANCHOR ROD NUTS SHALL BE INSTALLED TO A SNUG-TIGHT CONDITION. NO HEATING OR BENDING OF THE ANCHOR RODS IS PERMITTED. HOLES IN THE BASE MATERIAL SHALL NOT BE ENLARGED BY BURNING.

STEEL DECK

FLOOR DECK SHALL BE GALVANIZED COMPOSITE STEEL DECK AS CALLED OUT ON PLANS WITH THE MINIMUM PROPERTIES AS FOLLOWS:

2" DECK, 20 Ga., GRADE 50, I _p = 0.403 in ⁴ , I _n = 0.402 in ⁴ , S _p = 0.326 in ³ , S _n = 0.337 in ³ .
ROOF DECK SHALL BE


 01/13/2026

PROFESSIONAL CERTIFICATION:
 I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED
 OR APPROVED BY ME, AND THAT I AM A DULY LICENSED
 PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF
 MARYLAND, LICENSE NO. 47318. EXPIRATION DATE: 11/16/2027

SEAL

PROJECT:
**PRINCE GEORGE'S COUNTY PUBLIC
SCHOOLS ALTERNATIVE CONSTRUCTION
FINANCING PACKAGE 2**



One Thomas Circle NW, Suite 20
Washington, DC 20005
T. +1 202 861 1325
F. +1 202 861 1326

PRINCE GEORGE'S COUNTY PUBLIC SCHOOLS
Sasscer Administration Building, 14201 School Lane,
Upper Marlboro, MD 20772

PROGRESSIVE EDUCATION PARTNERSHIP
401 E. Kennedy Blvd., Suite 1470, Tampa, Florida 33602

MCN BUILD

ASSOCIATE ARCHITECT:

3003 Creston St, Hyattsville, MD 20781
 SAUL L. GITEE

BRADLEY SITE DESIGN
1010 Wisconsin Ave. NW, Ste.620, DC 20007

BRADLEY SITE DESIGN

STRUCTURAL:
XUN ASSOCIATES

MEPFP, LIGHTING & ENERGY MODELING:

FOOD SERVICE:

7146 Starmount Way, New Market, MD 21774

HELLER & METZGER PC
1600 K Street NW, Suite #500, Washington, DC 20004

PERKINS EASTMAN ARCHITECTS

ACOUSTICS:
POLYSONICS

AV, IT, & SECURITY:

TRAFFIC CONSULT:

9900 Franklin Square Drive, Ste. H, Baltimore, MD 21102

ENVELOPE CONSULTANT:

PROJECT TITLE:

PROJECT No: 0100147

0' 8' 16' 32' 48'

SCALE : $1/16" = 1'-0"$


S-003

06 APRIL 2026




Autodesk Docs://PGCPS-P3_8 Buildings/2025001_P3_ST_SpringHillES_R25.rvt
4/2/2026 4:28:08 PM

SCHEDULE OF SPECIAL INSPECTIONS						
MATERIAL/ACTIVITY	TYPE OF INSPECTION	Y/N	C/P	APPLICABLE TO THIS PROJECT		
GENERAL				ENTENT/REFERENCE	AGENT	COMPLETED
Pre-construction conference	Meeting with parties listed in Chapter 17 of IBC to discuss Special Inspection procedures	Y		Scheduled by Prince George's County DPIE with Contractor prior to commencement of work		
EARTHWORK						
Site preparation (building)	Field testing and inspection	Y	P	Field Review; IBC 1705.6		
Fill material (building)	Review submittals, field testing and inspection	Y	P	Field Review; IBC 1705.6		
Fill compaction (building)	In place density tests, lift thickness	Y	C	Field Review; IBC 1705.6		
Excavation	Field inspection and verification of proper depth	Y	P	Field Review; IBC 1705.6		
Foundation sub-grade	Field inspection of foundation subgrade prior to placement of concrete	Y	P	Field Review; IBC 1705.6		
DEEP FOUNDATION ELEMENTS						
Materials	Review product, sizes, and lengths	Y	C	Submittal and Field Review; IBC1705.7, 1705.8, 1705.9		
Test piles	Monitor driving of test piles	Y	C	Field Review; IBC 1705.8, .9 or .10		
Installation	Monitor drilling, placement, plumb, driving of piles, including recording blows per foot, cut off, and tip elevation	Y	C	Field Review; IBC 1705.2, 1705.3, 1705.7		
Load test	Monitor pile load test	Y	C	Field Review; IBC 1705.8, .9 or .10		
CONCRETE						
Materials	Review product supplied versus certificates of compliance and mix design	Y	P	Submittal & Field Review; IBC 1705.3; ACI 318: Ch. 4 and 5; IBC 1904.2, 1910.2, 1903.3		
Installation of reinforcing steel, including Pre-stressed tendons and anchor bolts as well as welding	Field inspection of placement	Y	P	Submittal and Field Review; ACI 318:3.5, 3.5.2, 3.8.6 & Ch. 7, 8.1.3 and 21.2.8; AWS D1.4; IBC 1705.3, 1908.5, 1909.1, 1910.4		
Formwork installation	Field inspection	Y	P	Field Review; ACI 318: 6.1.1; IBC 1705.3		
Concreting operations and placement	Field inspection of placement/sampling	Y	C	Field Review; ACI 318: 5.6, 5.8, 5.9-10; ASTM C 172, C 31; IBC 1705.3, 1910.6, 1910.7, 1910.8, 1910.10		
Concrete curing	Field inspection of curing process	Y	P	Field Review; ACI 318: 5.11-13; IBC 1705.3, 1910.9		
Concrete strength	Evaluation of concrete strength	Y	P	Laboratory Testing; ACI 318: 6.2; IBC 1705.3		
PRECAST CONCRETE						
Verify fabrication/quality control procedures	In-plant inspection of fabrication/quality control procedures**	N	P	Submittal or Field Review; IBC 1705.3		
Erection and installation	Review submittals and as-built assemblies; Field inspection of in-place precast	N	P	Submittal and Field Review; ACI 318; Ch. 16; IBC Table 1705.3		
MASONRY (Level B; Building Risk Category III)						
TYPICAL FOR LEVEL B AND RISK CATEGORY I,II,III						
Materials	Review of products supplied versus certificate of compliance and material submitted	Y	P	Submittal & Field Review; ACI 530/ASCE 5; ACI 530.1/ASCE 6; IBC 1705.4, 1708		
Strength	Testing/review of strength	Y	C	Submittal & Field Review; ACI 530/ASCE 5; ACI 530.1/ASCE 6; IBC 1705.4, 2105.2.2, 2105.3		
Mortar and Grout	Inspection of proportioning and mixing. Placement of mortar only.	Y	P	Field Review; IBC 1705.4; ACI 530/ASCE 5; ACI 530.1/ASCE 6		
Grout placement, including pre-stressing grout	Verification to ensure compliance	Y	C	Field Review; IBC 1705.4; ACI 530/ASCE 5; ACI 530.1/ASCE 6		
Grout space	Verification to ensure compliance	Y	P	Field Review; IBC 1705.4; ACI 530/ASCE 5; ACI 530.1/ASCE 6; TMS 602		
Mortar, grout, and prism specimens	Observe Preparation	Y	C	Field Review; IBC 1704.5, ACI 530.1; ASCE 6		
Reinforcement, pre-stressing tendons, and connections	Inspect condition, size, location, and spacing	Y	P	Field Review; IBC 1704.5; ACI 530/ASCE 5; ACI 530.1/ASCE 6		
Welding of reinforcing bars	Inspection and testing of welds	N	C	Field Review; IBC 1705.4; ACI 530/ASCE 5; ACI 530.1/ASCE 6		
Pre-stressing force	Verify application and measurement	N	C	Field Review; IBC 1705.4; ACI 530/ASCE 5; ACI 530.1/ASCE 6		
Protection	Inspect procedures for protection during cold and hot weather	Y	P	Field Review; IBC 1705.4; ACI 530/ASCE 5; ACI 530.1/ASCE 6		
Anchorage	Inspection of anchorages	Y	P	Field Review; ACI 530.1/ASCE 6, ASCE 6; IBC 1705.4; ACI 530/ASCE 5		
Masonry installation	Inspection of placement of masonry and joints (Periodic after the first 5000 sq.ft)	Y	C	Field Review; ACI 530/ASCE 5; ACI 530.1/ASCE 6; IBC 1705.4		
Grouting of pre-stressed tendons	Field inspection	N	C	Field Review; ACI 318: 18.18.4; IBC 1705.3		
Application of forces for pre-stressed concrete	Field inspection	N	C	Field Review; ACI 318: 18.20; IBC 1705.3		
STRUCTURAL STEEL						
Verify fabrication/quality control procedures	In-plant inspection of fabrication/quality control procedures or submit Certificate of Compliance	Y	P	IBC 1704.2.5, IBC 1704.2.5.1, 1704.2.5.2, 1705.2		
Bolts, nuts, and washers – materials	Material identification markings. Review of Certificate of Compliance	Y	P	Submittal & Field Review; IBC 1705.2.1; IBC 1705.2.2; IBC 1706; ASTM; AISC 360, Section A3.3		
Bolts, nuts, washers – installation	Inspection of in-place high-strength bolts, snug-tight joints, pre-tensioned and bearing type, and slip critical connections	Y	C	Submittal & Field Review; IBC 1705.2.1, 1705.2.2, AISC 360 Section M2.5		
Structural steel – materials	Material identification markings and review of Certificate of Compliance	Y	P	Submittal & Field Review; IBC 1705.2.1, 1705.2.2, 1706; ASTM A6, A568		
Structural steel details – installation	Inspection of member locations, structural details for bracing, connections, stiffening	Y	P	Submittal & Field Review; IBC 1705.2.1, 1705.2.2, AISC 360		
Weld filler materials and welder certification	Review of identification markings, certificate of compliance, and welder certifications	Y	P	Submittal & Field Review; ASTM AISC 360 A3.5		
Welds	Inspection and testing of welds	Y	C	Field Review; IBC 1705.2.2.1; AWS D1.1, D1.3		
Cold-formed metal deck – materials	Review of identification marking manufacturer's certified test results	Y	P	Submittal and Field Review; IBC 1705.2.2; ASTM		
Cold-formed metal deck – installation	Review laps and welds	Y	P	Submittal and Field Review; IBC 1705.2.2, AWS D1.3		
Cold-formed light frame construction – welds	Review welding operation	Y	P	IBC 1705.10, 1705.10.2, 1705.10.3		
Cold form light frame construction wind resistance – screws	Review screw attachment bolting, anchoring hold downs, bracing, diaphragms, struts	Y	P	Field Review; IBC 1705.10, 1705.10.2, 1705.10.3		
Cold-formed steel trusses spanning 60' or greater	Inspection of temporary and permanent restraints/bracing	N	C	Field review IBC 1705.2.2.2		
WOOD						
Verify fabrication/quality control procedures	In-plant inspection of fabrication/quality control procedures** or submit Certificate of Compliance	N	P	Submittal or Field Review; IBC 1704.2.5, 1705.5, 1705.5.2		
Metal plate connected wood/metal trusses spanning 60' or more	Review approved submittal and installation of restraint/bracing	N	P	Field Review; IBC 1704.2.5, 1705.5, 1705.2		
Joist Hangers – Materials/Installation	Review manufacturer's material and test standards.	N	P	Field Review; IBC 1711, ASTM D 1761		
High-Load Diaphragms – Installation	Review submittal and as-built assemblies. Inspection of sheathing, framing size, nail and staple diameter and length, number of fastener lines, and fastener spacing.	N	C	IBC 1705.5, 1705.5.1		
Wood Shear Walls–Installation	Review nailing, bolting, anchoring, fastening, Diaphragms, struts, braces, and hold downs when fasteners are < 4' on center.	N	P	Field Review; IBC1705.10.1		
MAIN WIND FORCE RESISTING SYSTEM						
Wind requirements	Review of the system components and installation for wood construction, cold-formed steel light frame construction, components, and cladding	N	P	Submittal and Field Review; IBC 1609.1.2, 1704.5.2, 1705.10, 1705, 1705.4, 1705.4.1, 1705.4.2, 1710		
SEISMIC FORCE RESISTING SYSTEMS						
Seismic requirements	Review of the designated seismic systems and seismic force resistance systems	N	C	Submittal and Field Review; IBC 1613, 1704.5.1, 1705.11, 1705.12; ASCE 7		
SMOKE CONTROL						
Special Inspection of smoke control systems	Leakage testing and recording of device location. Pressure difference testing, flow measurement and detection, and control verification	N	P	Field Review; IBC 1705.17, 1705.17.1, 1705.17.2		
SPRAYED FIRE RESISTIVE MATERIAL, FIRE PENETRATIONS; JOINTS, MASTIC AND INTERMESCENT FIRE RESISTANT COATING						
Structural member surface conditions	Field Review of surface conditions prior to application	N	P	AWCI 12-B; IBC 1705.13, 1705.13.2		
Application/thickness/density/bond strength	Field review of application operations, thickness, and density	N	P	ASTM E605, AWCI 12-B; IBC 1705.13.2; 1705.13.1, 1705.13.3, 1705.13.4; IBC 1705.13.5, 1705.13.6		
Mastic & Intumescent Fire Resistant Coating	Field review of application operations and thickness	N	P	AWCI 12-B; IBC 1705.14		
EXTERIOR INSULATION AND FINISH SYSTEMS (EIFS)						
Application	Field Review of application/installation	N	P	ASTM E2570, IBC 1705.15		
SPECIAL CASES						
Alternative Materials and Systems	As requested by Building Official, review system and installation	N	C	IBC 1705.1.1		

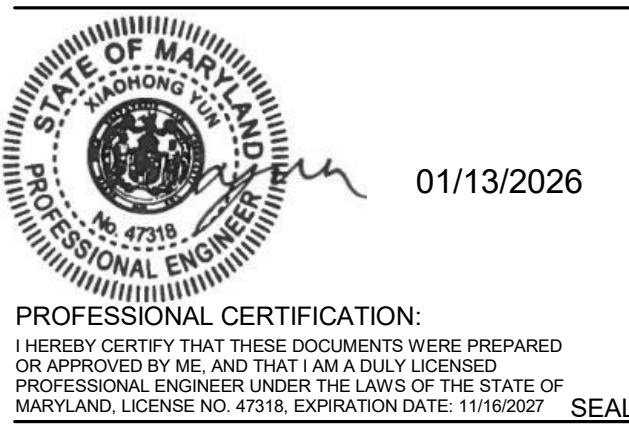[illegible]

PROJECT:
**PRINCE GEORGE'S COUNTY PUBLIC
SCHOOLS ALTERNATIVE CONSTRUCTION
FINANCING PACKAGE 2**

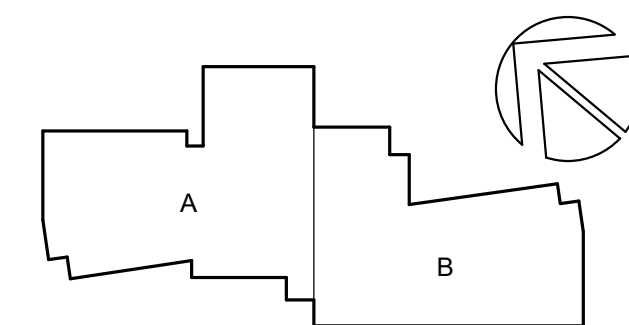

KEY PLAN

**PERKINS —
EASTMAN**
One Thomas Circle NW, Suite 200
Washington, DC 20005
T. +1 202 861 1325
F. +1 202 861 1326

OWNER:
PRINCE GEORGE'S COUNTY PUBLIC SCHOOLS
Sasscer Administration Building, 14201 School Lane,
Upper Marlboro, MD 20772

CLIENT:
PROGRESSIVE EDUCATION PARTNERSHIP
101 E. Kennedy Blvd, Suite 1470, Tampa, Florida 33606

GENERAL CONTRACTOR:
MCN BUILD
1214 28TH ST NW, Washington, DC 20007

ASSOCIATE ARCHITECT:
R. MCGHEE & ASSOCIATES, PLLC
5003 Creeton St., Hyattsville, MD 20781

CIVIL / SITE:
BRADLEY SITE DESIGN

LANDSCAPE:
BRADLEY SITE DESIGN

1010 Wisconsin Ave. NW, Ste.620, DC 20007
STRUCTURAL:
YUN ASSOCIATES

1050 Connecticut Ave. NW, Ste.500, DC 20036
MEPFP, LIGHTING & ENERGY MODELING:
CMTA INC. CONSULTING ENGINEERS

220 Lexington Green Circle Ste. 600, Lexington, KY 40502
FOOD SERVICE:
NYIKOS-GARCIA FOODSERVICE DESIGN INC.

7146 Starmount Way, New Market, MD 21774
SPECIFICATIONS:
HELLER & METZGER PC

PERKINS EASTMAN ARCHITECTS

One Thomas Circle NW, Ste. 200, Washington, DC 20037
ACOUSTICS:
BOIYSONICS

405 Belle Air Lane, Warrenton, VA 20186
AV, IT, & SECURITY:
CMTA INC. CONSULTING ENGINEERS

TRAFFIC CONSULT:
THE TRAFFIC GROUP

9900 Franklin Square Drive, Ste. H, Baltimore, MD 21206
ENVELOPE CONSULTANT:

PROJECT TITLE:

SPRINGHILL LAKE
ELEMENTARY
SCHOOL

PROJECT No: 0100147

DRAWING TITLE:
STATEMENT OF
SPECIAL
INSPECTION FORM

SCALE: NOT TO SCALE

DRWN BY: CH

CHKD BY: BY

S-004

FINAL CONSTRUCTION DOCUMENTS

06 APRIL 2026


FOUNDATION & FIRST FLOOR FRAMING PLAN NOTES:

- REFERENCE ELEVATION IS TOP OF SLAB ON GRADE ELEVATION AT 89.16' UNO THUS (+/-X'-X") ON PLAN RELATIVE TO REFERENCE ELEVATION.
- SLAB ON GRADE SHALL BE 5" NORMAL WEIGHT CONCRETE WITH 6x6 - W2.9xW2.9 WWF UNO ON PLAN. SEE TYPICAL DETAILS FOR SUBGRADE CONSTRUCTION.
- FOOTINGS AND GRADE BEAMS SHALL BE CENTERED UNDER COLUMNS AND WALLS UNO.
- TOP OF GRADE BEAM SHALL BE AT TOP OF FOOTING, PIER OR GRADE BEAM IT CONNECTS TO UNO THUS (+/-X'-X") ON PLAN RELATIVE TO REFERENCE ELEVATION.
- WHERE GRADE BEAMS FRAME INTO COLUMN FOOTING, GRADE BEAM REBARS SHOULD EXTEND 3'-0" BEYOND CENTER OF FOOTING FOR FOOTINGS 6' OR LARGER, OR EXTEND TO THE END OF FOOTINGS FOR FOOTINGS SMALLER THAN 6'. GRADE BEAM STIRRUPS TO START 3" AWAY FROM FACE OF SUPPORT.
- TOP OF FOOTING SHALL BE 1'-0" BELOW REFERENCE ELEVATION UNO THUS (+/-X'-X") ON PLAN RELATIVE TO REFERENCE ELEVATION. WHERE INDICATED ON PLAN, STEPS IN FOOTINGS ARE 12" HIGH UNO ON PLAN.
- TOP OF PIER SHALL BE 1'-0" BELOW TOP OF SLAB UNO THUS (+/-X'-X") ON PLAN RELATIVE TO REFERENCE ELEVATION.
- SEE SPEC FOR CONCRETE MIX DESIGN. CONCRETE COMPRESSIVE STRENGTH SHALL BE AS FOLLOWS:
PERIMETER FOOTINGS, GRADE BEAMS, PIERS AND WALLS: $f'_c = 4,500$ psi
INTERIOR FOOTINGS, GRADE BEAMS, PIERS AND WALLS: $f'_c = 3,000$ psi
SLAB ON GRADE: $f'_c = 3,500$ psi
TIE BEAMS: $f'_c = 3,000$ psi
- UNO ON PLANS OR IN SECTIONS, CMU WALLS SHOWN ARE 8" THICK FULLY GROUTED WITH #4@8" OC AT STAIRS AND #4 @48" OC AT THE ELEVATOR SHAFT.
- SEE ARCH DWGS FOR GRID LINES AND OTHER CONTROL DIMENSIONS.
- SEE ARCH DWGS FOR EDGE OF SLABS, SLAB DEPRESSIONS, STEPS AND CURBS.
- SEE MECH DWGS FOR HOUSEKEEPING PAADS.
- CONTRACTOR SHALL PREPARE CONTROL JOINT LAYOUT FOR SLAB ON GRADE AND CONCRETE WALLS FOR REVIEW AND APPROVAL BEFORE CONSTRUCTION.
- ALL FOUNDATIONS SHOWN ON S-111A AND S-111B ARE PRELIMINARY. FOUNDATIONS DESIGN WILL BE VERIFIED AFTER GEOTECHNICAL REPORT BECOME AVAILABLE.


CONCRETE PIER SCHEDULE			
TYPE	WIDTH	HEIGHT	REINFORCEMENT (SEE TYP DET FOR TIES)
P1	2'-0"	2'-0"	8-#8 VERT BARS EQUALLY SPACED
P2	2'-6"	2'-6"	12-#8 VERT BARS EQUALLY SPACED
P3	4'-0"	4'-0"	16-#11 VERT BARS EQUALLY SPACED
P4	3'-0"	3'-0"	12-#10 VERT BARS EQUALLY SPACED
P5	3'-0"	4'-6"	18-#10 VERT BARS (4 BARS AT SHORT SIDE)

GRADE/TIE BEAM SCHEDULE									
TYPE	WIDTH	DEPTH	TOP	BOTTOM	SIDE	STIRRUPS	VERT TIES	HORIZ TIES	
GB1	3'-6"	2'-0"	(4) #9	(7) #10	(1) #9 ES	#4 CLOSED @9" OC	(2) #4@9" OC	(1) #4@9" OC	
TB1	3'-0"	2'-0"	(4) #9	(4) #9	(1) #9 ES	#4 CLOSED @ 12" OC	(2) #4@12" OC	(1) #4@12" OC	
TB2	4'-1"	2'-0"	(6) #9	(6) #9	(1) #9 ES	#4 CLOSED @ 12" OC	(2) #4@12" OC	(1) #4@12" OC	

SPREAD FOOTING SCHEDULE					
TYPE	LENGTH	WIDTH	THICKNESS	REINFORCEMENT	
F4	4'-0"	4'-0"	1'-6"	(11) #4 EACH WAY BOT	
F5	5'-0"	5'-0"	1'-6"	(9) #5 EACH WAY BOT	
F5T	5'-0"	5'-0"	2'-0"	(11) #5 EACH WAY TOP&BOT	
F6	6'-0"	6'-0"	1'-6"	(9) #5 EACH WAY BOT	
F7	7'-0"	7'-0"	1'-6"	(11) #5 EACH WAY BOT	
F7T	7'-0"	7'-0"	2'-0"	(12) #5 EACH WAY TOP&BOT	
F7X5	5'-0"	7'-0"	1'-6"	(9) #5 LONG BAR BOT (11) #5 SHORT BAR BOT	
F8	8'-0"	8'-0"	1'-6"	(9) #5 EACH WAY BOT	
F8T	8'-0"	8'-0"	2'-0"	(10) #6 EACH WAY TOP&BOT	
F9	9'-0"	9'-0"	1'-6"	(9) #6 EACH WAY BOT	
F9T	9'-0"	9'-0"	2'-0"	(11) #6 EACH WAY TOP&BOT	
F9X7	9'-0"	7'-0"	1'-6"	(9) #6 SHORT BARS TOP&BOT (7) #6 LONG BARS TOP&BOT	
F10	10'-0"	10'-0"	1'-6"	(9) #7 EACH WAY BOT	
F10T	10'-0"	10'-0"	2'-0"	(10) #7 EACH WAY TOP&BOT	
F10X7	10'-0"	7'-0"	2'-0"	(10) #7 SHORT BAR TOP&BOT (10) #7 SHORT BAR TOP&BOT	
F11	11'-0"	11'-0"	2'-0"	(10) #7 EACH WAY BOT	
F11T	11'-0"	11'-0"	2'-0"	(10) #7 EACH WAY TOP&BOT	
F12	12'-0"	12'-0"	2'-0"	(10) #8 EACH WAY TOP&BOT	
F13	13'-0"	13'-0"	2'-0"	(12) #7 EACH WAY TOP&BOT	

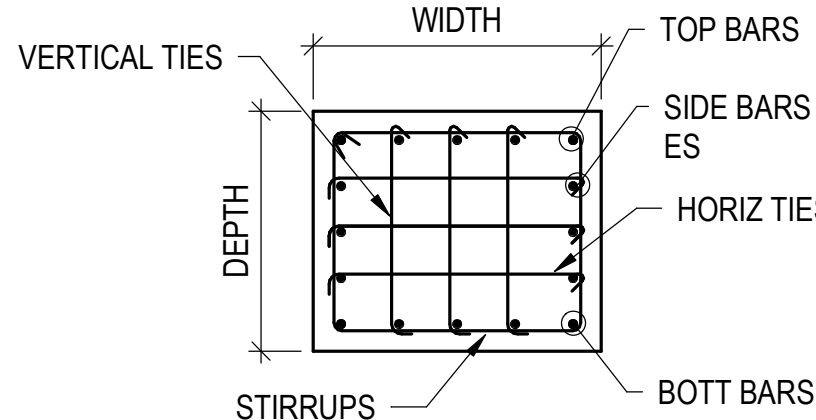


GRADE/TIE BEAM REBAR LAYOUT DIAGRAM

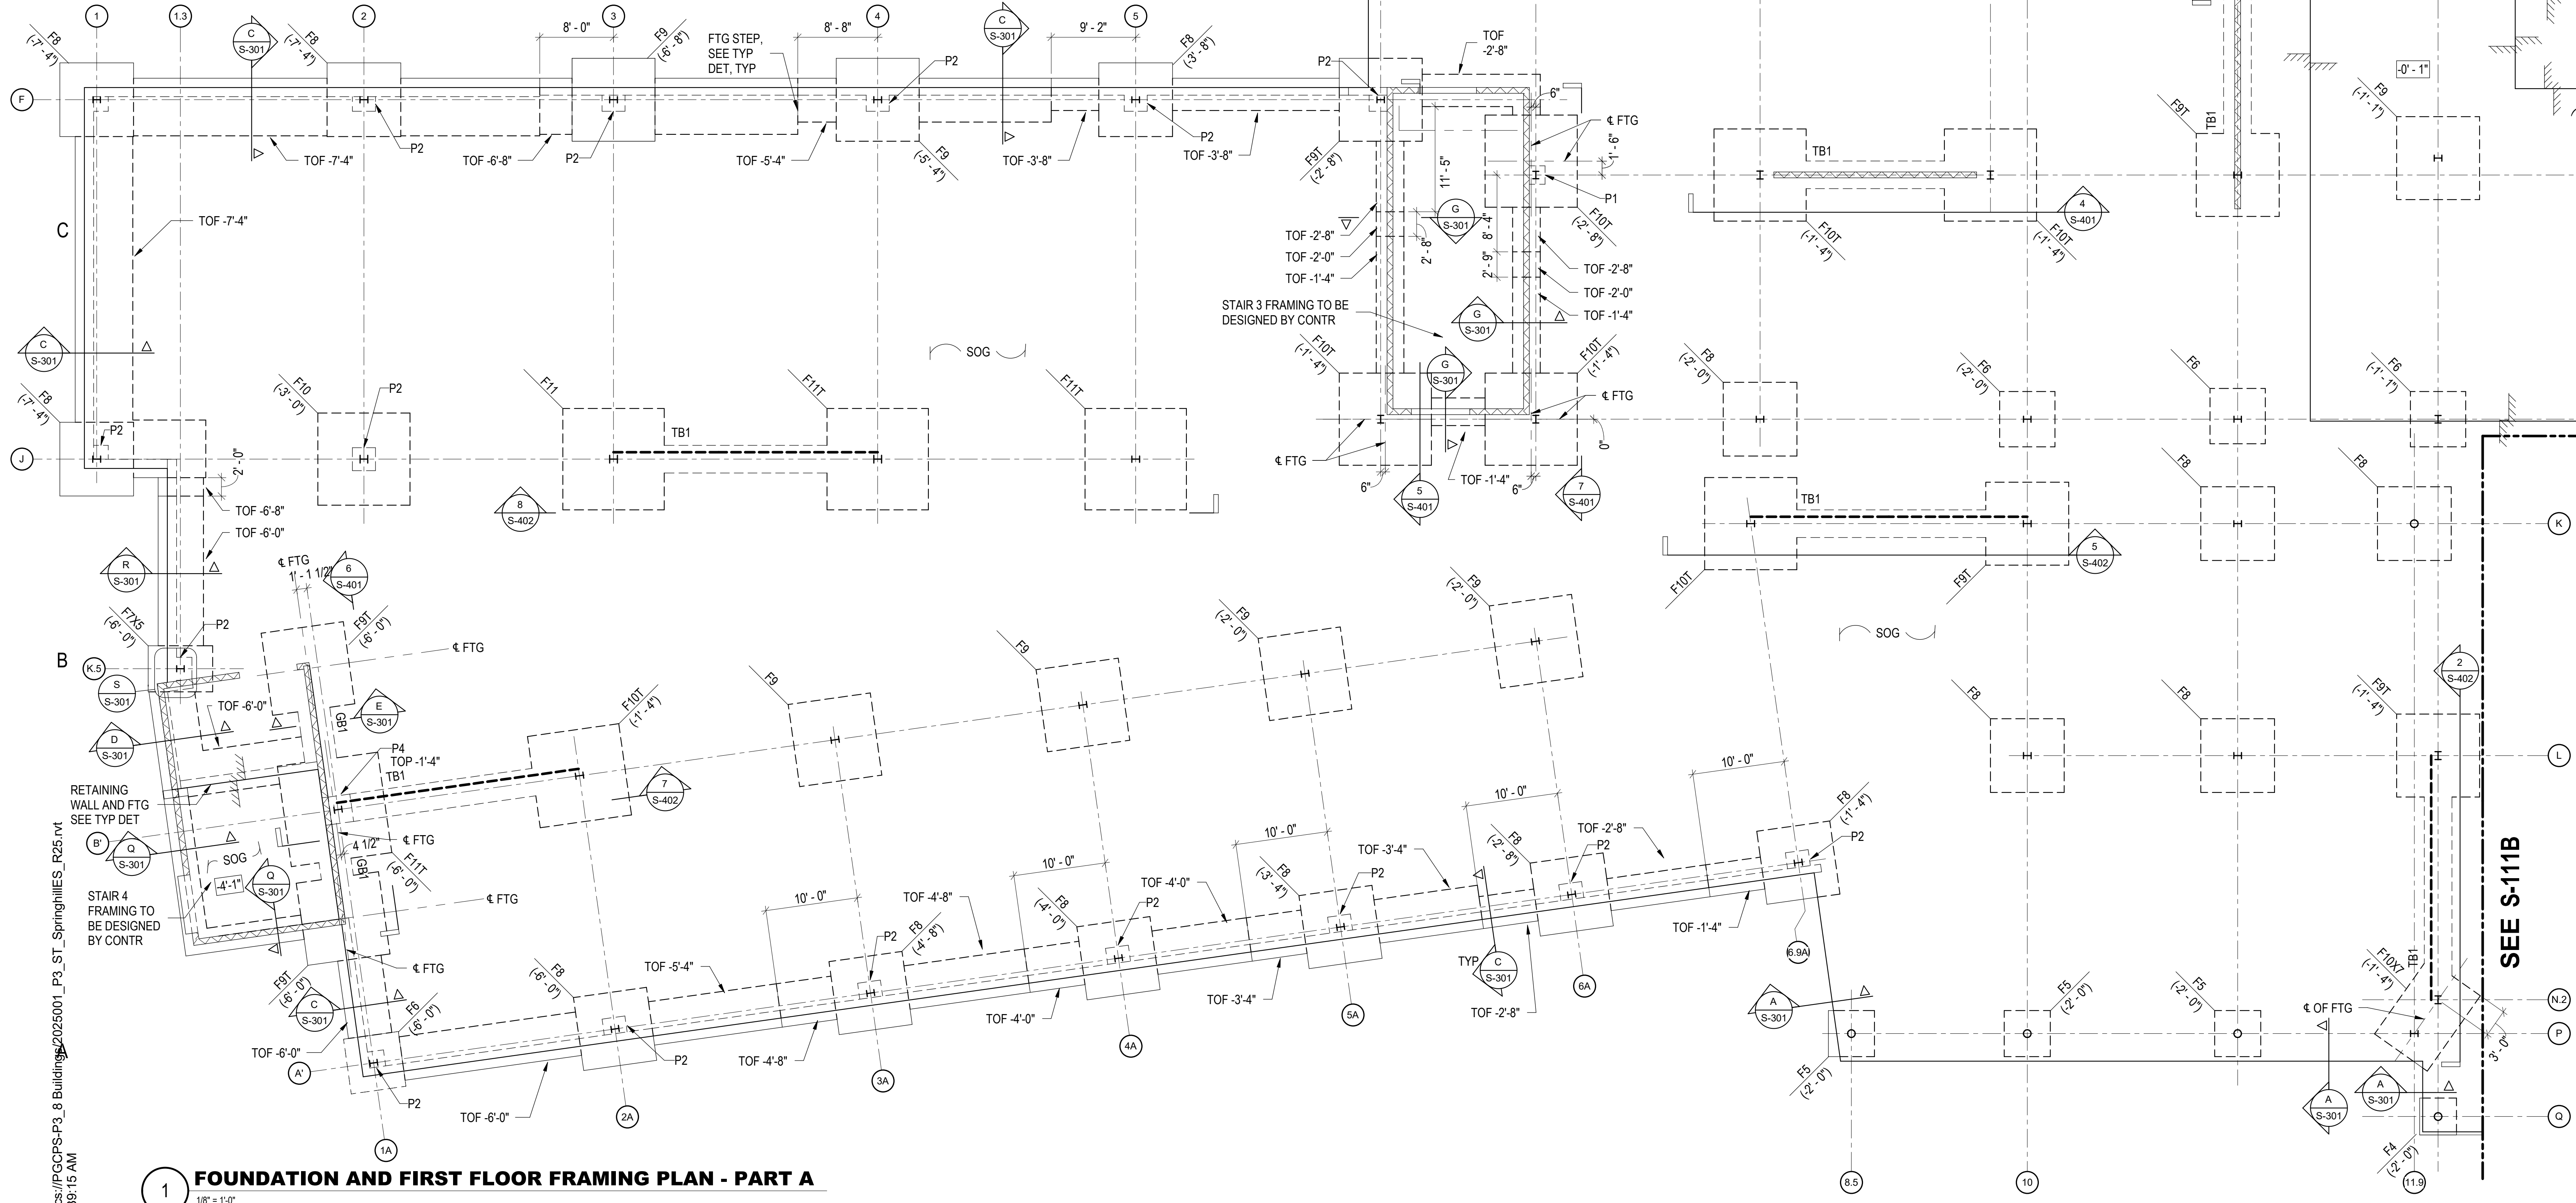


1 FOUNDATION AND FIRST FLOOR FRAMING PLAN - PART A

NO.	DESCRIPTION	YYYYMMDD
1	65% DD	2025/09/26
2	95% DD	2025/12/17
3	BLDG. PERMIT	2026/1/16
4	FTG PERMIT	2026/03/20
5	FINAL CONSTRUCTION DOCUMENTS	2026/04/06

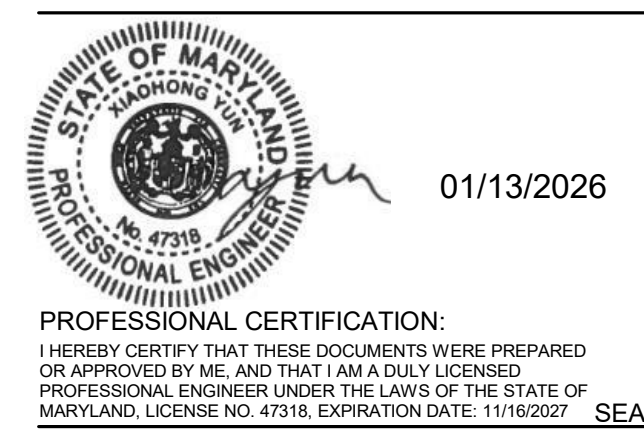

PROJECT:
PRINCE GEORGE'S COUNTY PUBLIC
SCHOOLS ALTERNATIVE CONSTRUCTION
FINANCING PACKAGE 2

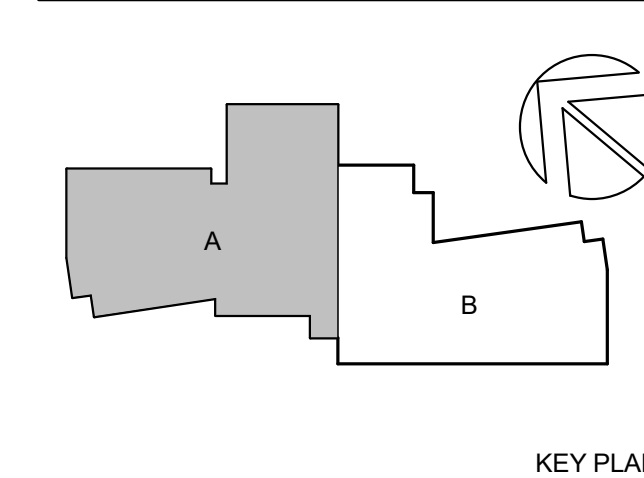

PERKINS EASTMAN
One Thomas Circle NW, Suite 200
Washington, DC 20005
T: +1 202 861 1325
F: +1 202 861 1326

OWNER:
PRINCE GEORGE'S COUNTY PUBLIC SCHOOLS
Sascer Administration Building, 14201 School Lane,
Upper Marlboro, MD 20772

CLIENT:
PROGRESSIVE EDUCATION PARTNERSHIP
101 E. Kennedy Blvd, Suite 1470, Tampa, Florida 33602

GENERAL CONTRACTOR:
MCN BUILD
1214 28TH ST NW, Washington, DC 20007

ASSOCIATE ARCHITECT:
R. MCGHEE & ASSOCIATES, PLLC
5003 Creston St, Hyattsville, MD 20781

CIVIL / SITE:
BRADLEY SITE DESIGN
1010 Wisconsin Ave. NW, Ste. 620, DC 20007

LANDSCAPE:
BRADLEY SITE DESIGN
1010 Wisconsin Ave. NW, Ste. 620, DC 20007

STRUCTURAL:
YUN ASSOCIATES
1050 Connecticut Ave. NW, Ste. 500, DC 20036

MEPPF, LIGHTING & ENERGY MODELING:
CMTA INC. CONSULTING ENGINEERS
220 Lexington Green Circle Ste. 600, Lexington, KY 40503

FOOD SERVICE:
NYIKOS-GARCIA FOODSERVICE DESIGN INC.
7146 Starmount Way, New Market, MD 21774

SPECIFICATIONS:
HELLER & METZGER PC
1600 K Street NW, Suite #500, Washington, DC 20006

SUSTAINABILITY, NZE, SPECIALIST:
PERKINS EASTMAN ARCHITECTS
One Thomas Circle NW, Ste. 200, Washington, DC 20005

ACOUSTICS:
POLYSONICS
405 Belle Air Lane, Warrenton, VA 20186


AV, IT, & SECURITY:
CMTA INC. CONSULTING ENGINEERS
220 Lexington Green Cir. Ste. 600, Lexington, KY 40503

TRAFFIC CONSULT:
THE TRAFFIC GROUP
9900 Franklin Square Drive, Ste. H, Baltimore, MD 21236

ENVELOPE CONSULTANT:

PROJECT TITLE:
SPRINGHILL LAKE
ELEMENTARY
SCHOOL

PROJECT NO: 0100147
DRAWING TITLE:
FOUNDATION AND
FIRST FLOOR
FRAMING PLAN -
PART A

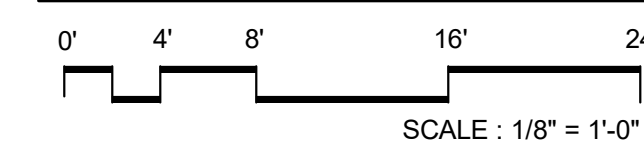

SCALE: As indicated
DRWN BY: CH
CHKD BY: BY

S-111A
FINAL CONSTRUCTION DOCUMENTS

06 APRIL 2026



01/13/2026

PROFESSIONAL CERTIFICATION:

I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND, LICENSE NO. 47318. EXPIRATION DATE: 11/16/2027

SEA

Diagram showing two overlapping polygons, A and B, with a key plan indicating the orientation.

OWNER:
PRINCE GEORGE'S COUNTY PUBLIC SCHO
Sasscer Administration Building, 14201 School Lane
Upper Marlboro, MD 20772

GENERAL CONTRACTOR:
MCN BUILD
1214 28TH ST NW, Washington, DC 20007

CIVIL / SITE:
BRADLEY SITE DESIGN
1010 Wisconsin Ave. NW, Ste 620, DC 20007

STRUCTURAL:
YUN ASSOCIATES
 1050 Connecticut Ave. NW, Ste 500, DC 20036

FOOD SERVICE:
NYIKOS-GARCIA FOODSERVICE DESIGN INC.
7146 Starmount Way, New Market, MD 21774

PERKINS EASTMAN ARCHITECTS
One Thomas Circle NW, Ste. 200, Washington, DC 20005

CMTA INC. CONSULTING ENGINEERS
220 Lexington Green Cir. Ste. 600, Lexington, KY 40502
TRAFFIC CONSULT:

DRAWING TITLE:

0' 4' 8' 16' 2'

SCALE : 1/8" = 1'-0"

DRWN BY: CH

FINAL CONSTRUCTION DOCUMENTS

06 APRIL 2026


1. SEE S-111A FOR FOUNDATION AND FIRST FLOOR FRAMING PLAN NOTES.
2. WHERE NOTED IN PLAN, 8" SLAB ON GRADE SHALL BE REINFORCED WITH 4x4 - W4.0xW4.0 WWF. SEE TYPICAL DETAIL FOR SUBGRADE CONSTRUCTION.
3. KITCHEN EQUIPMENT SUPPORT, INCLUDING HOOD SUPPORT, TO BE PROVIDED BY CONTRACTOR.



1 FOUNDATION AND FIRST FLOOR FRAMING PLAN - PART B
1/8" = 1'-0"

1. TOP OF SLAB IS AT REFERENCE ELEVATION OF 103.16' UNO THUS $\frac{1}{4} \cdot X \cdot X'$ ON PLAN RELATIVE TO REFERENCE ELEVATION.
2. STANDS FOR 3 1/2" NORMAL WEIGHT CONCRETE ON 2" THICK 19 GAGE COMPOSITE METAL DECK WITH 6x6-W2.9xW2.9 WWF
3. STANDS FOR 3 1/2" NORMAL WEIGHT CONCRETE ON 2" THICK 18/20 GAGE ACOUSTIC CELLULAR COMPOSITE METAL DECK WITH 6x6-W2.9xW2.9 WWF.
4. STANDS FOR SPAN DIRECTION OF 3" THICK 19-GAGE ROOF DECK.
5. STANDS FOR SPAN DIRECTION OF 3" THICK 18/20 GAGE ACOUSTICAL CELLULAR ROOF DECK.
6. STANDS FOR W12X16
7. TOP OF STEEL IS AT BOTTOM OF DECK UNO THUS $\pm \frac{1}{4} \cdot X \cdot X'$ RELATIVE TO REFERENCE ELEVATION
8. PROVIDE MINIMUM ONE STUD @ 12" OC FOR ALL BEAMS BELOW SLAB ON METAL DECK UNLESS NOTED "NO STUDS" ON THE BEAMS.
9. SEE SPEC FOR CONCRETE MIX DESIGN. CONCRETE COMPRESSIVE STRENGTH SHALL BE AS FOLLOWS:


SLAB ON METAL DECK:	$f_c = 3,500$ psi
---------------------	-------------------
10. SEE ARCH DWGS FOR GRID LINE AND OTHER CONTROL DIMENSIONS.
11. SEE ARCH DWGS FOR EDGE OF SLAB DIMENSIONS, INCLUDING SLAB DEPRESSIONS AND CURBS.
12. SEE ARCH DWGS FOR FIREPROOFING OF STEEL FRAMING UNDER SLAB ON METAL DECK AND FIREPROOFING OF STEEL FRAMING AND ROOF DECK AT ROOF DECK AREAS.

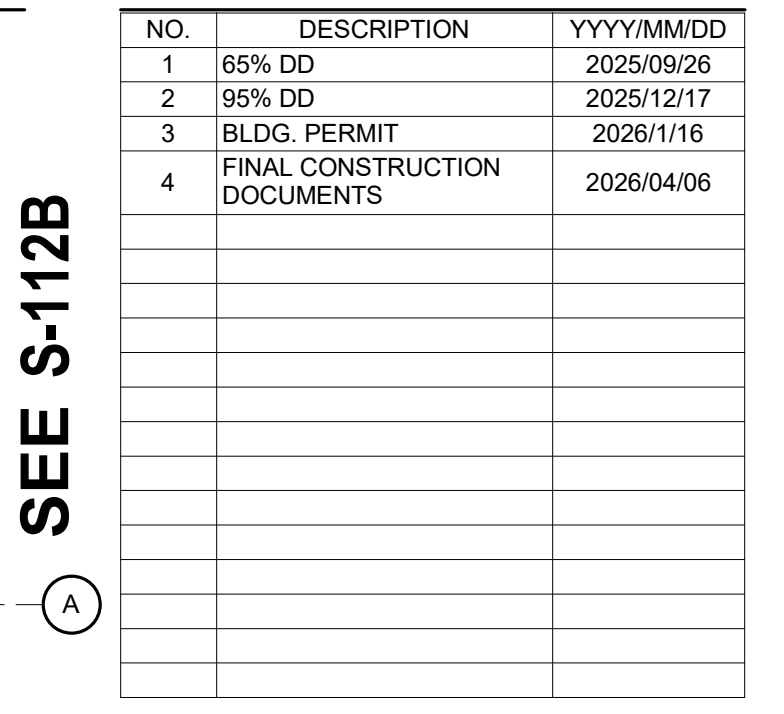

1/13/2026

PROFESSIONAL CERTIFICATION:
I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED
OR APPROVED BY ME, AND THAT I AM A DULY LICENSED
PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF
MARYLAND, LICENSE NO. 47318, EXPIRATION DATE: 11/16/2027 **SEAL**

PROJECT:
PRINCE GEORGE'S COUNTY PUBLIC
SCHOOLS ALTERNATIVE CONSTRUCTION
FINANCING PACKAGE 2

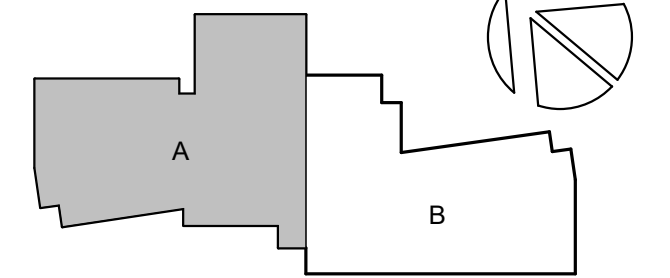

KEY PLAN

**PERKINS —
EASTMAN**
One Thomas Circle NW, Suite 200
Washington, DC 20005
T. +1 202 861 1325
F. +1 202 861 1326

OWNER:
PRINCE GEORGE'S COUNTY PUBLIC SCHOOLS
Sasscer Administration Building, 14201 School Lane,
Upper Marlboro, MD 20772

CLIENT:
PROGRESSIVE EDUCATION PARTNERSHIP
101 E. Kennedy Blvd, Suite 1470, Tampa, Florida 33602

GENERAL CONTRACTOR:
MCN BUILD
1214 28TH ST NW, Washington, DC 20007

ASSOCIATE ARCHITECT:
R. MCGHEE & ASSOCIATES, PLLC
5003 Creston Stt, Hyattsville, MD 20781

CIVIL / SITE:
BRADLEY SITE DESIGN
1010 Wisconsin Ave. NW, Ste.620, DC 20007

LANDSCAPE:
BRADLEY SITE DESIGN
1010 Wisconsin Ave. NW, Ste.620, DC 20007

STRUCTURAL:
YUN ASSOCIATES
1050 Connecticut Ave. NW, Ste.500, DC 20036

MEPFP, LIGHTING & ENERGY MODELING:
CMTA INC. CONSULTING ENGINEERS
 220 Lexington Green Circle Ste. 600, Lexington, KY 40503

FOOD SERVICE:
NYIKOS-GARCIA FOODSERVICE DESIGN INC.
7146 Starmount Way, New Market, MD 21774

SPECIFICATIONS:
HELLER & METZGER PC
1600 K Street NW, Suite #500, Washington, DS 20006
SUSTAINABILITY MFG. SPECIALIST

PERKINS EASTMAN ARCHITECTS
One Thomas Circle NW, Ste. 200, Washington, DC 20005

POLYSONICS
405 Belle Air Lane, Warrenton, VA 20186
AV, IT & SECURITY:

CMTA INC. CONSULTING ENGINEERS
220 Lexington Green Cir. Ste. 600, Lexington, KY 40503
TRAFFIC CONSULT:


THE TRAFFIC GROUP
9900 Franklin Square Drive, Ste. H, Baltimore, MD 21236
ENVELOPE CONSULTANT:

PROJECT TITLE:

SPRINGHILL LAKE
ELEMENTARY
SCHOOL

PROJECT No: 0100147

DRAWING TITLE:
SECOND FLOOR
FRAMING PLAN -
PART A

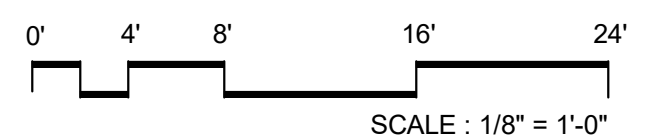

SCALE: As indicated

DRWN BY: CH

CHKD BY: BY

S-112A


06 APRIL 2026

 01/13/2026

PROFESSIONAL CERTIFICATION:

I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND, LICENSE NO. 47318. EXPIRATION DATE: 1/16/2027

SEA

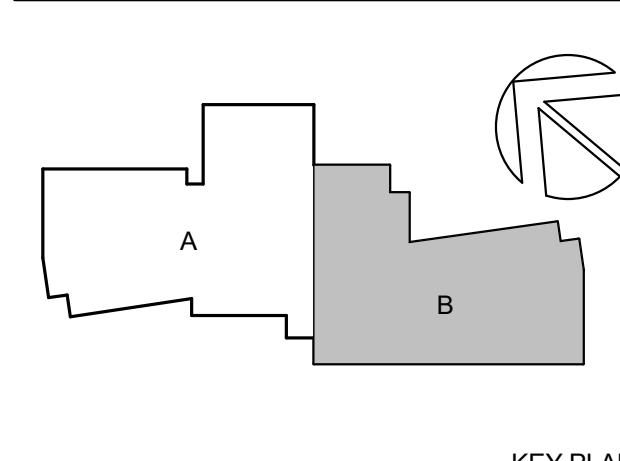

OWNER:
PRINCE GEORGE'S COUNTY PUBLIC SCHOOLS
Sasscer Administration Building, 14201 School Lane
Upper Marlboro, MD 20772

GENERAL CONTRACTOR:
MCN BUILD
1214 28TH ST NW, Washington, DC 20007

CIVIL / SITE:
BRADLEY SITE DESIGN
1010 Wisconsin Ave. NW, Ste.620, DC 20007

STRUCTURAL:
YUN ASSOCIATES
1050 Connecticut Ave. NW, Ste.500, DC 20036

FOOD SERVICE:
NYIKOS-GARCIA FOODSERVICE DESIGN INC.
7146 Starmount Way, New Market, MD 21774

PERKINS EASTMAN ARCHITECTS
One Thomas Circle NW, Ste. 200, Washington, DC 20005
202/691-3000

CMTA INC. CONSULTING ENGINEERS
220 Lexington Green Cir. Ste. 600, Lexington, KY 40502
TRAFFIC CONSULT:

PROJECT TITLE:

PROJECT No: 0100147

SECOND FLOOR
FRAMING PLAN -

0' 4' 8' 16' 20'

CHKD BY: BY _____

C 110B

FINAL CONSTRUCTION DOCUMENTS

06 APRIL 2026

1. SEE SECOND FLOOR FRAMING PLAN NOTES ON S-112A.



ROOF FRAMING PLAN NOTES:

- TOP OF ROOF DECK IS AT REFERENCE ELEVATION OF 117.16' UNO THUS $\pm\text{'-X'-X"}$ ON PLAN RELATIVE TO REFERENCE ELEVATION.
- $\nearrow 3$ STANDS FOR SPAN DIRECTION OF 3" THICK 19-GAGE ROOF DECK.
- $\nearrow A$ STANDS FOR SPAN DIRECTION OF 2" THICK 18-GAGE ACOUSTIC DECK.
- W12 STANDS FOR W12X16.
- TOP OF STEEL IS AT BOTTOM OF DECK UNO THUS $\pm\text{'-X'-X"}$ RELATIVE TO REFERENCE ELEVATION.
- SEE ARCH DWGS FOR GRID LINE AND OTHER CONTROL DIMENSIONS.
- L STANDS FOR L4X3X5/16 LLH DSA, SEE TYPICAL DETAIL.
- SEE ARCH DWGS FOR FIREPROOFING OF STEEL FRAMING AND ROOF DECK AT ROOF DECK AREA.
- SEE S-404 FOR ADDITIONAL LOADINGS FOR JOIST DESIGN.

E

D

C

B

A

1A

2A

3A

4A

5A

6A

7A

8A

9A

10A

11A

12A

13A

14A

15A

16A

17A

18A

19A

20A

21A

22A

23A

24A

25A

26A

27A

28A

29A

30A

31A

32A

33A

34A

35A

36A

37A

38A

39A

40A

41A

42A

43A

44A

45A

46A

47A

48A

49A

50A

51A

52A

53A

54A

55A

56A

57A

58A

59A

60A

61A

62A

63A

64A

65A

66A

67A

68A

69A

70A

71A

72A

73A

74A

75A

76A

77A

78A

79A

80A

81A

82A

83A

84A

85A

86A

87A

88A

89A

90A

91A

92A

93A

94A

95A

96A

97A

98A

99A

100A

101A

102A

103A

104A

105A

106A

107A

108A

109A

110A

111A

112A

113A

114A

115A

116A

117A

118A

119A

120A

121A

122A

123A

124A

125A

126A

127A

128A

129A

130A

131A

132A

133A

134A

135A

136A

137A

138A

139A

140A

141A

142A

143A

144A

145A

146A

147A

148A

149A

150A

151A

152A

153A

154A

155A

156A

157A

158A

159A

160A

161A

162A

163A

164A

165A

166A

167A

168A

169A

170A

171A

172A

173A

174A

175A

176A

177A

178A

179A

180A

181A

182A

183A

184A

185A

186A

187A

188A

189A

190A

191A

192A

193A

194A

195A

196A

197A

198A

199A

200A

201A

202A

203A

204A

205A

206A

207A

208A

209A

210A

211A

212A

213A

214A

215A

216A

217A

218A

219A

220A

221A

222A

223A

224A

225A

226A

227A

228A

229A

230A

231A

232A

233A

234A

235A

236A

237A

238A

239A

240A

241A

242A

243A

244A

245A

246A

247A

248A

249A

250A

251A

252A

253A

254A

255A

256A

257A

258A

259A

260A

261A

262A

263A

264A

265A

266A

267A

268A

269A

270A

271A

272A

273A

274A

275A

276A

277A

278A

279A

280A

281A

282A

283A

284A

285A

286A

287A

288A

289A

290A

291A

292A

293A

294A

295A

296A

297A

298A

299A

300A

301A

302A

303A

304A

305A

306A

307A

308A

309A

310A

311A

312A

313A

314A

315A

316A

317A

318A

319A

320A

321A

322A

323A

324A

325A

326A

327A

328A

329A

330A

331A

332A


333A

</


 01/13/2026

PROFESSIONAL CERTIFICATION:
 I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED
 OR APPROVED BY ME, AND THAT I AM A DULY LICENSED
 PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF
 MARYLAND, LICENSE NO. 47318. EXPIRATION DATE: 11/16/2027

SEAL

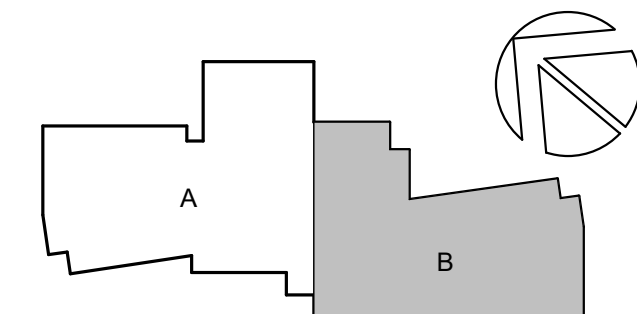

**PERKINS —
EASTMAN**
One Thomas Circle NW, Suite 200
Washington, DC 20005
T. +1 202 861 1325
F. +1 202 861 1326

GENERAL CONTRACTOR:
MCN BUILD
4244 20TH CT NW, Washington, DC 20007

LANDSCAPE:
BRADLEY SITE DESIGN

CMTA INC. CONSULTING ENGINEERS
220 Lexington Green Circle Ste. 600, Lexington, KY 40502
FOOD SERVICE:

HELLER & METZGER PC
1600 K Street NW, Suite #500, Washington, DS 20006


ACOUSTICS:
POLYSONICS
405 Belle Air Lane, Warrenton, VA 20186

220 Lexington Green Cir. Ste. 600, Lexington, KY 405

9900 Franklin Square Drive, Ste. H, Baltimore, MD 21144
ENVELOPE CONSULTANT:

SPRINGHILL LAKE
ELEMENTARY
SCHOOL

DRAWING TITLE:
ROOF FRAMING
PLAN - PART B

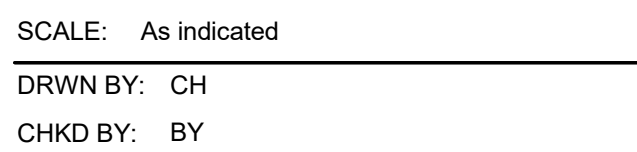


S-113B

FINAL CONSTRUCTION DOCUMENTS

06 APRIL 2026

1. SEE ROOF FRAMING PLAN NOTES ON S-113A.
2. STANDS FOR SPAN DIRECTION OF 2" THICK 18-GAGE ACOUSTIC DECK.

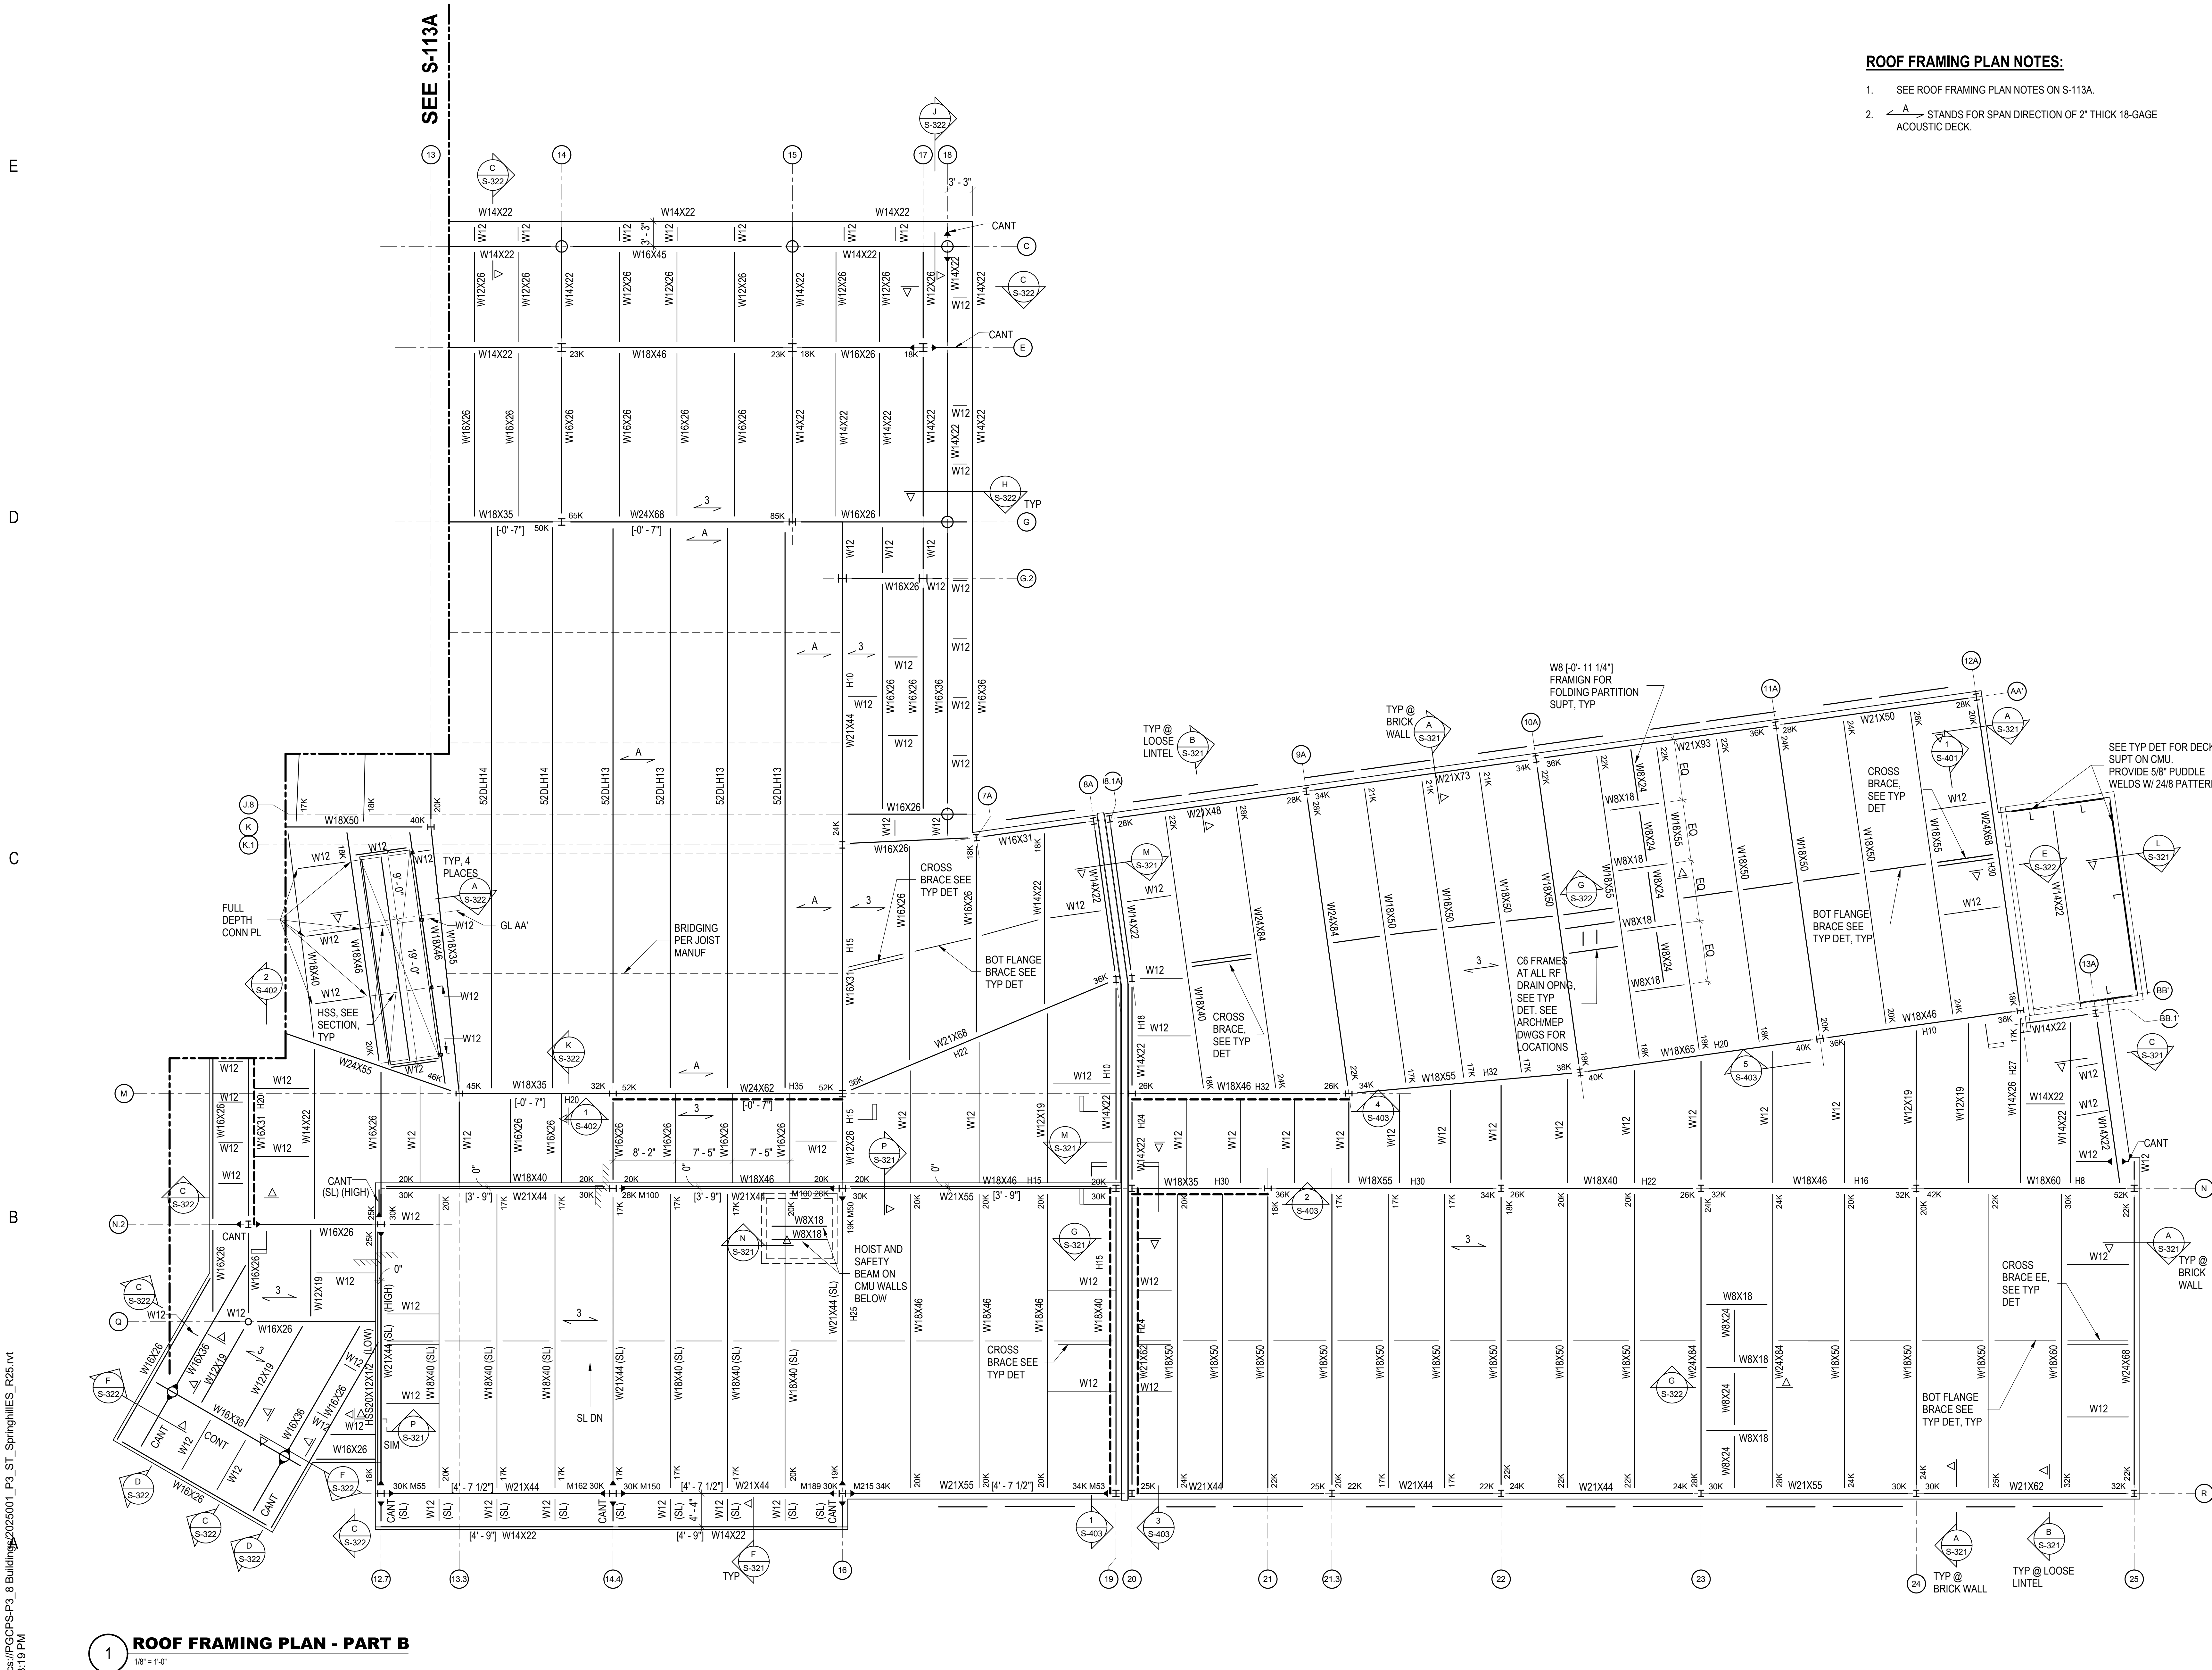



NOTES:

1. WHERE FILLER IS REQUIRED PER ARCHITECTURAL REQUIREMENTS, PROVIDE 2" FILLER WITH MINIMUM 50 PERCENT COMPRESSIBILITY.
2. FIREPROOFING (IF REQUIRED) REMOVED OR DAMAGED BY INSTALLATION OF TOP OF WALL CONNECTIONS SHALL BE REPLACED.
3. TYPICAL EXPANSION ANCHOR SHALL BE HILTI KWIK BOLT TZ OR APPROVED EQUIVALENT.


 01/13/2026

PROFESSIONAL CERTIFICATION:
 I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED
 OR APPROVED BY ME AND THAT I AM A DULY LICENSED
 PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF
 MARYLAND, LICENSE NO. 47318. EXPIRATION DATE: 11/16/2027

SEAL



**PERKINS—
EASTMAN**
One Thomas Circle NW, Suite 200
Washington, DC 20005
T. +1 202 861 1325
F. +1 202 861 1326

OWNER:
PRINCE GEORGE'S COUNTY PUBLIC SCHOOLS
Sasser Administration Building, 14201 School Lane,
Upper Marlboro, MD 20772

CLIENT:
PROGRESSIVE EDUCATION PARTNERSHIP
101 E. Kennedy Blvd, Suite 1470, Tampa, Florida 33606

GENERAL CONTRACTOR:
MCN BUILD
1214 28TH ST NW, Washington, DC 20007

ASSOCIATE ARCHITECT:
R. MCGHEE & ASSOCIATES, PLLC
5003 Creston Stt, Hyattsville, MD 20781

CIVIL / SITE:
BRADLEY SITE DESIGN
1010 Wisconsin Ave. NW, Ste.620, DC 20007

LANDSCAPE:
BRADLEY SITE DESIGN
1010 Wisconsin Ave. NW, Ste.620, DC 20007

STRUCTURAL:
YUN ASSOCIATES
1050 Connecticut Ave. NW, Ste.500, DC 20036

MEPFP, LIGHTING & ENERGY MODELING:
CMTA INC. CONSULTING ENGINEERS
 220 Lexington Green Circle Ste. 600, Lexington, KY 4

FOOD SERVICE:
NYIKOS-GARCIA FOODSERVICE DESIGN INC.
7146 Starmount Way, New Market, MD 21774

SPECIFICATIONS:
HELLER & METZGER PC
1600 K Street NW, Suite #500, Washington, DS 2000

SUSTAINABILITY, NZE, SPECIALIST:
PERKINS EASTMAN ARCHITECTS
One Thomas Circle NW, Ste. 200, Washington, DC 20005

POLYSONICS
405 Belle Air Lane, Warrenton, VA 20186
ANALYTICAL SECURITY

CMTA INC. CONSULTING ENGINEERS
220 Lexington Green Cir. Ste. 600, Lexington, KY 40505
TRAFFIC CONSULT:

THE TRAFFIC GROUP
9900 Franklin Square Drive, Ste. H, Baltimore, MD 21204
ENVELOPE CONSULTANT:

PROJECT TITLE:

SPRINGHILL LAKE

ELEMENTARY
SCHOOL

SCHOOL

PROJECT No: 0100147

DRAWING TITLE:
TYPICAL DETAILS

TYPICAL DETAILS

SCALE: NOT TO SCALE

DRWN BY: CH

CHKD BY: BY _____

S-206

FINAL CONSTRUCTION DOCUMENTS

 01/13/2026

PROFESSIONAL CERTIFICATION:

I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND, LICENSE NO. 47318. EXPIRATION DATE: 11/16/2027

SEA

**PERKINS—
EASTMAN**
One Thomas Circle NW, Suite 200
Washington, DC 20005
T. +1 202 861 1325
F. +1 202 861 1326

CLIENT:
PROGRESSIVE EDUCATION PARTNERSHIP
101 E. Kennedy Blvd, Suite 1470, Tampa, Florida 33606

ASSOCIATE ARCHITECT:
R. MCGHEE & ASSOCIATES, PLLC
5003 Creston Stt, Hyattsville, MD 20781

LANDSCAPE:
BRADLEY SITE DESIGN
1010 Wisconsin Ave. NW, Ste.620, DC 20007

MEPFP, LIGHTING & ENERGY MODELING:
CMTA INC. CONSULTING ENGINEERS
 220 Lexington Green Circle Ste. 600, Lexington, KY

SPECIFICATIONS:
HELLER & METZGER PC
 1600 K Street NW, Suite #500, Washington, DS 20006

POLYSONICS
405 Belle Air Lane, Warrenton, VA 20186

THE TRAFFIC GROUP
9900 Franklin Square Drive, Ste. H, Baltimore, MD 21206
ENVELOPE CONSULTANT:




















SPRINGHILL LAKE

SECTIONS

SCALE : $\frac{3}{4}" = 1'-0"$

DRWN BY: CH
CHKD BY: BY

FINAL CONSTRUCTION DOCUMENTS

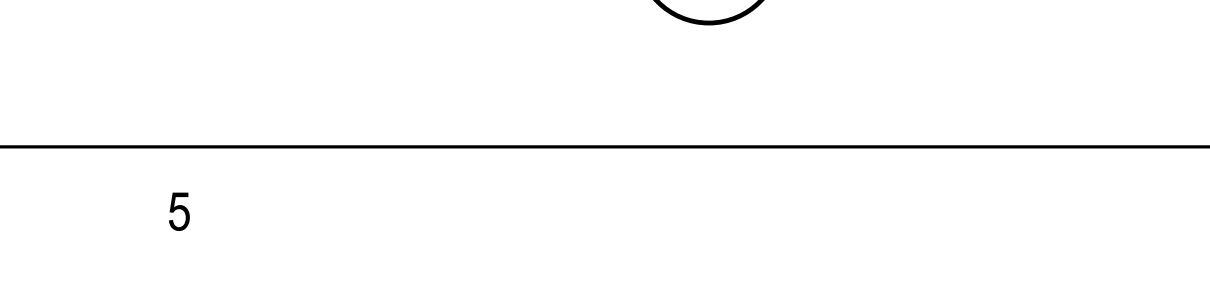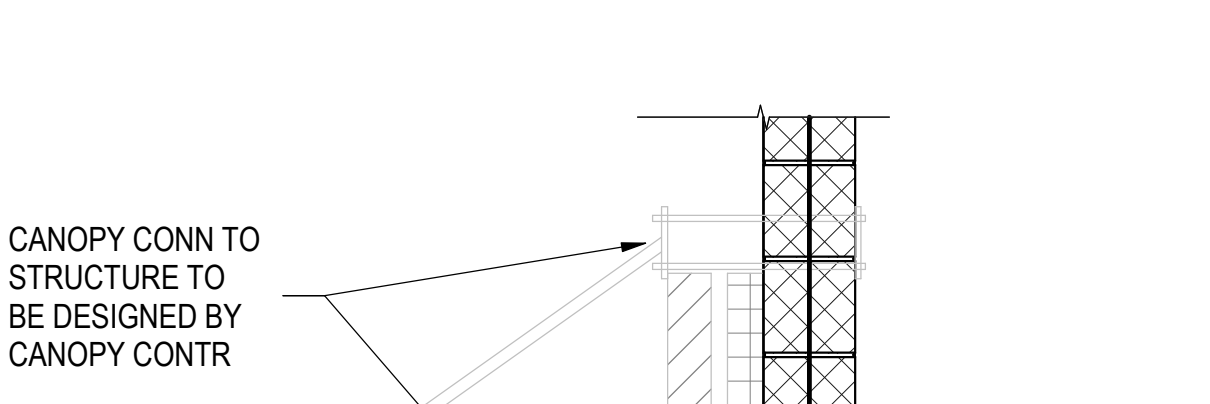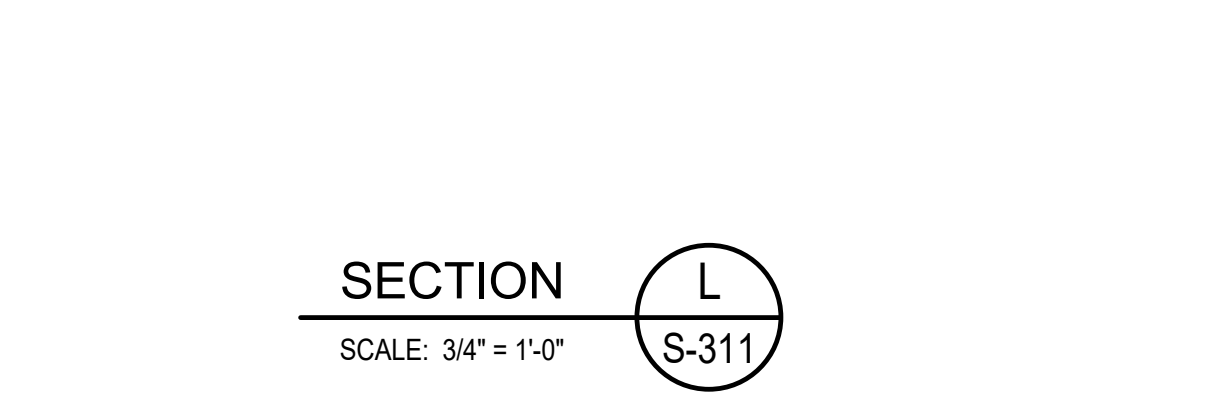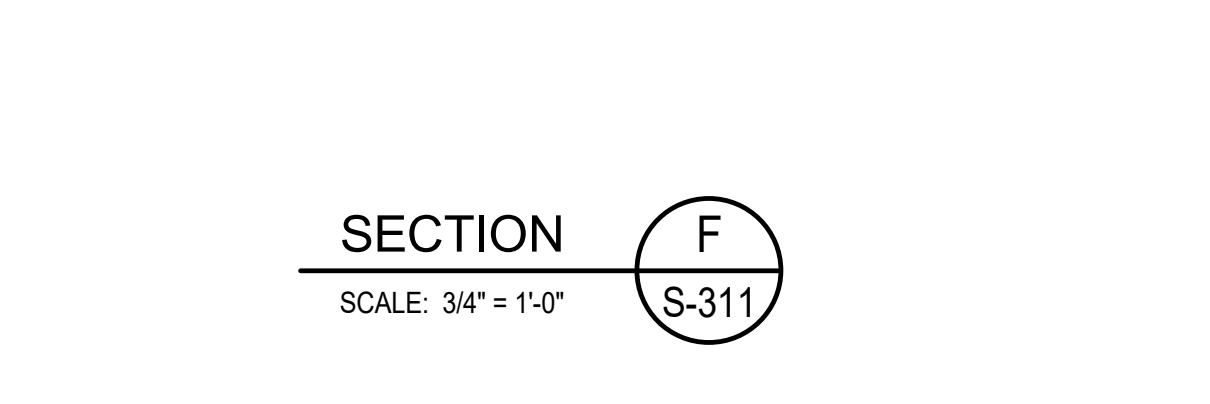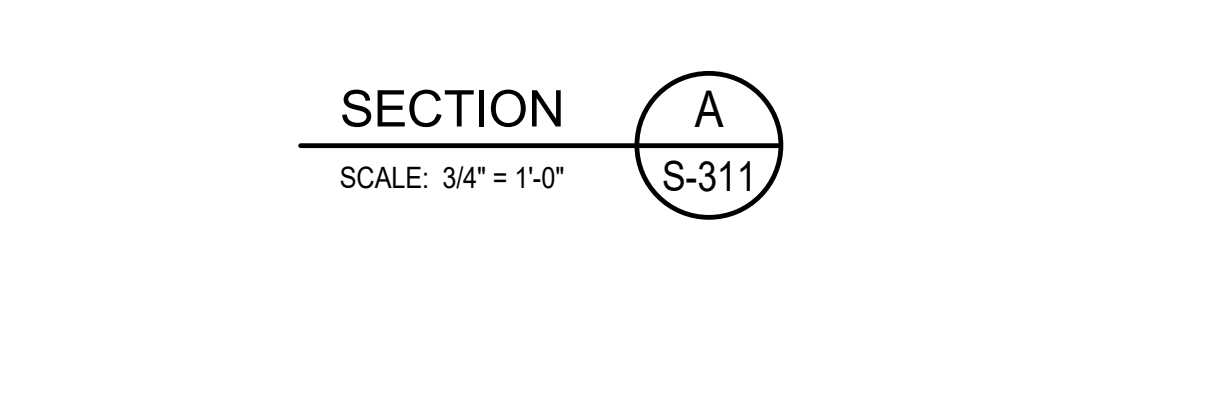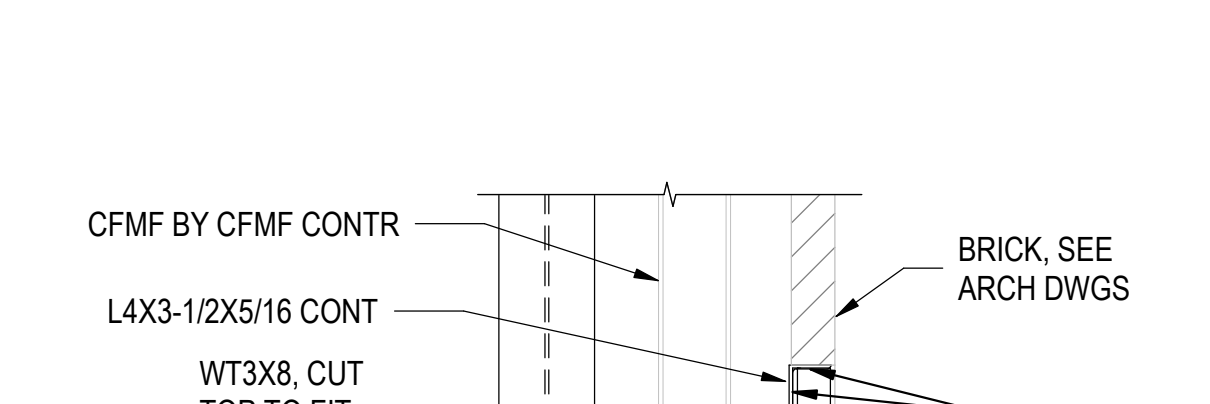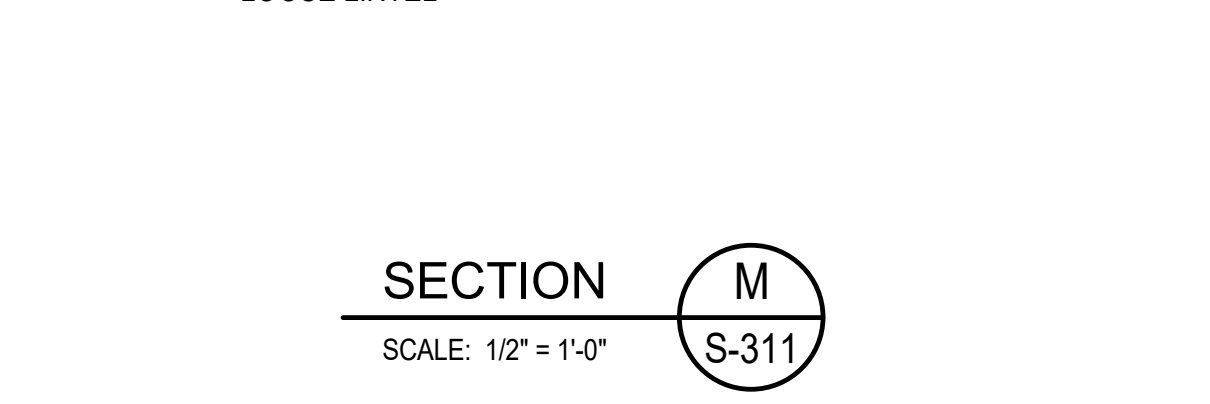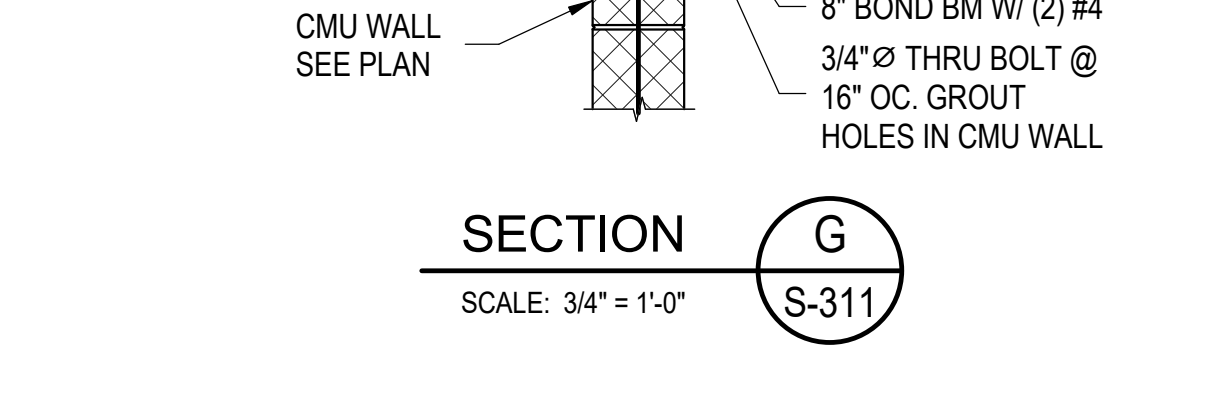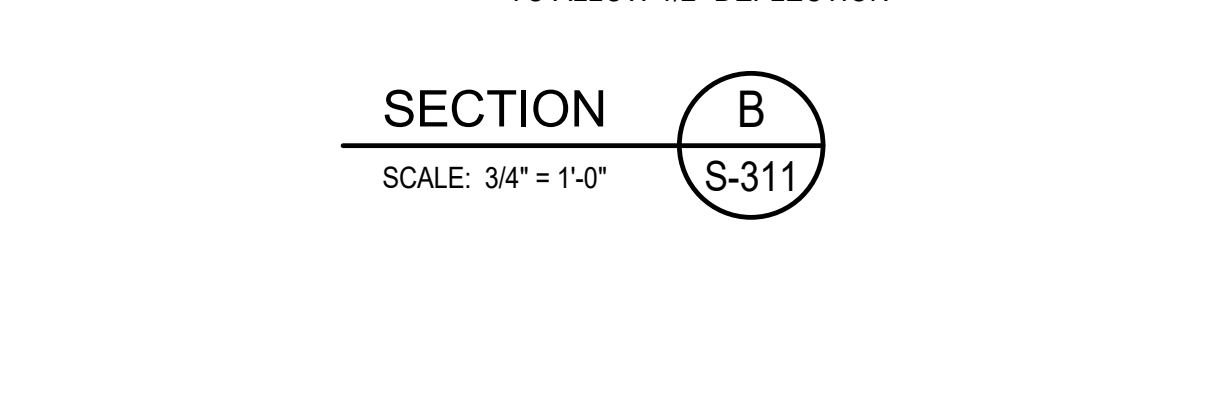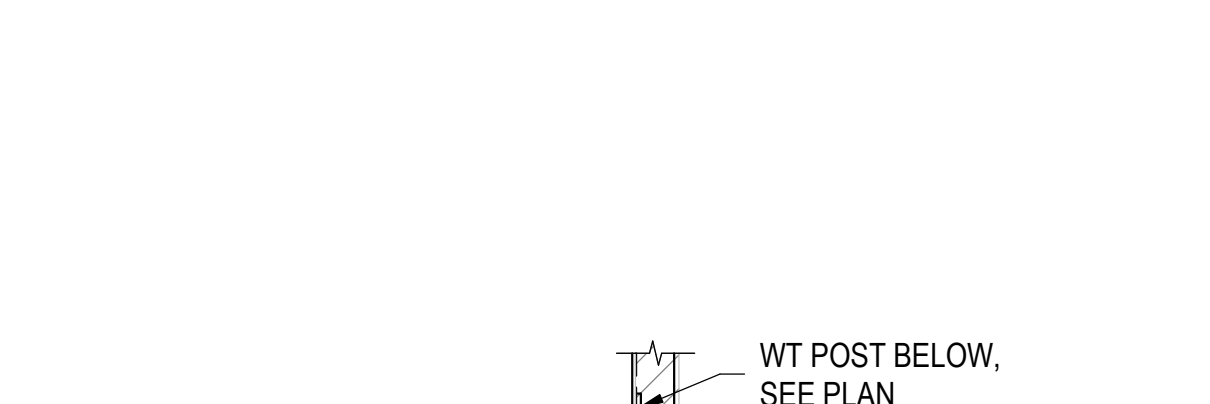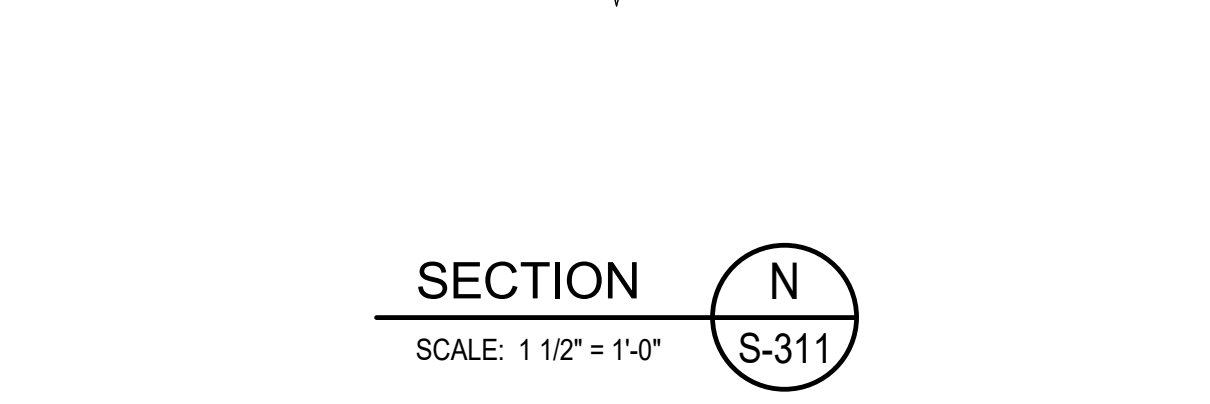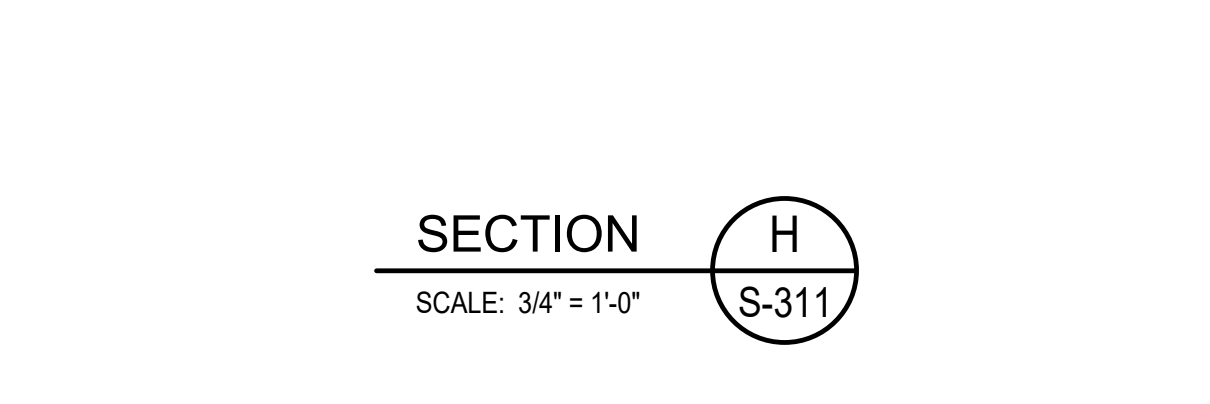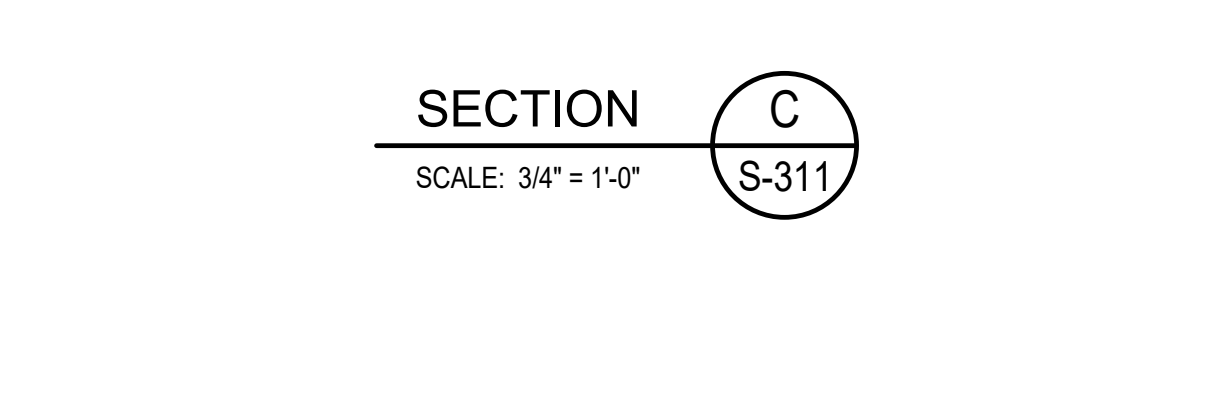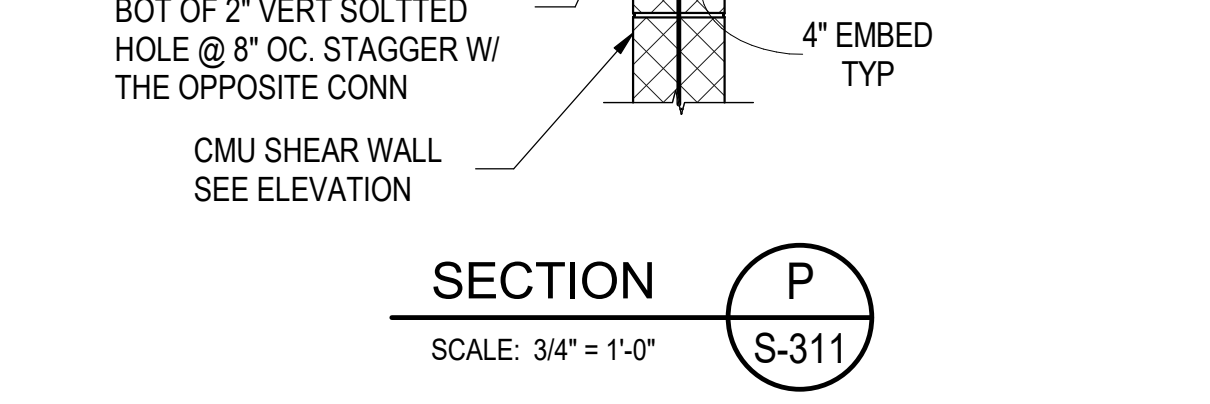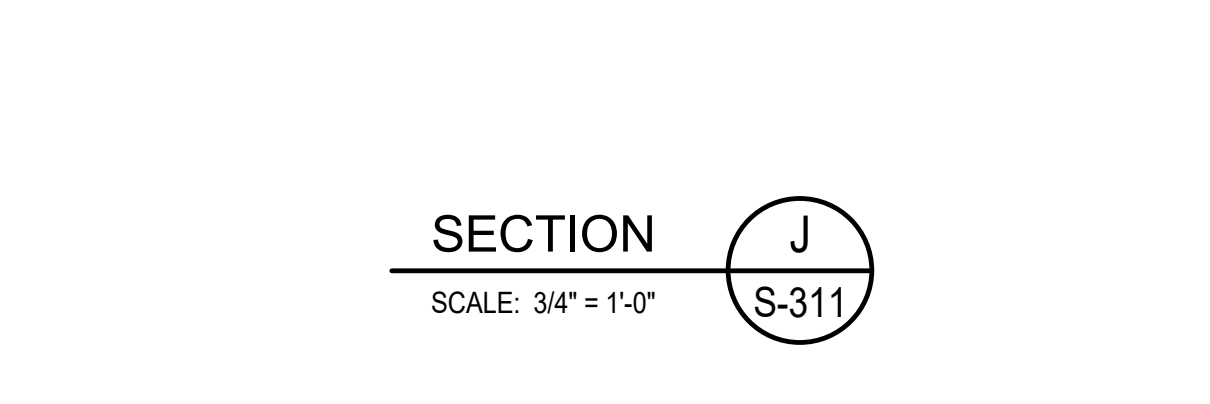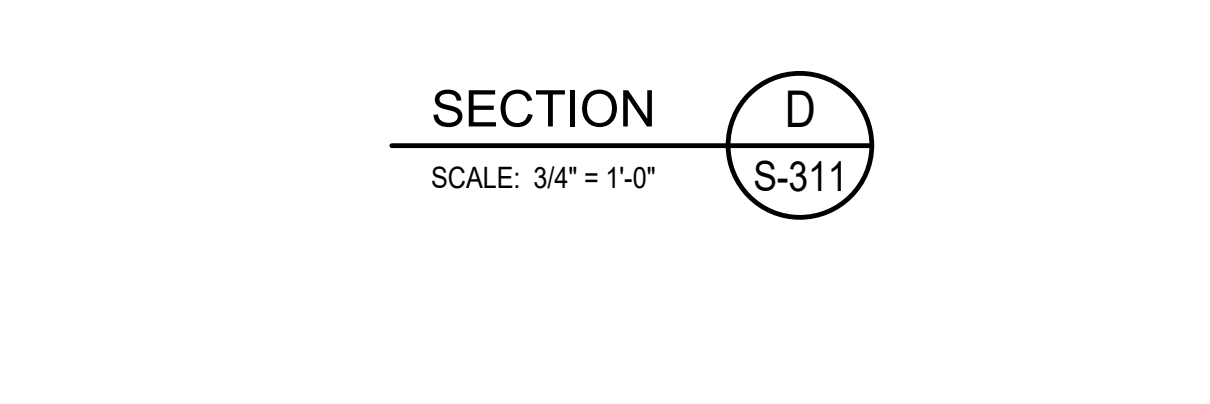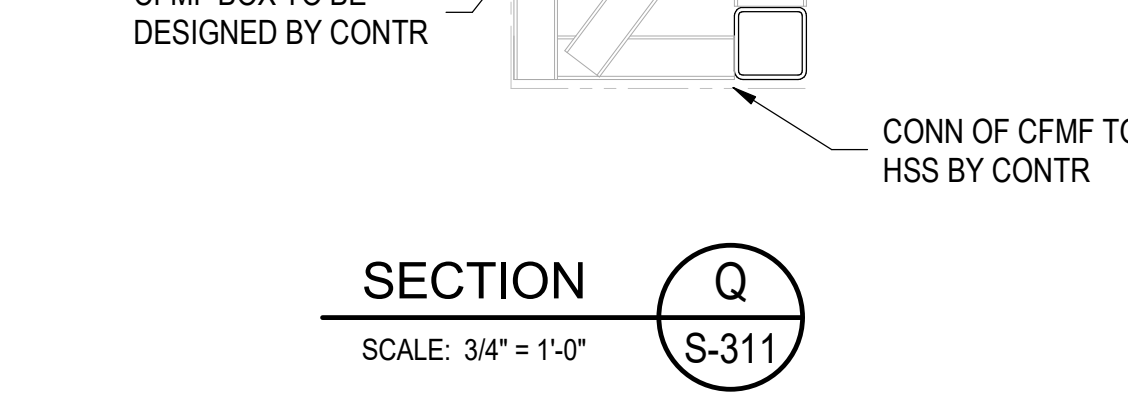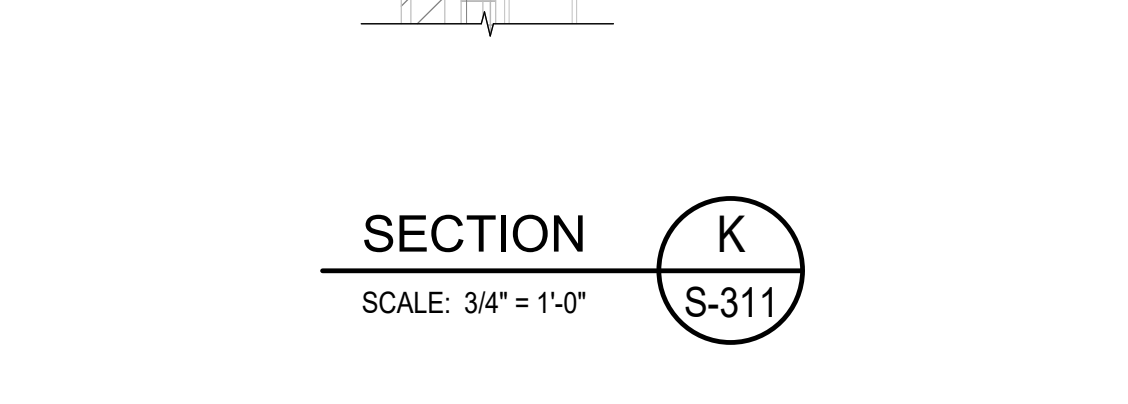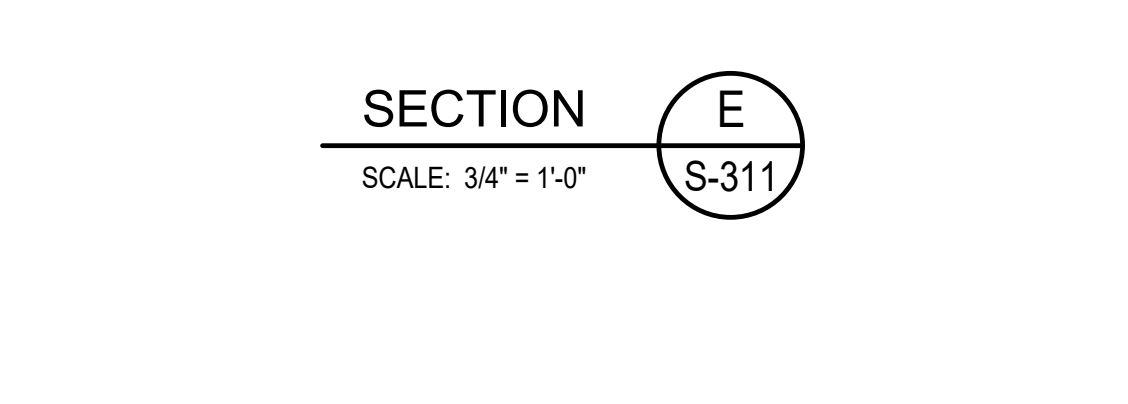

 01/13/2026

PROFESSIONAL CERTIFICATION:

I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND. LICENSE NO. 47318. EXPIRATION DATE: 11/16/2027

SEA

KEY PLAIN

OWNER:
PRINCE GEORGE'S COUNTY PUBLIC SCHO
Sasscer Administration Building, 14201 School Lane
Upper Marlboro, MD 20772

MCN BUILD
4244 20TH ST NW, Washington, DC 20007

5003 Creston Stt, Hyattsville, MD 20781
CIVIL / SITE:

BRADLEY SITE DESIGN
1010 Wisconsin Ave. NW, Ste.620, DC 20007
STRUCTURAL:

CMTA INC. CONSULTING ENGINEERS
220 Lexington Green Circle Ste. 600, Lexington, KY
502.255.1105

SPECIFICATIONS:
HELLER & METZGER PC
 1600 K Street NW, Suite #500, Washington, DS 20005

ACOUSTICS:
POLYSONICS
405 Belle Air Lane, Warrenton, VA 20186

TRAFFIC CONSULT:
THE TRAFFIC GROUP
8888 E. 15th Ave., Suite 200, Denver, CO 80231
303.751.1100

PROJECT TITLE: _____

DRAWING TITLE:
SECTIONS

SCALE : 3/4" = 1'-0"

SCALE: As indicated


S-312

06 APRIL 2026



Autodesk Docs\\PGOPSP3_8 Buildings\\2025001_P3_ST_SpringhillES_R25.rvt
4/2/2026 4:28:29 PM


E

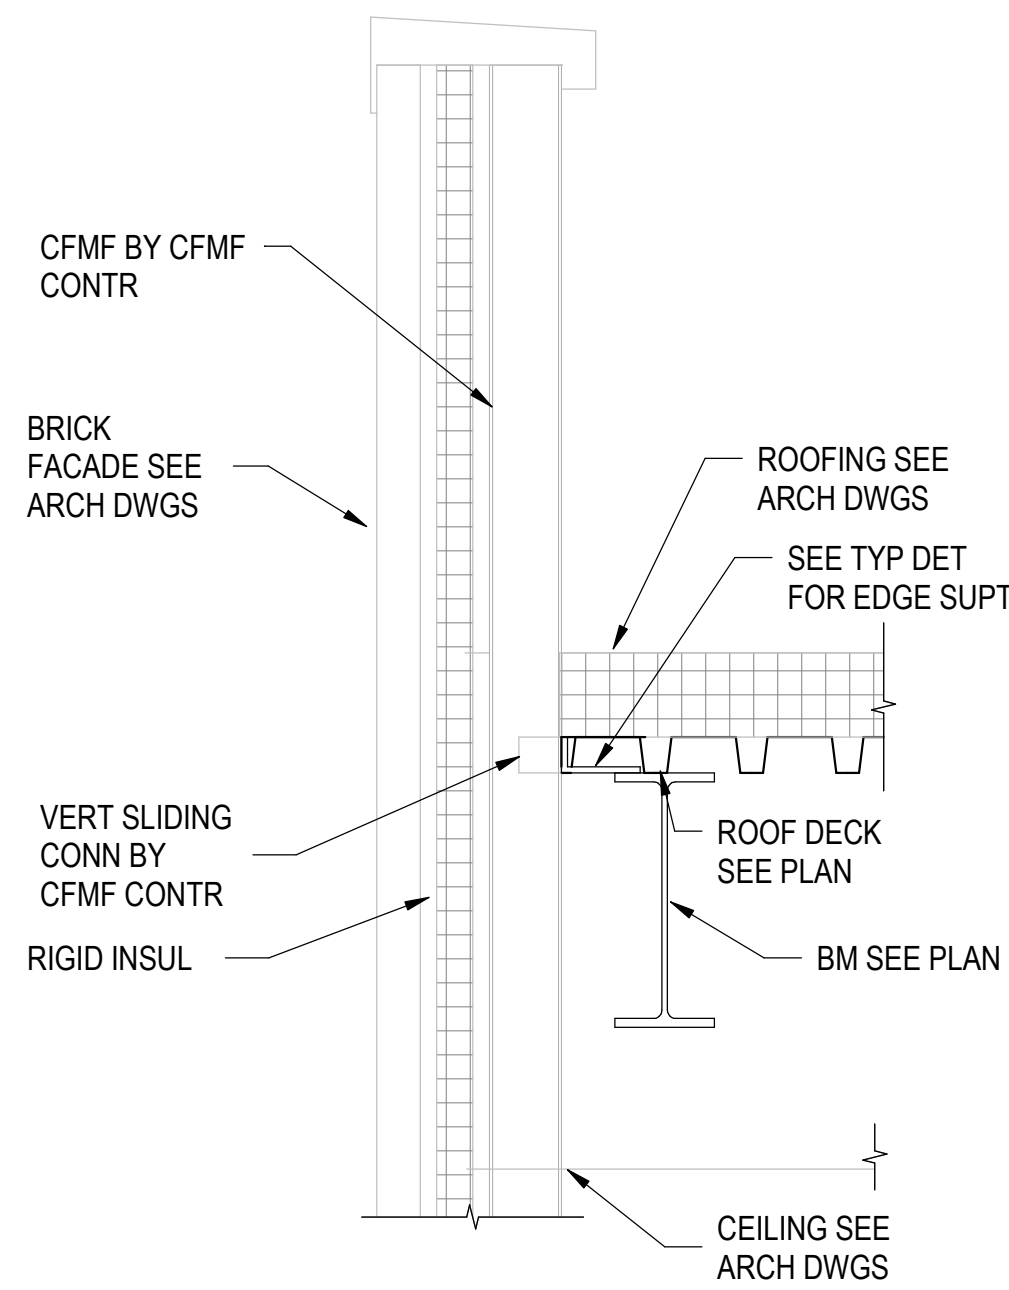

NOTE: ATTACHMENT OF CFMF TO BASE STRUCTURE SHALL OCCUR AT BENT PLATE AND SLAB BELOW ONLY

SECTION A
SCALE: 3/4" = 1'-0"


D

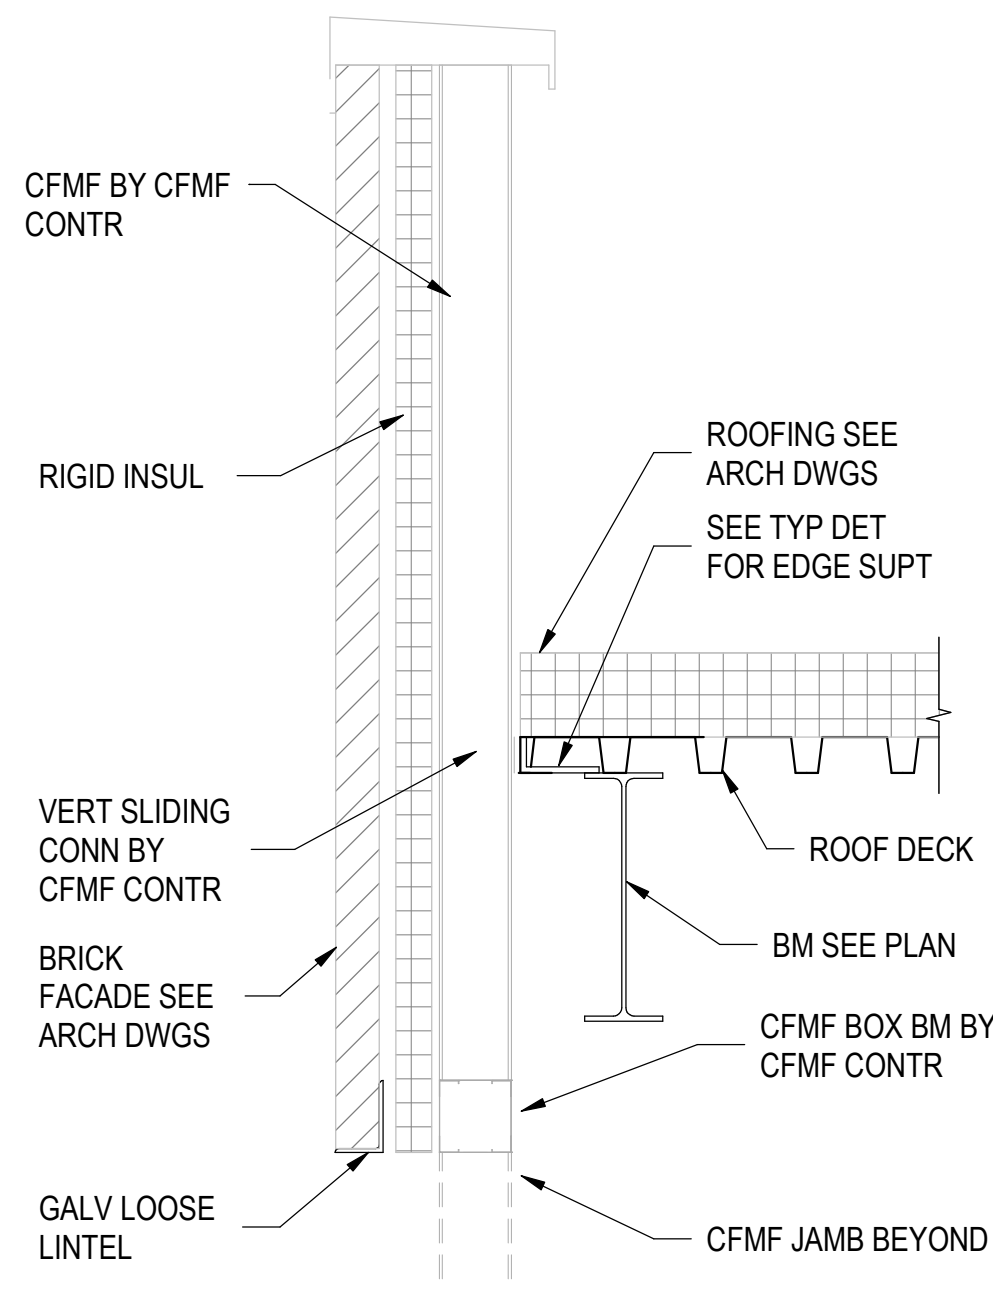

NOTE: ATTACHMENT OF CFMF TO BASE STRUCTURE SHALL OCCUR AT BENT PLATE AND SLAB BELOW ONLY


SECTION B
SCALE: 3/4" = 1'-0"

C

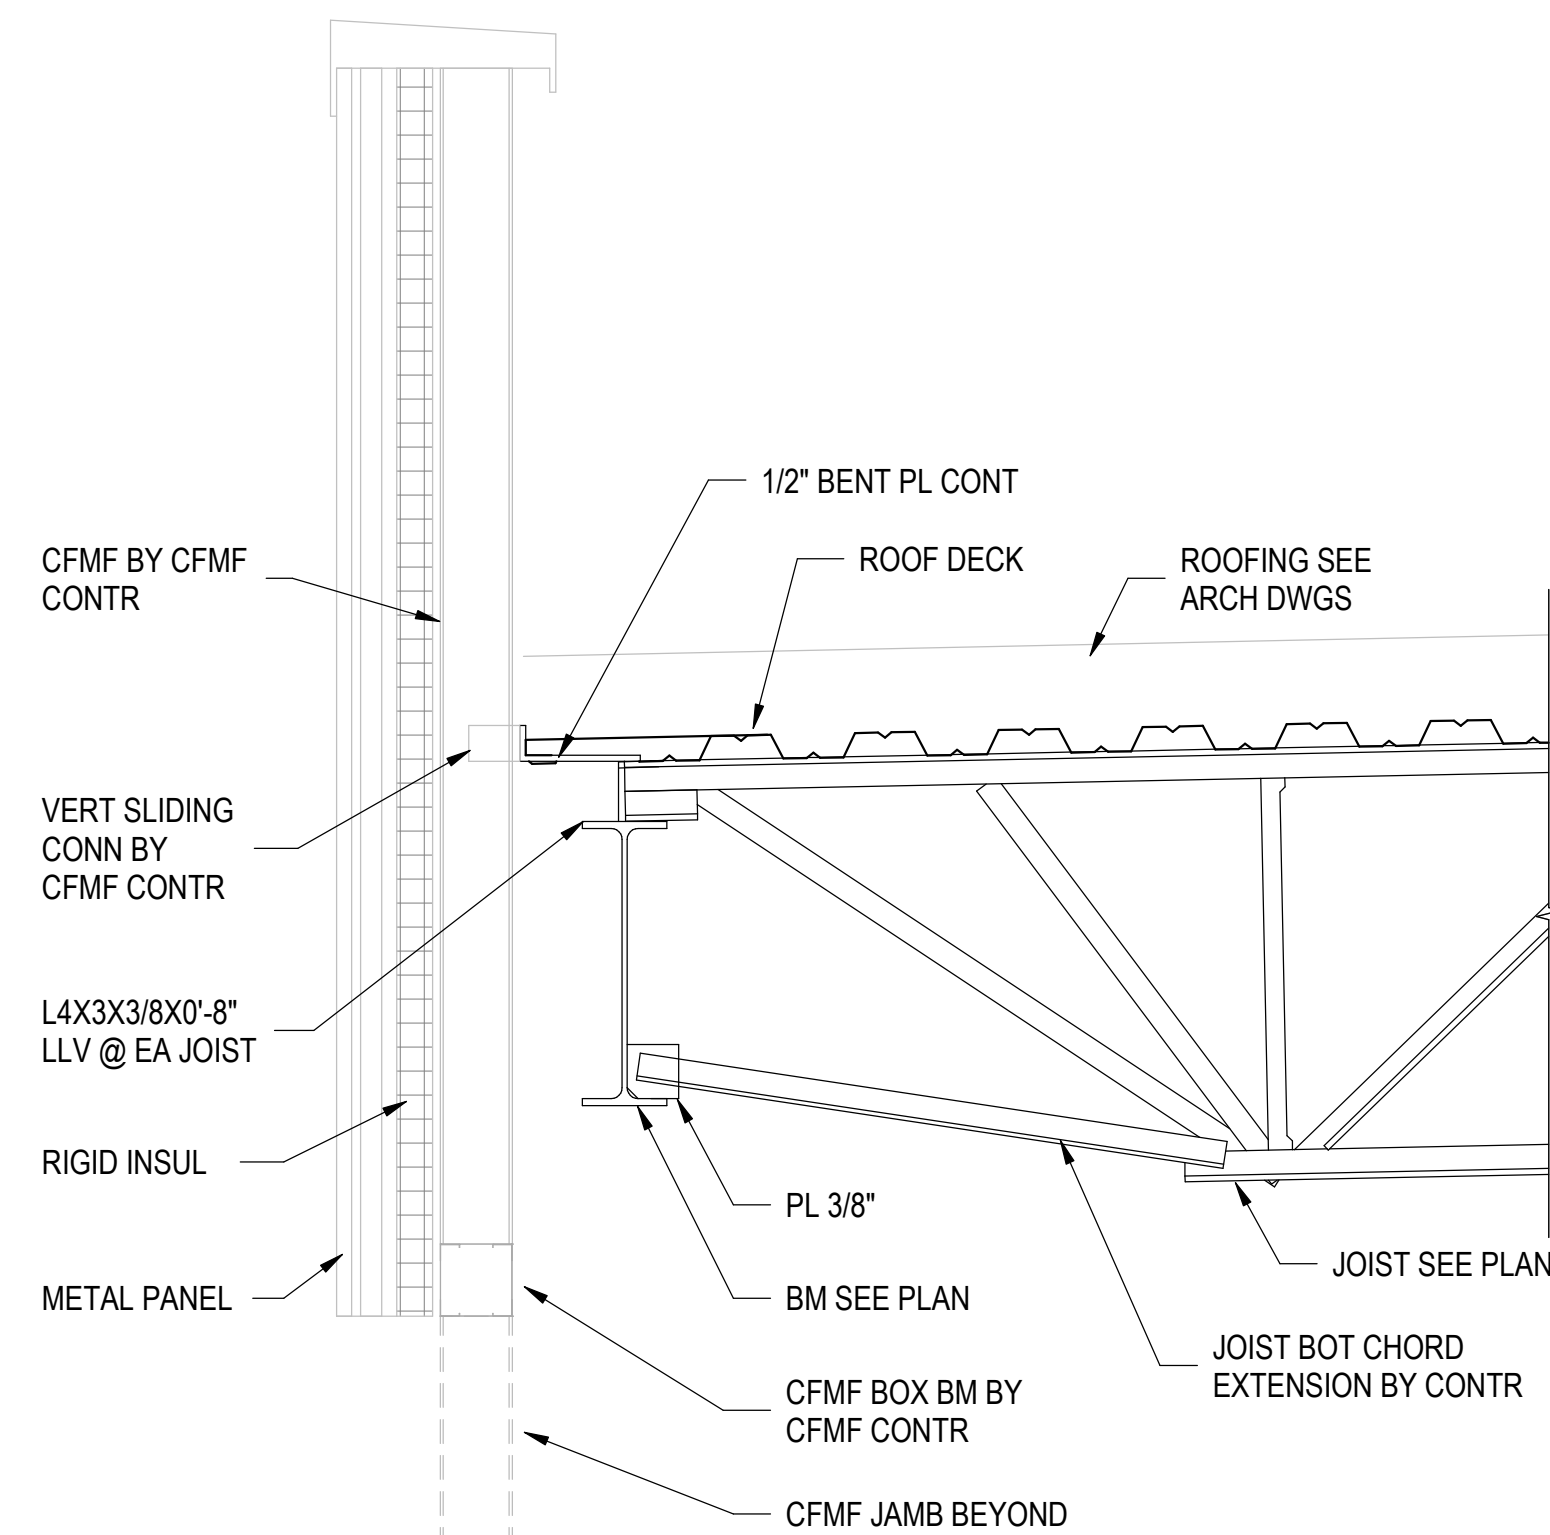


SECTION E
SCALE: 3/4" = 1'-0"


B

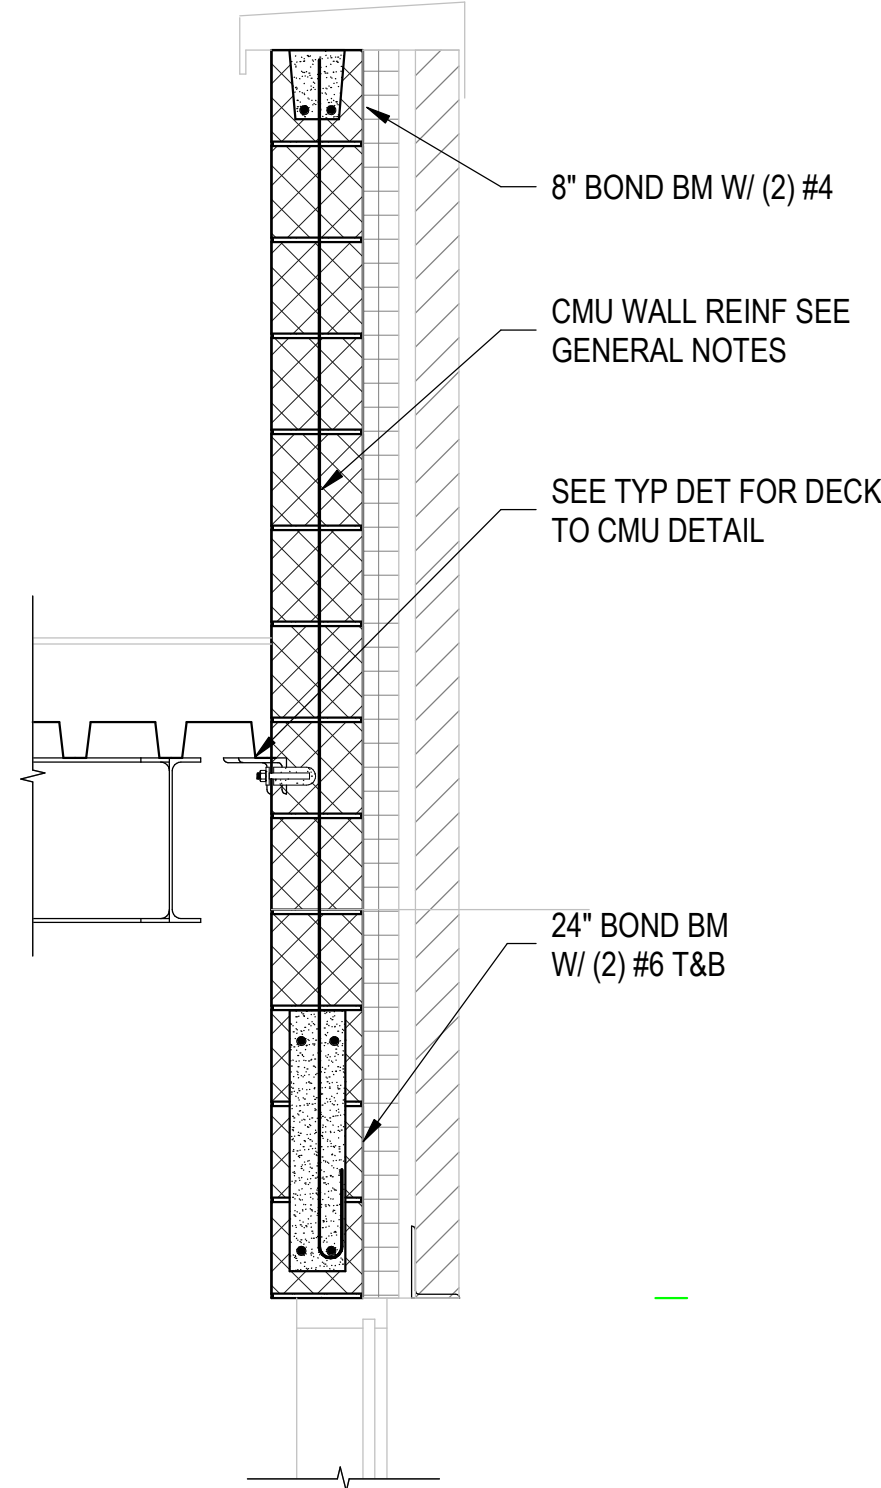


SECTION K
SCALE: 3/4" = 1'-0"

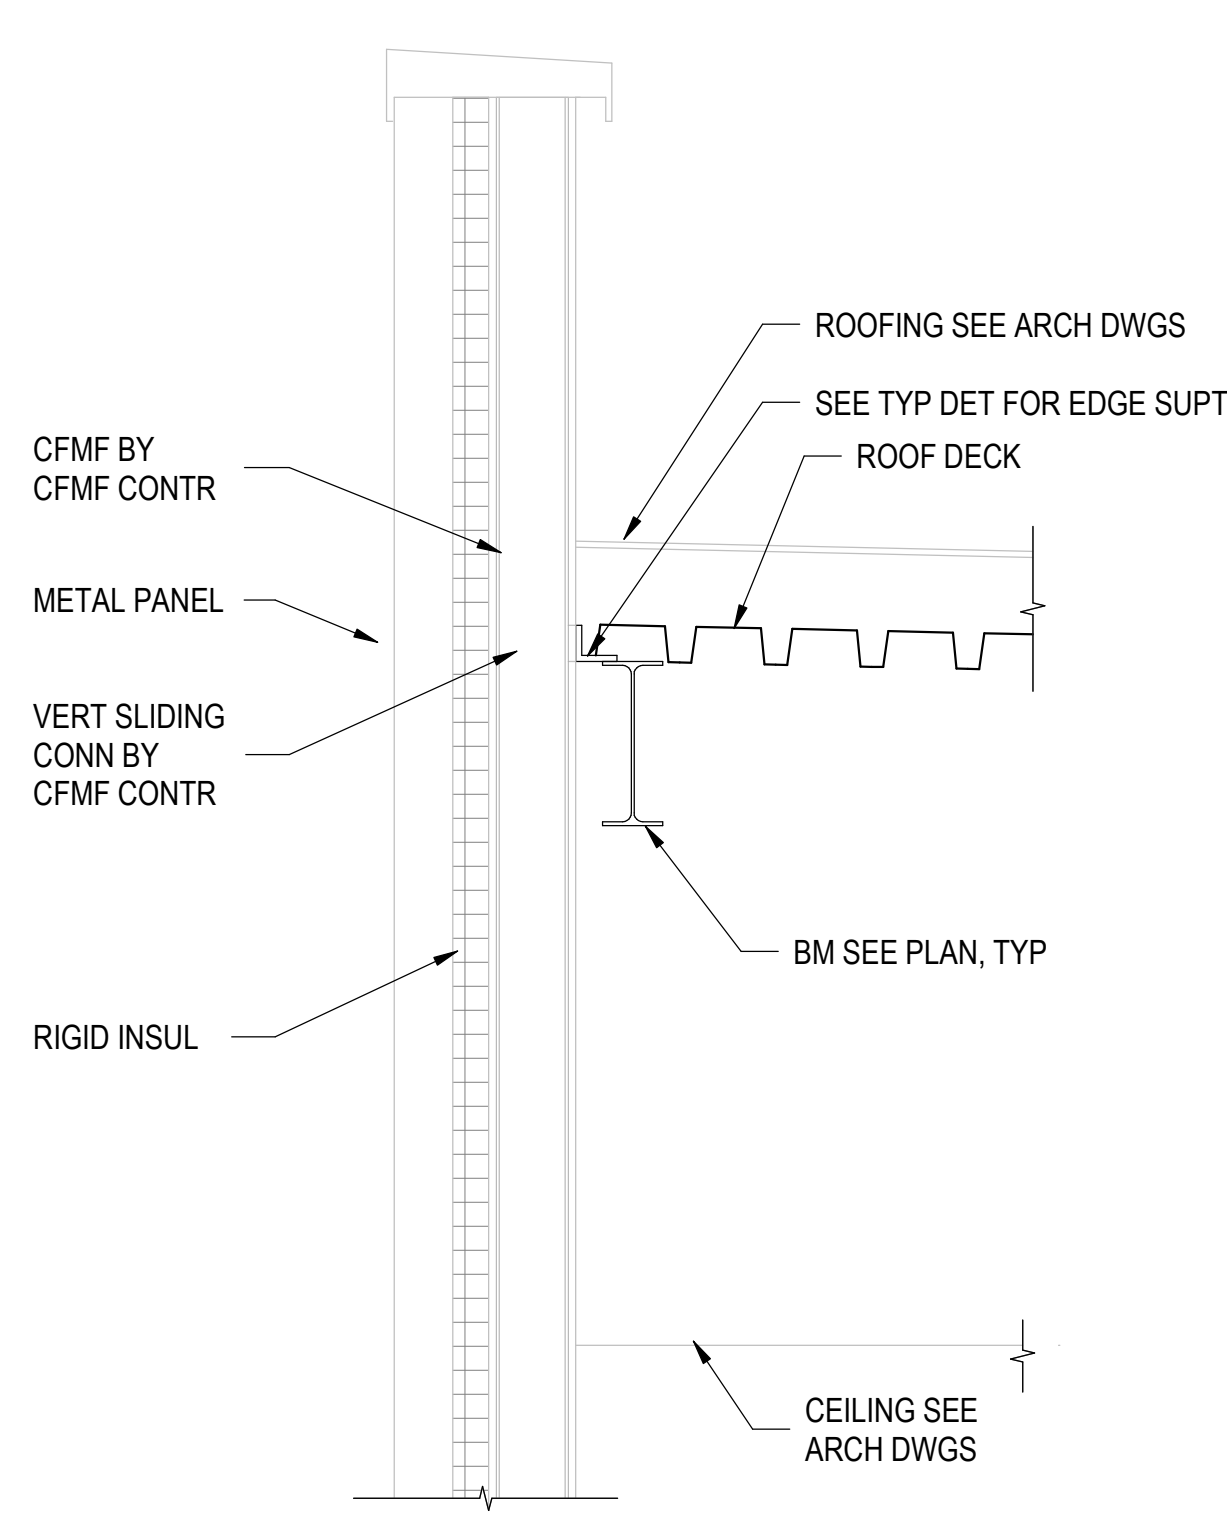


SECTION F
SCALE: 3/4" = 1'-0"

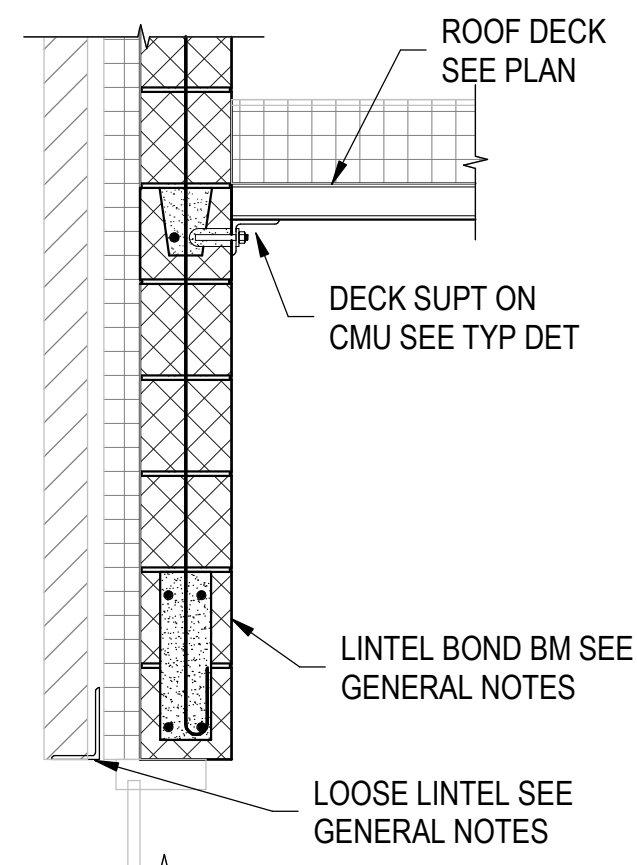

SECTION L
SCALE: 3/4" = 1'-0"

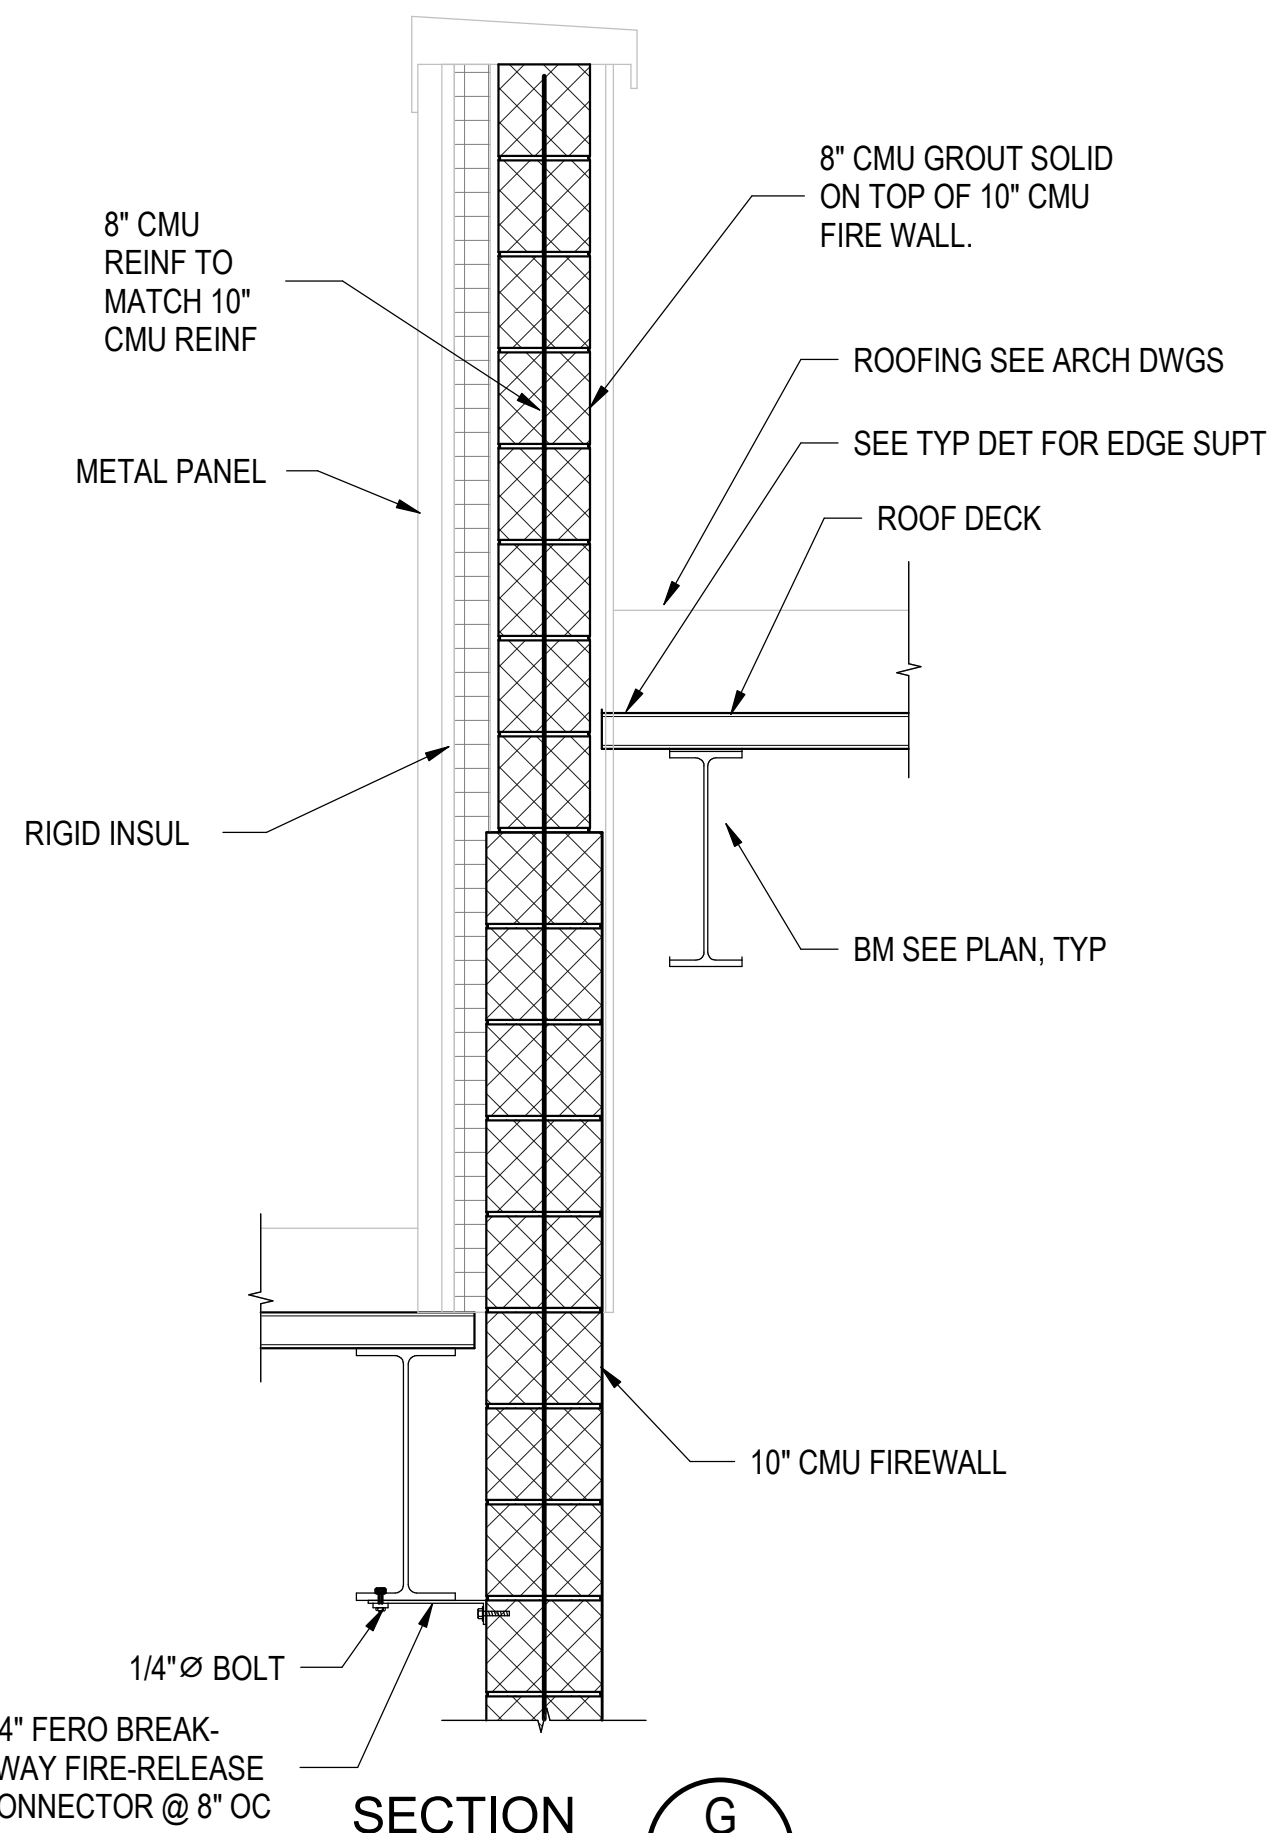


SECTION G
SCALE: 3/4" = 1'-0"

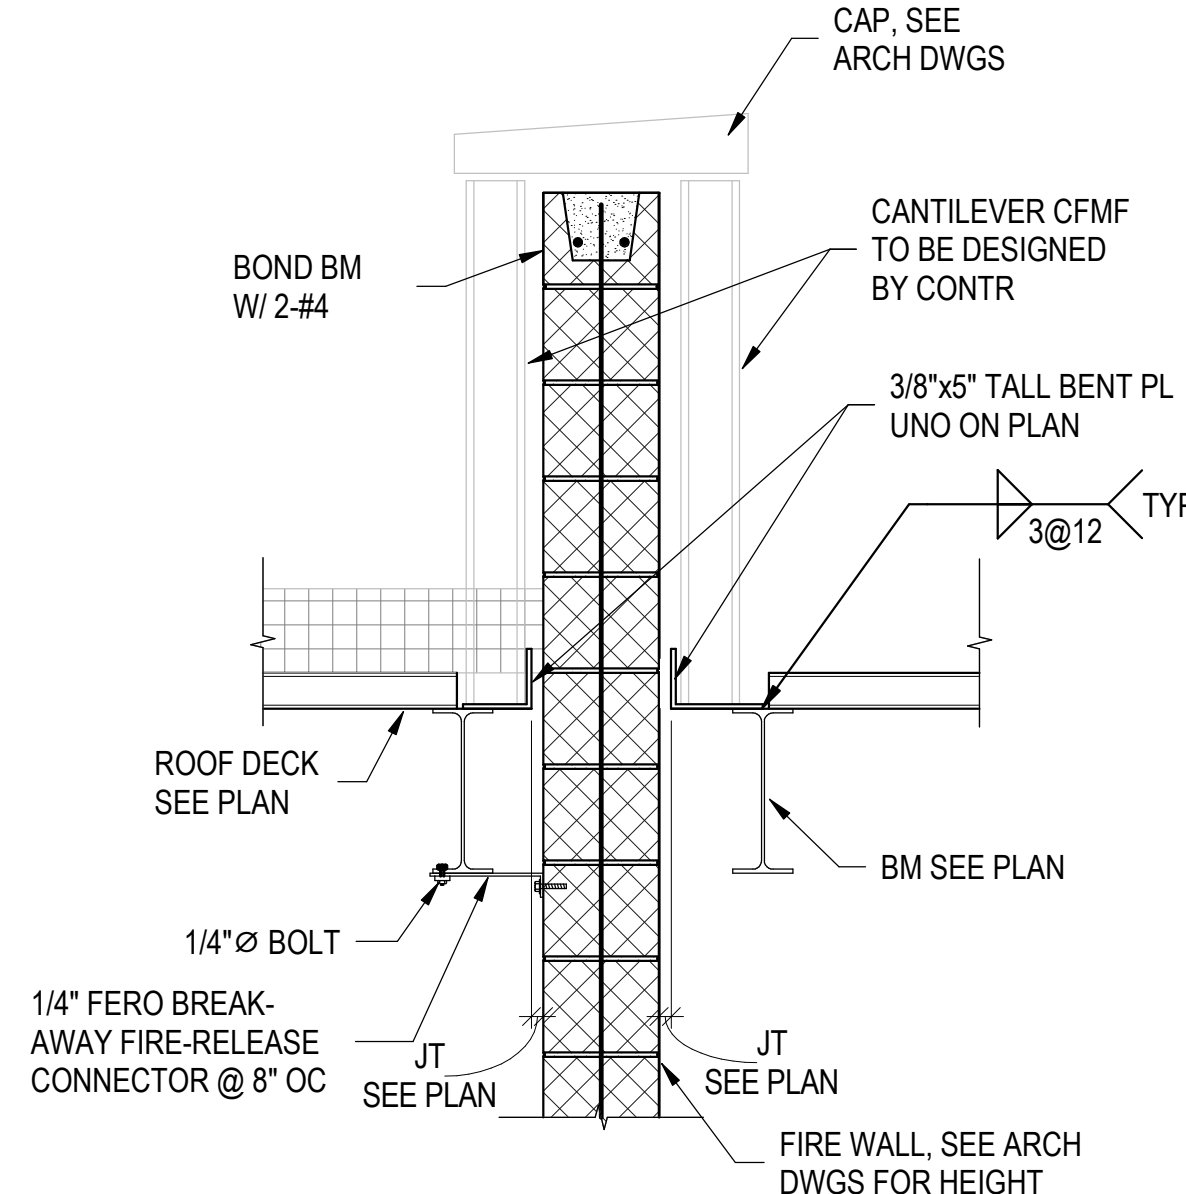


SECTION M
SCALE: 3/4" = 1'-0"


SECTION C
SCALE: 3/4" = 1'-0"

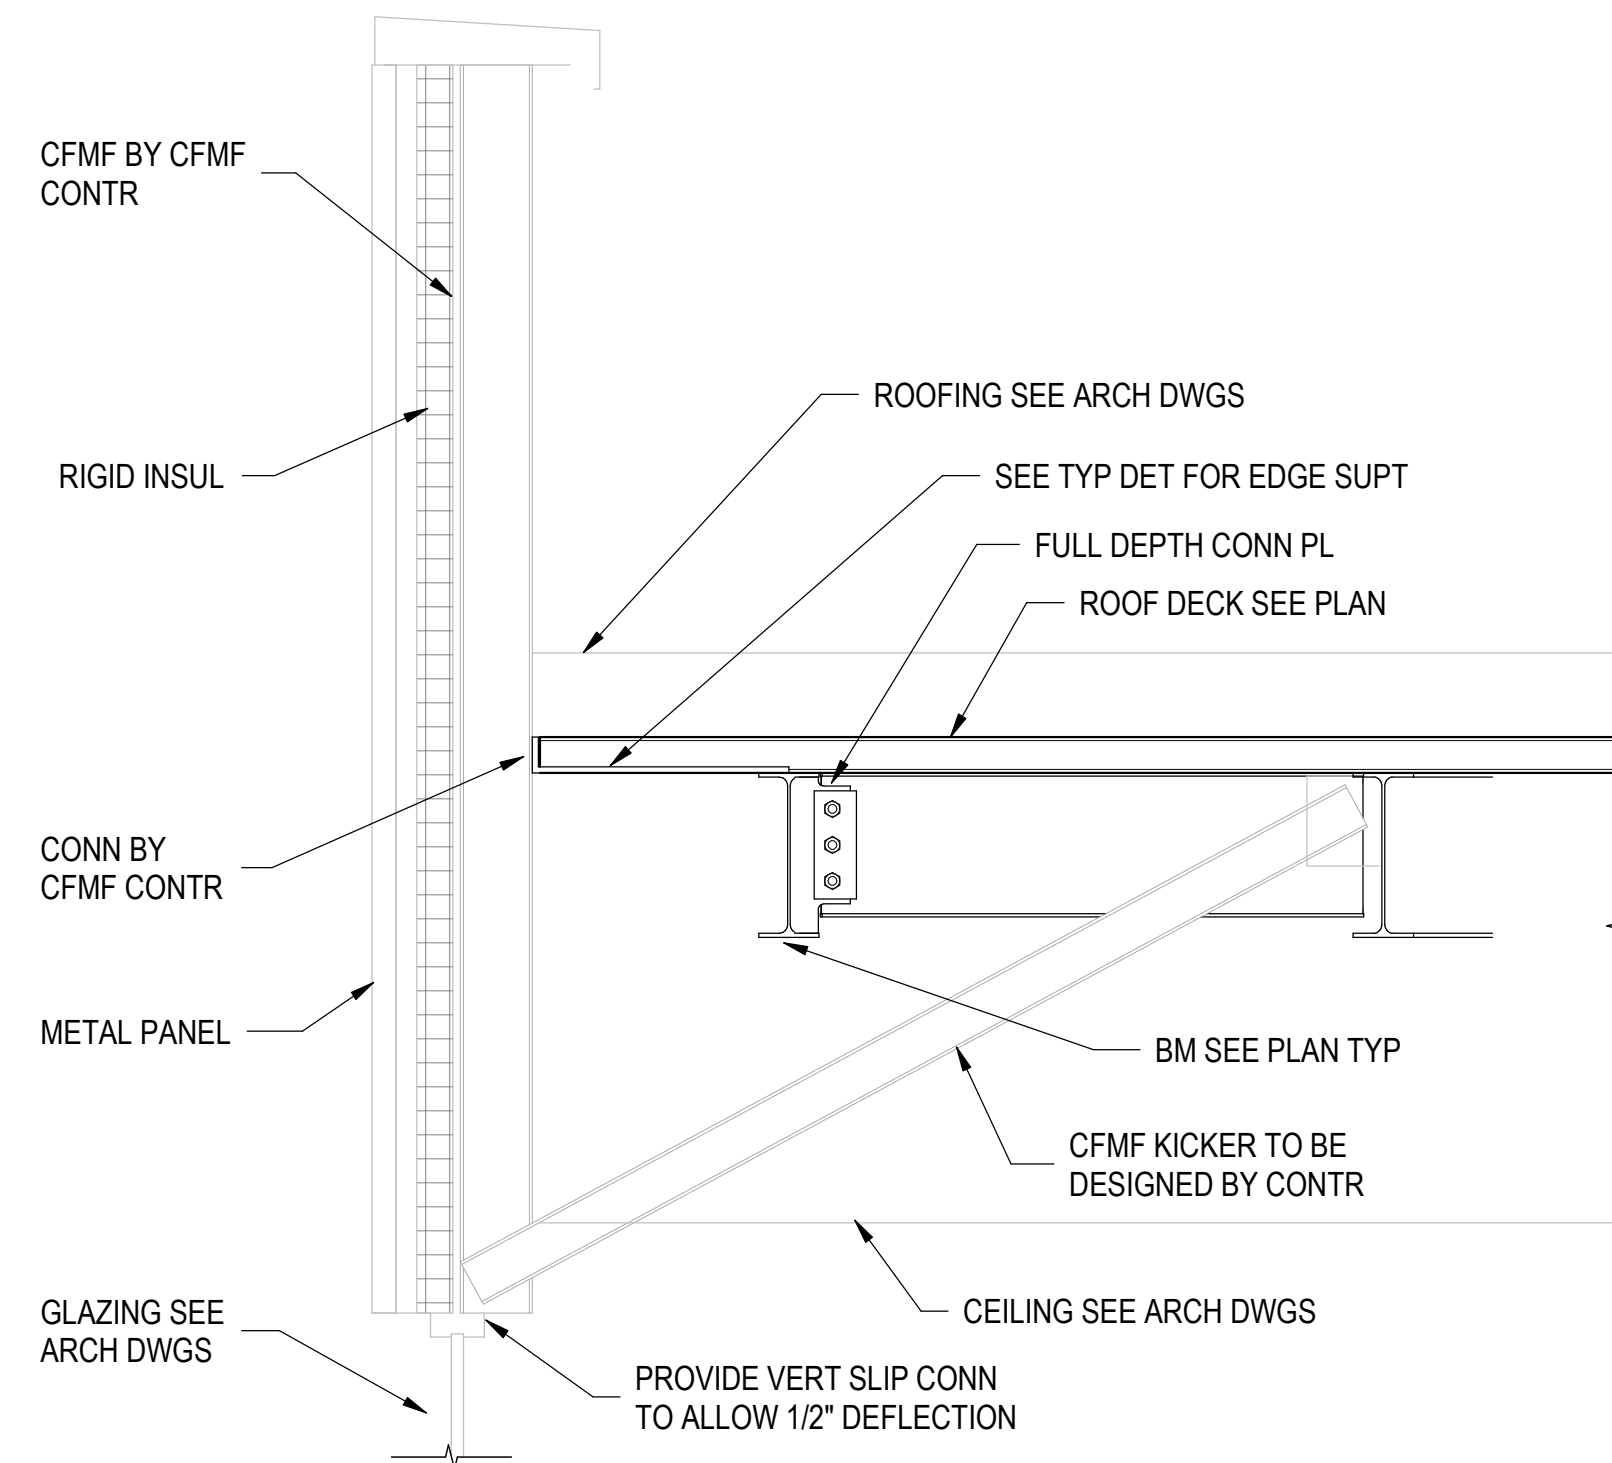


SECTION C
SCALE: 3/4" = 1'-0"

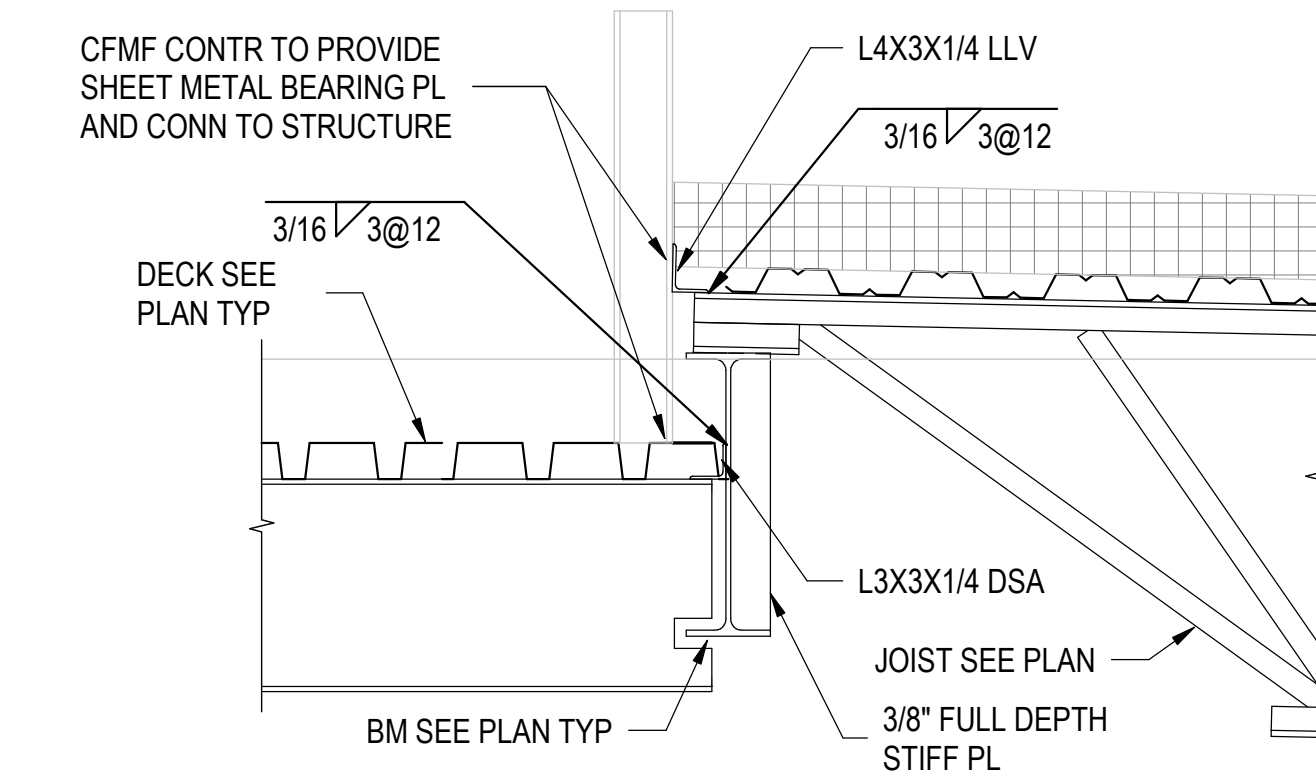


SECTION H
SCALE: 3/4" = 1'-0"

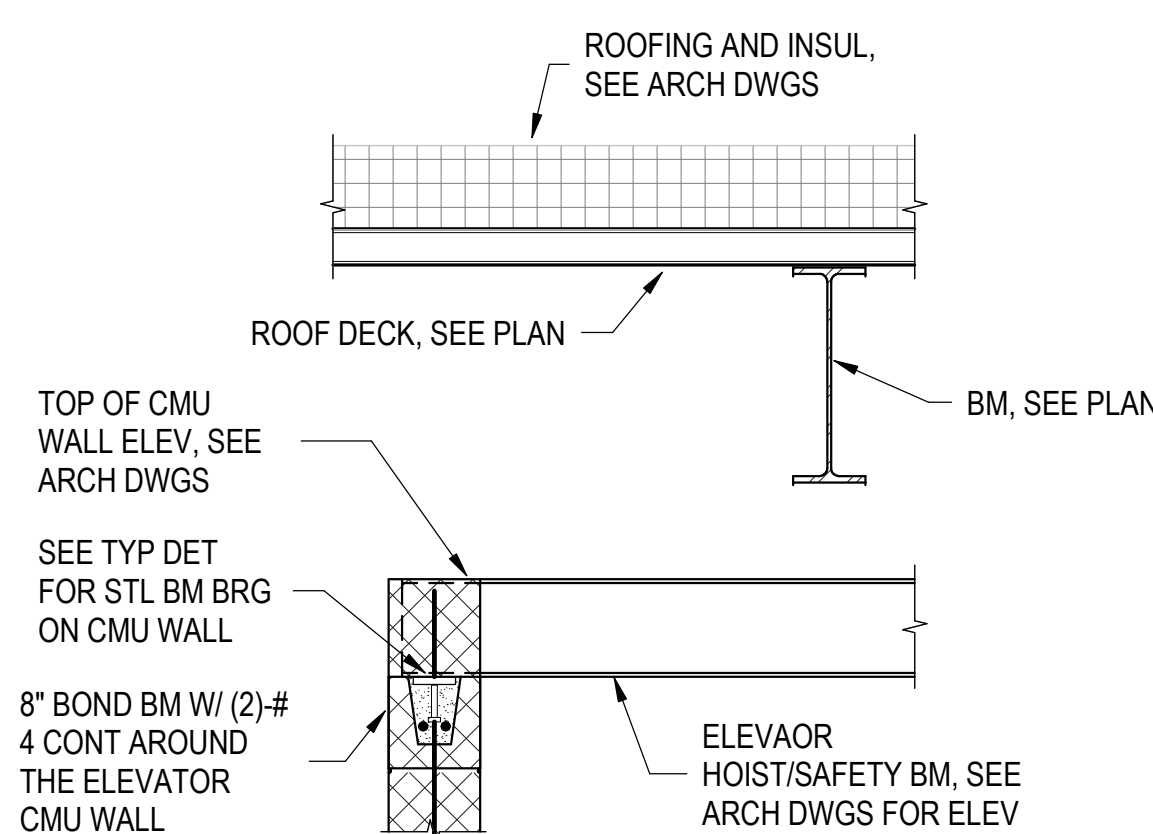

SECTION N
SCALE: 3/4" = 1'-0"

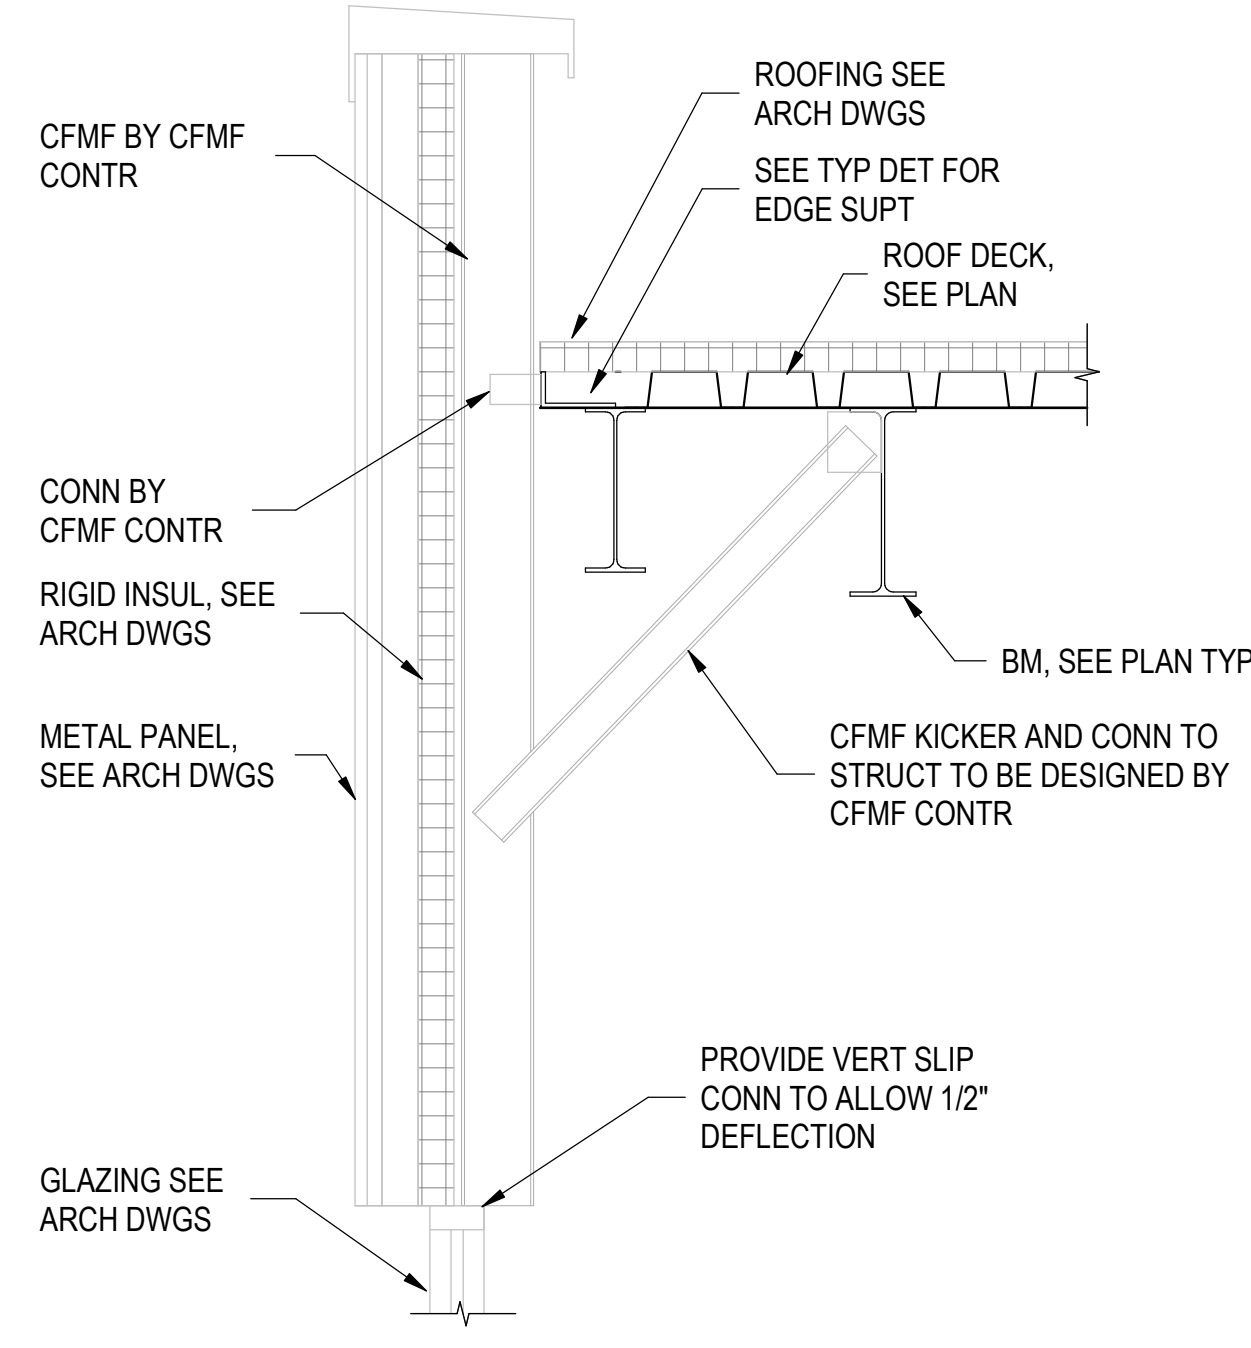


SECTION D
SCALE: 3/4" = 1'-0"

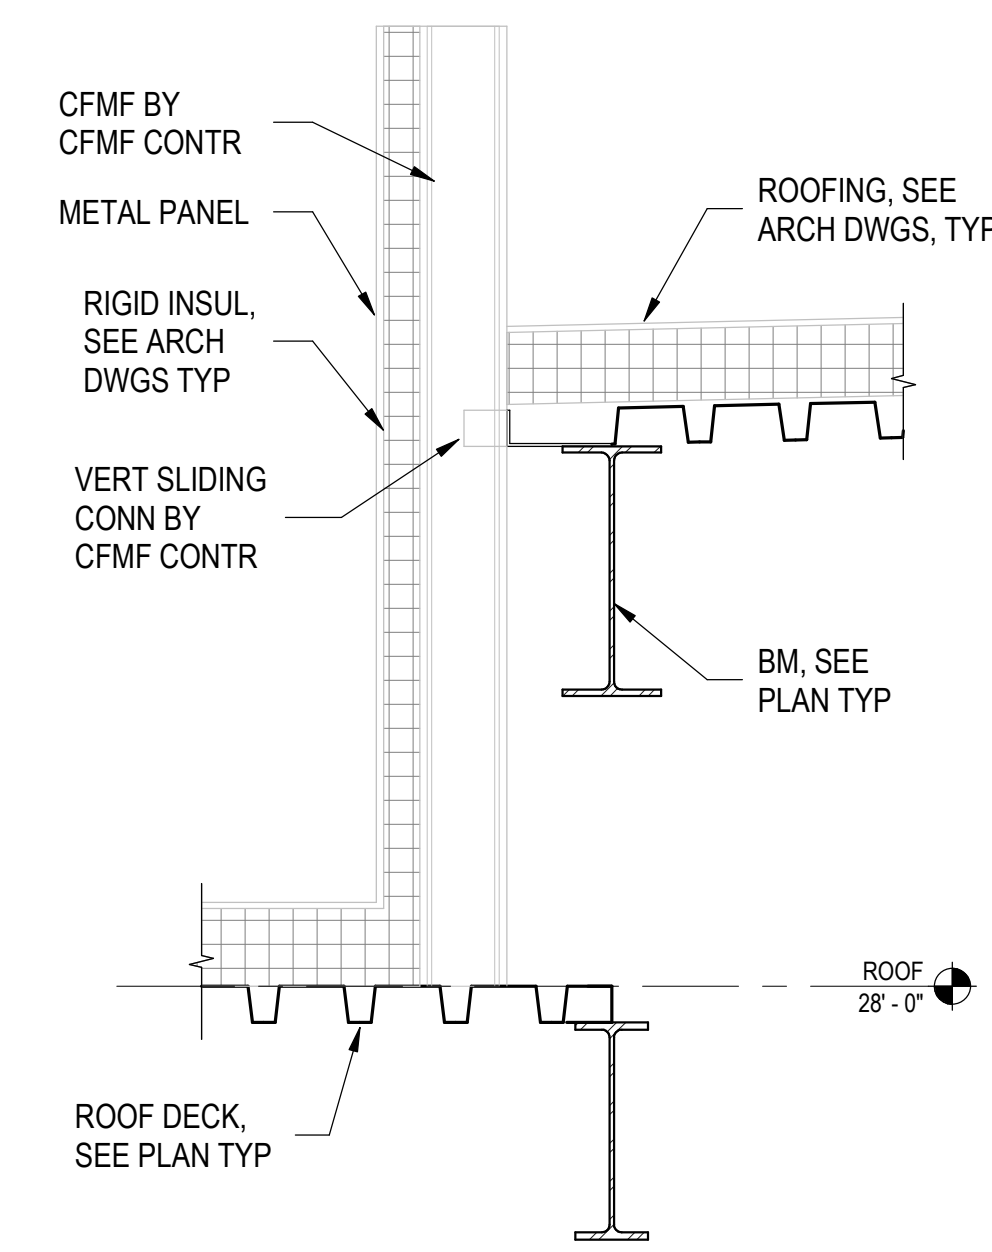


SECTION P
SCALE: 3/4" = 1'-0"

NO.	DESCRIPTION	YYYY/MM/DD
1	65% DD	2025/09/26
2	95% DD	2025/12/17
3	BLDG. PERMIT	2026/1/16
4	FINAL CONSTRUCTION DOCUMENTS	2026/04/06

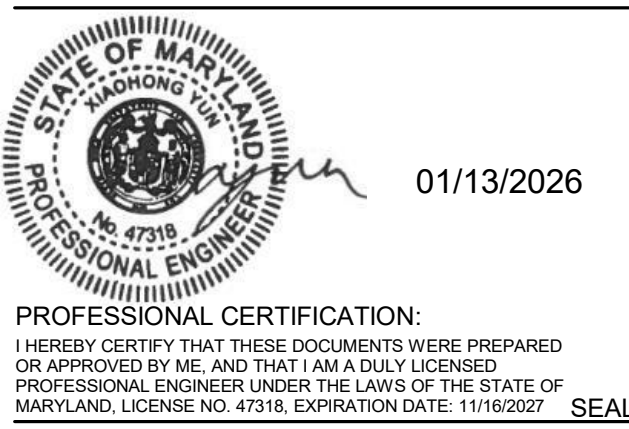

PROFESSIONAL CERTIFICATION:
I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND, LICENSE NO. 47318, EXPIRATION DATE: 11/16/2027. SEAL

PROJECT:
PRINCE GEORGE'S COUNTY PUBLIC SCHOOLS ALTERNATIVE CONSTRUCTION FINANCING PACKAGE 2

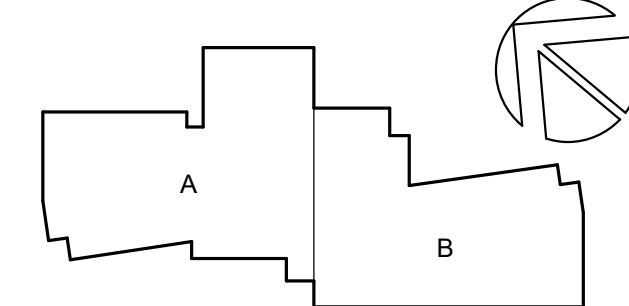

KEY PLAN

PERKINS EASTMAN
One Thomas Circle NW, Suite 200
Washington, DC 20005
T: +1 202 861 1325
F: +1 202 861 1326

OWNER:
PRINCE GEORGE'S COUNTY PUBLIC SCHOOLS

Sasser Administration Building, 14201 School Lane, Upper Marlboro, MD 20772

CLIENT:
PROGRESSIVE EDUCATION PARTNERSHIP

101 E. Kennedy Blvd, Suite 1470, Tampa, Florida 33602

GENERAL CONTRACTOR:
MCN BUILD

1214 28TH ST NW, Washington, DC 20007

ASSOCIATE ARCHITECT:
R. MCGHEE & ASSOCIATES, PLLC

5003 Creston St, Hyattsville, MD 20781

CIVIL / SITE:
BRADLEY SITE DESIGN

1010 Wisconsin Ave. NW, Ste 620, DC 20007

LANDSCAPE:
BRADLEY SITE DESIGN

1010 Wisconsin Ave. NW, Ste 620, DC 20007

STRUCTURAL:
YUN ASSOCIATES

1050 Connecticut Ave. NW, Ste 500, DC 20036

MEPPF, LIGHTING & ENERGY MODELING:
CMTA INC. CONSULTING ENGINEERS

220 Lexington Green Circle Ste. 600, Lexington, KY 40503

FOOD SERVICE:
NYIKOS-GARCIA FOODSERVICE DESIGN INC.

7146 Starmount Way, New Market, MD 21774

SPECIFICATIONS:
HELLER & METZGER PC

1500 K Street NW, Suite #500, Washington, DC 20006

SUSTAINABILITY, NZE, SPECIALIST:
PERKINS EASTMAN ARCHITECTS

One Thomas Circle NW, Ste. 200, Washington, DC 20005

ACOUSTICS:
POLYSONICS

405 Belle Air Lane, Warrenton, VA 20186

AV, IT, & SECURITY:
CMTA INC. CONSULTING ENGINEERS

220 Lexington Green Cir. Ste. 600, Lexington, KY 40503

TRAFFIC CONSULT:
THE TRAFFIC GROUP

9500 Franklin Square Drive, Ste. H, Baltimore, MD 21236

ENVELOPE CONSULTANT:

PROJECT TITLE:

SPRINGHILL LAKE ELEMENTARY SCHOOL

PROJECT NO: 0100147

DRAWING TITLE:

SECTIONS

0' 4" 8" 1' 2' 3'

SCALE: 3/4" = 1'-0"

0' 1' 2' 4' 6'

SCALE: 1/2" = 1'-0"

SCALE: 3/4" = 1'-0"

DRWN BY: CH

CHKD BY: BY

S-321

FINAL CONSTRUCTION DOCUMENTS

06 APRIL 2026


 01/13/2026

PROFESSIONAL CERTIFICATION:
 I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED
 OR APPROVED BY ME, AND THAT I AM A DULY LICENSED
 PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF
 MARYLAND, LICENSE NO. 47318. EXPIRATION DATE: 11/16/2027

SEAL

OWNER:
PRINCE GEORGE'S COUNTY PUBLIC SCHOOLS
Sasser Administration Building, 14201 School Lane,
Upper Marlboro, MD 20772

CLIENT:

GENERAL CONTRACTOR:
MCN BUILD
1214 28TH ST NW, Washington, DC 20007

CIVIL / SITE:
BRADLEY SITE DESIGN
1010 Wisconsin Ave. NW, Ste.620, DC 20007

STRUCTURAL:
YUN ASSOCIATES
1050 Connecticut Ave. NW, Ste. 500, DC 20036

FOOD SERVICE:
NYIKOS-GARCIA FOODSERVICE DESIGN INC.
7146 Starmount Way, New Market, MD 21774

SUSTAINABILITY, NZE, SPECIALIST:
PERKINS EASTMAN ARCHITECTS
One Thomas Circle NW, Ste. 200, Washington, DC 20005

CMTA INC. CONSULTING ENGINEERS
220 Lexington Green Cir. Ste. 600 Lexington KY 40505

ENVELOPE CONSULTANT:

SPRINGHILL LAKE
ELEMENTARY
SCHOOL







PROJECT No: 0100147

0' 4" 8" 1' 2' 3'

SCALE : 1/2" = 1'-0"

CHKD BY: BY _____

FINAL CONSTRUCTION DOCUMENTS

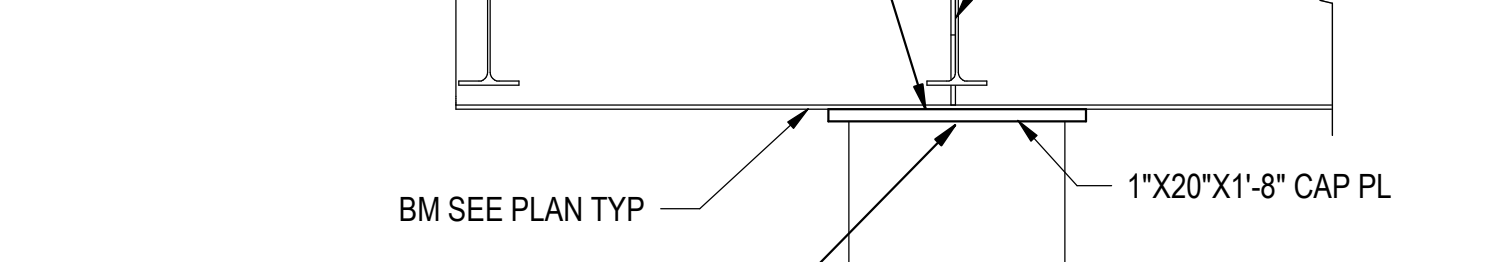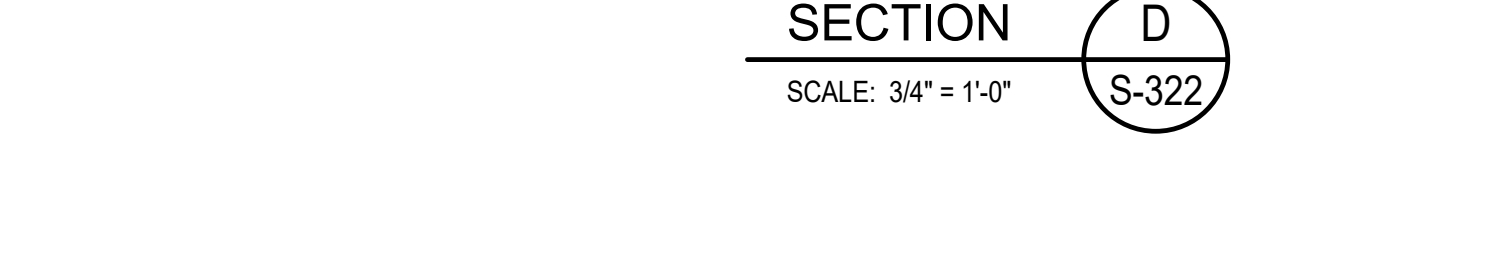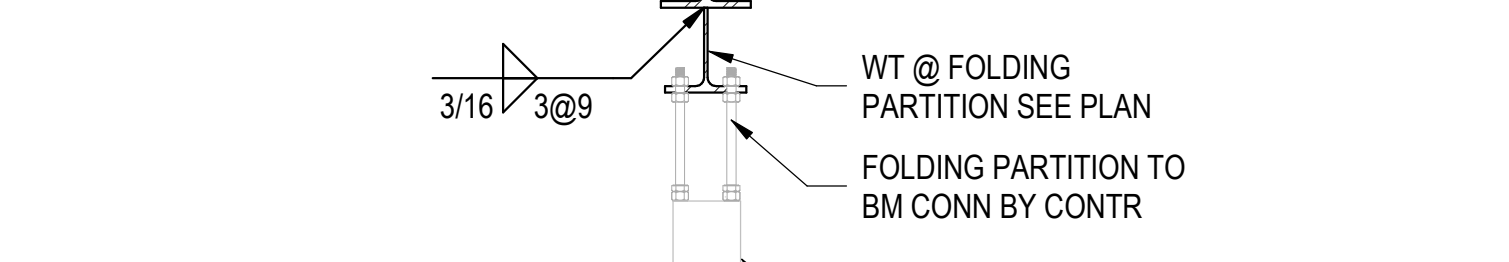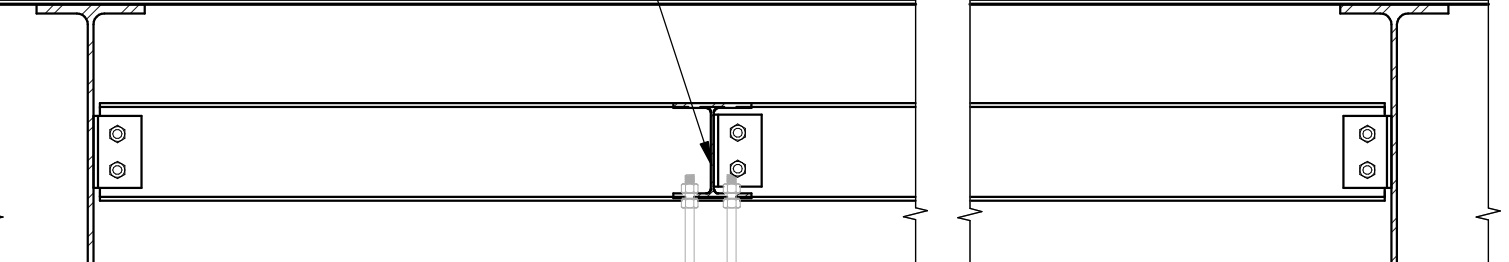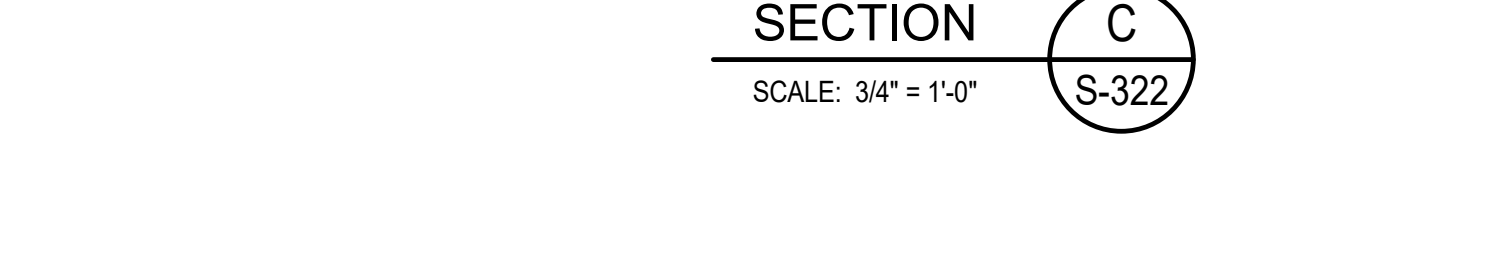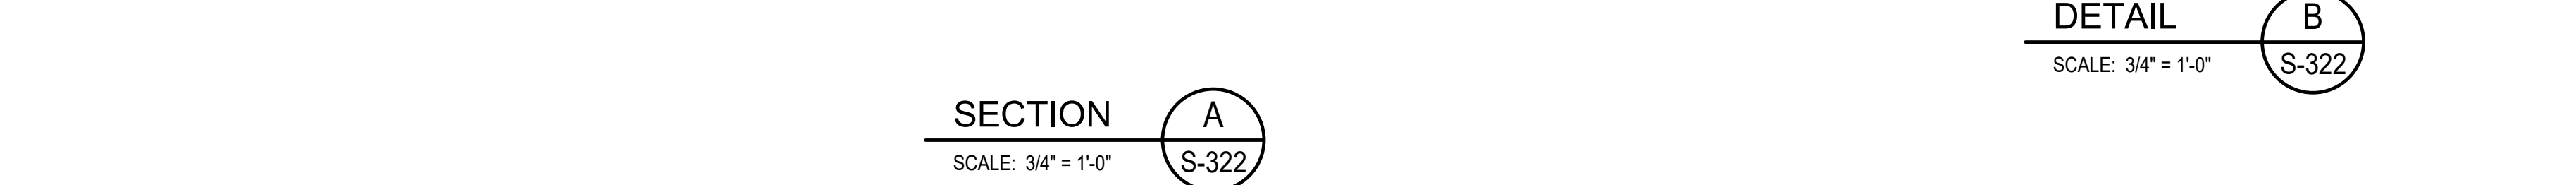

 01/13/2026

PROFESSIONAL CERTIFICATION:
I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND, LICENSE NO. 47318. EXPIRATION DATE: 11/16/2027

SEAL

OWNER:
PRINCE GEORGE'S COUNTY PUBLIC SCHOOLS
Sasser Administration Building, 14201 School Lane,
Upper Marlboro, MD 20772

GENERAL CONTRACTOR:
MCN BUILD
1214 28TH ST NW, Washington, DC 20007

CIVIL / SITE:
BRADLEY SITE DESIGN
1010 Wisconsin Ave. NW, Ste.620, DC 20007

STRUCTURAL:
YUN ASSOCIATES
1050 Connecticut Ave, NW, Ste.500, DC 20036

FOOD SERVICE:
NYIKOS-GARCIA FOODSERVICE DESIGN INC.
 7146 Starmount Way, New Market, MD 21774

SUSTAINABILITY, NZE, SPECIALIST:
PERKINS EASTMAN ARCHITECTS
One Thomas Circle NW, Ste. 200, Washington, DC 20005

CMTA INC. CONSULTING ENGINEERS
220 Lexington Green Cir. Ste. 600, Lexington, KY 40505
TRAFFIC CONSULT:

SCALE: As indicated



DRWN BY: CH

CHKD BY: BY

0 101

S-401

FINAL CONSTRUCTION DOCUMENTS

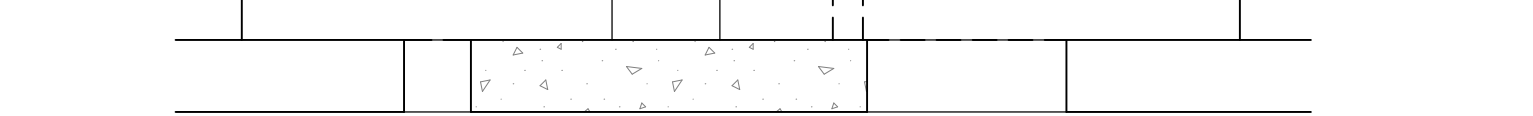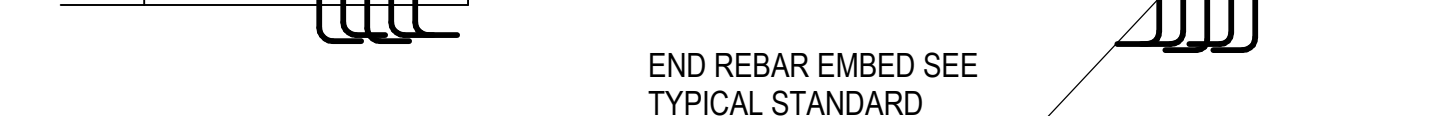

NOTE:
1. CMU WALLS SHOWN ON THIS SHEET TO BE 8" CMU FULLY GROUTED.
2. BALANCE CMU REINFORCING SHALL BE #5@16" ON CENTER.
3. REINFORCING SPLICES IN CMU SHALL BE 52" FOR #7 BAR. SEE GENERAL NOTES FOR #6 AND #5 BAR SPLICES IN CMU.

01/13/2026

PROJECT:
PRINCE GEORGE'S COUNTY PUBLIC
SCHOOLS ALTERNATIVE CONSTRUCTION
FINANCING PACKAGE 2



OWNER:
PRINCE GEORGE'S COUNTY PUBLIC SCHOOLS
Sasser Administration Building, 14201 School Lane,
Upper Marlboro, MD 20772

GENERAL CONTRACTOR:
MCN BUILD
1214 28TH ST NW, Washington, DC 20007

CIVIL / SITE:
BRADLEY SITE DESIGN
1010 Wisconsin Ave. NW, Ste.620, DC 20007

STRUCTURAL:
YUN ASSOCIATES
1050 Connecticut Ave. NW, Ste.500, DC 20036

FOOD SERVICE:
NYIKOS-GARCIA FOODSERVICE DESIGN INC.
7146 Starmount Way, New Market, MD 21774


SUSTAINABILITY, NZE, SPECIALIST:
PERKINS EASTMAN ARCHITECTS
One Thomas Circle NW, Ste. 200, Washington, DC 20005

CMTA INC. CONSULTING ENGINEERS
220 Lexington Green Cir. Ste. 600, Lexington, KY 40505
TRAFFIC CONSULT.

SPRINGHILL LAKE
ELEMENTARY
SCHOOL

DRWN BY: CH
CHKD BY: BY

FINAL CONSTRUCTION DOCUMENTS

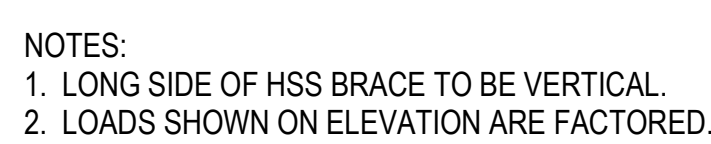

NOTES:

1. BRACING AXIAL LOADS SHOWN IN ELEVATIONS ACT IN EITHER DIRECTIONS.
2. SEE TYPICAL BRACING CONNECTION DETAIL FOR CONNECTIONS AND WORK POINTS



01/13/2026

PROFESSIONAL CERTIFICATION:
 I HEREBY CERTIFY THAT THE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND, LICENSE NO. 47318. EXPIRATION DATE: 11/16/2027

SEAL

The diagram shows a stepped profile divided into two regions, A and B, by a vertical line. Region A is on the left and Region B is on the right. A circular inset in the upper right corner provides a magnified view of a corner where a horizontal surface meets a vertical surface, showing a diagonal line and a shaded area.

**PERKINS—
EASTMAN**
One Thomas Circle NW, Suite 200
Washington, DC 20005
T. +1 202 861 1325
F. +1 202 861 1326


PROJECT TITLE:

SPRINGHILL LAKE
ELEMENTARY
SCHOOL

DRAWING TITLE:
**JOIST LOADING
DIAGRAMS**

S-404

06 APRIL 2026

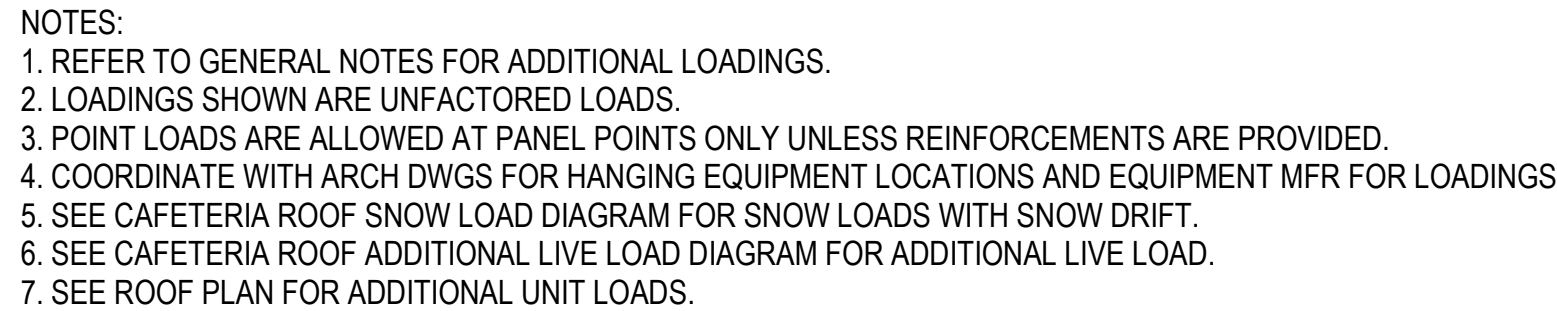

NOTES:


1. REFER TO GENERAL NOTES FOR ADDITIONAL LOADINGS.
2. LOADINGS SHOWN ARE UNFACTORED LOADS.
3. POINT LOADS ARE ALLOWED AT PANEL POINTS ONLY UNLESS REINFORCEMENTS ARE PROVIDED.
4. COORDINATE WITH ARCH DWGS FOR HANGING EQUIPMENT LOCATIONS AND EQUIPMENT MFR FOR LOADINGS
5. SEE GYM ROOF SNOW LOAD DIAGRAM FOR SNOW LOADS WITH SNOW DRIFT.

ROOF SNOW LOAD DIAGRAM




[illegible]

ROOF 28' - 0"																												ROOF 28' - 0"					
SECOND FLOOR 14' - 0"	W10X49	HSS18X0.500	W10X33	W10X45	W10X45	W10X39	W12X65	W12X65	W10X39	W10X39	W10X33	W10X33	W10X33	W10X33	W10X45	W10X49	W10X49	W10X54	W10X45	HSS18X0.375	W10X45	W10X45	W10X39	HSS10X0.500	W10X33	W10X33	W10X33	W10X39	W10X39	W10X45	W10X45	14' - 0"	
FIRST FLOOR 0' - 0"																												FIRST FLOOR 0' - 0"					
Column Locations	G-15	G-18	G.1-7	G.1-8.2	G.1-9	G.1-11	G.2-16	G.2-17	H-6	H-7	H-8.2	H-10	H-11	H-12	H-13	J-1	J-2	J-3	J-4	J-5	J.8-18	K-6.9A	K-10	K-11	K-11.9	K-13	K.1-16	K.5-1.3	L-10	L-11	L-12	M-9A	
Unfactored Reaction (kips)	75	45	75	170	180	140	25	30	111	100	110	75	70	70	45	126	216	218	193	170	30	180	155	105	120	90	70	25	135	125	150	180	
Base Plate Size	1'x18"x18"	3/4"x22"x22"	1'x18"x18"	1 1/4"x18"x18"	1 1/4"x18"x18"	1 1/4"x18"x18"	3/4"x20"x20"	3/4"x20"x20"	1'x18"x18"	1'x18"x18"	1'x18"x18"	1'x18"x18"	3/4"x18"x18"	3/4"x18"x18"	3/4"x18"x18"	1 1/4"x18"x18"	1 1/2"x18"x18"	1 1/2"x18"x18"	1 1/4"x18"x18"	1 1/2"x18"x18"	3/4"x22"x22"	1 1/4"x18"x18"	1 1/4"x18"x18"	1'x18"x18"	1'x18"x18"	3/4"x18"x18"	3/4"x18"x18"	1 1/4"x18"x18"	1 1/4"x18"x18"	1 1/4"x18"x18"	1 1/4"x18"x18"	1 1/4"x18"x18"	

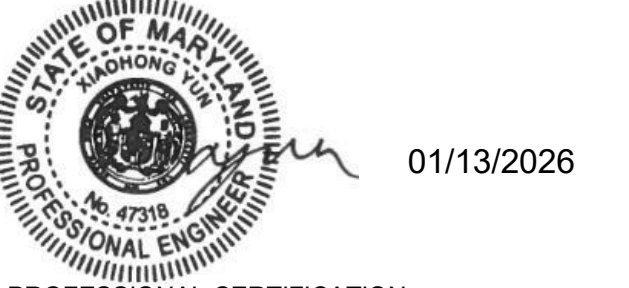[illegible]

PROFESSIONAL CERTIFICATION:
I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED
OR APPROVED BY ME, AND THAT I AM A DULY LICENSED
PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF
MARYLAND, LICENSE NO. 47318, EXPIRATION DATE: 11/16/2027 **SEAL**

PROJECT:
PRINCE GEORGE'S COUNTY PUBLIC
SCHOOLS ALTERNATIVE CONSTRUCTION
FINANCING PACKAGE 2

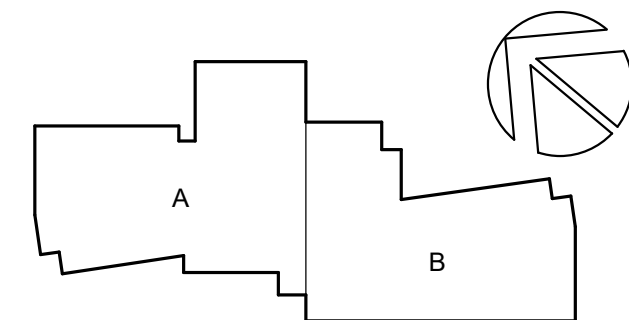

KEY PLAN

**PERKINS —
EASTMAN**
One Thomas Circle NW, Suite 200
Washington, DC 20005
T. +1 202 861 1325
F. +1 202 861 1326

OWNER:
PRINCE GEORGE'S COUNTY PUBLIC SCHOOLS
Sasscer Administration Building, 14201 School Lane,
Upper Marlboro, MD 20772

CLIENT:
PROGRESSIVE EDUCATION PARTNERSHIP
101 E. Kennedy Blvd, Suite 1470, Tampa, Florida 336

GENERAL CONTRACTOR:
MCN BUILD
1214 28TH ST NW, Washington, DC 20007

ASSOCIATE ARCHITECT:
R. MCGHEE & ASSOCIATES, PLLC
5003 Creston Stt, Hyattsville, MD 20781

CIVIL / SITE:
BRADLEY SITE DESIGN
1010 Wisconsin Ave. NW, Ste.620, DC 20007

LANDSCAPE:
BRADLEY SITE DESIGN
1010 Wisconsin Ave. NW, Ste.620, DC 20007

STRUCTURAL:
YUN ASSOCIATES
1050 Connecticut Ave. NW, Ste.500, DC 20036

MEPFP, LIGHTING & ENERGY MODELING:
CMTA INC. CONSULTING ENGINEERS
 220 Lexington Green Circle Ste. 600, Lexington, KY 40502

FOOD SERVICE:
NYIKOS-GARCIA FOODSERVICE DESIGN INC.
7146 Starmount Way, New Market, MD 21774

SPECIFICATIONS:
HELLER & METZGER PC
 1600 K Street NW, Suite #500, Washington, DS 20006

SUSTAINABILITY, NZE, SPECIALIST:
PERKINS EASTMAN ARCHITECTS
One Thomas Circle NW, Ste. 200, Washington, DC 20005
202.462.2000

ACOUSTICS:
POLYSONICS
405 Belle Air Lane, Warrenton, VA 20186
NAT. & SECURITY

CMTA INC. CONSULTING ENGINEERS
220 Lexington Green Cir. Ste. 600, Lexington, KY 40505
TRAFFIC CONSULT.

THE TRAFFIC GROUP
9900 Franklin Square Drive, Ste. H, Baltimore, MD 21114
ENVELOPE CONSULTANT:


PROJECT TITLE:

SPRINGHILL LAKE
ELEMENTARY
SCHOOL

PROJECT No:0100147

DRAWING TITLE:

COLUMN SCHEDULE

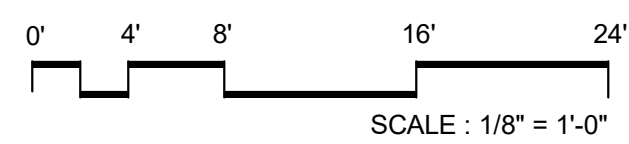

SCALE: 1/8" = 1'-0"

DRWN BY: CH

CHKD BY: BY

S-501

FINAL CONSTRUCTION DOCUMENTS

06 APRIL 2026

COLUMN SCHEDULE NOTES:

1. SEE PLANS FOR COLUMN ORIENTATION.
2. SEE TYPICAL DETAILS FOR ANCHOR ROD LAYOUTS.
3. * SEE TYPICAL BRACE TO FOUNDATION DETAIL FOR ANCHOR LAYOUT.
4. ** PROVIDE DOUBLE HEAVY HEX NUTS @ EMBEDDED END OF ANCHOR ROD


 01/13/2026

PROFESSIONAL CERTIFICATION:
 I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED
 AND APPROVED BY ME, AND THAT I AM A FULLY LICENSED
 PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF
 MARYLAND, LICENSE NO. 47318. EXPIRATION DATE: 11/19/2027

SEAL

**PERKINS —
EASTMAN**
One Thomas Circle NW, Suite 200
Washington, DC 20005
T. +1 202 861 1325
F. +1 202 861 1326


ENVELOPE CONSULTANT:

SPRINGHILL LAKE
ELEMENTARY
SCHOOL

DRAWING TITLE:
STORAGE SHED
FRAMING PLANS
AND SECTIONS



06 APRIL 2026

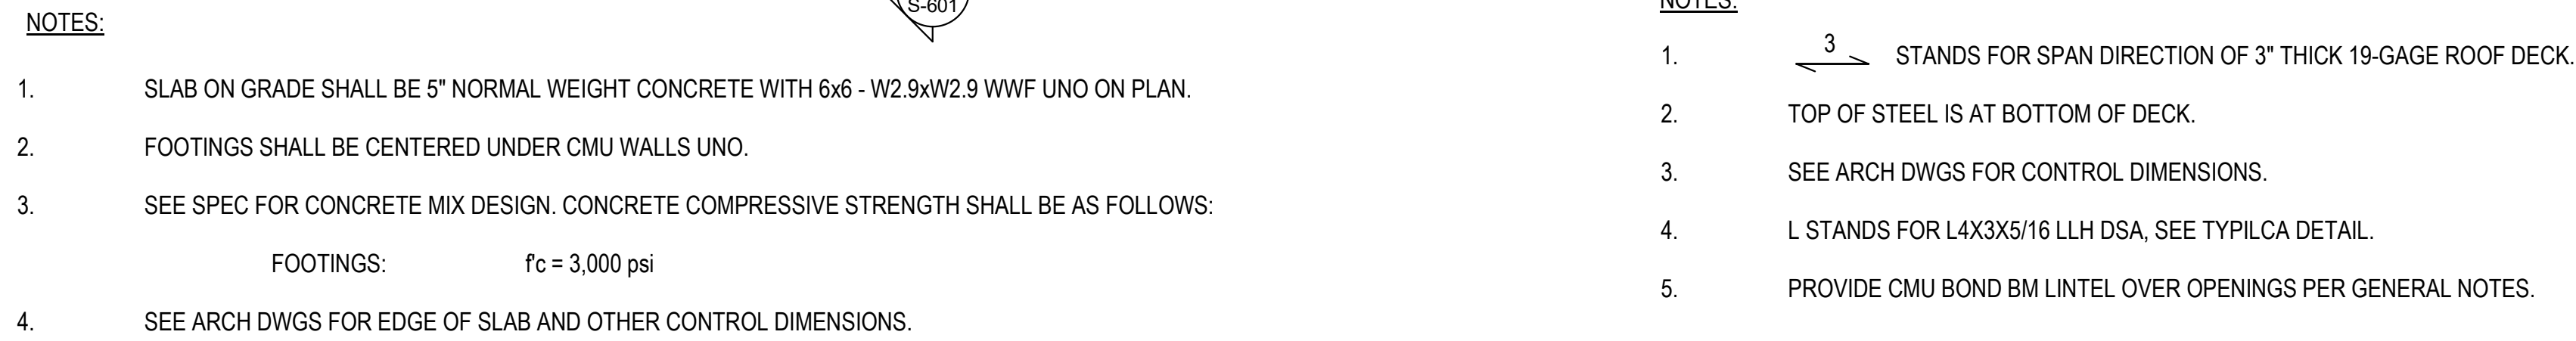

2 STORAGE SHED ROOF FRAMING PLAN
3/16" = 1'-0"

